


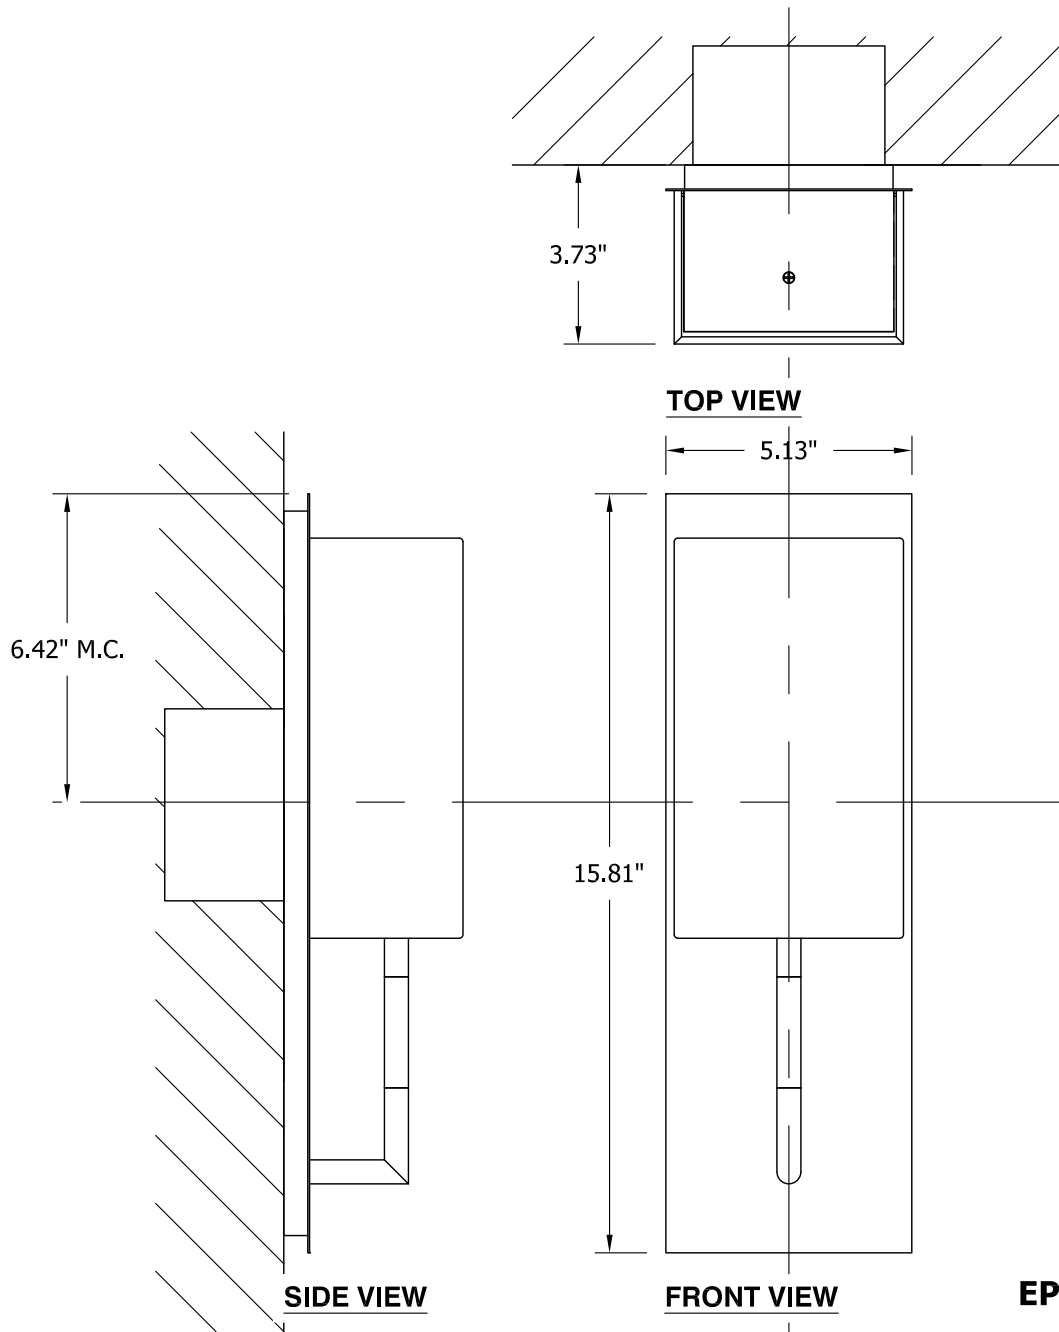

EPOCH sconce
 120v **3-564-122**
 277v **37-564-122**

OXYGEN LIGHTING ©

LAMPING

- o (1x) 8.2w LED array
- o 3000K, 350mA
- o Initial Lumens: 1173 lm
- o Delivered Lumens: TBD
- o CRI > 80
- o Color Consistency: 3 step MacAdam Ellipse

DRIVER (Dimmable)

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

METAL FINISHES

- o **22** - Oiled Bronze
- o **24** - Satin Nickel
- o **40** - Aged Brass

DIFFUSER

- o **1** - White Cotton
- o **2** - Matte White Acrylic

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DIMENSIONS

- o 5.13" (w) x 15.81" (h) x 3.73" (ext.)

INSTALLATION

- o 4" Octagonal J-Box
- o ETL Dry/Damp Listed
- o ADA
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0



Sample Catalog Number

<u>Series #</u>	<u>Diffuser</u>	<u>Finish</u>	<u>Catalog Number</u>
3-564	1	24	3-564-124

oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____

DATE: _____

