



Honesty® | K-T99763-4

Rite-Temp® bath and shower trim kit with push-button diverter, 2.5 gpm

Features

- Includes lever handle, single-function showerhead, shower arm and flange, valve trim, and nondiverter bathtub spout with NPT or slip-fit connection
- Single lever handle allows for both on/off activation and temperature setting
- Rite-Temp® pressure-balancing technology maintains water temperature within +/- 3°F
- Integrated push-button diverter
- Includes single-function 2.5 gpm (9.5 lpm) showerhead with Katalyst® air-induction technology



Available Colors/Finishes

Color tiles intended for reference only.

	CP	Polished Chrome
	BN	Vibrant Brushed Nickel
	BL	Matte Black
	2MB	Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-10-2026 17:08 - US-CA

THE BOLD LOOK
OF **KOHLER**®

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992

All product dimensions are nominal.

Handle Style/Type: Lever

Shower/Rainhead Rated Maximum Flow: 2.5 gpm (9.5 l/min)

Required Valves: Diverter, Pressure Balance, Thermostatic

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

K-23723 Faucet cleaner


- K-11748 Series Rite-Temp® Valves

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:08 - US-CA

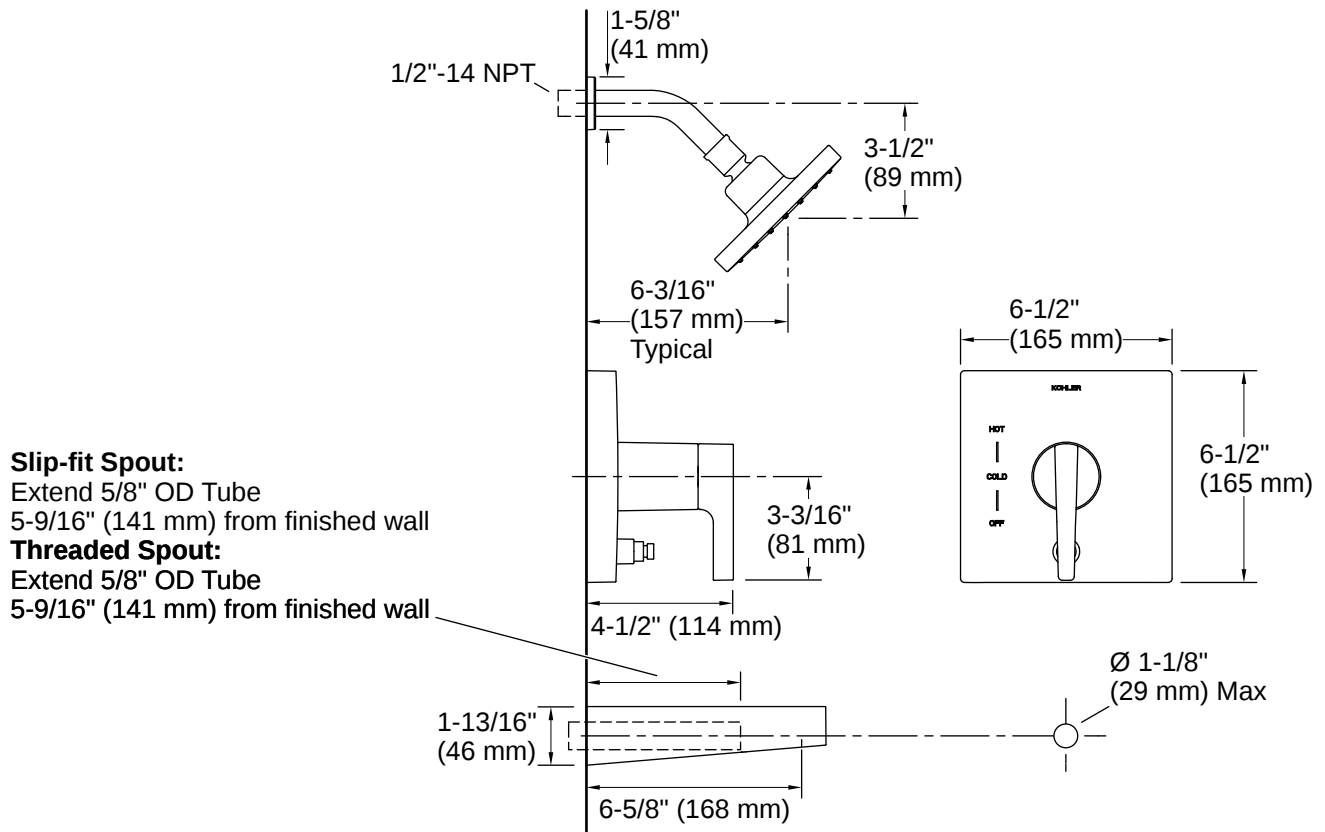

Installation

- Trim only; requires K-11748-K or K-11748-KS Rite-Temp pressure-balancing valve (sold separately)

Installation Notes

Install this product according to the installation instructions.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout. Elbow must be a 90 degree drop ell that is secured to rigid framing.

