



**LBL394 LBL395
LBL396 LBL397
LBL398**

USER MANUAL
LED SURFACE DOWNLIGHT

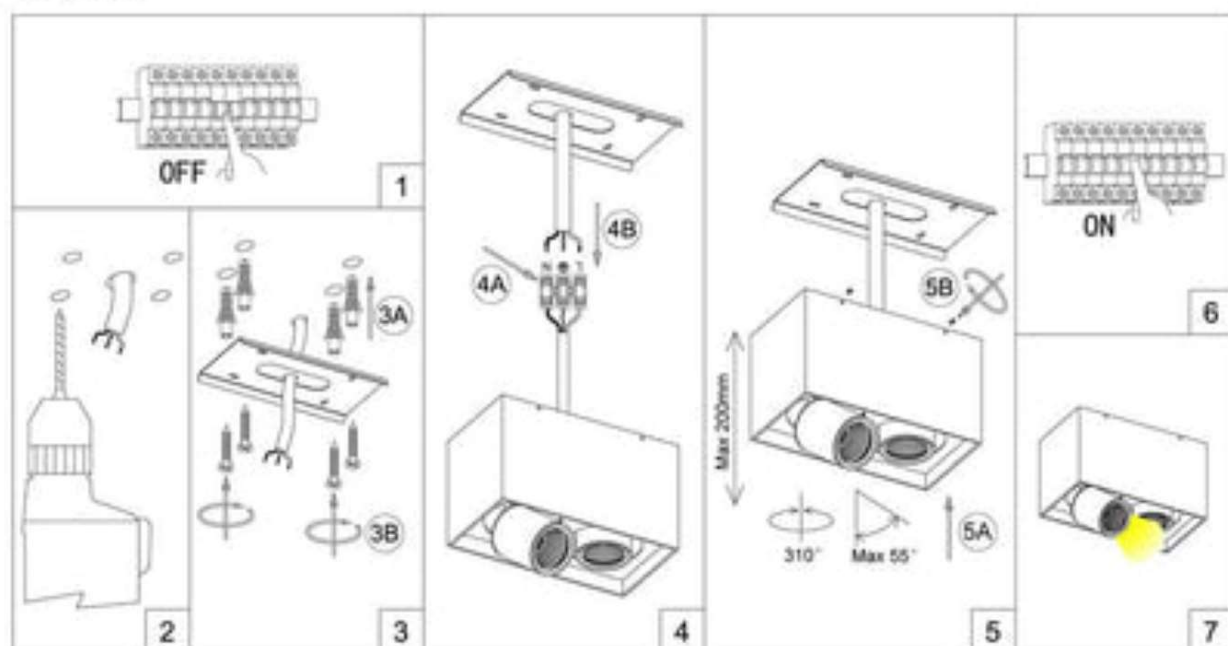

Accessories	Accessories	Accessories
expansion plug 3pcs	expansion plug 3pcs	connector 3pcs
screw 3pcs	screw 3pcs	

1. SWITCH OFF MAIN
2. MAKE HOLE PATTERN
3. INSTALL THE BASE PLATE
4. CONNECT LAMP TO THE MAIN
5. DRIVE IN THE SCREWS UNTILL TIGHT
6. SWITCH ON THE MAIN AND LIGHT ON

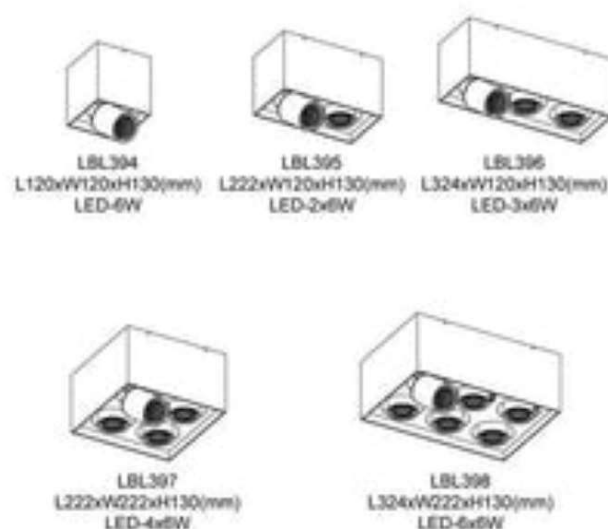

Lamp: CREE COB LED
 Color: 2700K/3000K/4000K/6000K
 Color rendering: Ra90
 Input: 220V-240V AC
 Current: Constant 150/300/400/600/900mA
 Frequency: 50/60Hz
 Watt: 6W/2x6W/3x6W/4x6W/6x6W
 Life span: 20,000hrs
 Operating temp: -20°C ~ +40°C
 Indoor use only
 IP20
 Dimmable: NO

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied
 by manufacturer for products guarantee