

Purist® | K-T11837

Wall-mount touchless faucet trim with Insight™ technology and 8-1/4" 35-degree spout, requires valve

Features

- 0.5 gpm (1.9 lpm) maximum flow rate
- This is trim set only. It requires valve kit to complete the faucet
- Vandal-resistant aerator
- Less drain
- On-demand on and off control. Valve kit is factory-set to 30-second maximum continual run cycle
- Complies with the Safe Drinking Water Act (SDWA)



Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

Technology

- Valve kit has electronic Insight™ sensor technology for accurate and consistent activation
- This trim set can be used with 11830-NA (Hybrid-DC power) wall mount valve or 11843-NA (AC Power) wall mount valve

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

Technical Information

All product dimensions are nominal.

Spout

Spout Reach: 8-1/16" (205 mm)

Flow Rate

Faucet Flow Rate: 0.5 gpm (1.9 l/min)

Valves

Required Valve: Thermostatic Mixer

Material


- Brass

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner



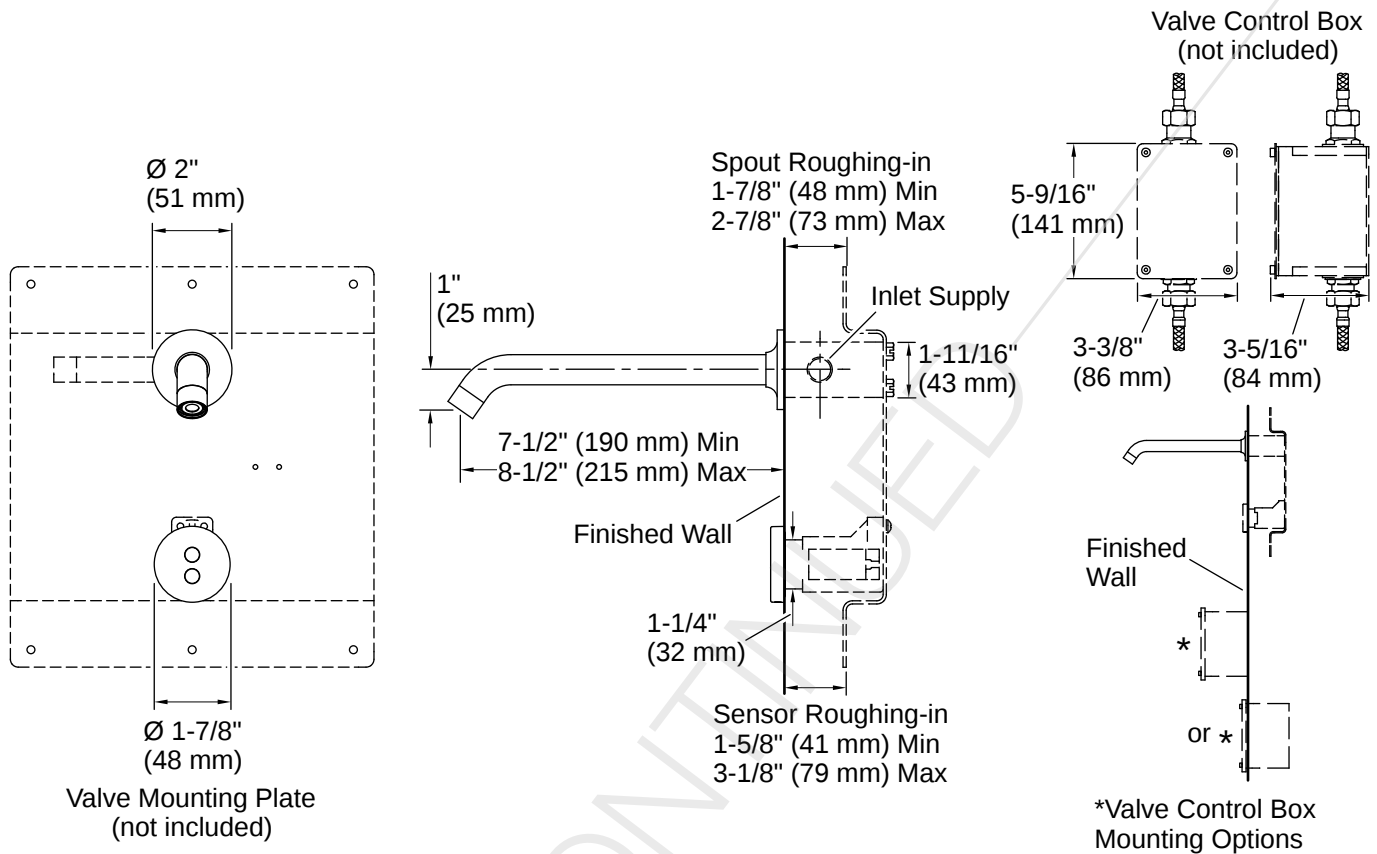

Installation

- Single-hole spout mounting. Please consider appropriate distance between spout and sensor
- Below the counter valve for easy installation and maintenance

Installation Notes

Install this product according to the installation instructions.

The sensor roughing-in allows for installation to a back splash or thicker finished wall than the spout roughing-in. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

