


ASSEMBLY INSTRUCTIONS STOOL

LOOSELY ATTACH EACH SCREW UNTIL FRAME IS ASSEMBLED THEN TIGHTEN WHEN COMPLETE


1 STEP : 1

1) Attach swivel plate(E) to "X" crossing on seat frame by using 4pcs cross head bolts(A), 4pcs lock washers(B) and 4pcs flat washers(C) as shown.

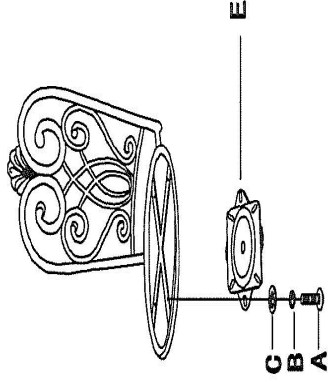


2 STEP : 2

2) Attach swivel plate(E) to chair base by using 4pcs cross head bolts(A), 4pcs lock washers(B) and 4pcs flat washers(C) as shown.

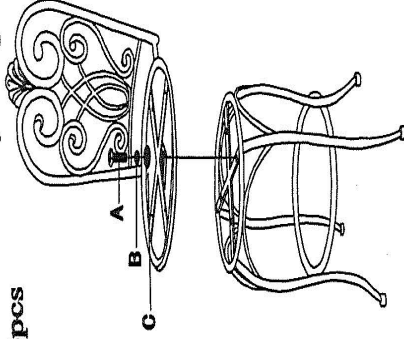


3 STEP : 3

3) Attach cushion to seat frame by using 4pcs screws(D).



4 STEP : 4

4) Assembly is complete.






IMPORTANT NOTE:
HARDWARE PACK LOCATION



Hardware Box

HARDWARE PACK
CHECK THAT THE FOLLOWING PARTS ARE IN CARTON

A		Cross head bolt 1/4"*5/8"L 8PCS
B		Lock washer 1/4" 8 PCS
C		Flat washer Ø 16mm 8PCS
D		Screw 30mm 4 PCS
E		Swivel plate 1PC