ASSEMBLY AND INSTALLATION INSTRUCTIONS

Model: CA2735-LW-R


Kind Reminder :

This lighting fixture needs to be installed In a sunny place

Product Specification	
Battery capacity	4000mA
Output voltage	DC 3~4V
CRI	80
Color Temp	2700K
Material	Metal & Glass
Solar energy control	Automatic lights off during the day; automatic lights on at night.

Packing list

Part	Description	Quantity
Wall light	7.125"x15.75"x7.625"	1 pc
Box screw	N08-32UNCx32mm	2 pcs
Decorative nut	Ø10xH10mm	3 pcs
Rubber pad	M4xØ8x2mm	3 pcs
Bent metal strip	123x110x20mm	1 pc
Fixing screw	M4x8mm	1 pc
Hanging ring	45x38x19mm	1 pc
Rubber pad	M10xØ14x1.5mm	1 pc
Wooden screw	M4x30mm	2 pcs
Strain relief bushing	Ø6x30mm	2 pcs
Instruction manual	A4 PAPER	1 pc

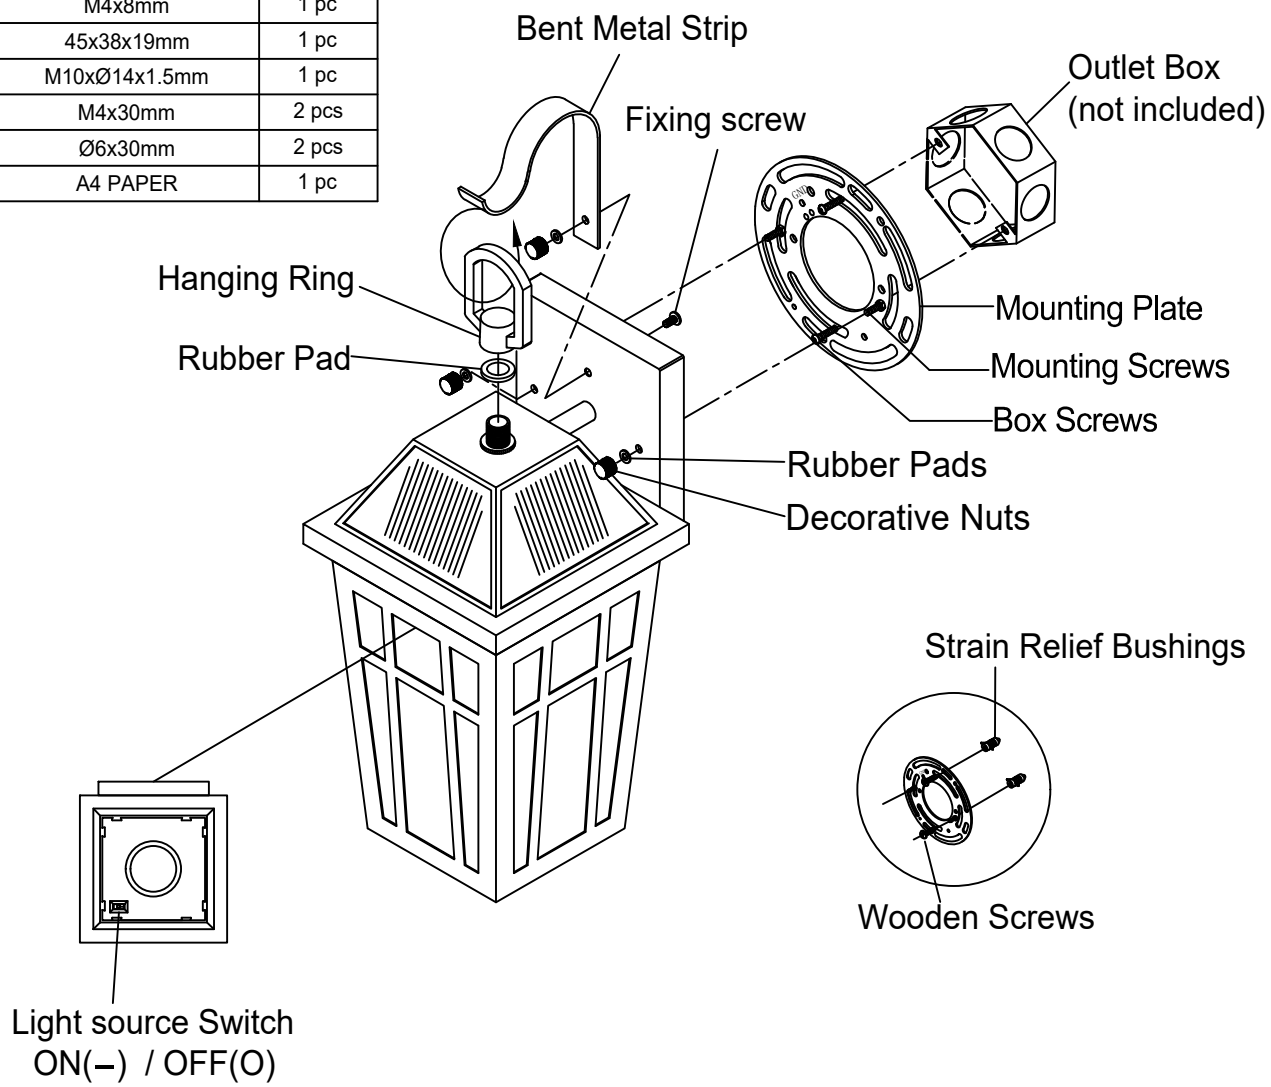

Installation Instructions

1.Drill holes at your desired installation location according to the distance between the two holes on the mounting plate.
Install the mounting plate in the desired position using 2 strain relief bushings and wooden screws.
2.Thread the rubber pad onto the exposed fully threaded tube pre-installed on the fixture body, then connect and fasten with the hanging ring.
3.Hook curved metal strip's bent end into hanging ring; secure straight end to back plate with decorative nut, rubber pad and screws, as shown in diagram.
4.Press the toggle switch to test the light source. ON(−) / OFF (O).
5.Attach the back plate to the mounting plate by inserting the screws, and then fixed with two Rubber pads and two Decorative nuts.