

2 Linear

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.




This product is suitable for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

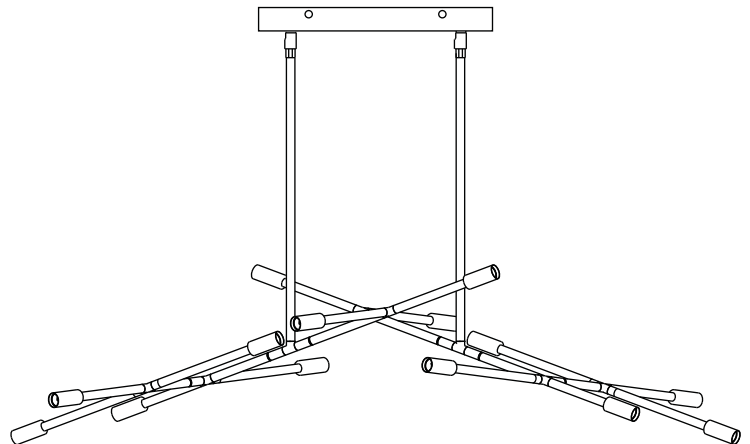


Install the Mounting Plate

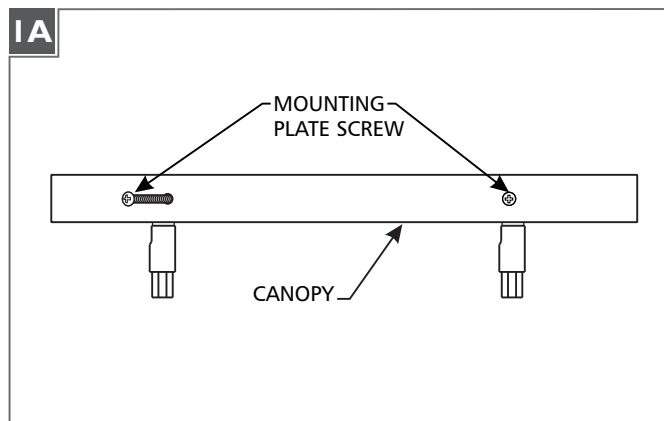

- 1** Separate the mounting plate assembly from the canopy by unscrewing the four mounting plate screws on the canopy.

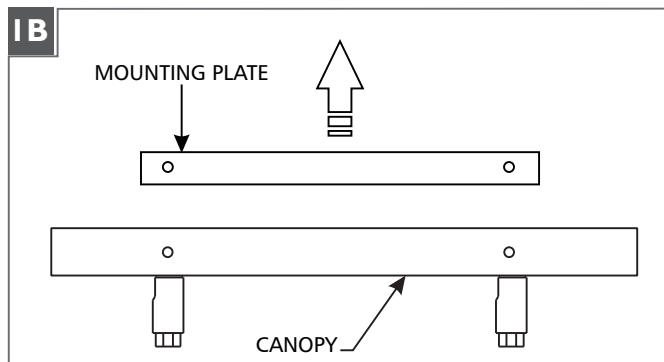


- 2** Remove the mounting plate from the canopy.

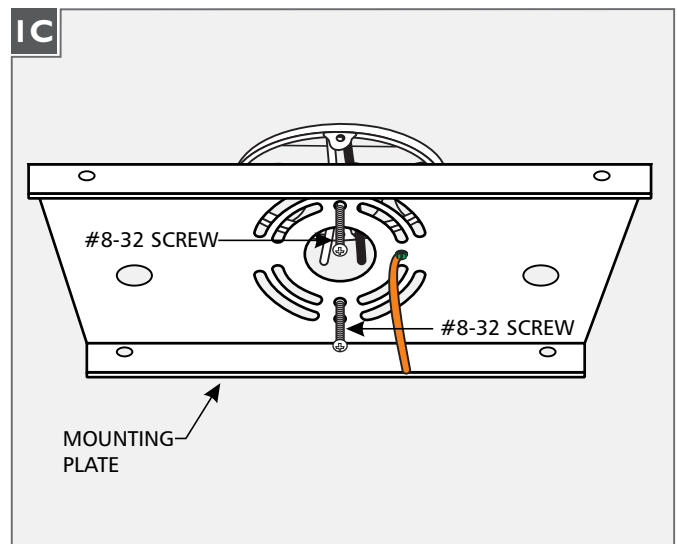


- 3** Secure the mounting plate to the electrical box with the two #8-32 screws provided.

ID

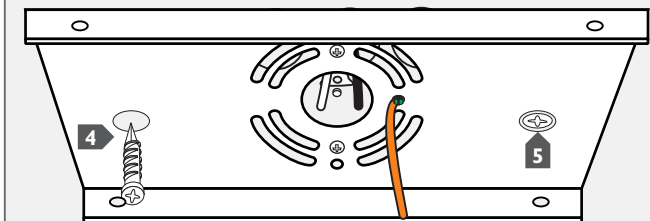

- 4 Line up an anchors with the center of a backplate holes and push the anchors in, up to the threads.
- 5 Screw the anchors the rest of the way in with a screwdriver.


IE

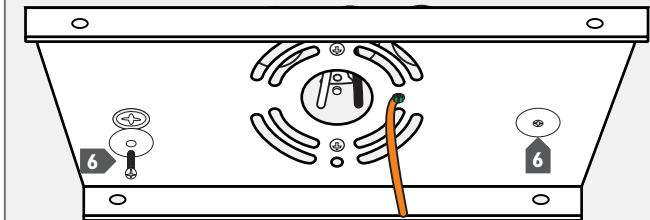

- 6 Secure the backplate to the anchors with screws and washers.

Assemble the Fixture


2A

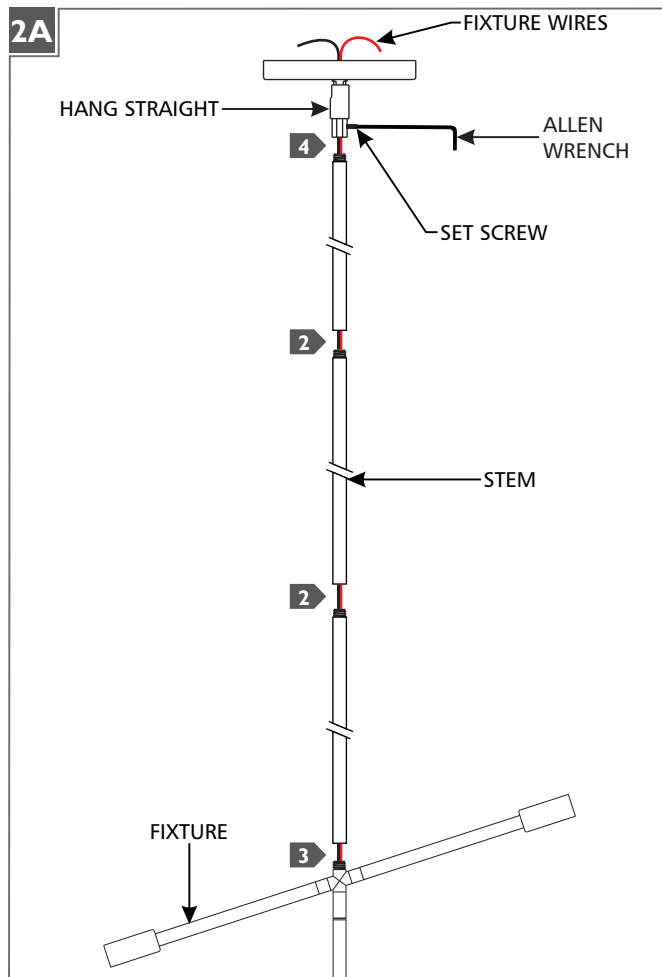


NOTE: Complete next steps for each side of the fixture.

- 1 Loosen the set screw on the hang straight using the provided Allen wrench.
- 2 Determine desired length of fixture using the provided stems and assemble them by screwing them together.
- 3 Feed the fixture wires through the stem assembly and screw it to the fixture.
- 4 Feed the fixture wires through the hang straight and screw it onto the stem assembly.
- 5 Re-tighten the set screw on the hang straight.

Install the Fixture

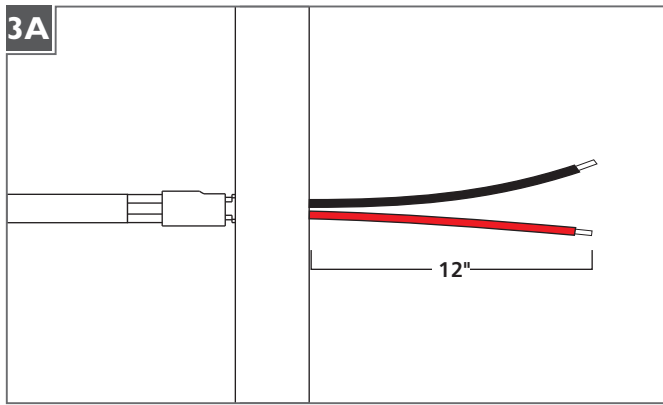


- 1 Leave 12" of the cord behind the canopy for power connections. Cut the excess cord.
- 2 Strip the end of the wires.

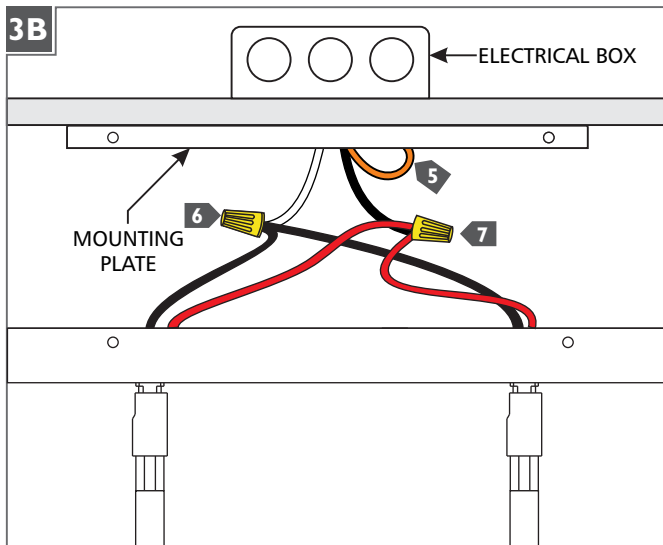

- 3 Connect the ground wire to a suitable ground in accordance with local electrical codes.
- 4 Connect the black wires to the neutral power wire with a wire nut.
- 5 Connect the red wires to the hot power wire with a wire nut.
- 6 Neatly place all wires and wire nut connections in the canopy and reinstall the canopy to the mounting plate (reversal of step 1A).

Install the Lamps

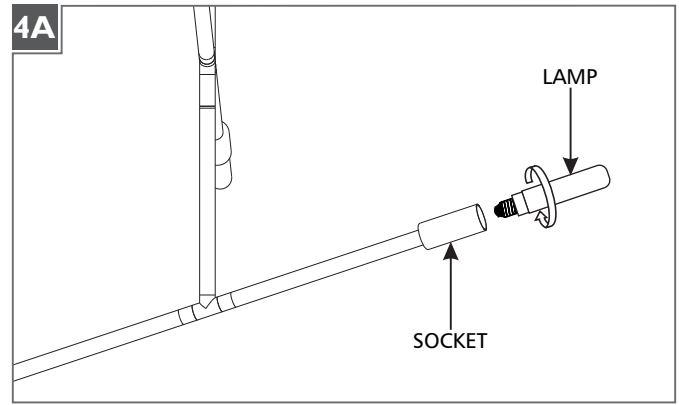

CAUTION: To reduce the risk of a burn or electric shock during re-lamping, disconnect the power to the fixture.

Refer to fixture marking for lamp information.

- 1 Screw the lamps into the sockets.

SAVE THESE INSTRUCTIONS!