
MOON CHAIR

ASSEMBLY GUIDE



Important - Please read these instructions fully before starting assembly



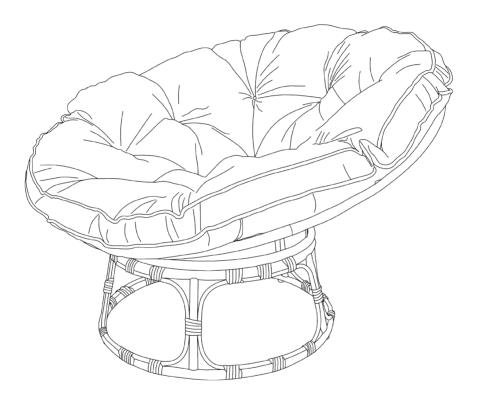

SAFETY AND CARE ADVICE

- Check you have all the components and tools listed.
- Remove all fittings from the plastic bags and separate them into their groups.
- We do not recommend the use of power drills/drivers for inserting screws, as this could damage the unit. Only use hand screwdrivers and Allen keys.
- Keep children and animals away from the work area, small parts could cause choking if swallowed.
- Make sure you have enough space to layout the parts before starting.
- Assemble the item as close to its final position (in the same room) as possible.
- Do not overtighten the nuts to avoid causing damage to the threads.

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners
- From time to time check that there are no loose screws on this unit
- This product should not be discarded with household waste. Take to your local authority waste disposal centre

IMPORTANT INFORMATION







PLEASE CHECK CAREFULLY AND MAKE SURE YOU HAVE ALL FITTINGS AND TOOLS LISTED BELOW BEFORE YOU START.


			M6*20	M6*38
A X1	B X1	C X1	D X4	E X4
₩6	0			
F X8	G X16	H X1	I X1	J X1

NOTE: The quantities above are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

Construct your furniture on a nice flat, soft surface like a carpet, rug, or the lawn, to avoid any bumps and scratches. First, lay out all your pieces and check you have all the items listed on the inventory.

STEP 1


Connect the two halves of the seat [A] and [B]. Use bolt [E] + 1x washer [G] on one side of the holes and secure with 1x washer [G] + 1x nut [F] on the other side of the holes. Do this 4 times at the locations shown in the illustration. Thread bolts from seat section [A] down towards bottom section [B]. Don't fully tighten the bolts until all seat components are in place.

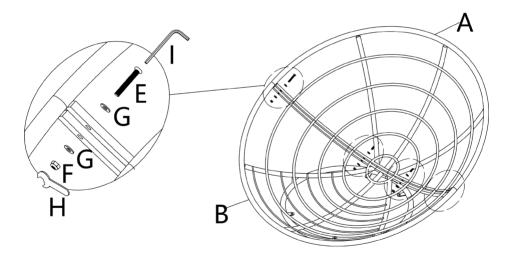

STEP 2

Carefully, and with help, place the seat on the base [C]. Ensure that the two black dots on the seat frame and the base line up before securing anything. Once aligned, connect seat to base using 1x bolt [D] + 1x washer [G] down from top to bottom, and secure with 1x washer [G] + 1x nut [F] on the other side of the hole. Repeat this 4 times at the locations shown in the illustration.

Once everything is in place, go ahead and tighten all the bolts, but take care not to over-tighten.

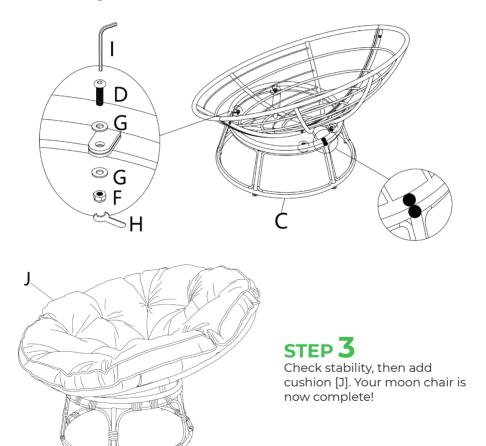

WHAT THE GUARANTEE COVERS



PRE-INSERTED FIXINGS e.g. lose metal threads



FAULTY JOINTS e.g. legs bending



e.g. metal discs removing from table top



e.g. the frame of the product