


Installation

1

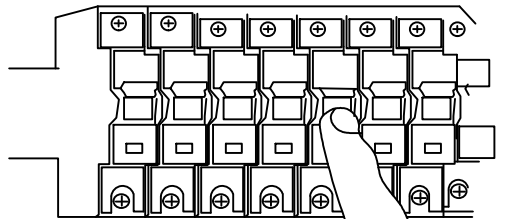


OFF

STEPS

Turn off the power

2


- ① Ceiling plate
- ② hanging plate
- ③ Lock ring
- ④ Lifting chain
- ⑤ Lifting ring
- ⑥ Lifting rod
- ⑦ Lamp body
- ⑧ Glass lampshade

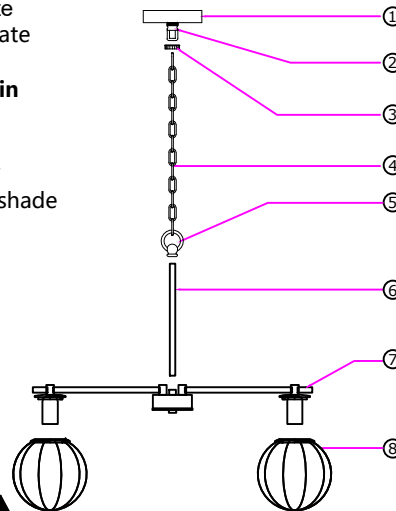

STEPS

1. First, connect the lifting ring with the lifting rod, and then fasten the lifting chain to the lifting ring.
 2. Take out the hanging plate with the lifting ring on the suction top plate, and take out the lifting ring on the hanging plate.
- And then proceed to the next step, as shown in Figure 3


3

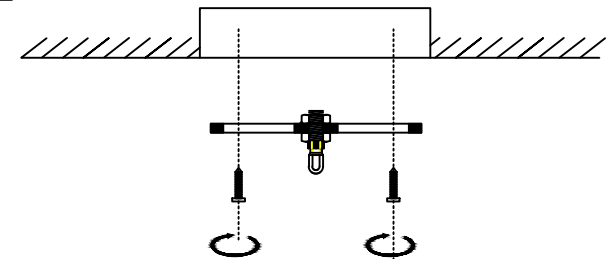

STEPS

Install the hanging board on the ceiling, and then proceed to the next step, as shown in Figure 4


4

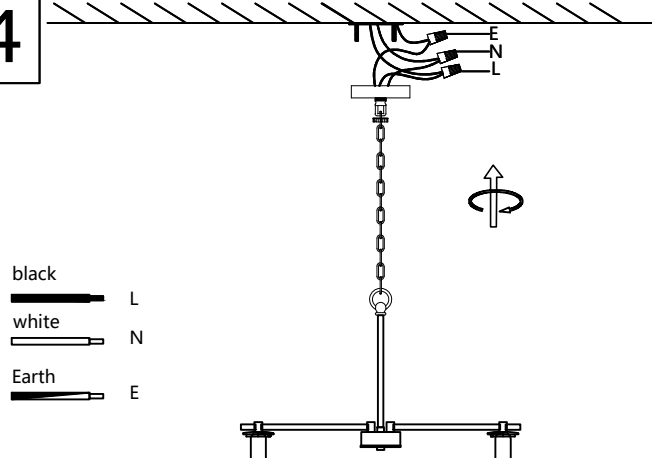

STEPS

1. Connect the power wire of lamp body to the reserved Power cable, pay attention to the positive and negative poles
2. Fix the ceiling plate with a lock ring

5

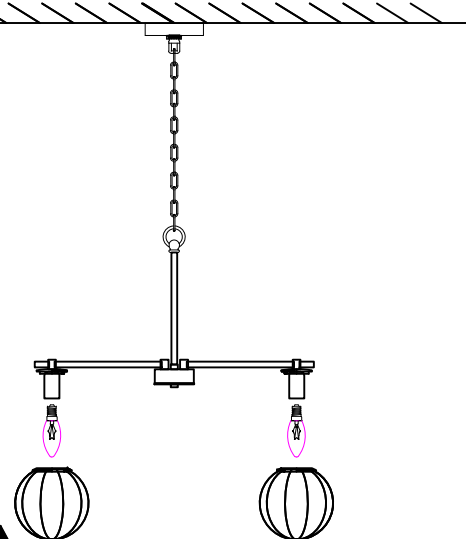

STEPS

1. Install the E12 bulb, and finally tighten the glass lampshade to complete the installation.


Caution:

Advertencia:

1. Voltage: 110V-130V
2. Bulb Model: E12 / MAX-40W (not include)
3. Before installation, please check whether the accessories are complete, If you have any problem, please contact our customer service in time
4. Before installation, please cut off the power supply to prevent electric shock.
5. Please be sure the installation according to the company's instructions.



Screw



Wire connector



Instruction