


# RAVELLO

LOUNGE HEATER

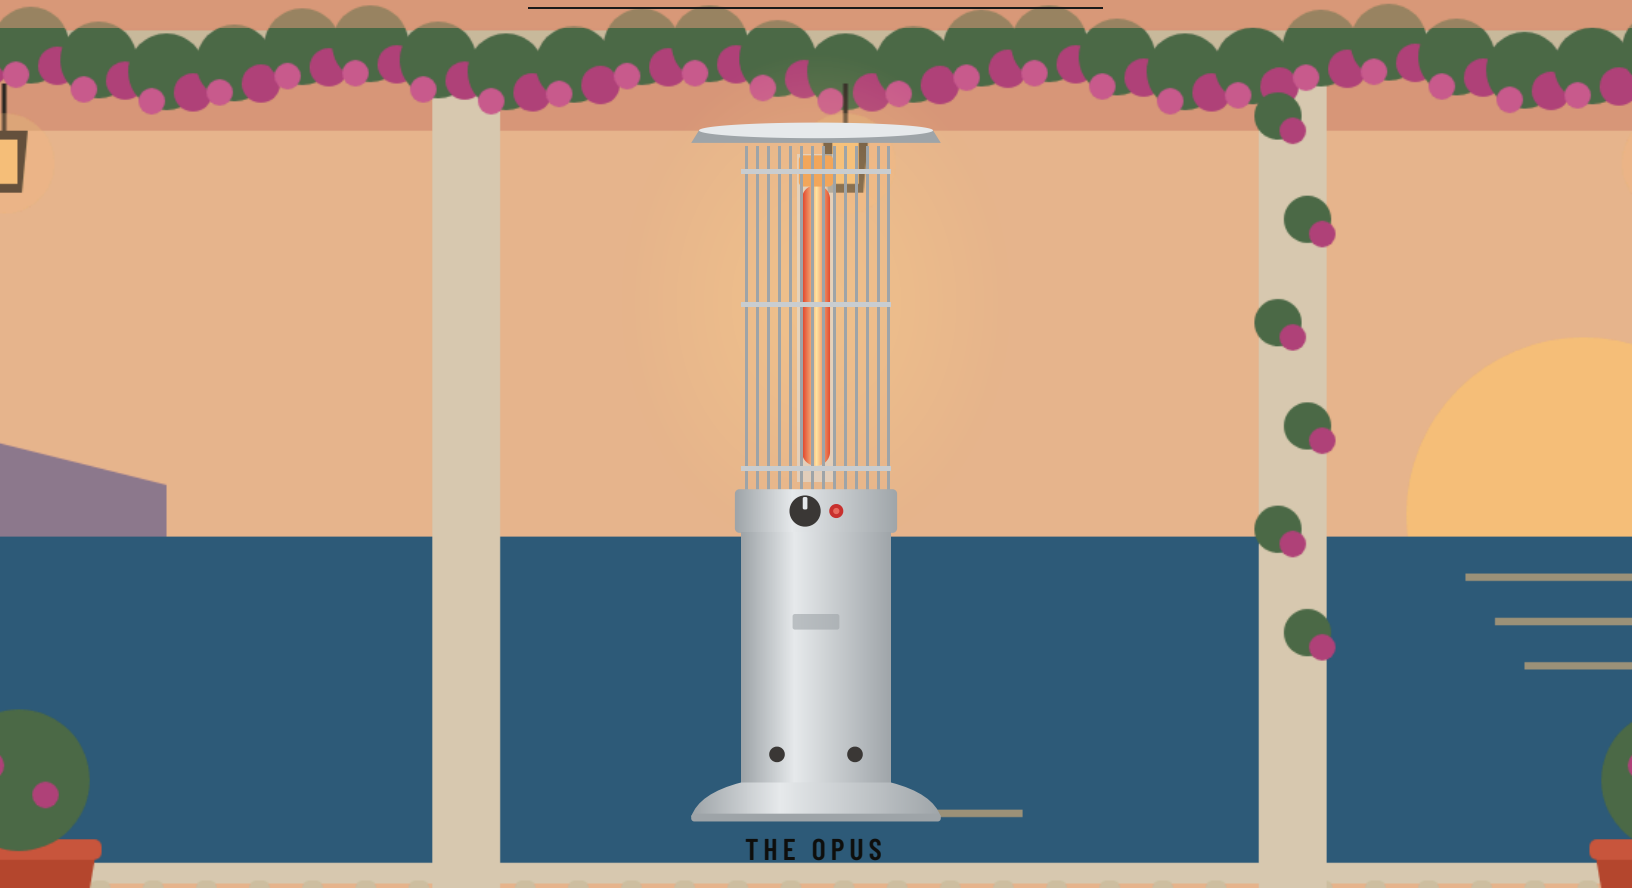

THE OPUS

QUICK START GUIDE • THE OPUS • RAVELLO LOUNGE COLLECTION

## Your first evening.

*Una sera a Ravello — six steps, one sunset.*

|               |               |                 |                   |                  |                   |
|---------------|---------------|-----------------|-------------------|------------------|-------------------|
|               |               |                 |                   |                  |                   |
| <b>17:00</b>  | <b>17:45</b>  | <b>18:00</b>    | <b>18:15</b>      | <b>18:30</b>     | <b>23:00</b>      |
| <i>Arrivo</i> | <i>Il Gas</i> | <i>La Prova</i> | <i>Accensione</i> | <i>Il Calore</i> | <i>Buonanotte</i> |

**About 60 minutes • Phillips screwdriver and adjustable wrench.**


You'll need one AA battery and a 20 lb propane cylinder (not included). **READ YOUR OWNER'S MANUAL FIRST**

**17:00***Arrivo*

STEP 1

## Assemble and place your Opus


- Assemble it with the **10 Assembly Instructions in your Owner's Manual**, about 60 minutes: wheels, back plate, burner unit, door and chain, then the reflector and its top cover.
- Last assembly step: remove **one protection guard** (four screws), take out the foam around the glass tube, then refit the guard and all four screws.
- Stand it outdoors on hard, level ground, clear of combustibles by the distances in your Owner's Manual, away from windows, air intakes and sprinklers. Wind under 10 mph.

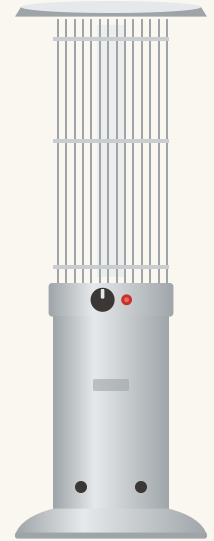**17:45***Il Gas*

STEP 2

## Battery and fuel

- Unscrew the **igniter button** and fit **one AA battery**, + side facing out. Screw the button back on.
- Lift the door panel off. Stand a standard **20 lb propane cylinder**, valve closed, inside and secure it with the **chain** so it can't shift.
- Screw the supplied regulator onto the cylinder and **tighten securely**. Keep the hose clear of hot surfaces. Refit the door.

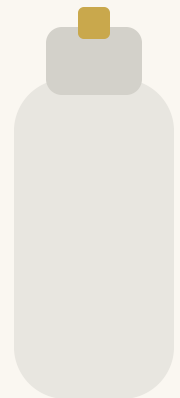

20 lb · propane only

**18:00***La Prova*

STEP 3

## Test every connection

- Mix **1 part dish soap to 3 parts water**. Brush it where the hose meets the regulator and where the regulator meets the cylinder.
- Knob OFF, then open the cylinder valve. **Bubbles mean a leak**: close the valve. Tighten the hose joint, or disconnect and reconnect the regulator, and test again.
- Still bubbling? Don't use the heater; call us. Never test with a flame. Test again whenever a gas connection is loosened or changed.


18:15

*Accensione*

STEP 4

## Light the Opus

- First start or new cylinder: **hold the knob in for 2 minutes** to purge air from the gas lines. Then knob to OFF and **open the cylinder valve fully**.
- **Push in and turn the knob counter-clockwise to PILOT.** Keep holding it and **press the igniter button**. Look for the pilot flame through the glass tube.
- No pilot? Turn the knob clockwise to OFF and repeat. Never hold the knob in for more than 10 seconds before it lights.

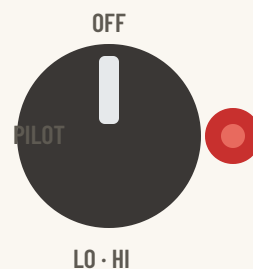

KNOB · IGNITER BUTTON

1 × AA behind the button


18:30

*Il Calore*

STEP 5

## Set the warmth

- With the pilot lit, turn the knob counter-clockwise to **LO**. For maximum heat, turn further to **HI**.
- The flame rises up the glass in tongues of blue and yellow. Excessive yellow or thick black smoke? Turn it off and see Troubleshooting in your Owner's Manual.
- First use: some smoke and smell for **about 30 minutes** is normal. It runs less efficiently below 40°F.

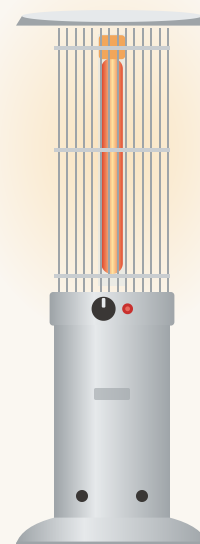

23:00

*Buonanotte*

STEP 6

## Shut down

- **Press the knob in and turn it clockwise to OFF.** A slight pop as the burner goes out is normal.
- **Close the cylinder valve** clockwise, and disconnect the regulator when the heater is not in use.
- Do not touch or move it for **45 minutes**; the reflector stays hot. Relighting? Wait 5 minutes first.

SAFETY FIRST, ALWAYS

# If you smell gas

1. Shut off the gas at the cylinder valve.
2. Extinguish any open flame.
3. If the odor continues, move away and call your gas supplier or fire department from a safe place.

## OUTDOOR USE ONLY

Never use inside a home, garage, tent, vehicle or any enclosed space. Carbon monoxide can kill.

## La Cura *care through the seasons*

### THE FINISH

Once cool, a soft cloth with warm soapy water. No abrasive pads, solvents or pressure washers. Car wax on the body every few months protects the finish; never on the emitter screen or dome. Near the sea, check often for corrosion.

### HOSE & PASSAGES

Each season, check the hose for cracks and clear spiders and insects from the burner and orifices with a pipe cleaner and compressed air.

### GLASS & CONTROLS

Keep the burner, pilot and control valve dry. If the gas control is ever submerged, don't use it. To replace the glass tube, remove a guard and the top as your Owner's Manual shows.

### COVER & STORE

Cover once cool and store upright, sheltered from rain and snow. For long storage, disconnect the cylinder and keep it outdoors.

## LIFETIME FRAME • 5 YEARS PARTS • 5 YEARS FINISH • 1 YEAR BURNER

Parts only; labor and freight not included. Full terms at [lavaheat.com/warranty-and-product-care](http://lavaheat.com/warranty-and-product-care)



### WE'RE HERE TO HELP

[customerservice@lavaheat.com](mailto:customerservice@lavaheat.com) · 310-559-1700

[lavaheat.com/troubleshooting](http://lavaheat.com/troubleshooting)

Lava Heat Italia · 940 W. Washington Blvd., Los Angeles, CA  
90015 · Est. 2001

*Buona  
serata.*