



80077 Product Installation Instructions




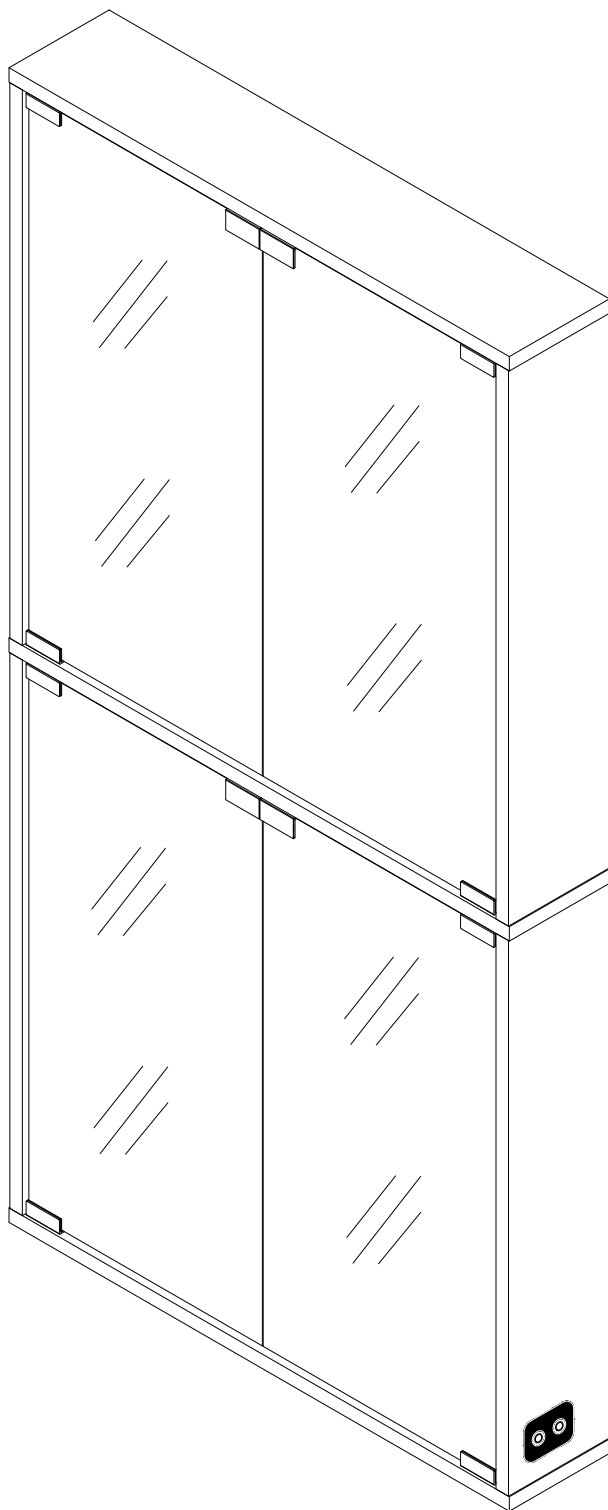


Ax1




Bx1




Cx2




Dx1




Ex1




Fx1




Gx1

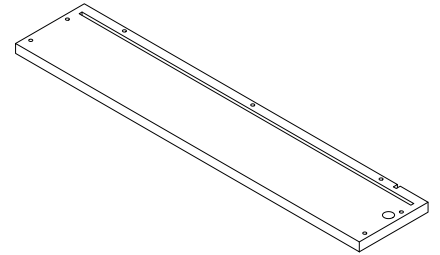


Hx1




Ix4




Jx1

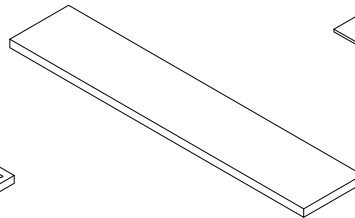


Kx1

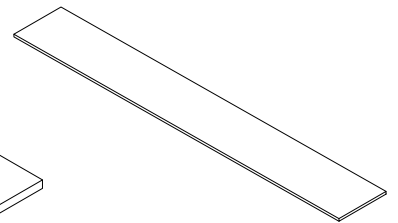


Lx8

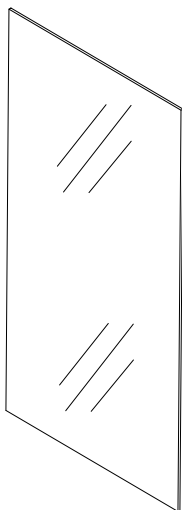














Mx4




Nx1



Ox1


①		Two in one screw (6x28mm)	44pcs +5pcs
②		Two in one nut (10x12mm)	44pcs +5pcs
③		Rebound device & Screw (3x16mm)	8pcs +1pcs 2pcs
		Iron sheet	4pcs
		Hinge	8pcs 4pcs 4pcs
④		Laminate support nail	32pcs +3pcs
⑤		Wire clamp	6pcs +2pcs
⑥		Fixing clip & screw (3x16mm)	8pcs +2pcs
⑦		Sticker (50x20mm)	4pcs
⑧	Wall-mounted hardware  x5  x5  x4  x2  x2		
⑨		Backboard card strip(566mm)	2pcs
⑩		Double end connecting line	4pcs
		AC/DC Adapter (12V=3.0A)	1pcs
Double-head screwdriver, use as required  1pcs 			
			2

Product structure decomposition

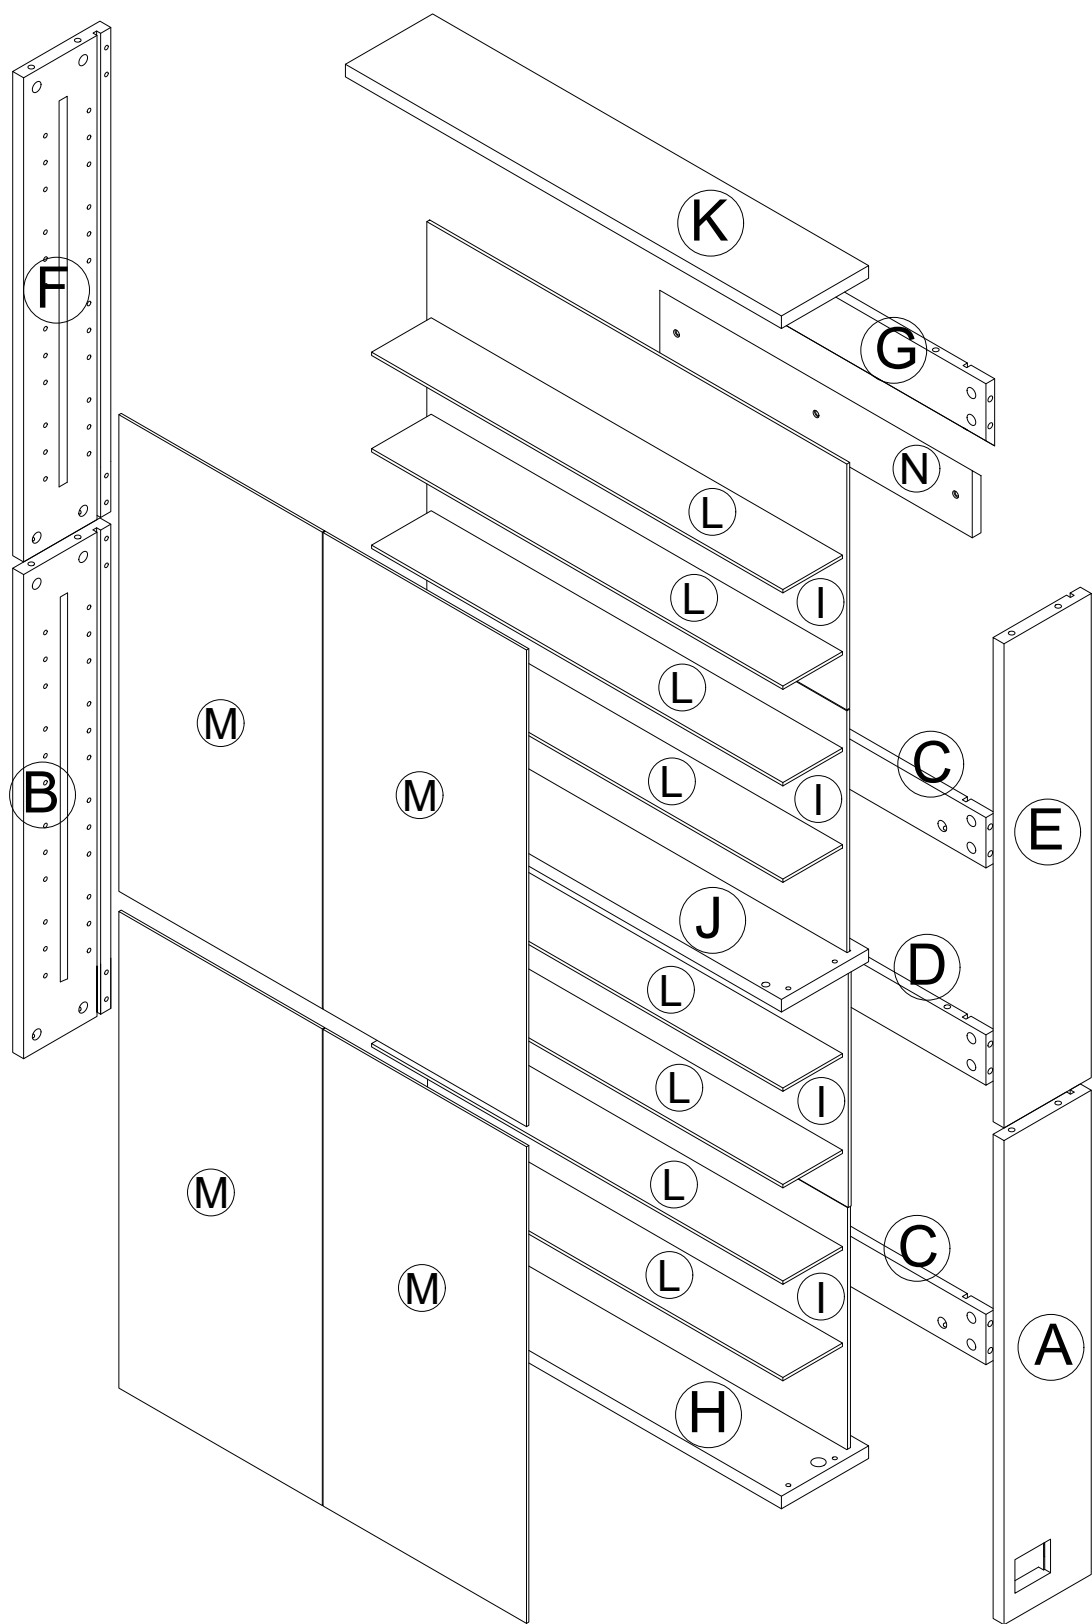


Use parts ① and ②



Step1

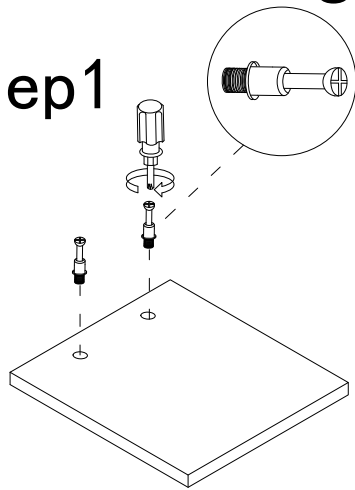


Step2

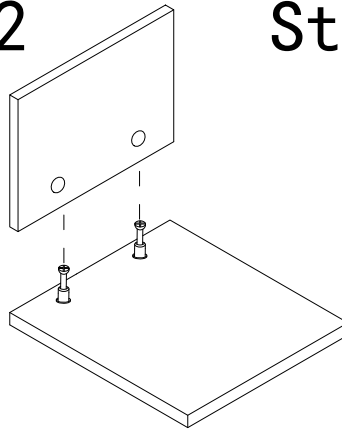

Step3

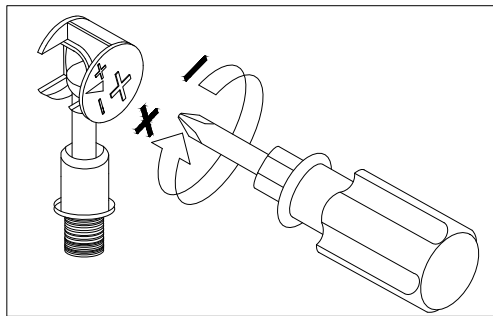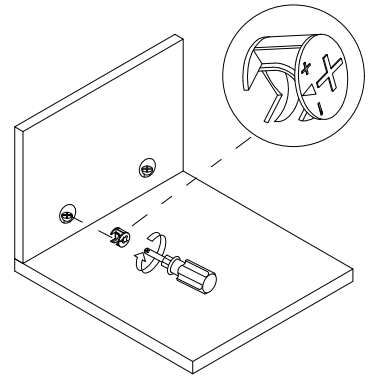


Use a screwdriver to lock in the direction of the "+" sign

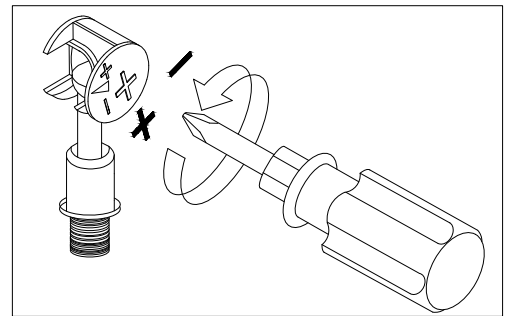


Disassemble along the direction of "-" sign

Step 1



B

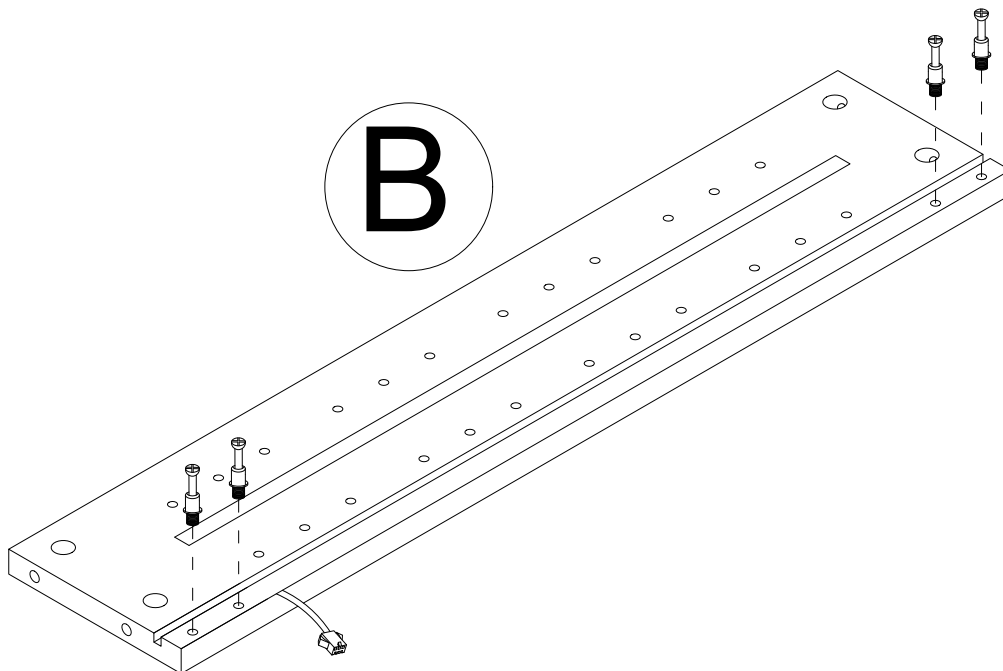


Step 2

2




x4

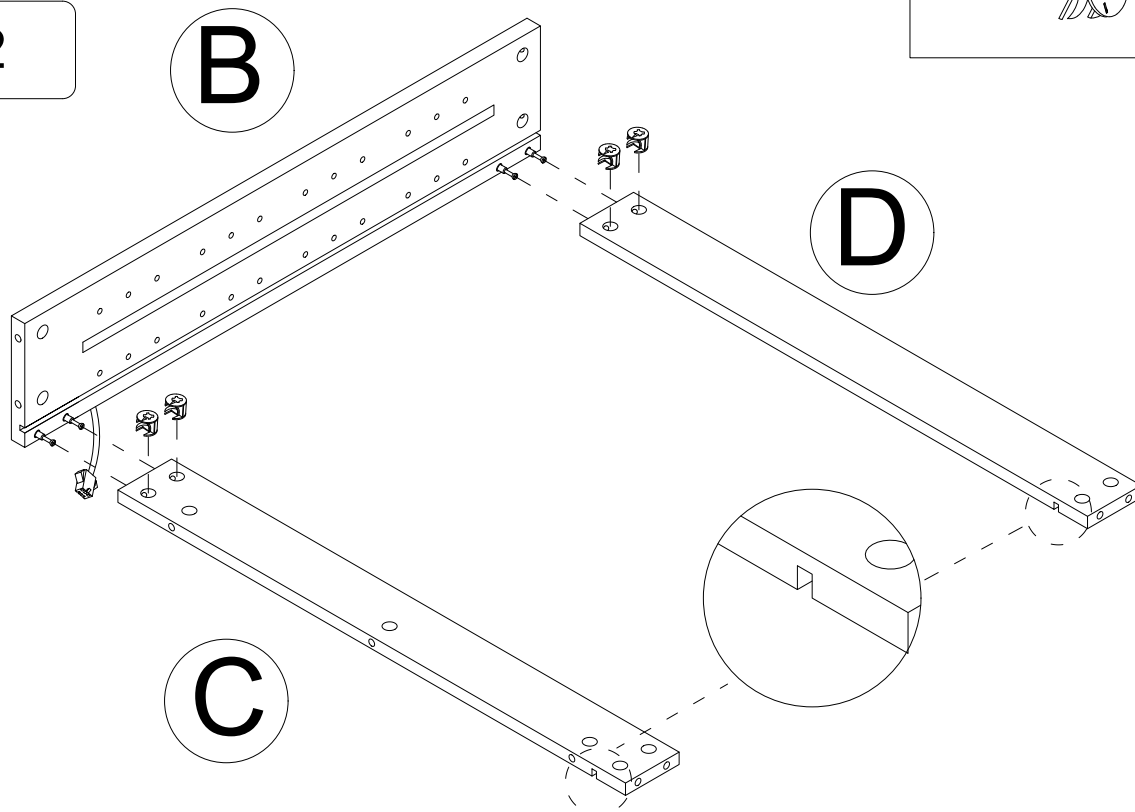


Pay attention to the position of the notch

Step 3

1



x4

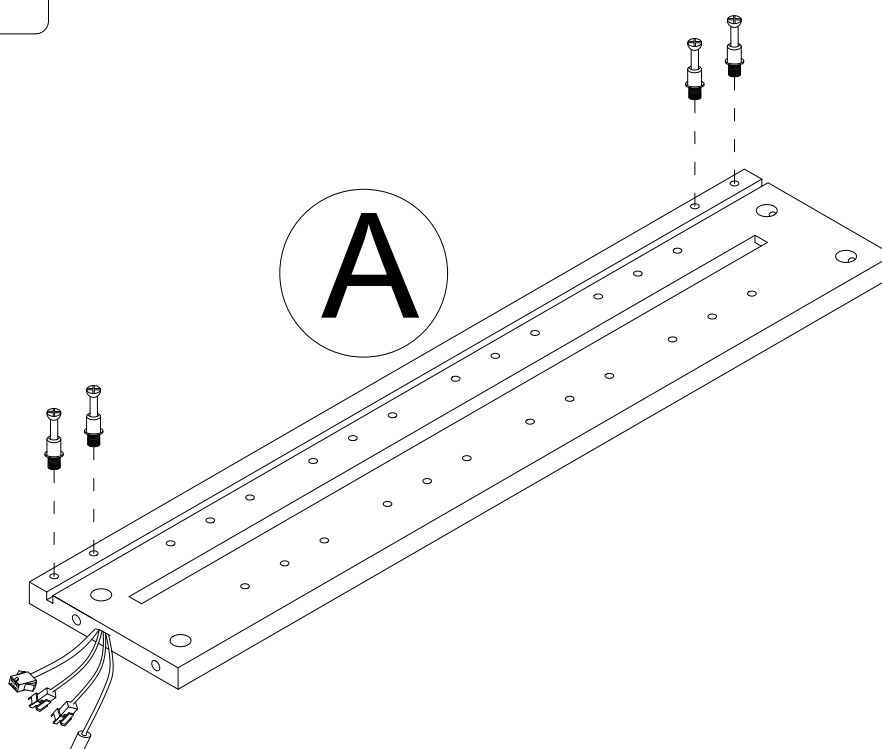


Step 4

2




x4

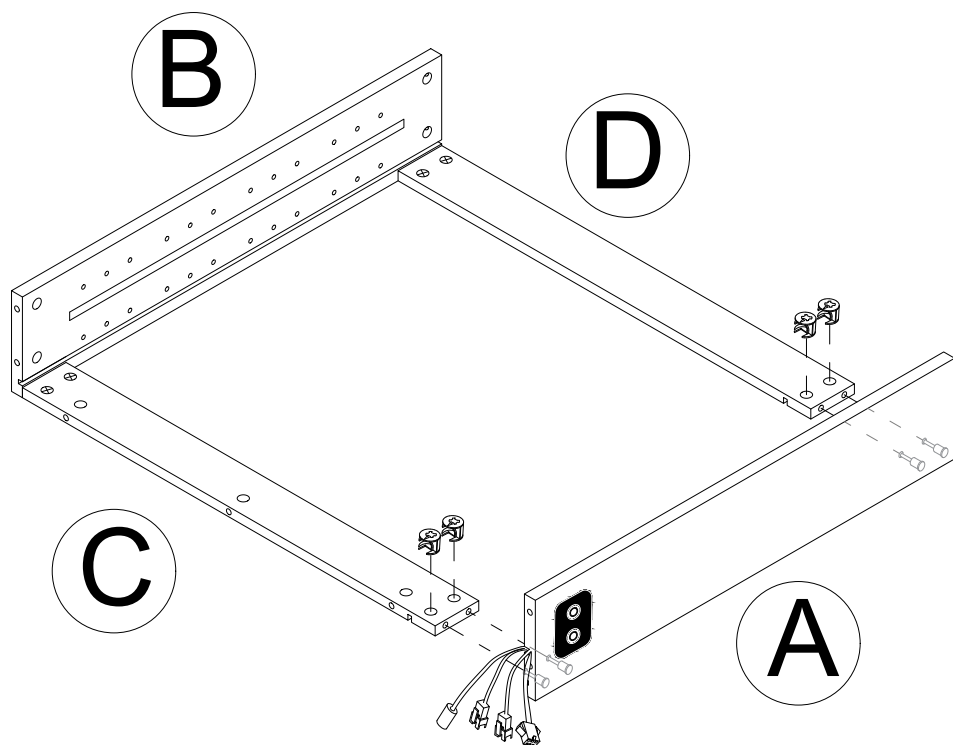


Step 5

1



x7

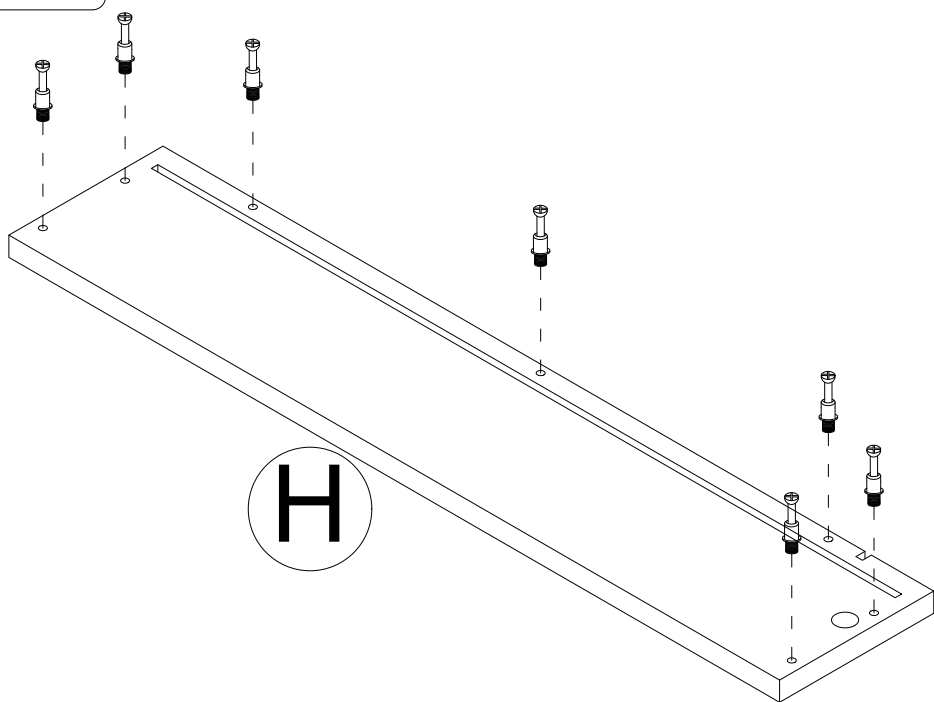


Step 6

2



x7

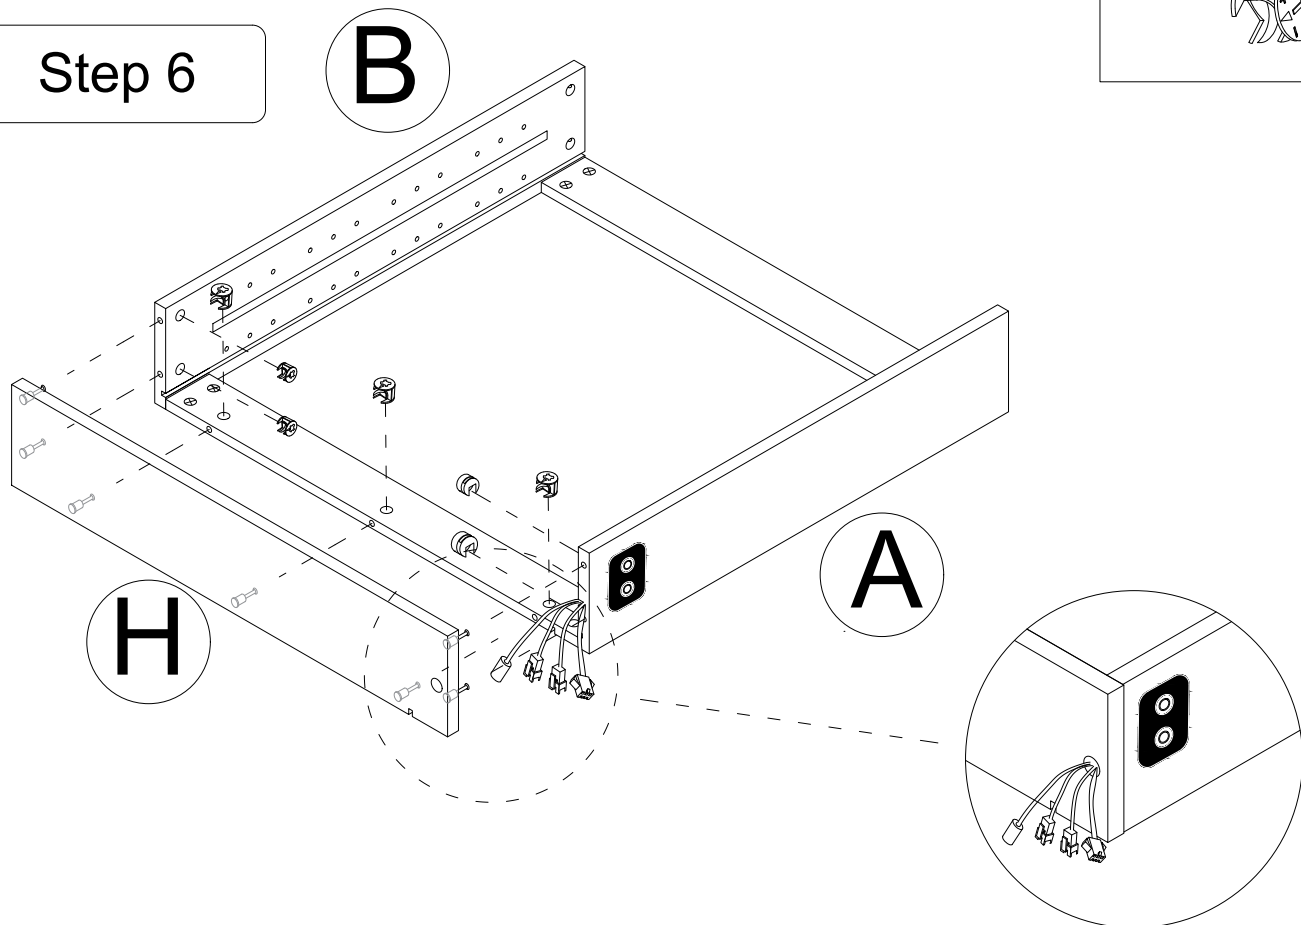


Pass the wires of board A out of board H

Step 7

B

H





Turn Over

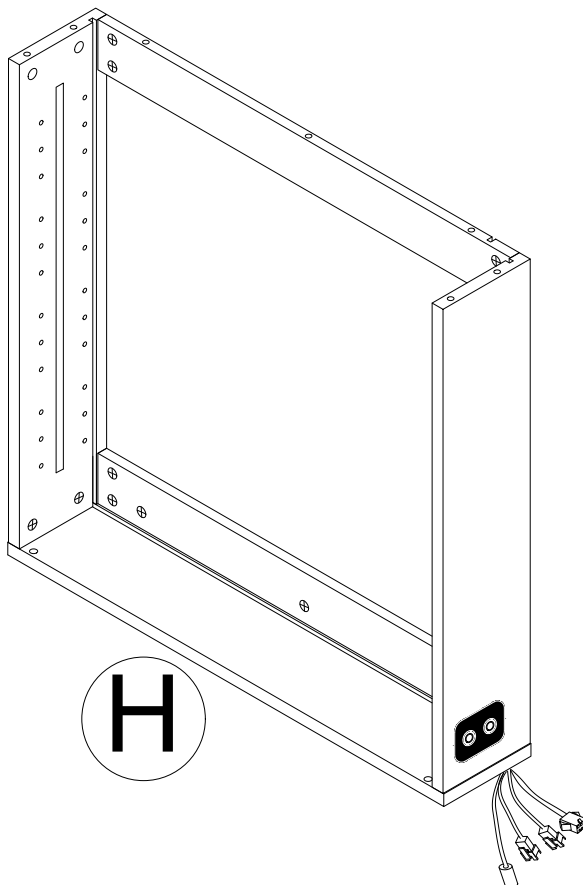



7

Step 8



9

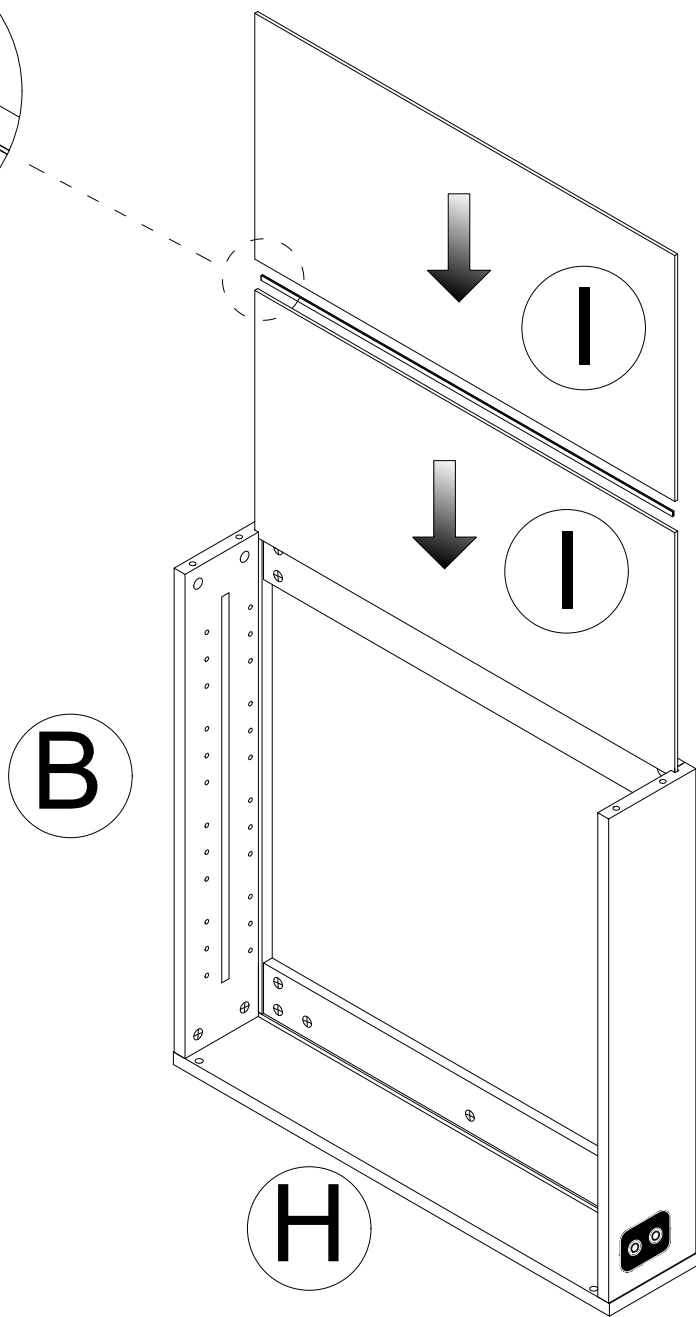

Step 9

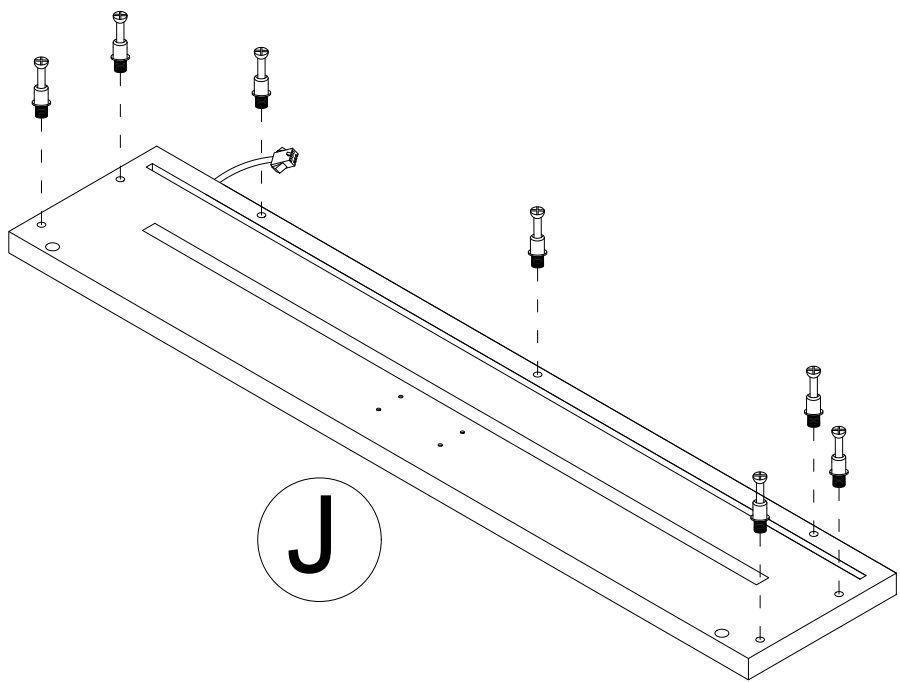

Step 10

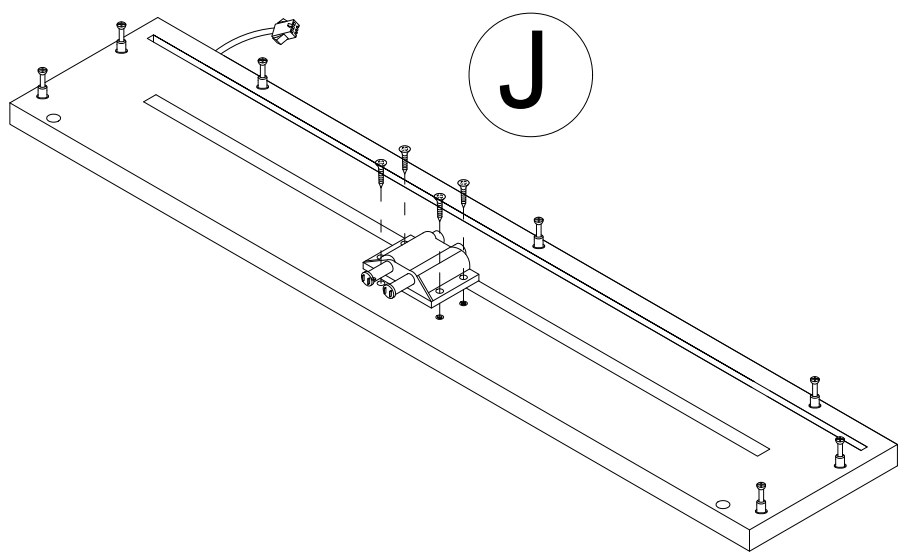


Step 11

2




x7

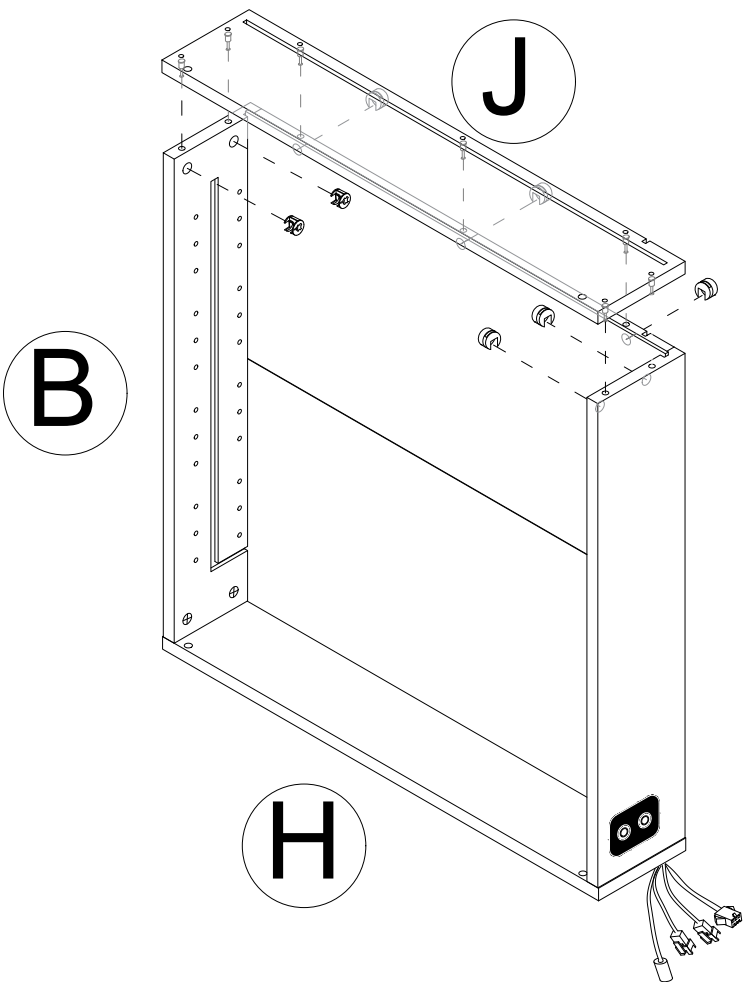


Step 12



1




x7

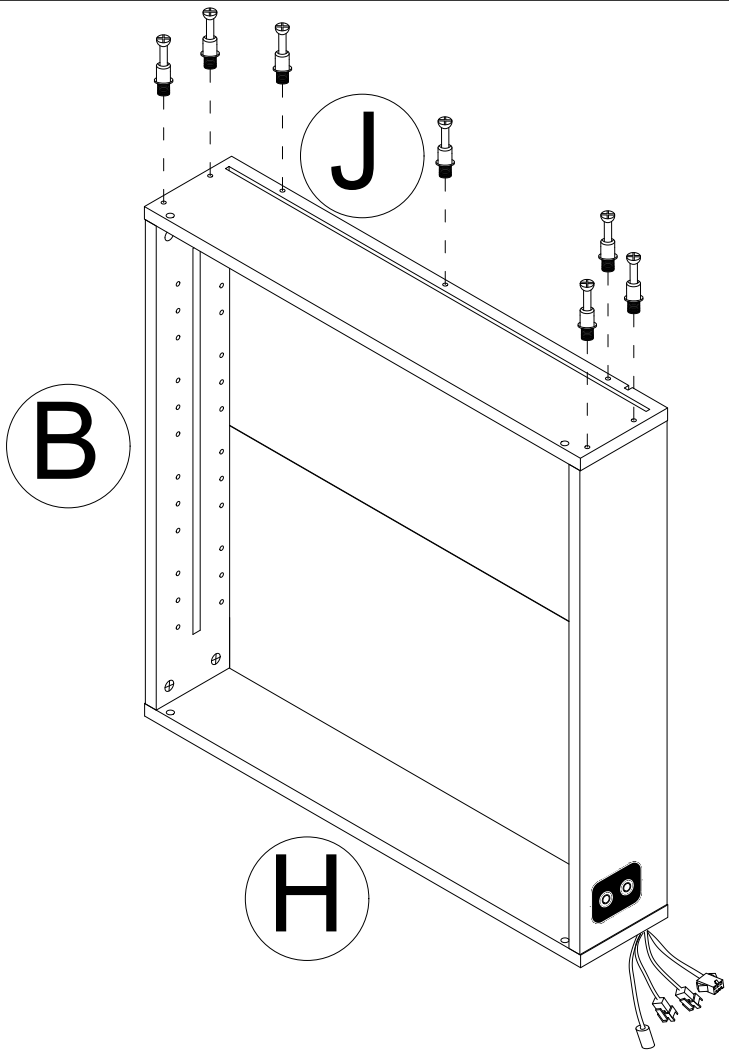



Step 13

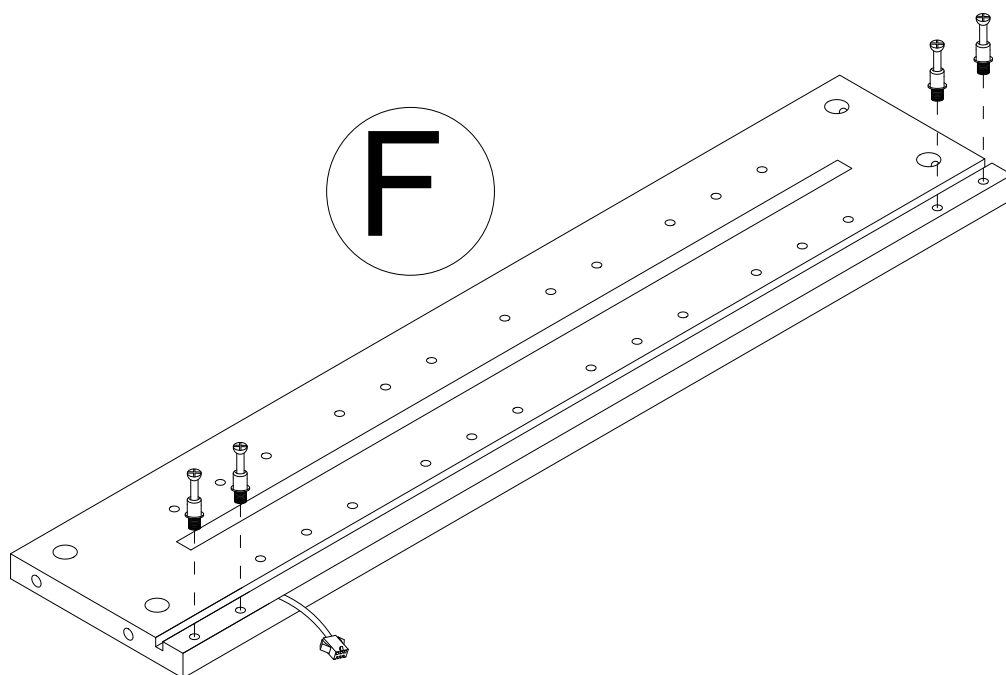



Step 14

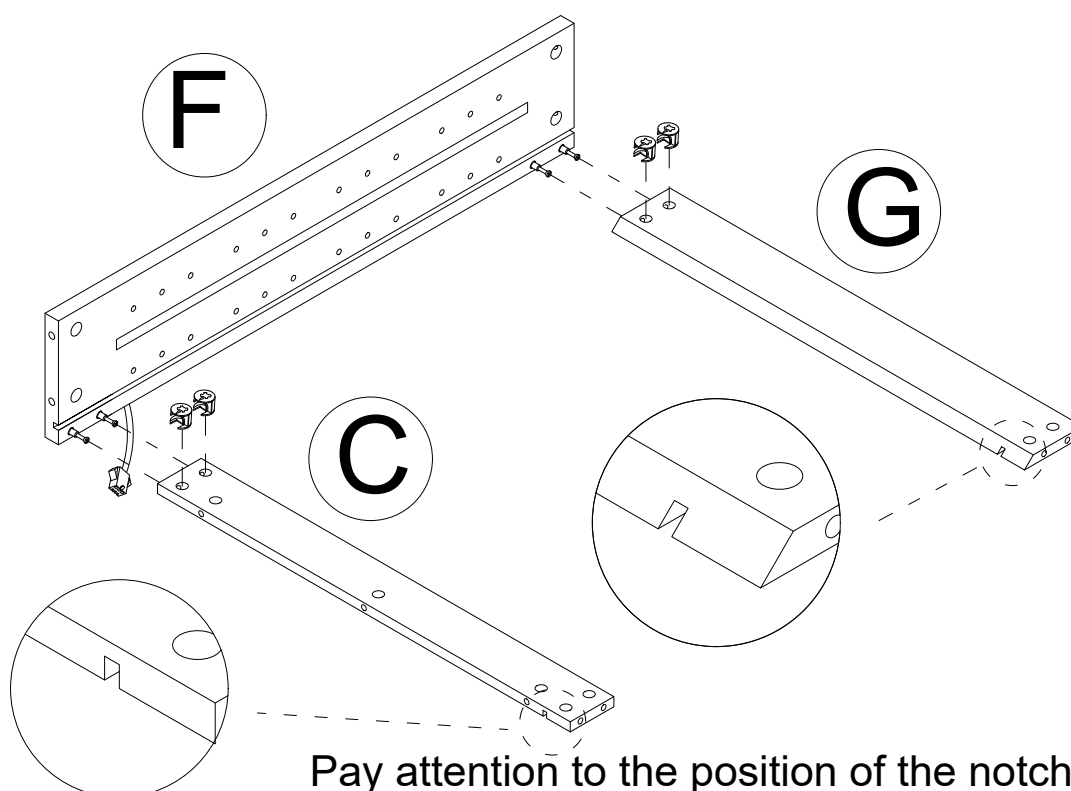

Step 15

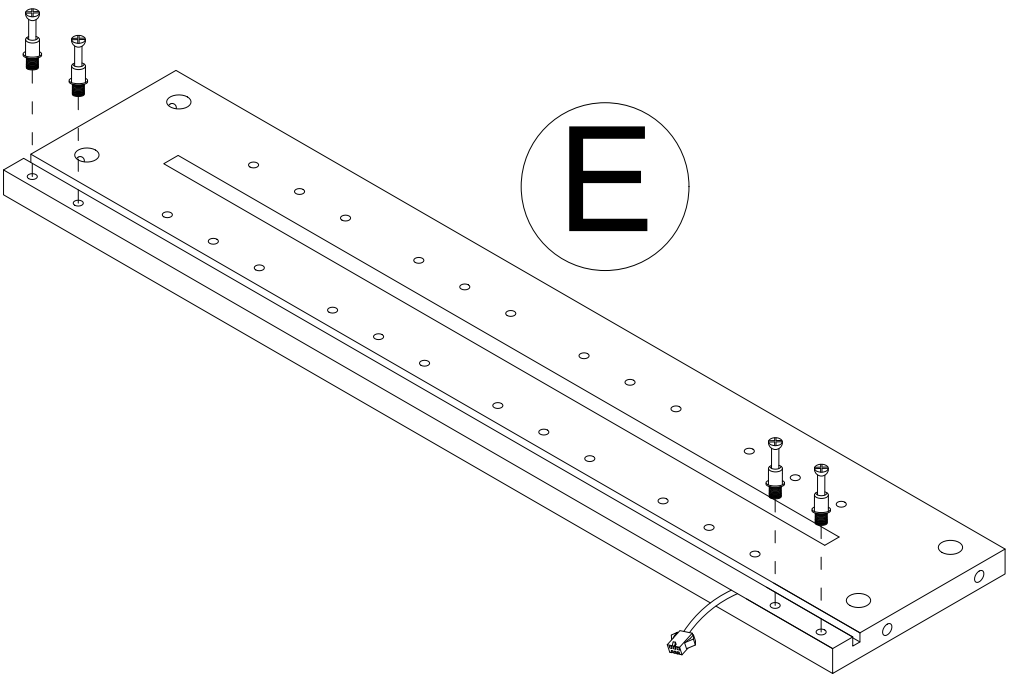

Step 16

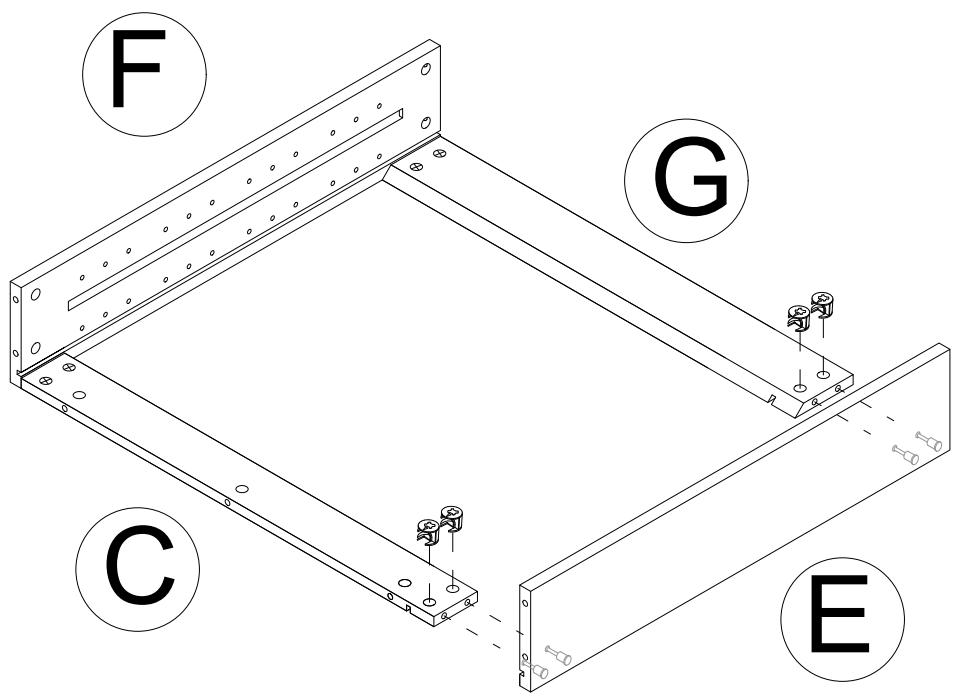


Step 17

2








x7

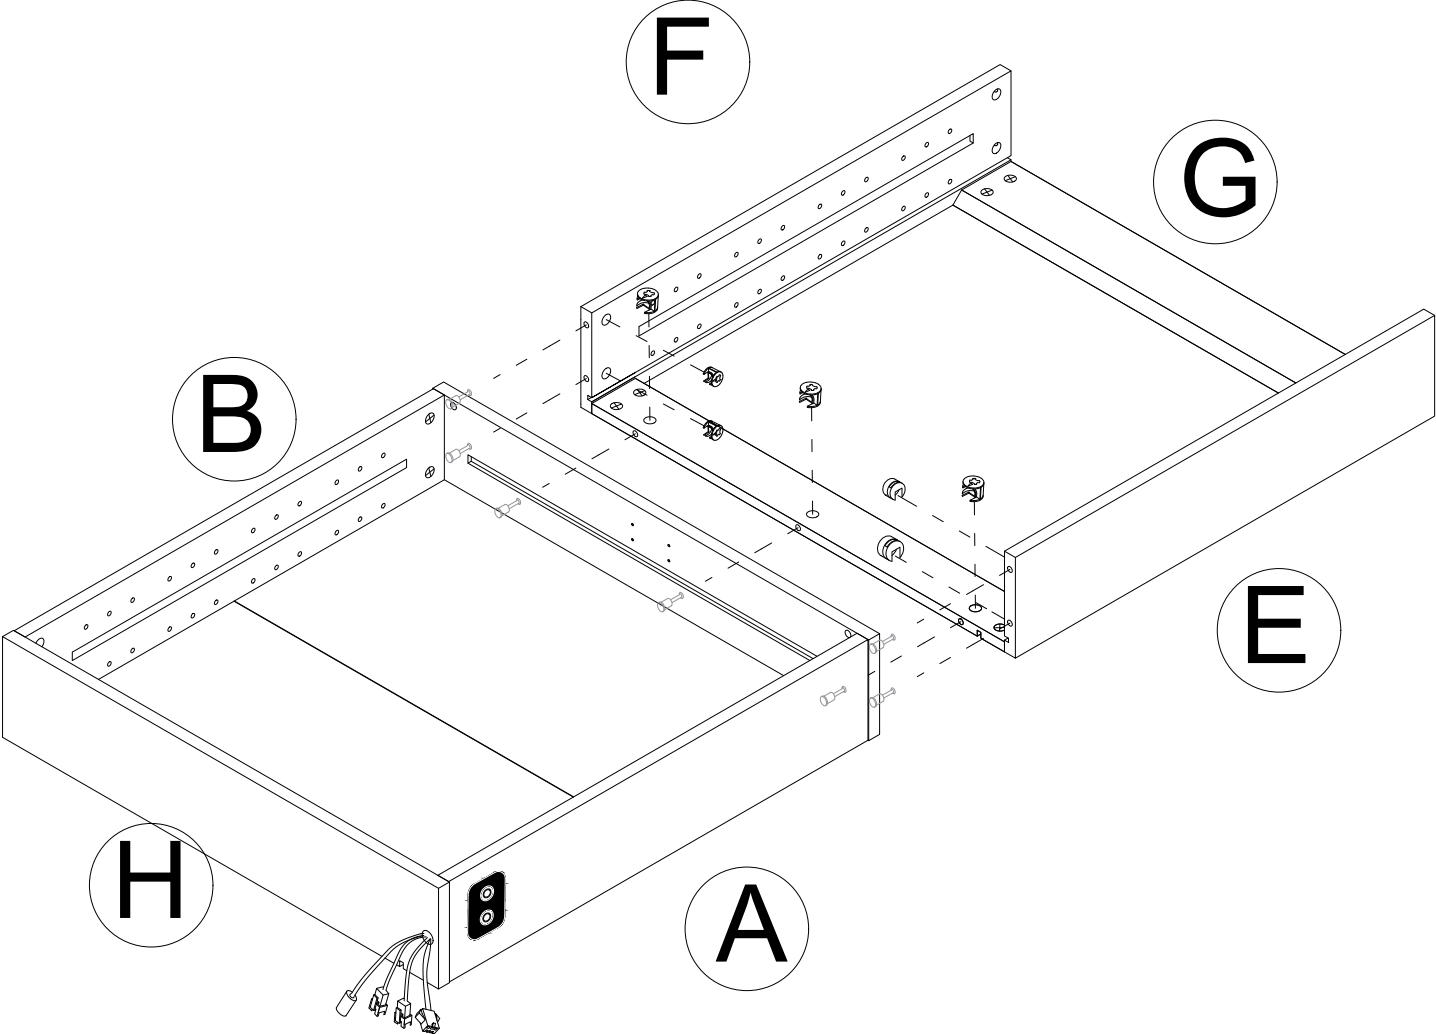

Step 18


9

x1





F



E

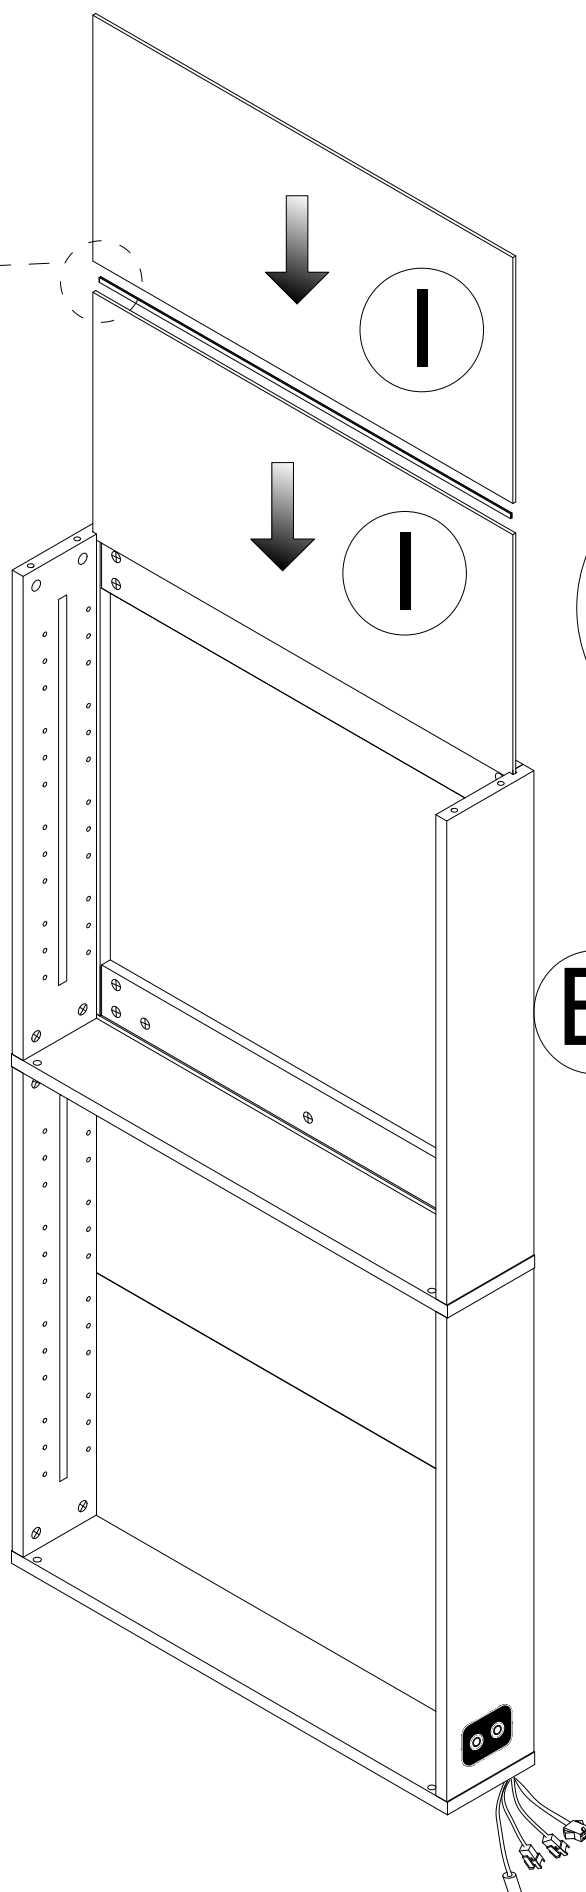

Step 19

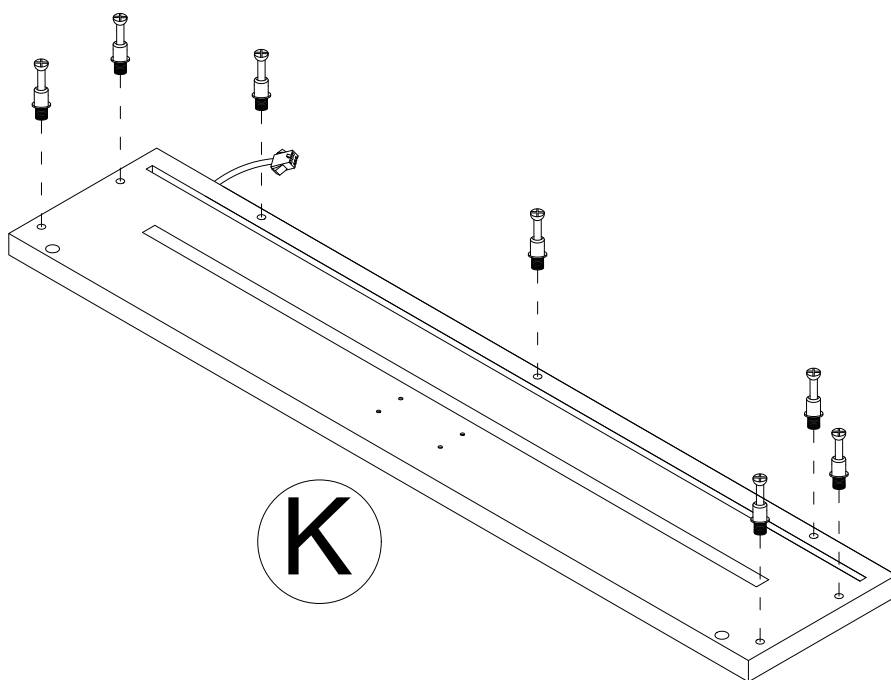

Step 20

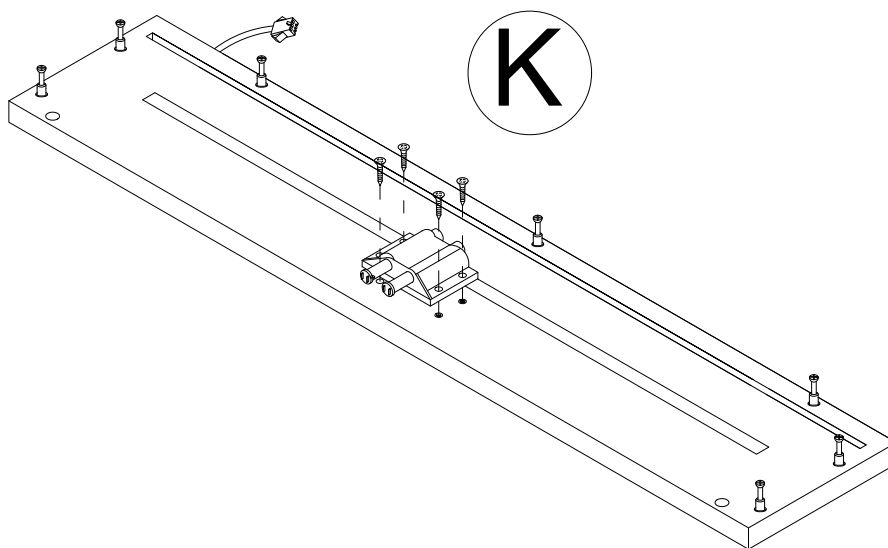


Step 21


2




x7

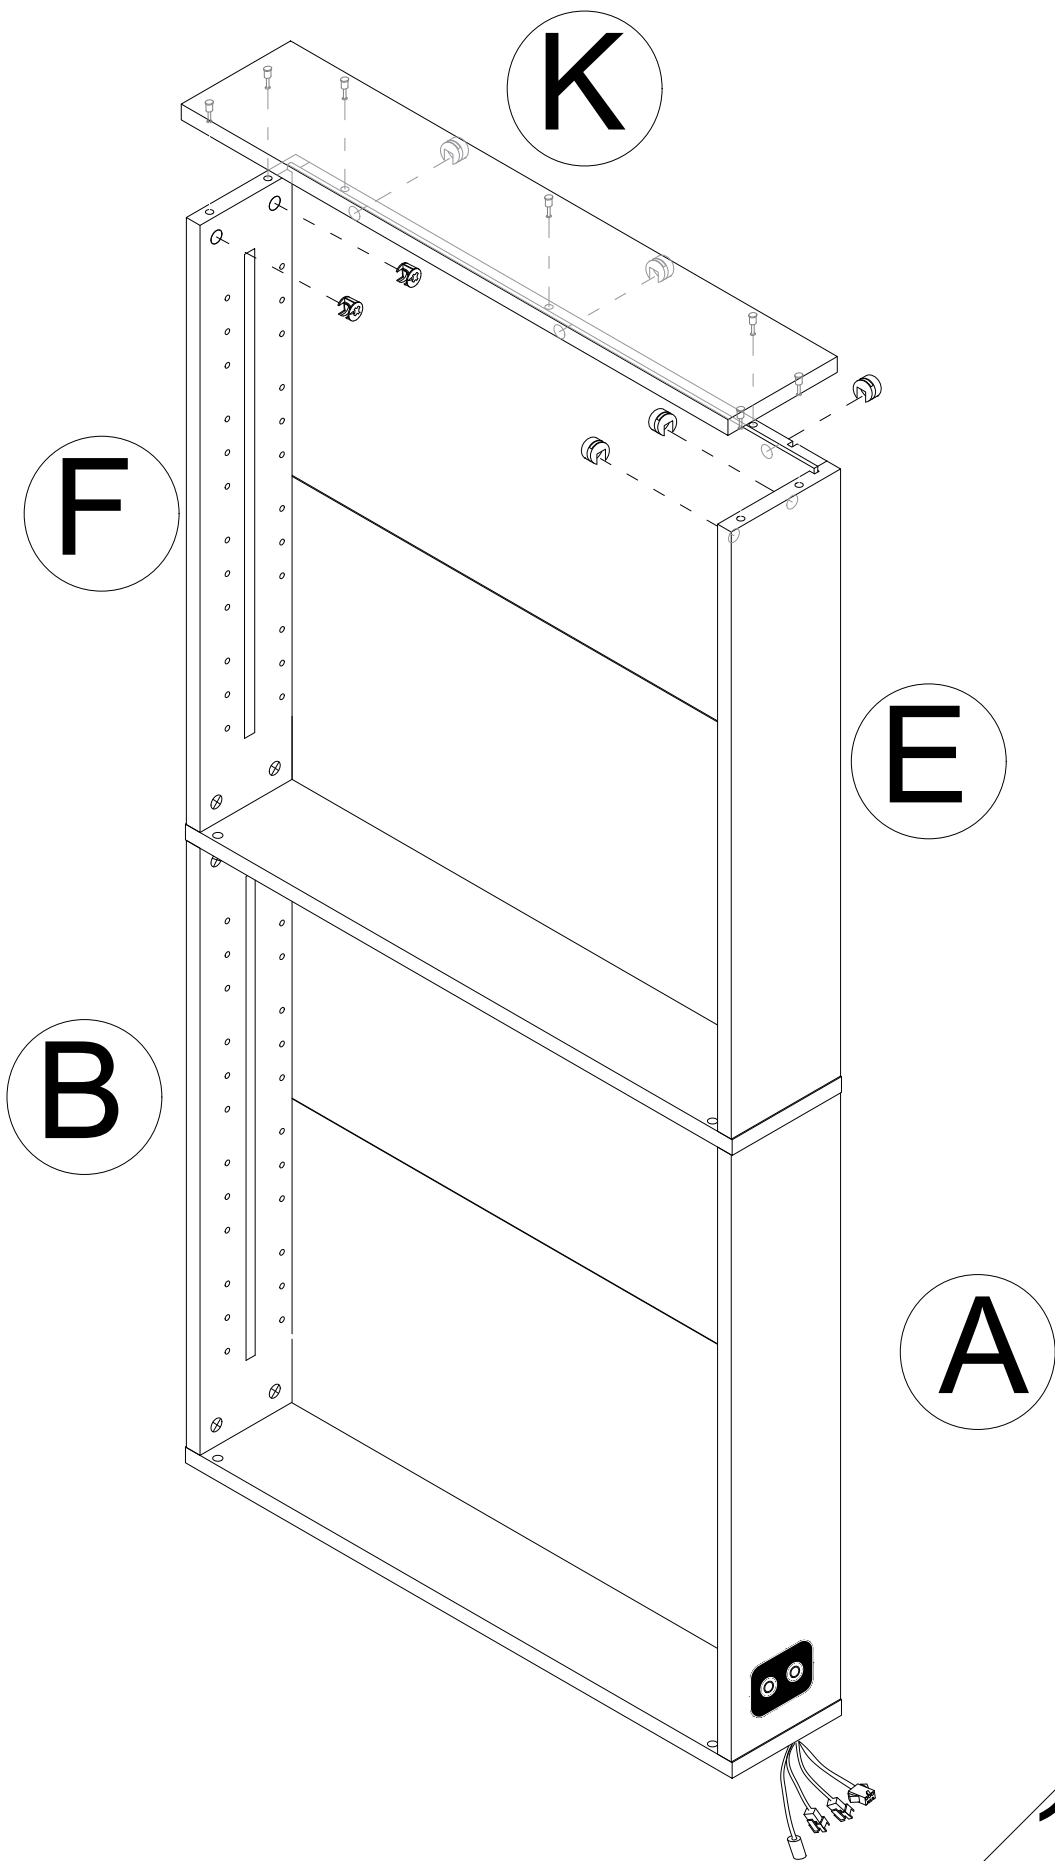

Step 22




Route the LED wiring for Panel F, E and K via integrated routed grooves inside panels to reach the lower compartment of the cabinet. All cables shall be fully concealed within the grooves without exposed wiring.

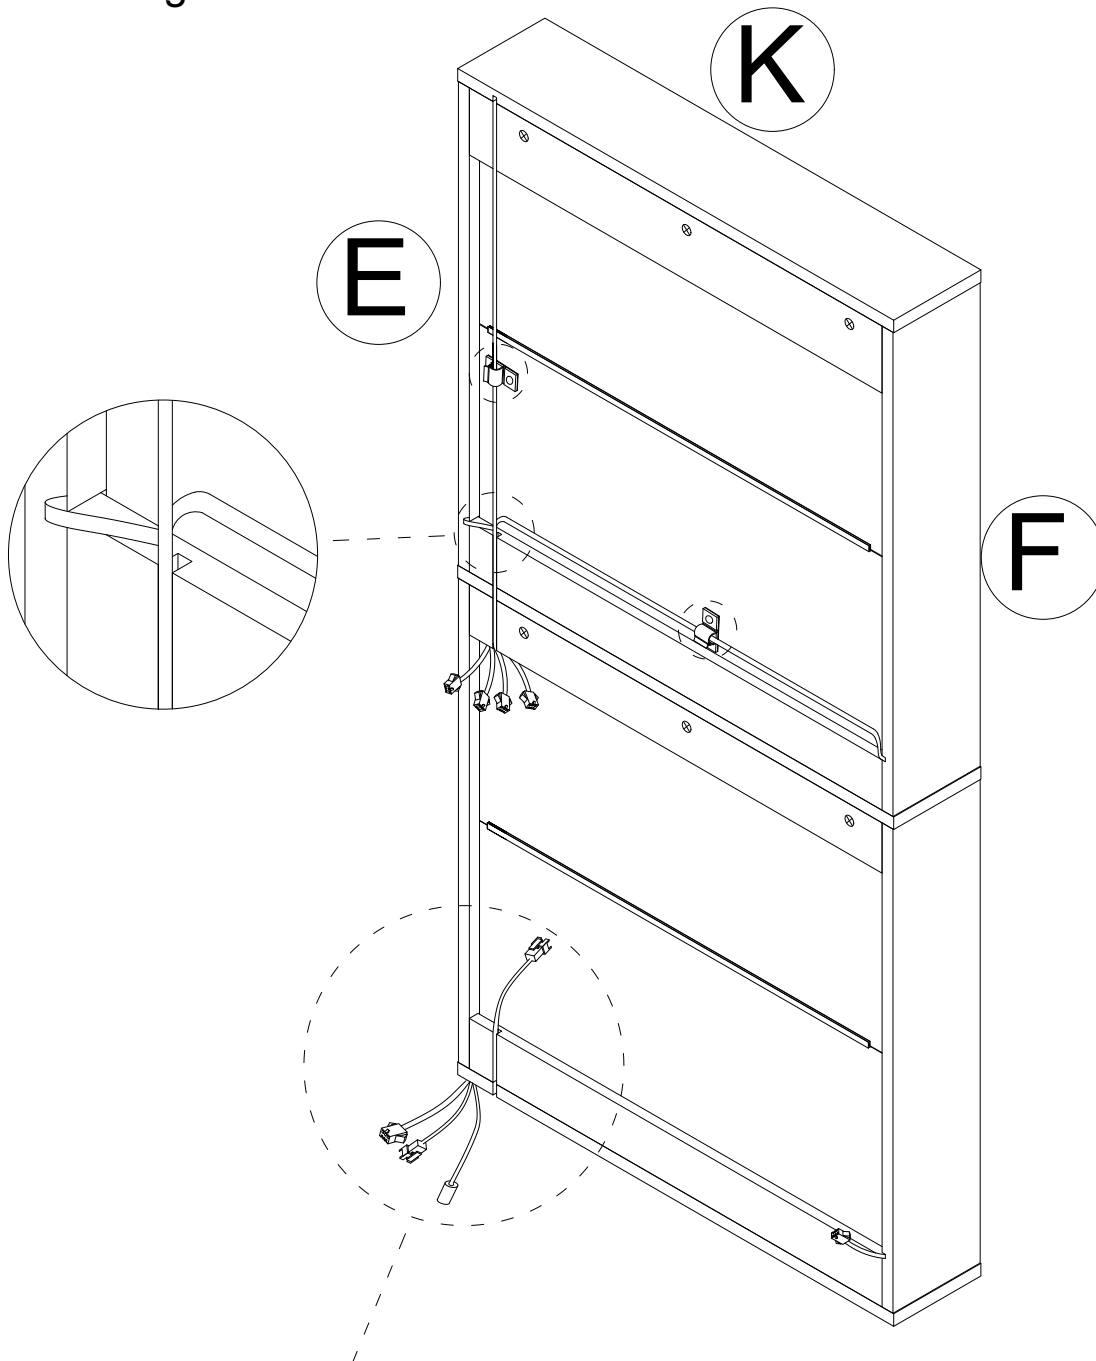

Pull the bottom female connector wire up to the top via routed grooves.

Step 23



10




E



K

F

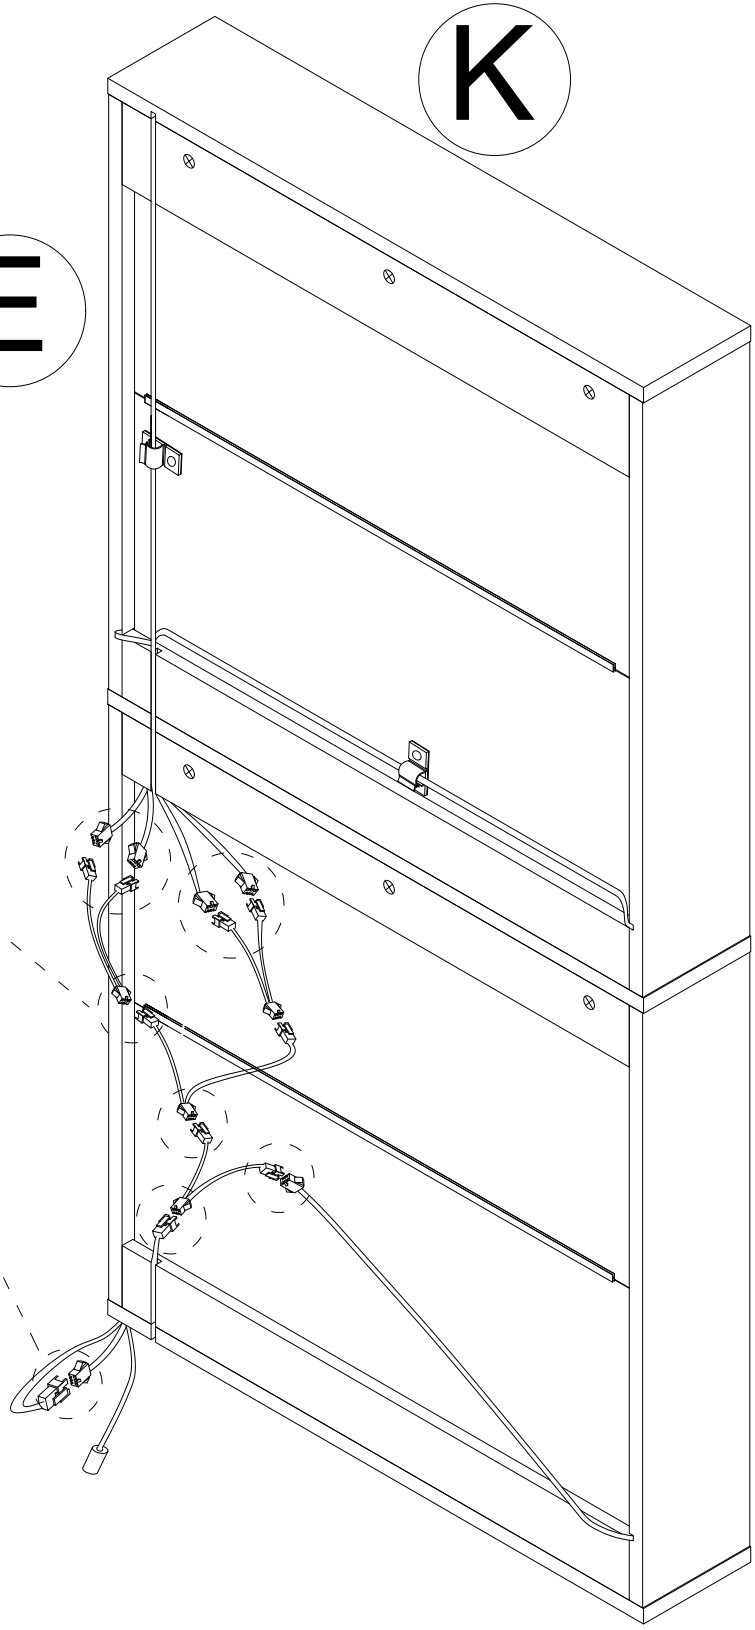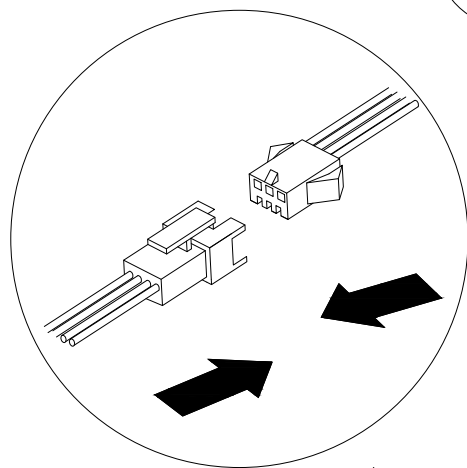

Step 24


5  x4

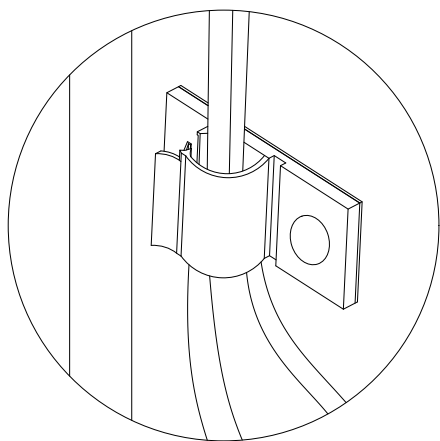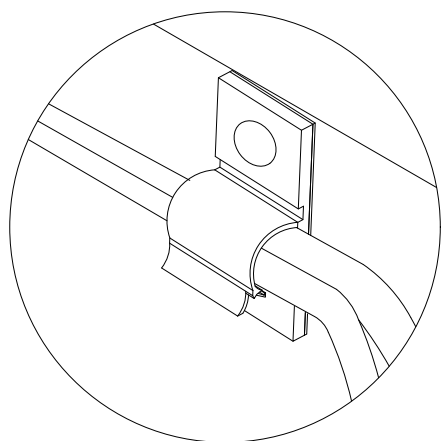

E



K

F

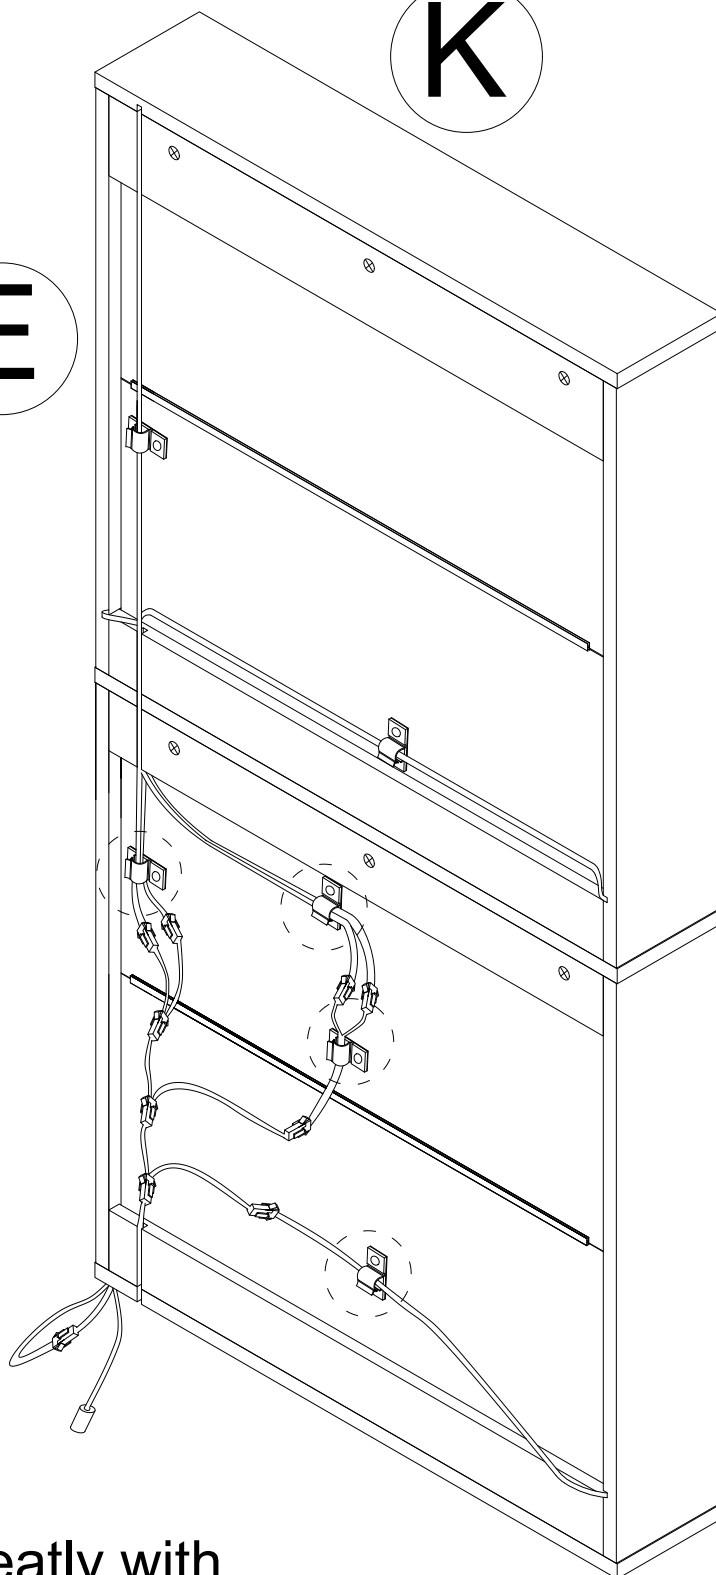


Arrange all wires neatly with cable clips according to actual wiring conditions for easy wall mounting of the product.

Step 25

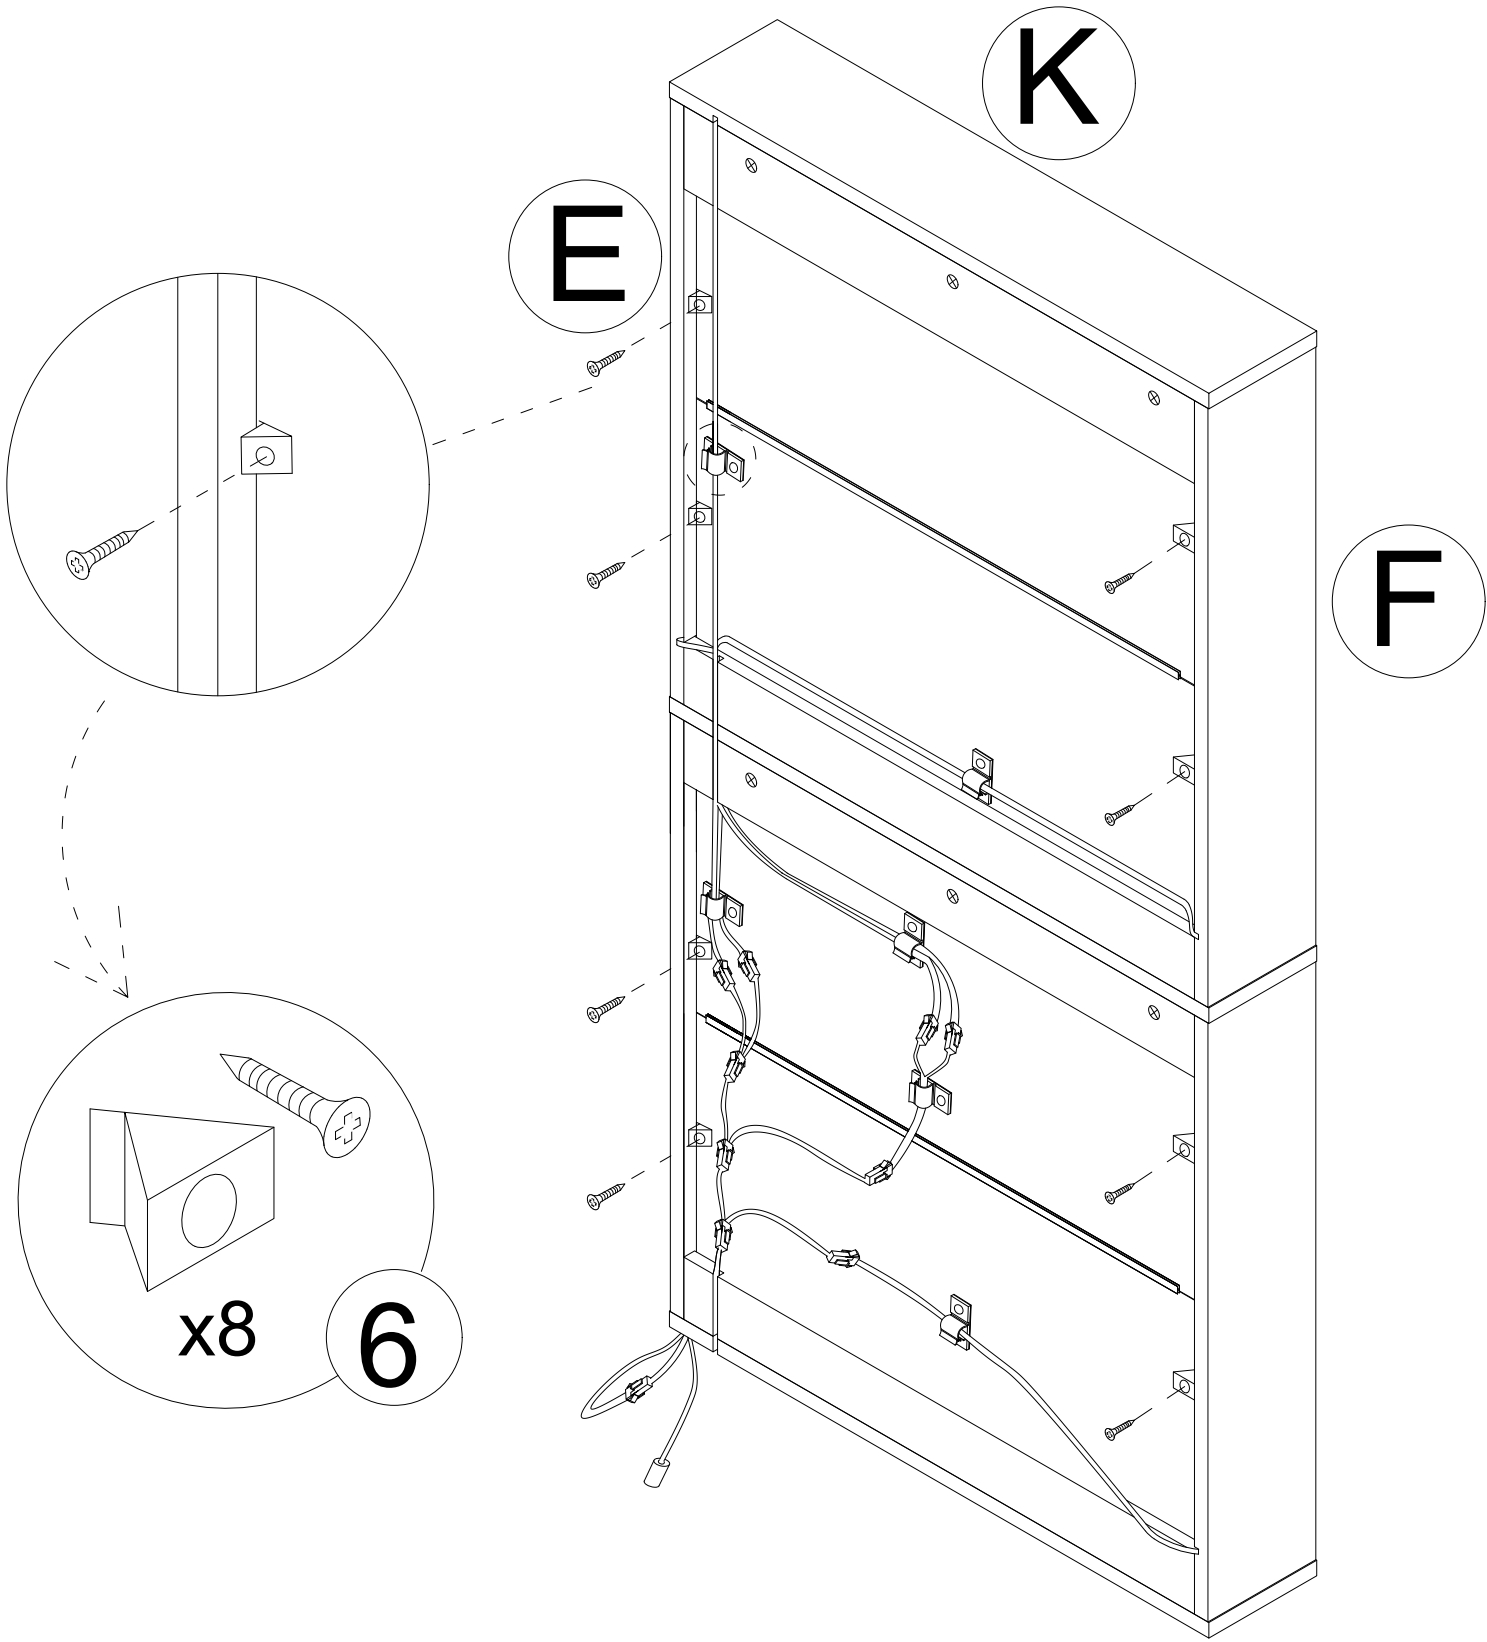


Step 26

7





Tear off the release paper and stick the sticker on the C-plate and C-plate lamp slot to avoid the lamp wire from falling off.

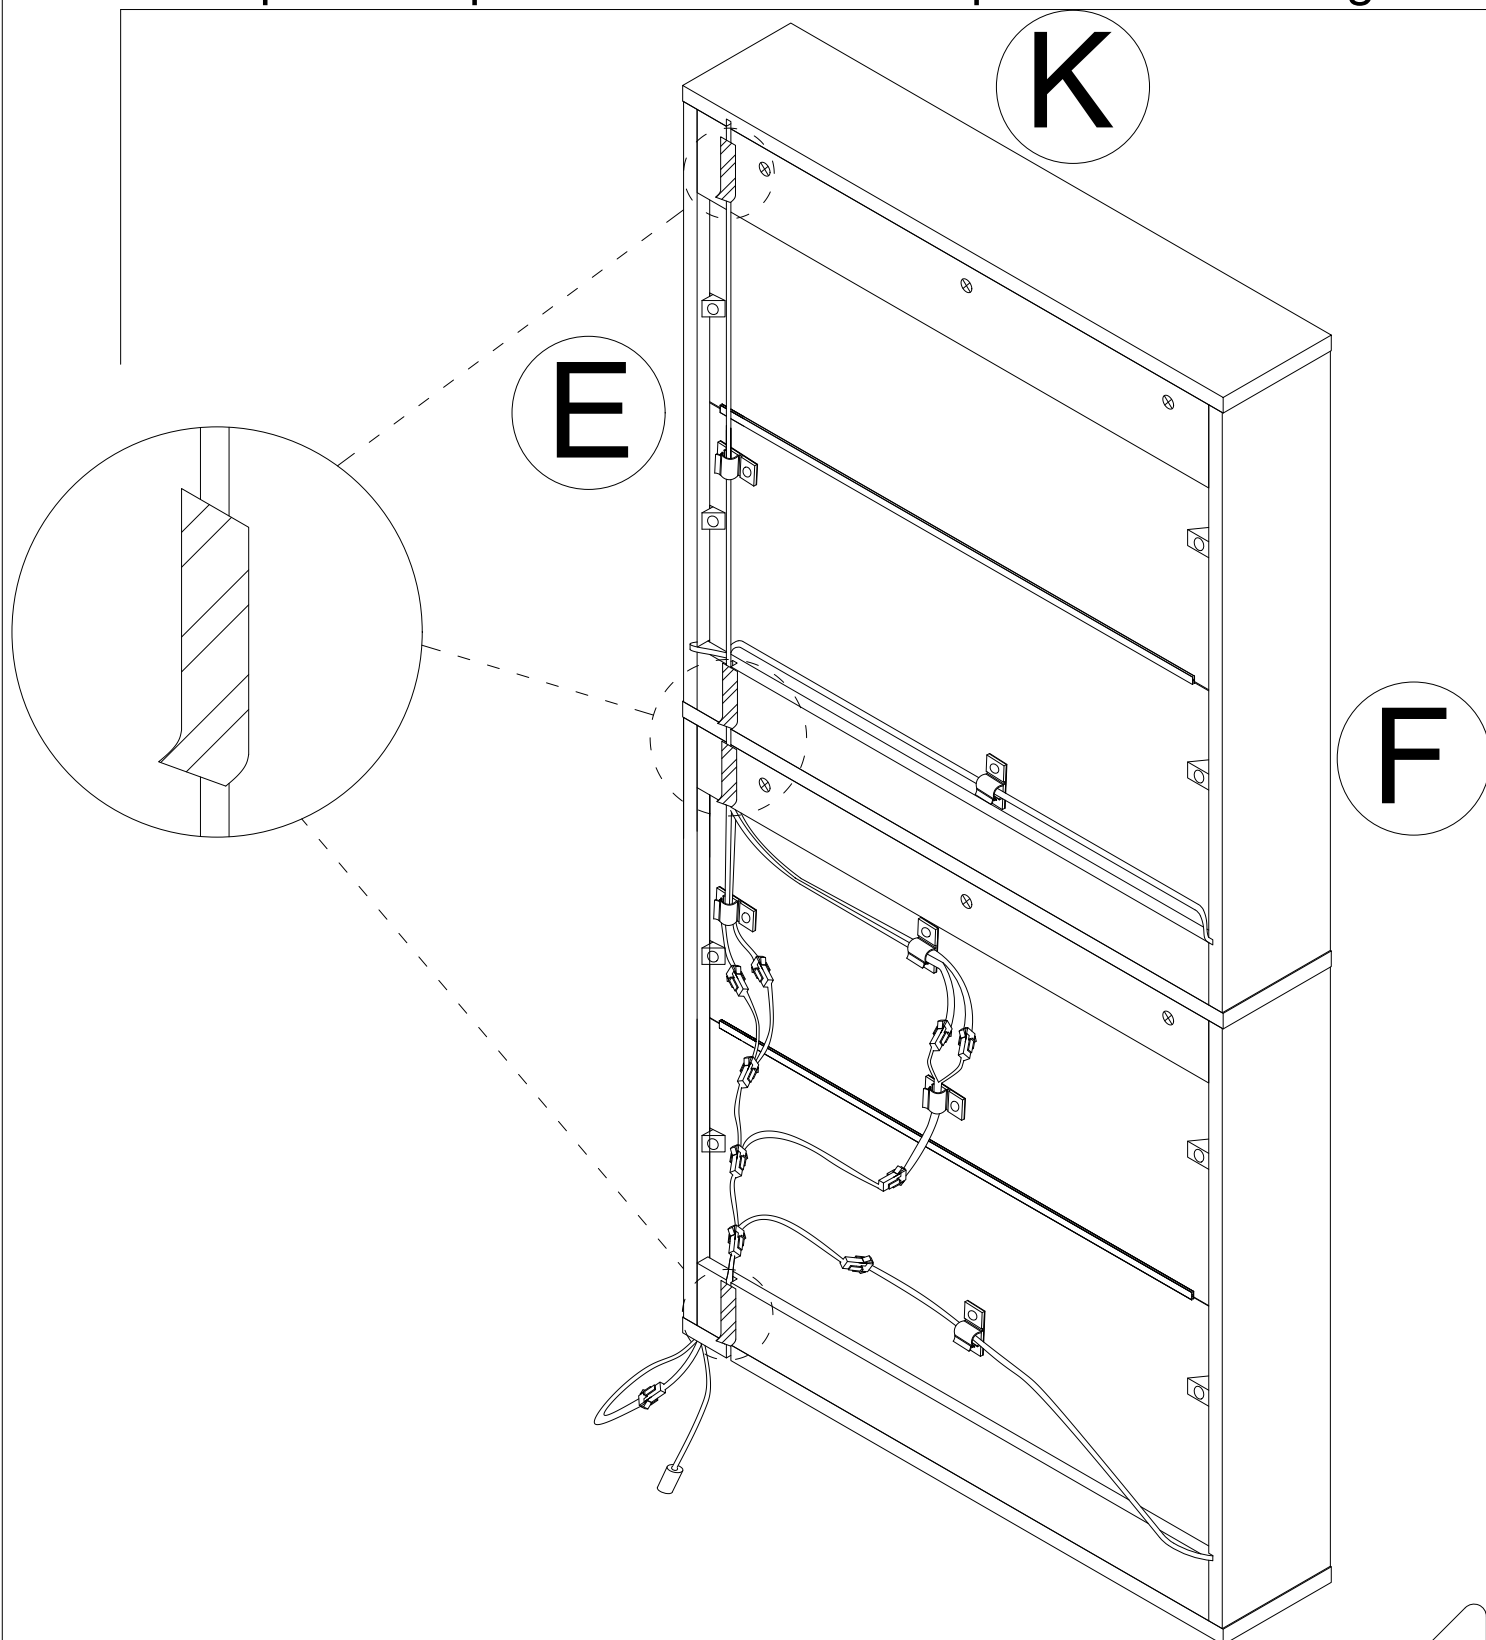


Step 27


8

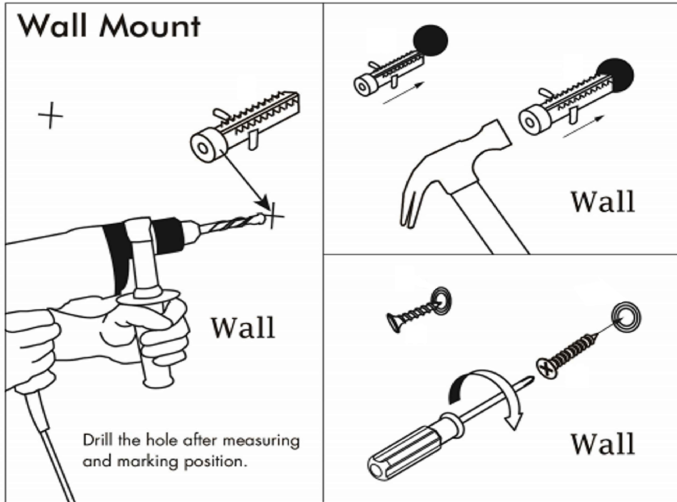


1. Choose the height that suits you
Drill the hole with an electric drill
and punch in the colloidal particles

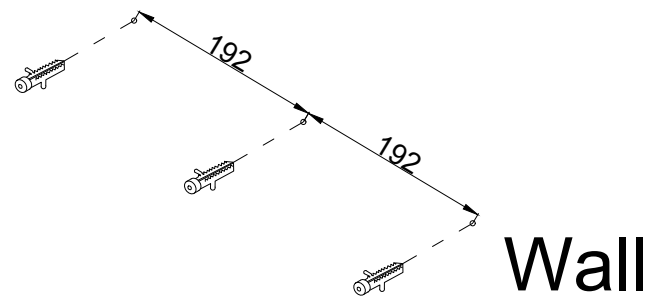


2. Fix the L board to the wall

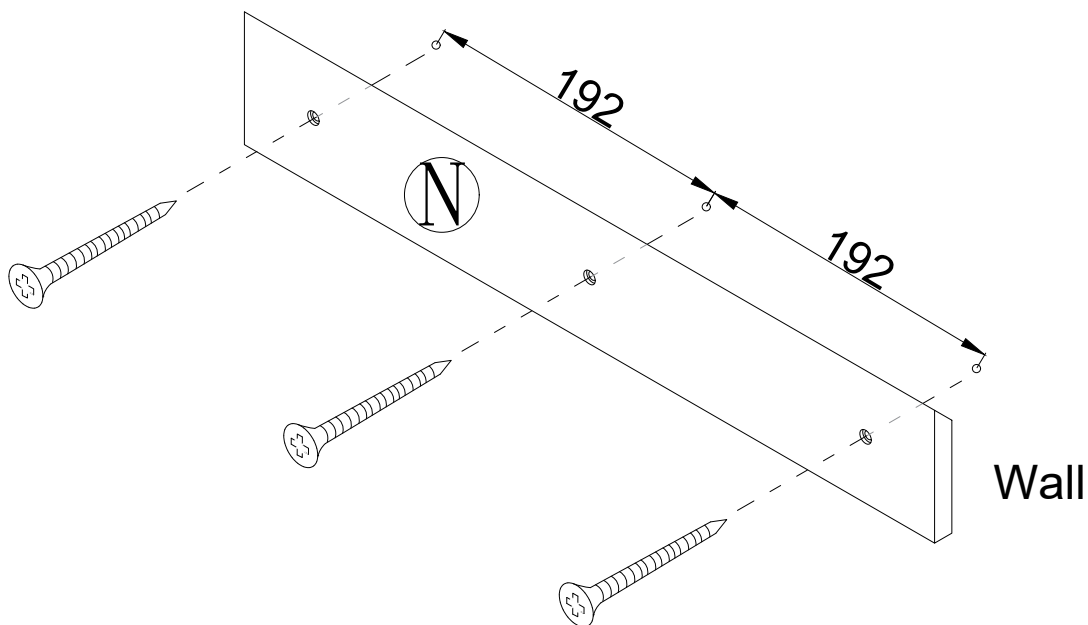


Step 28



Insert it into the cut

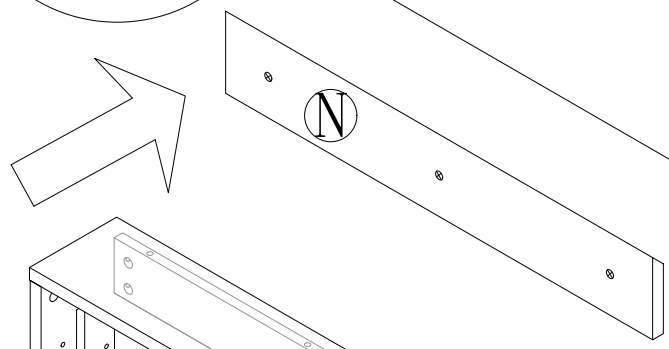

F

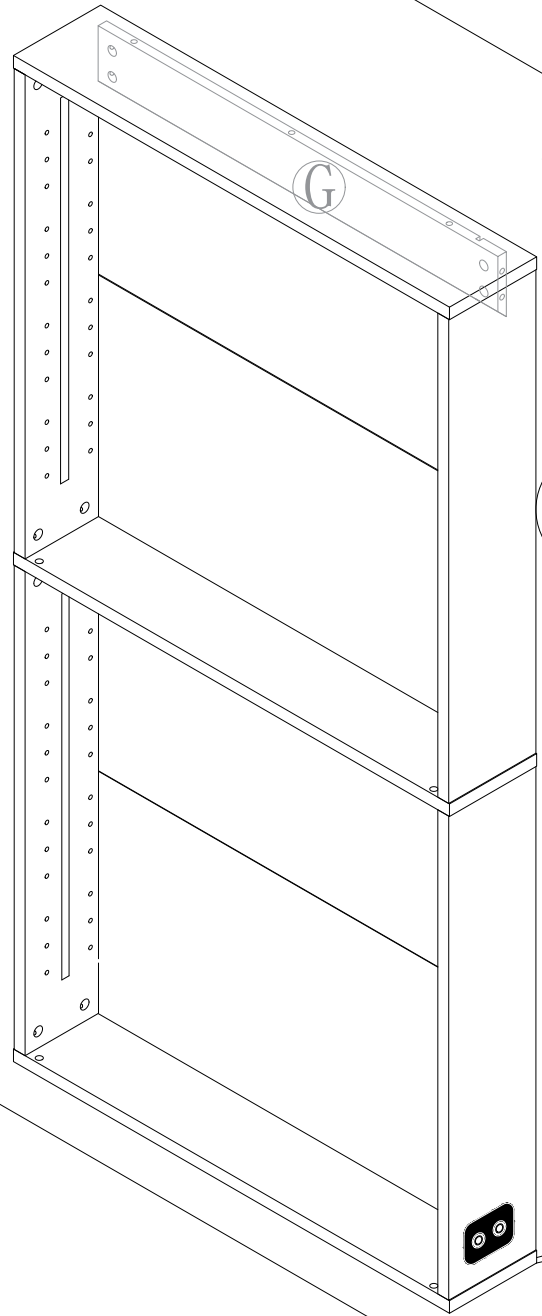


Wall

E

Step 29

8



x2



x2

x2

F






E

B

A

H

Wall

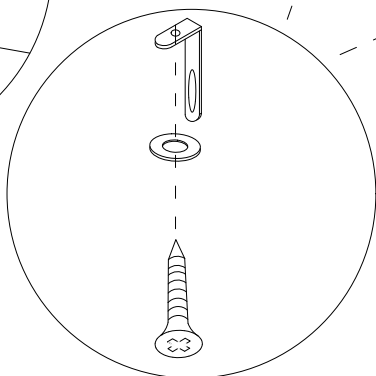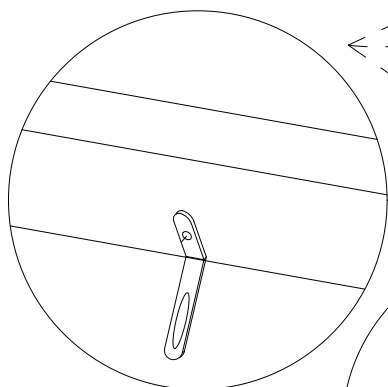


Install the anti fall hardware on the cabinet as shown in the picture first

3.5x14mm

24

Step 30

8



x1

x1

F


E

B

A

H

Wall

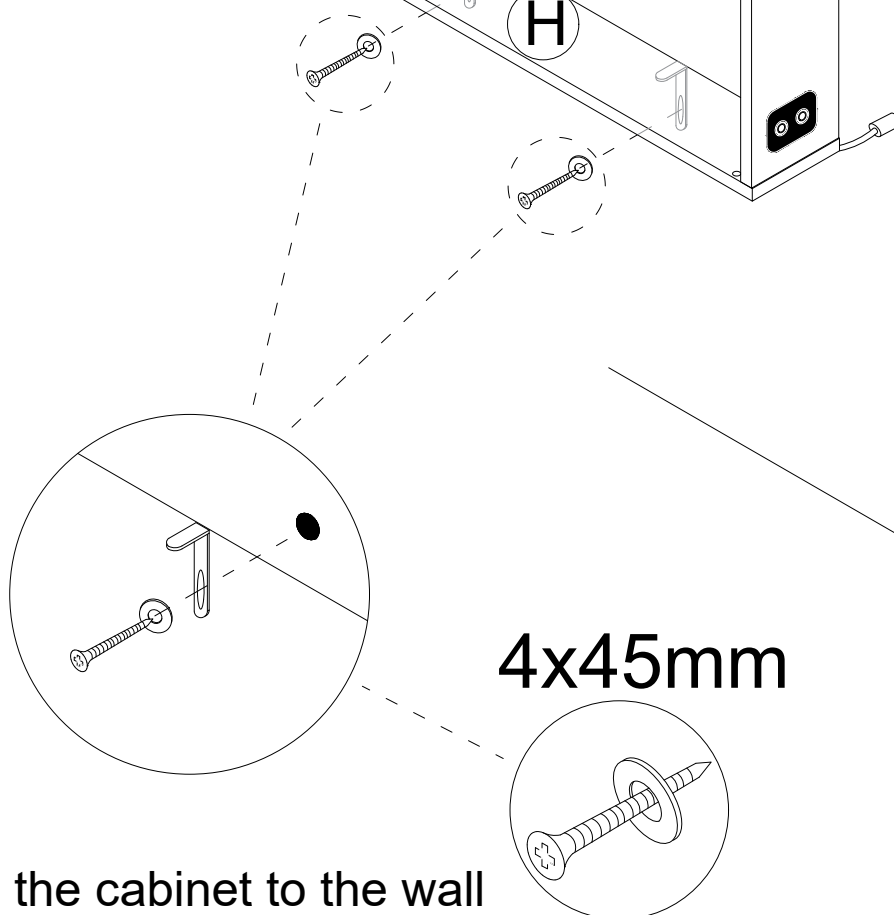


Fasten the cabinet to the wall


25

Step 31

4




x32

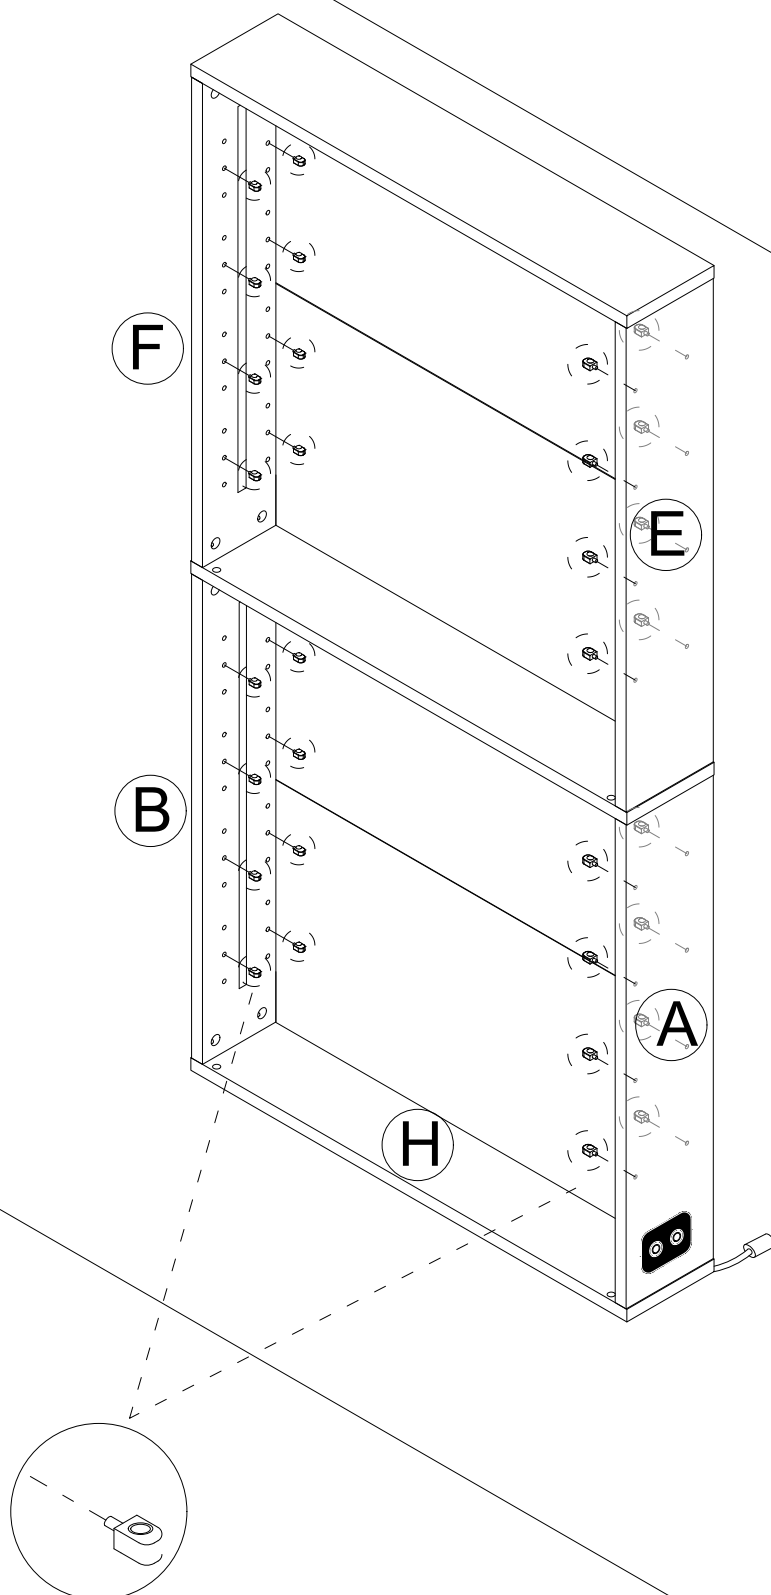

Wall


It can be adjusted up and down.

Step 31

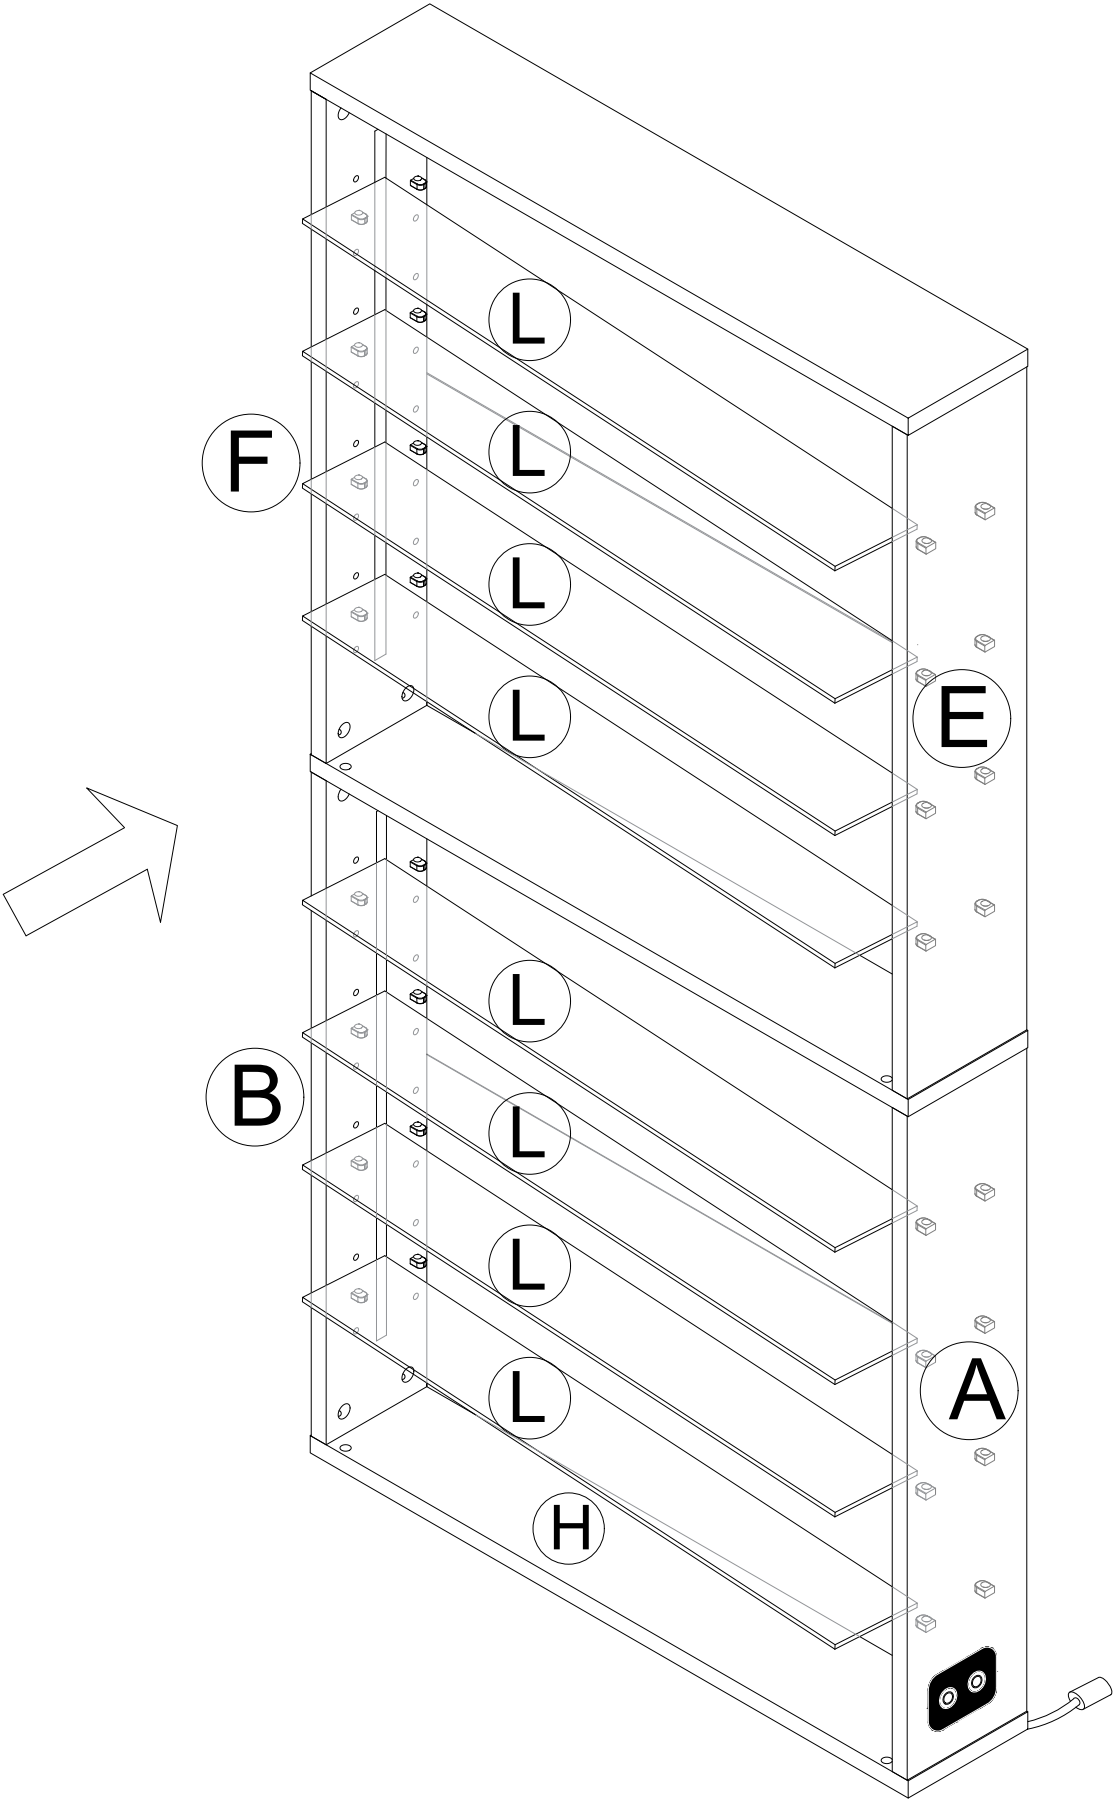


Step 32

- ③ x4
- x2 x2

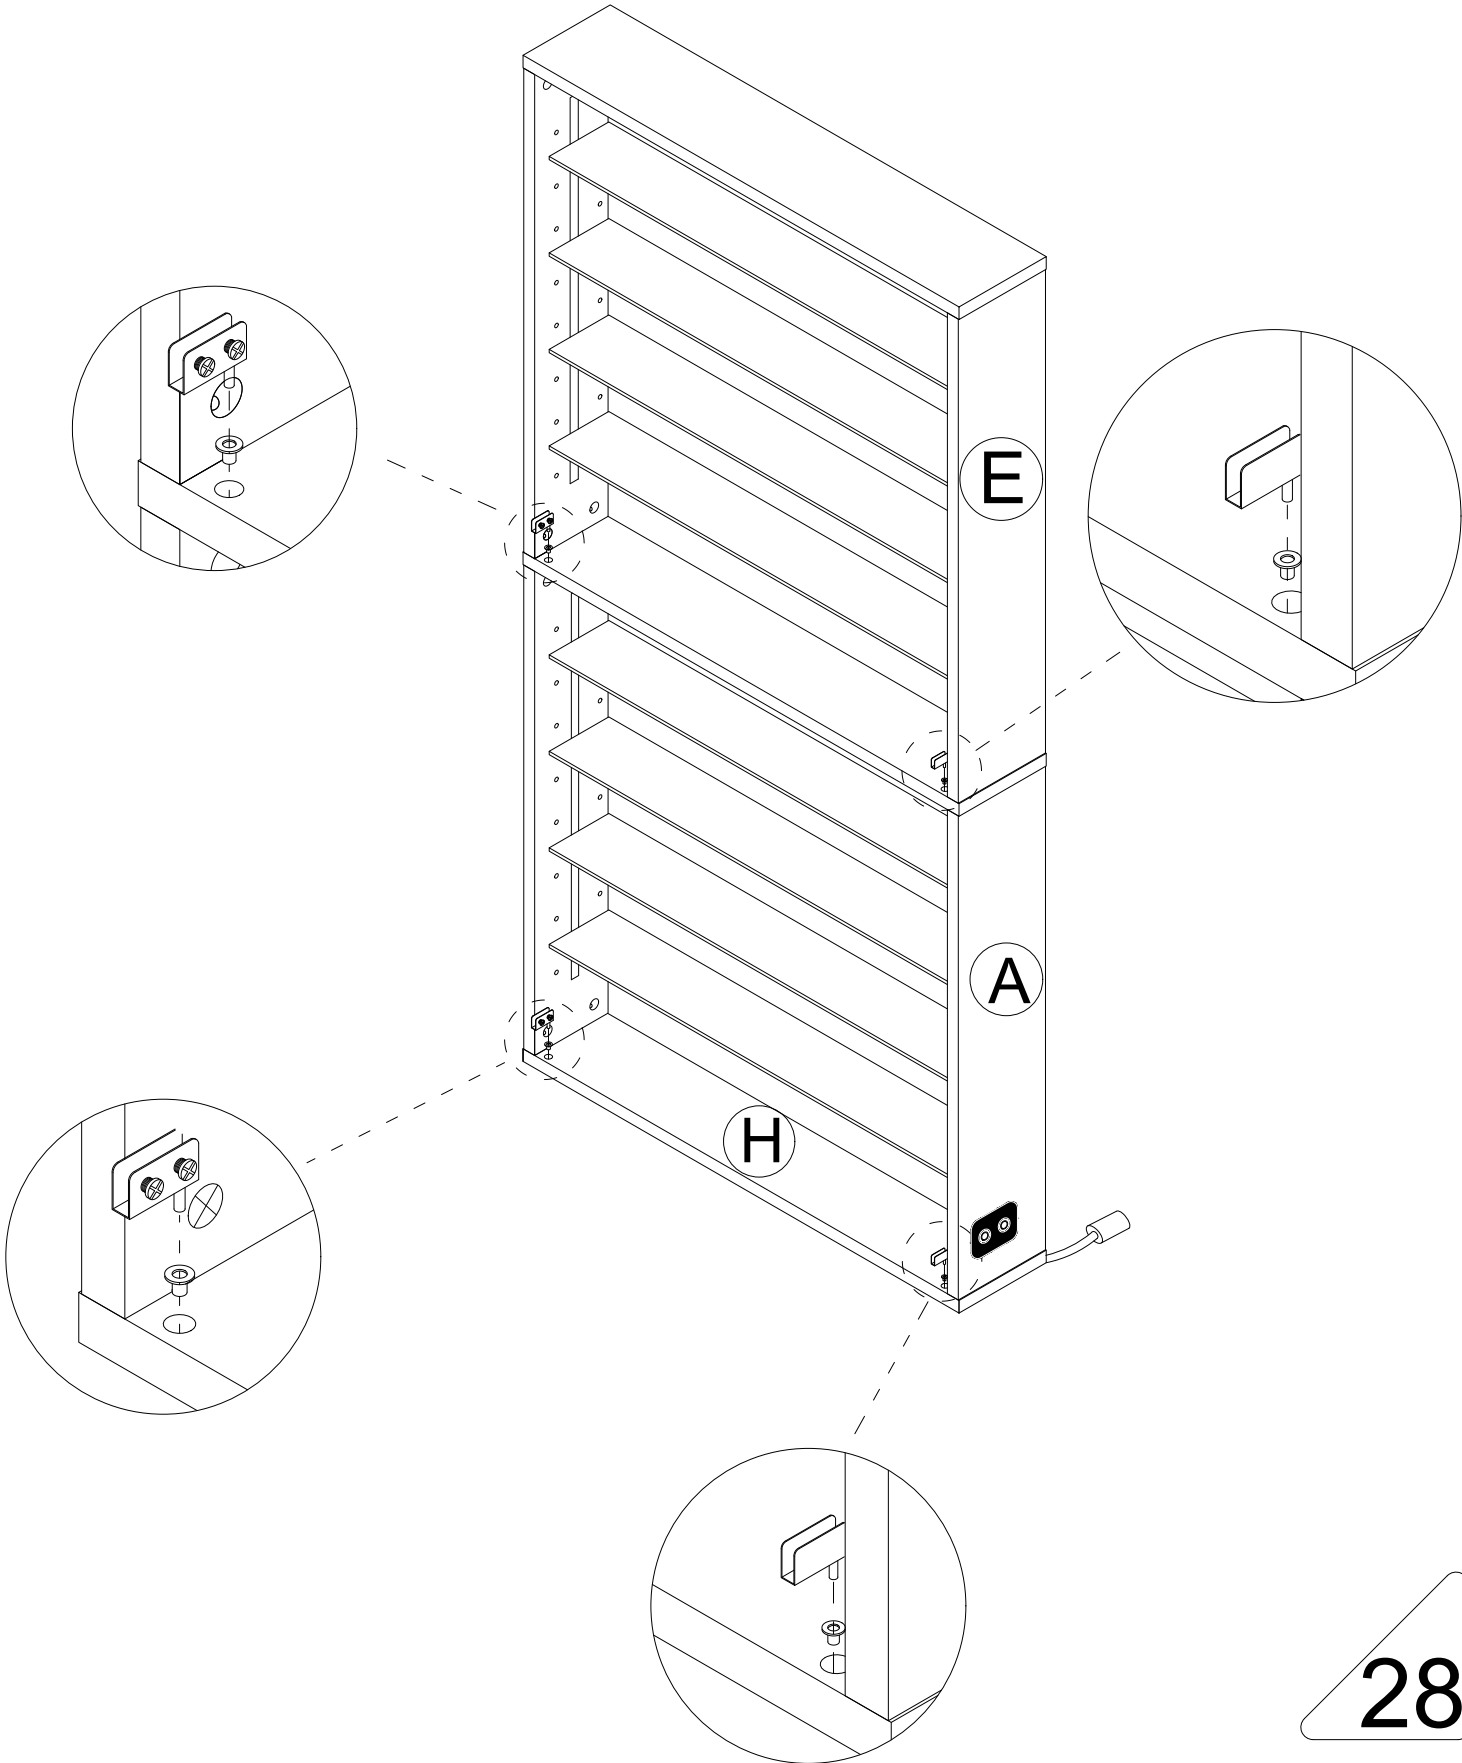


Step 33


First, completely unscrew the screws on the parts




Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

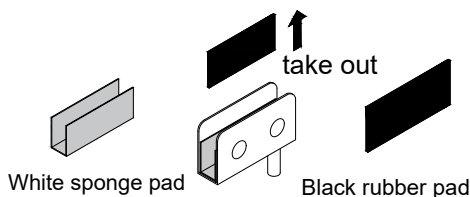

3




x2



x2


x2

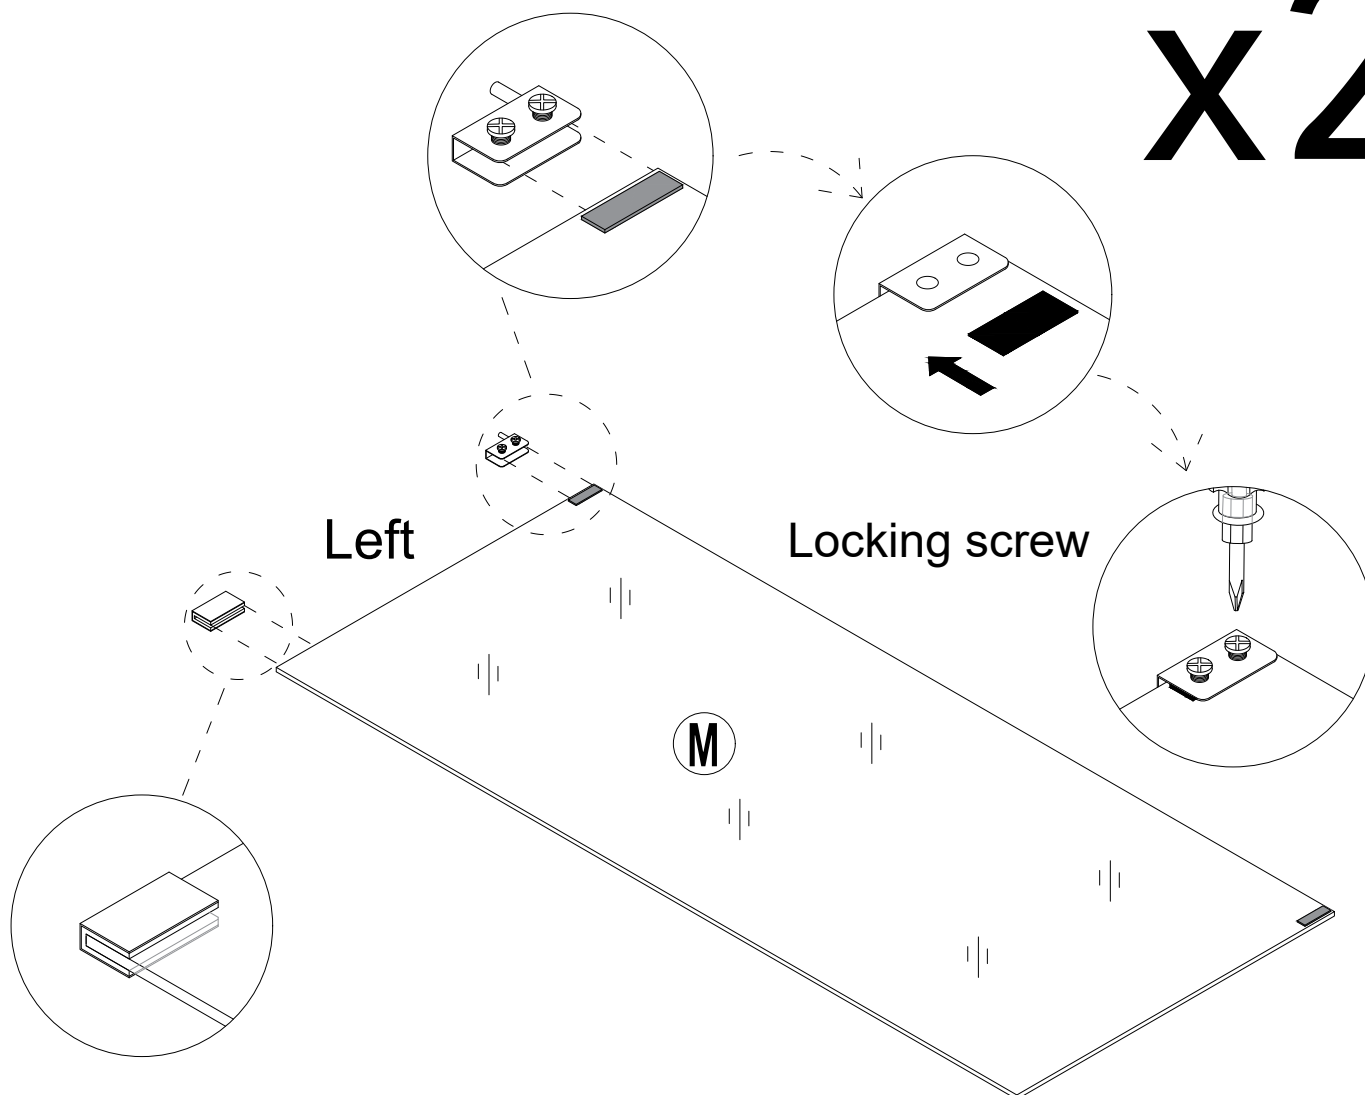

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 34

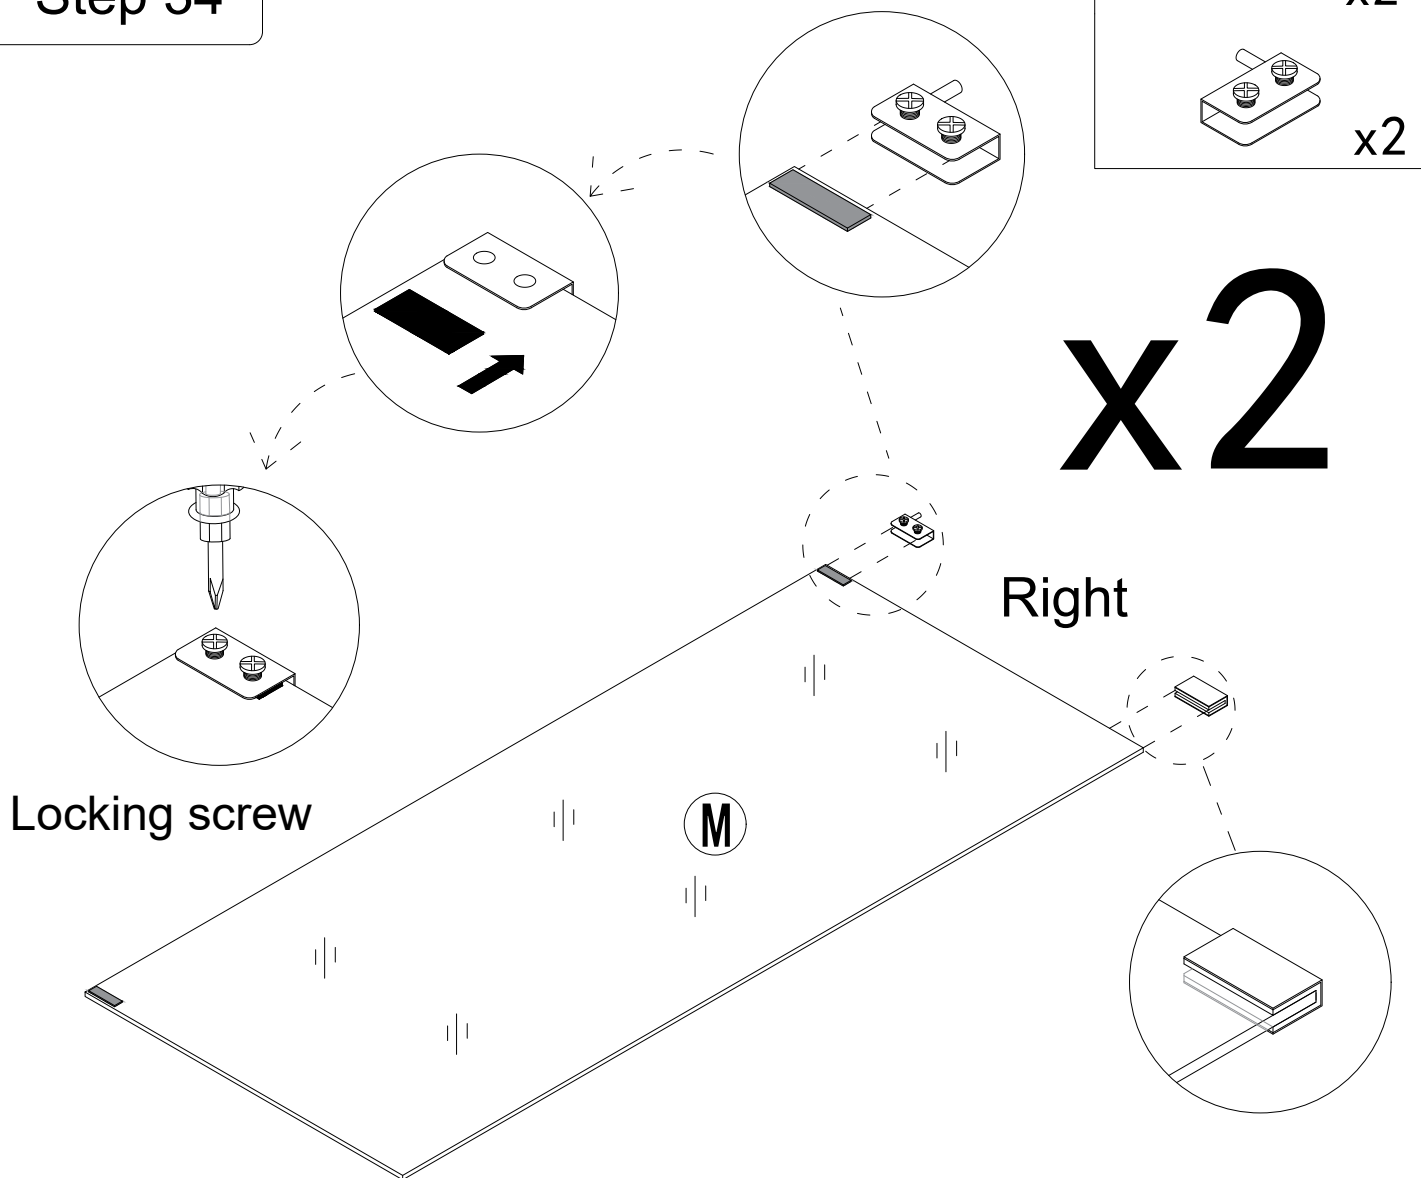

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed


Step 35

3


x4

Pay attention to the direction of the door hinge during installation

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first




second

After installing the glass door, place the black gasket on the side where the screws are installed




third


Locking screw

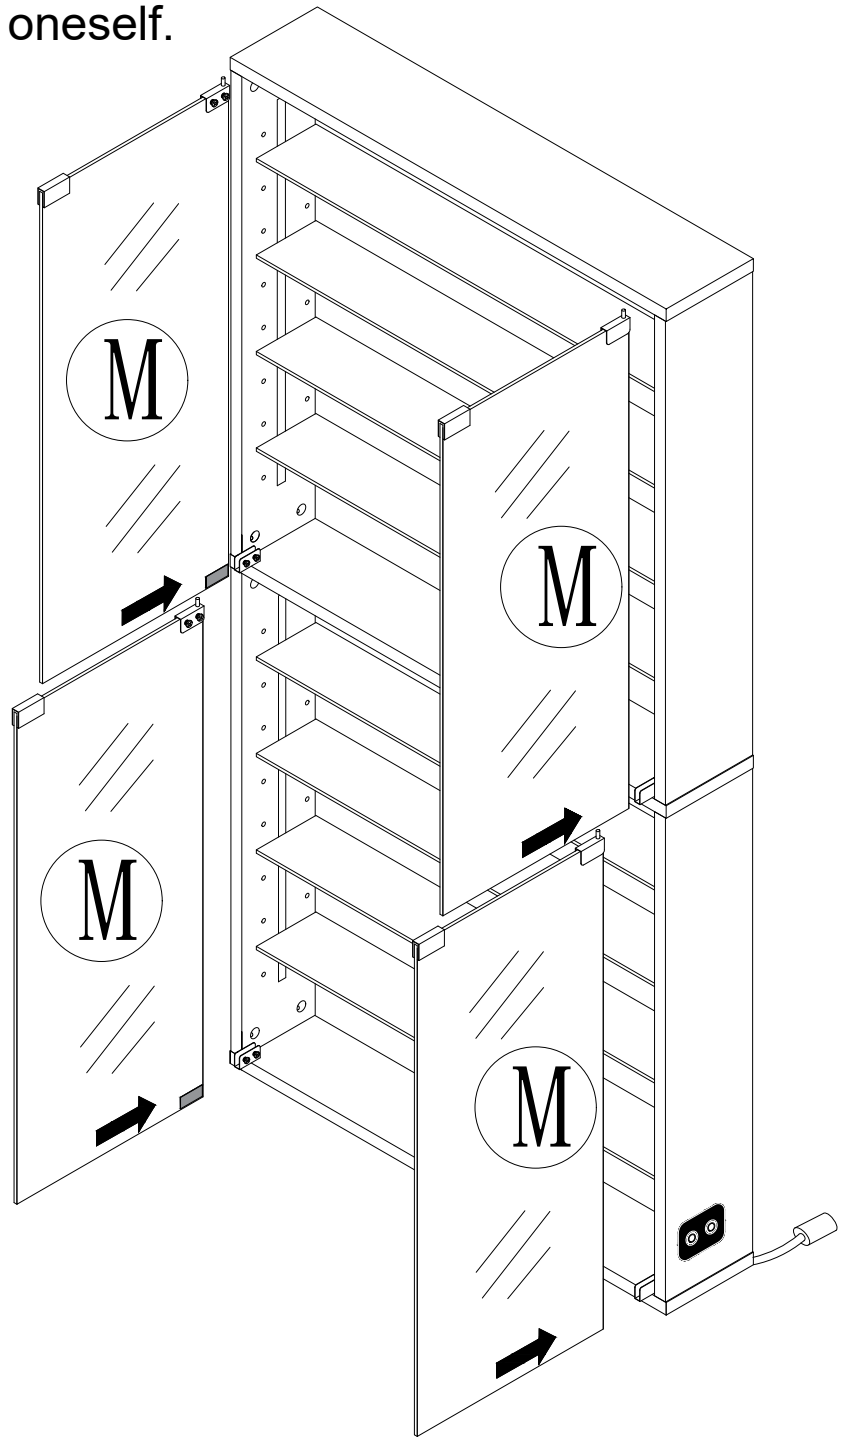

Step 36



x1

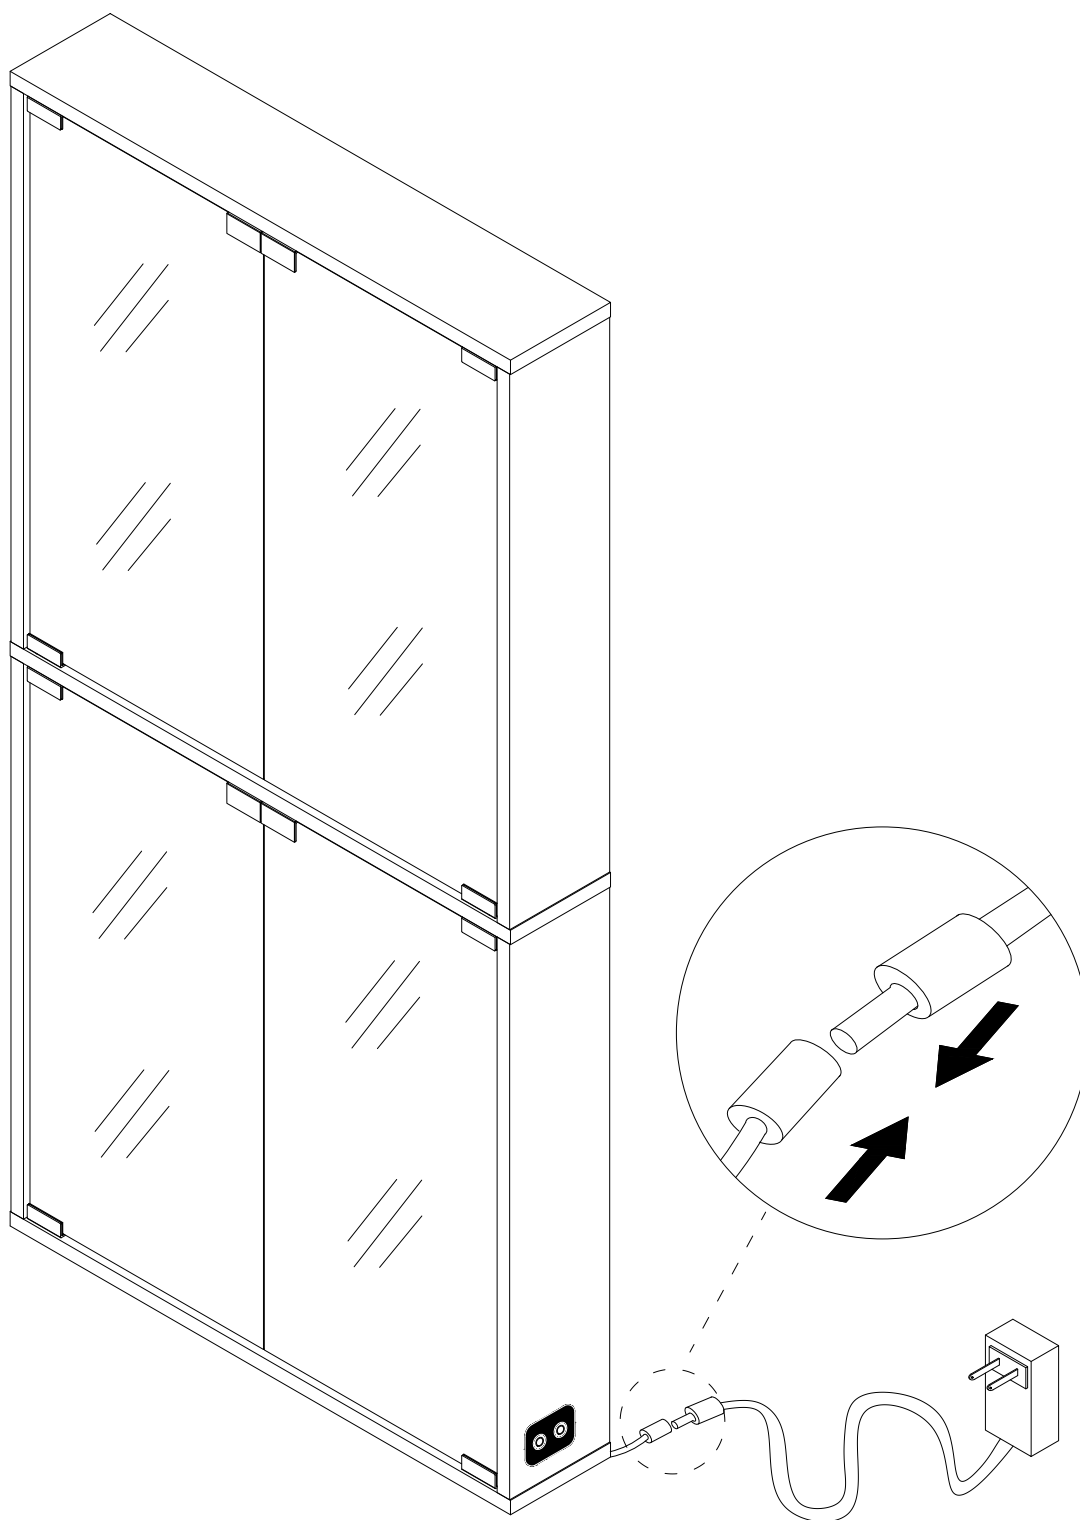


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

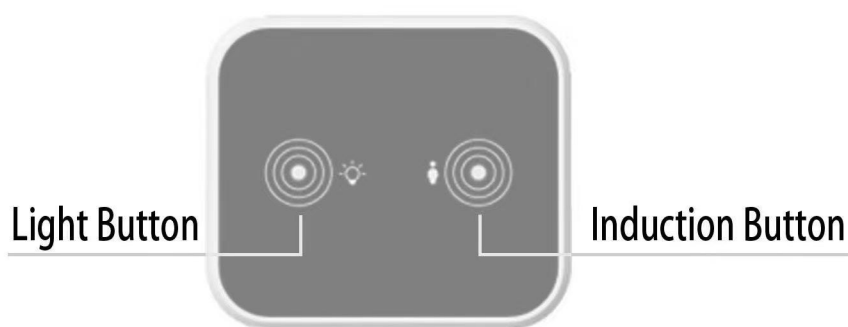

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.