


91103 Product Installation Instructions

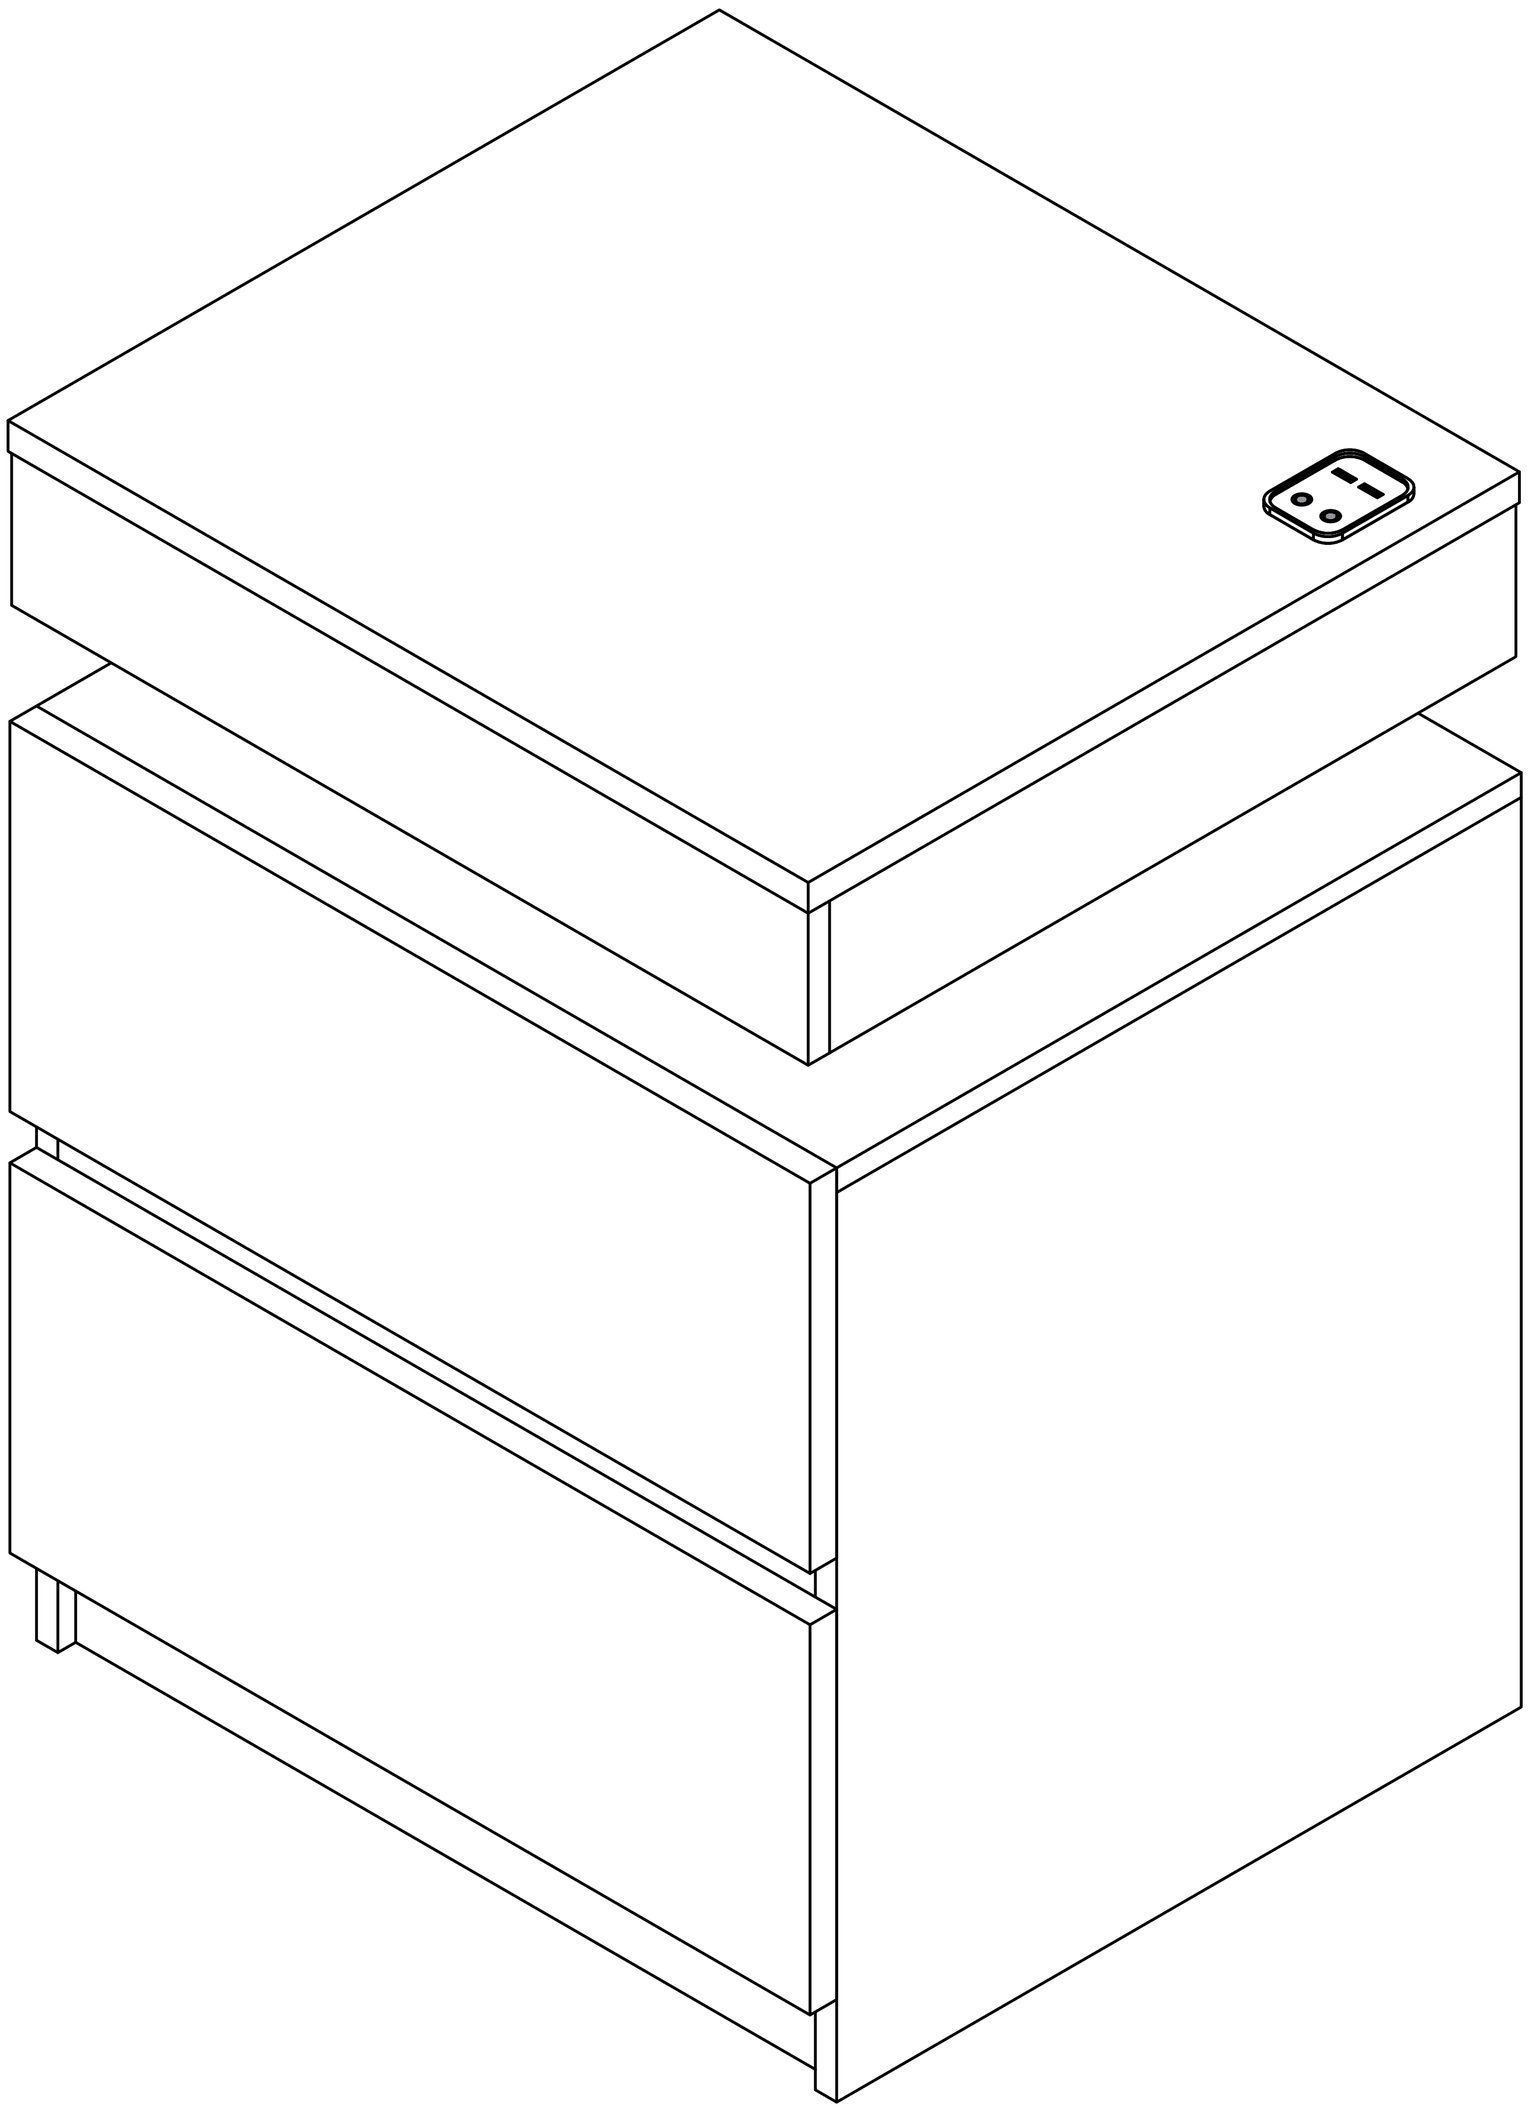


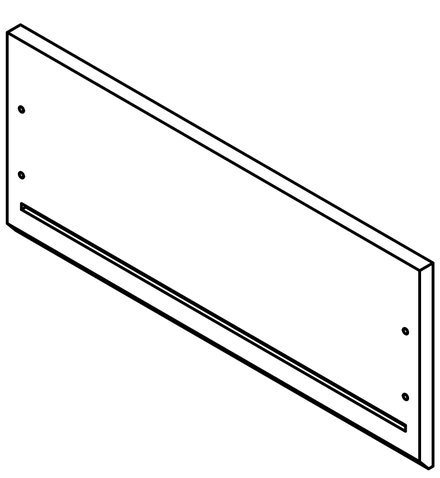


A1x1

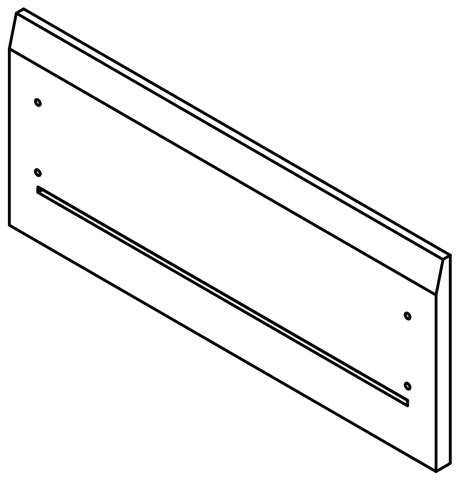


A2x1




Bx4

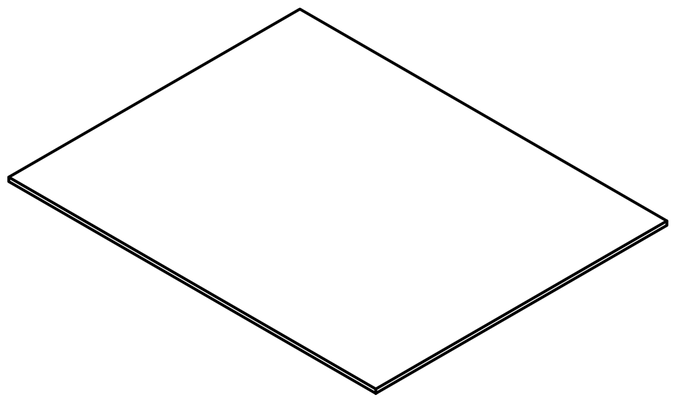


Cx2

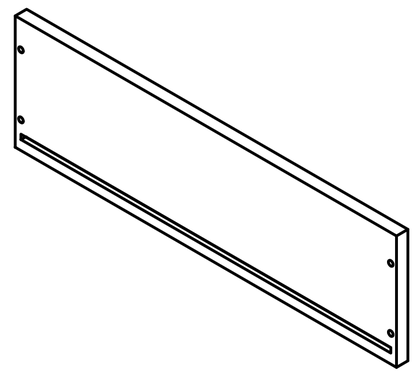


Dx2

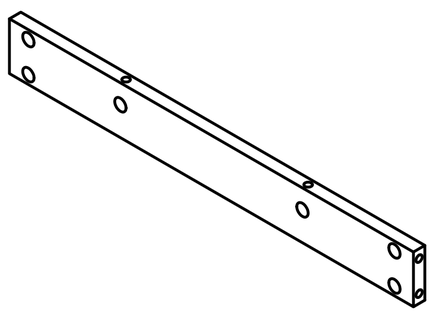


Ex2

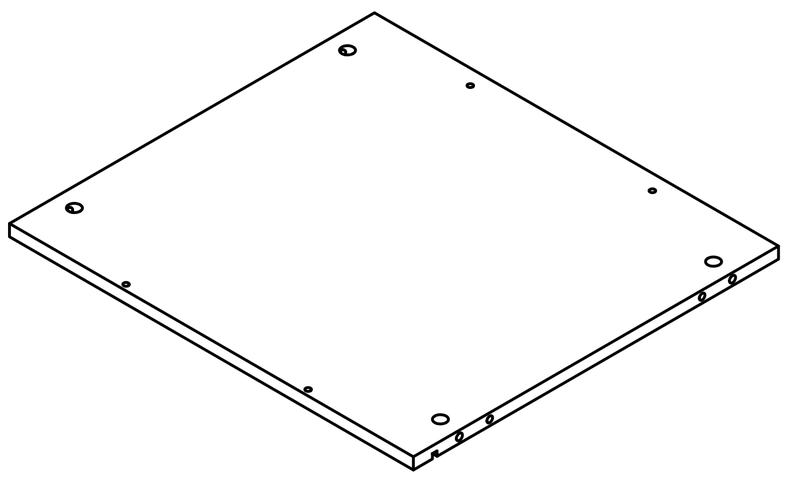


Fx1

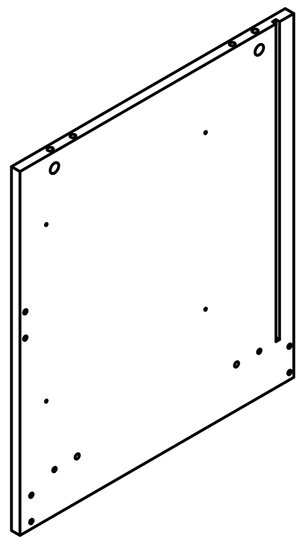


Gx1

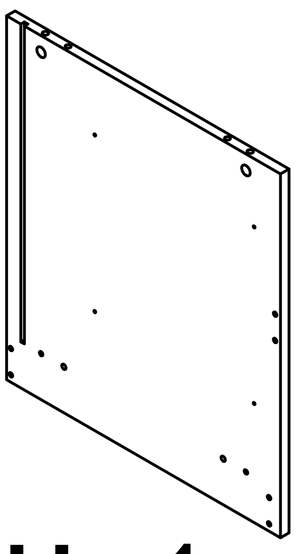


Hx1

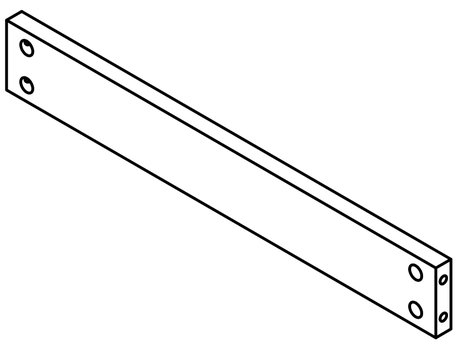


Ix1

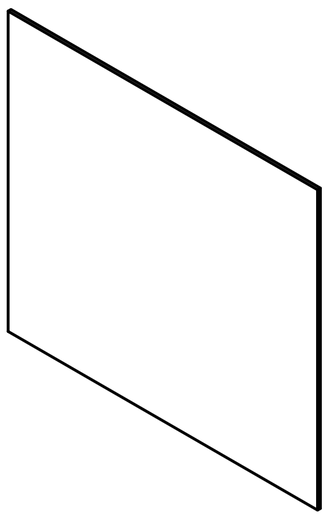


Jx1

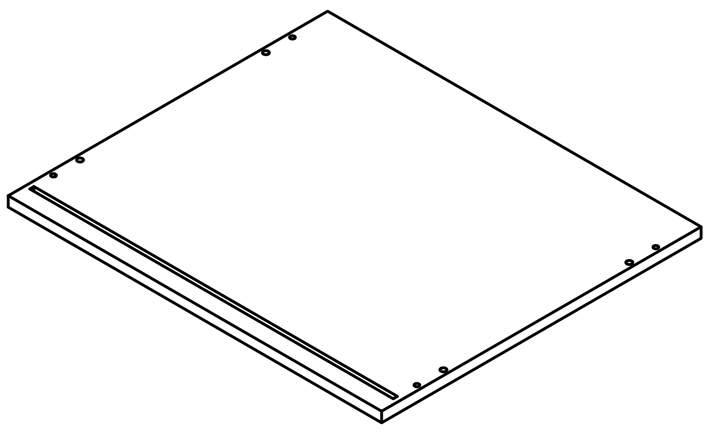


Kx1




Lx1

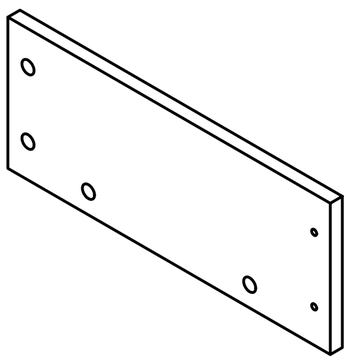


Mx1

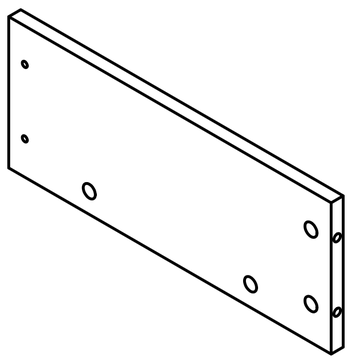


Nx1




Ox1

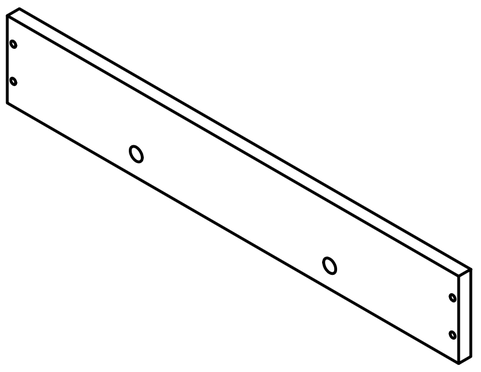


Px1

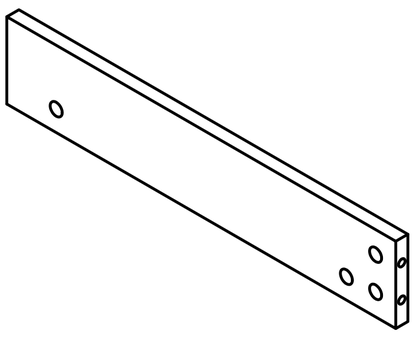


Qx1

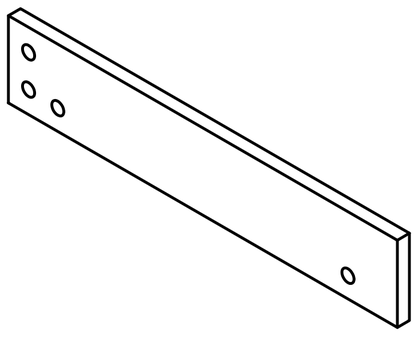


Rx1



Sx2

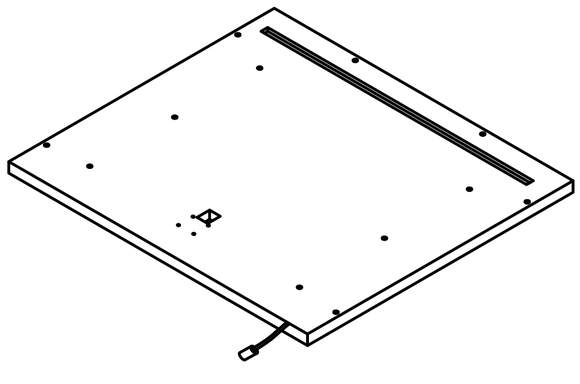






Tx1

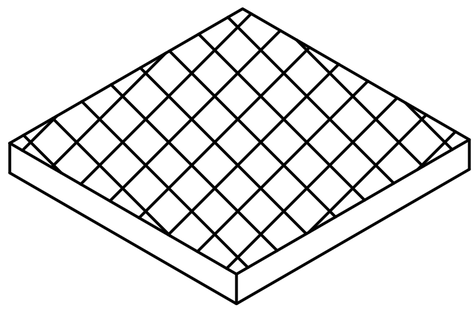


Ux1


1

Accessories list

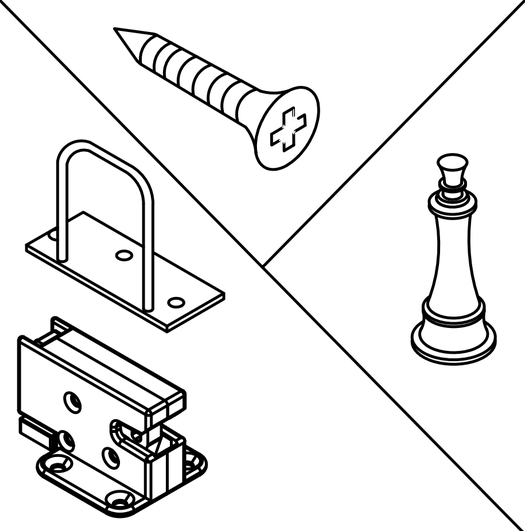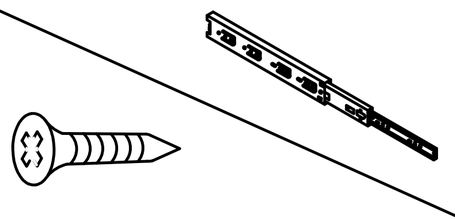1		Two In One Screw (6x28mm)	70pcs +6pcs
2		Two In One Nut (10x12mm)	70pcs +6pcs
3		Wood Chipping (6x30mm)	8pcs +2pcs
4		Concealed lock & Screw (3x12mm)	7pcs +1pcs 2pcs 1pcs
5		Screw & Guide (12 inch) (3x12mm)	6pcs 30pcs +2pcs
6		Non-slip pads (50x10x2mm)	4pcs +2pcs
7		Fixing Clip & Screw (3x16mm)	4pcs +1pcs
		AC/DC Adapter(12V⎓2.0A)	1pcs

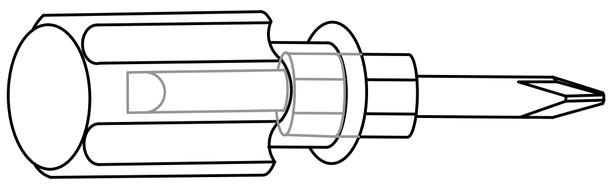






1pcs

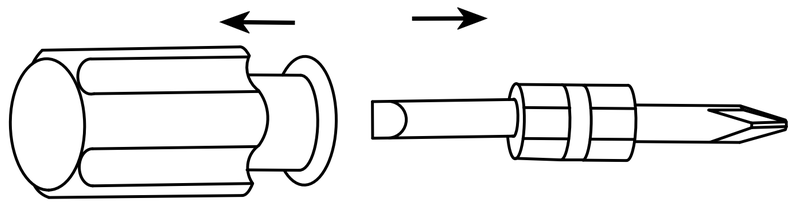


Double-head screwdriver, use as required

Product structure decomposition

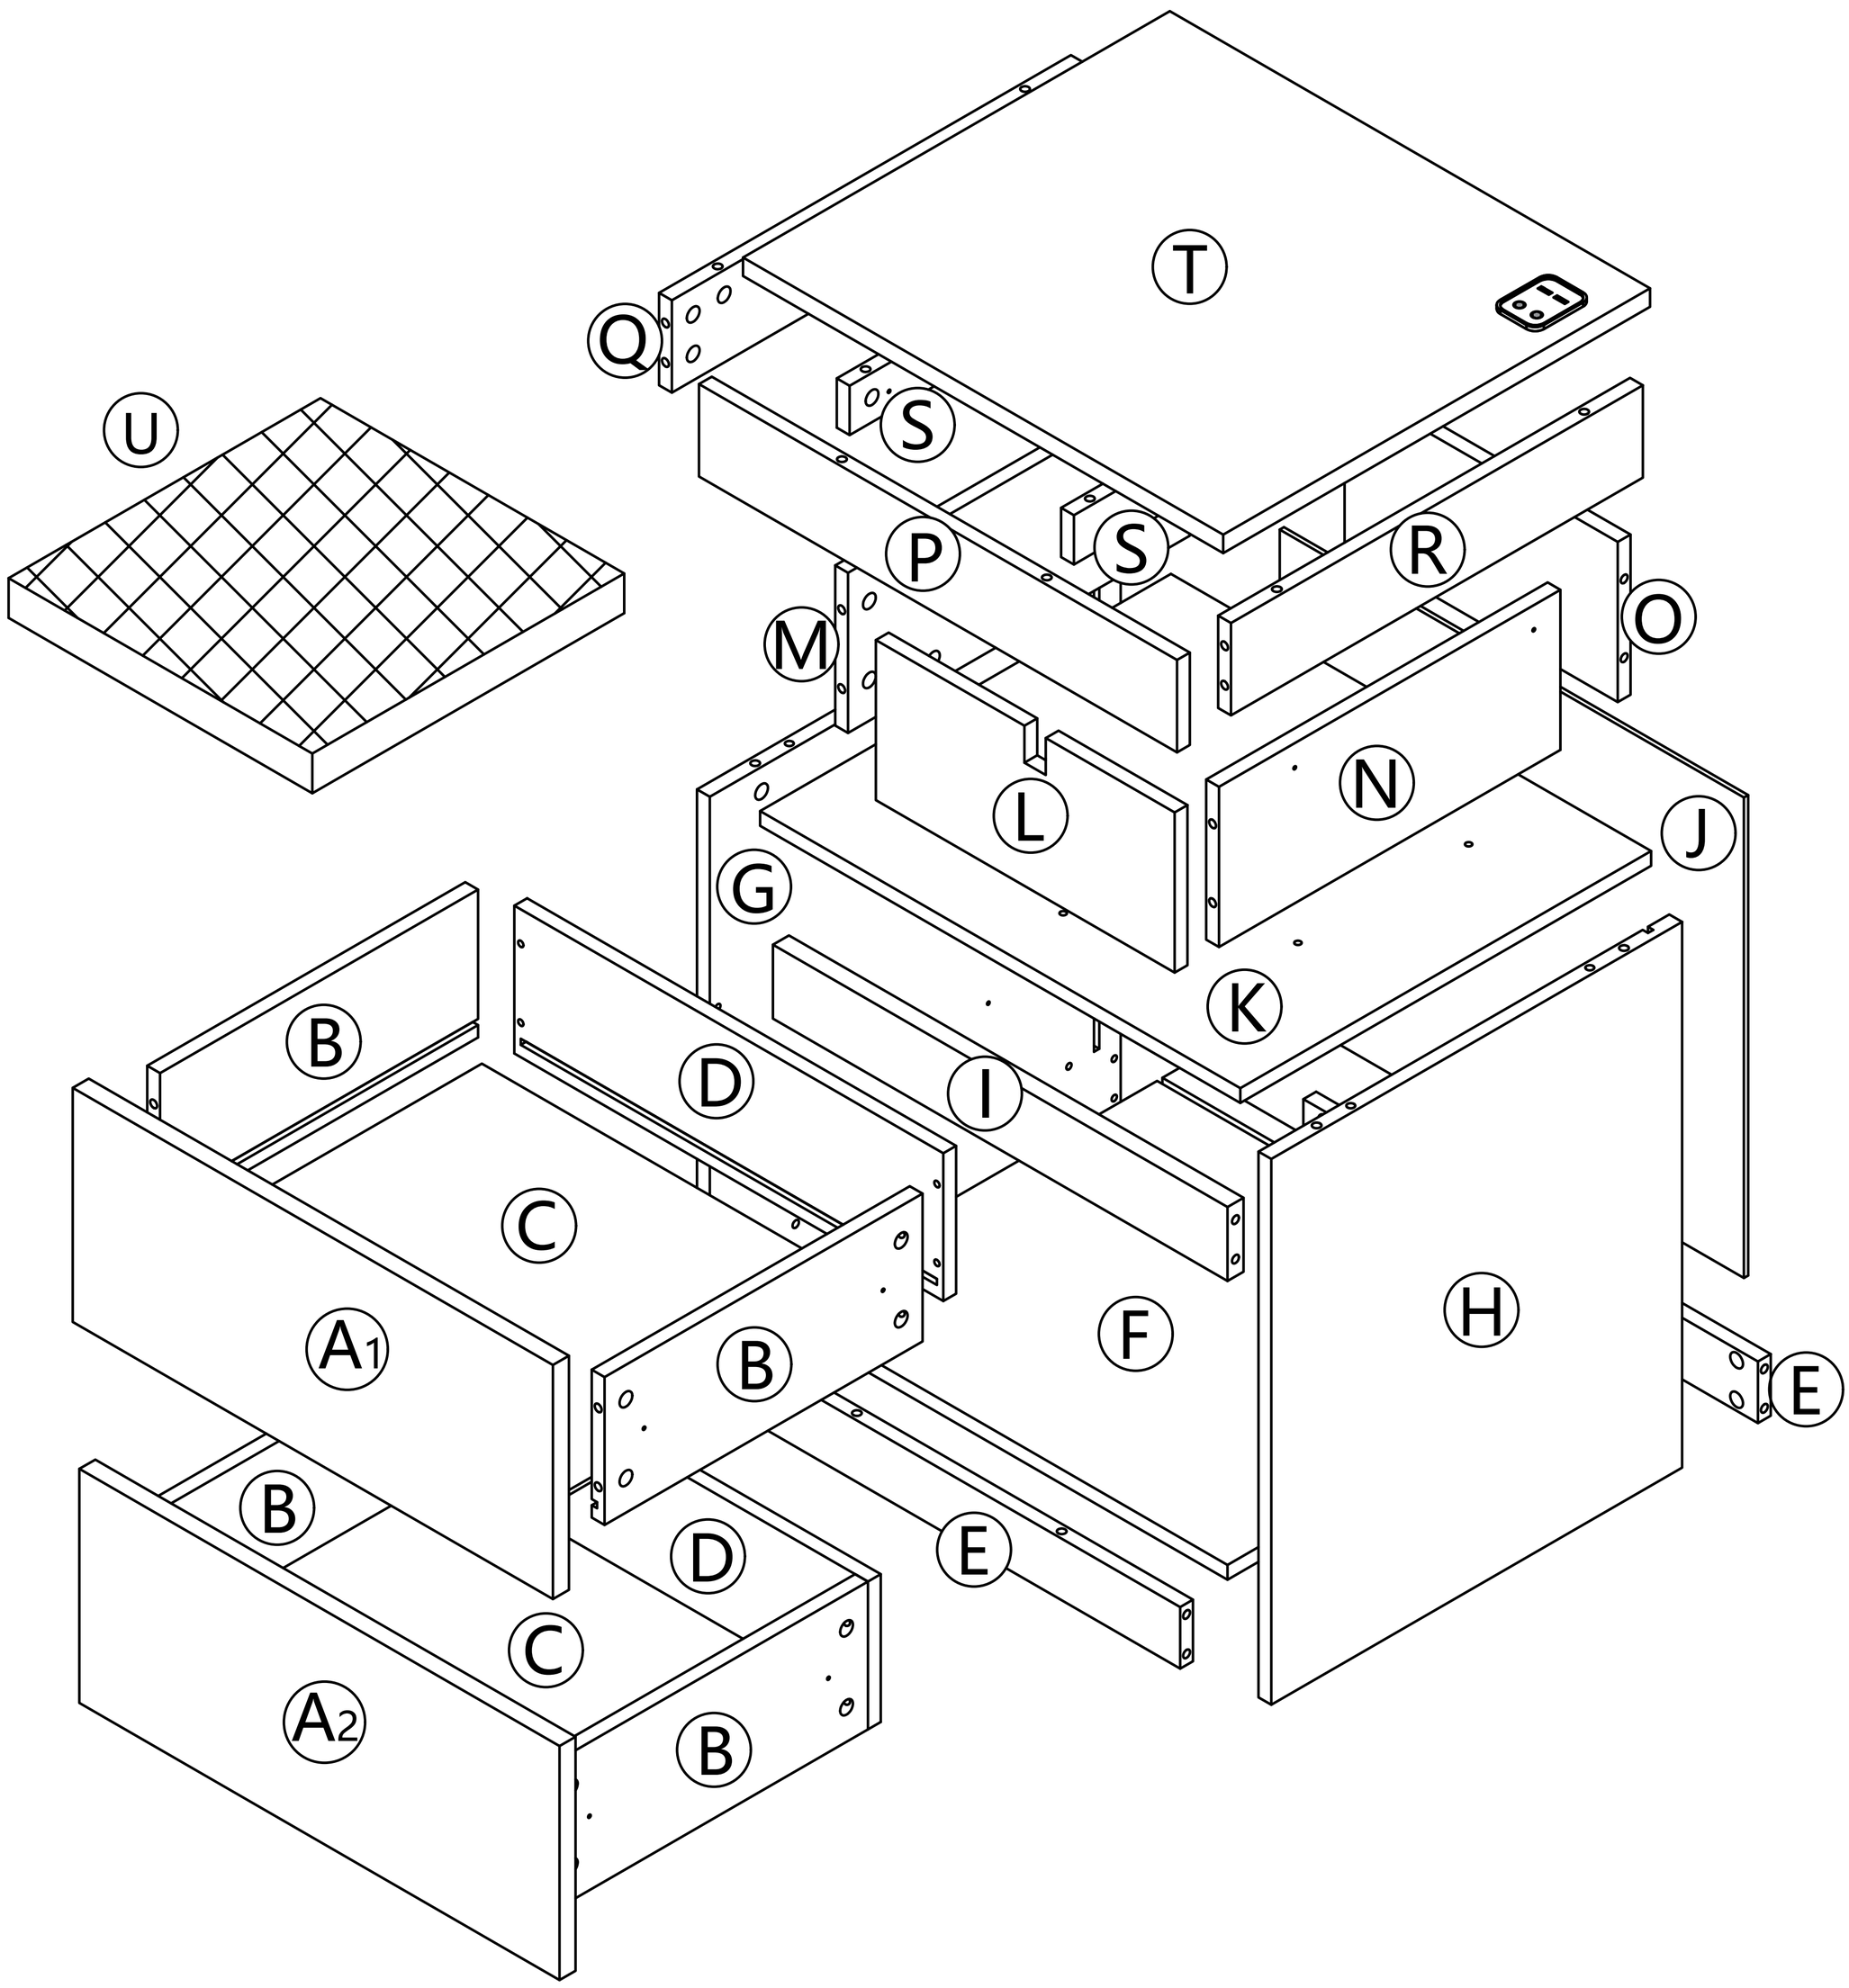


1		32pcs	2		32pcs	4	 1pcs  4pcs	
5	 6pcs  12pcs							

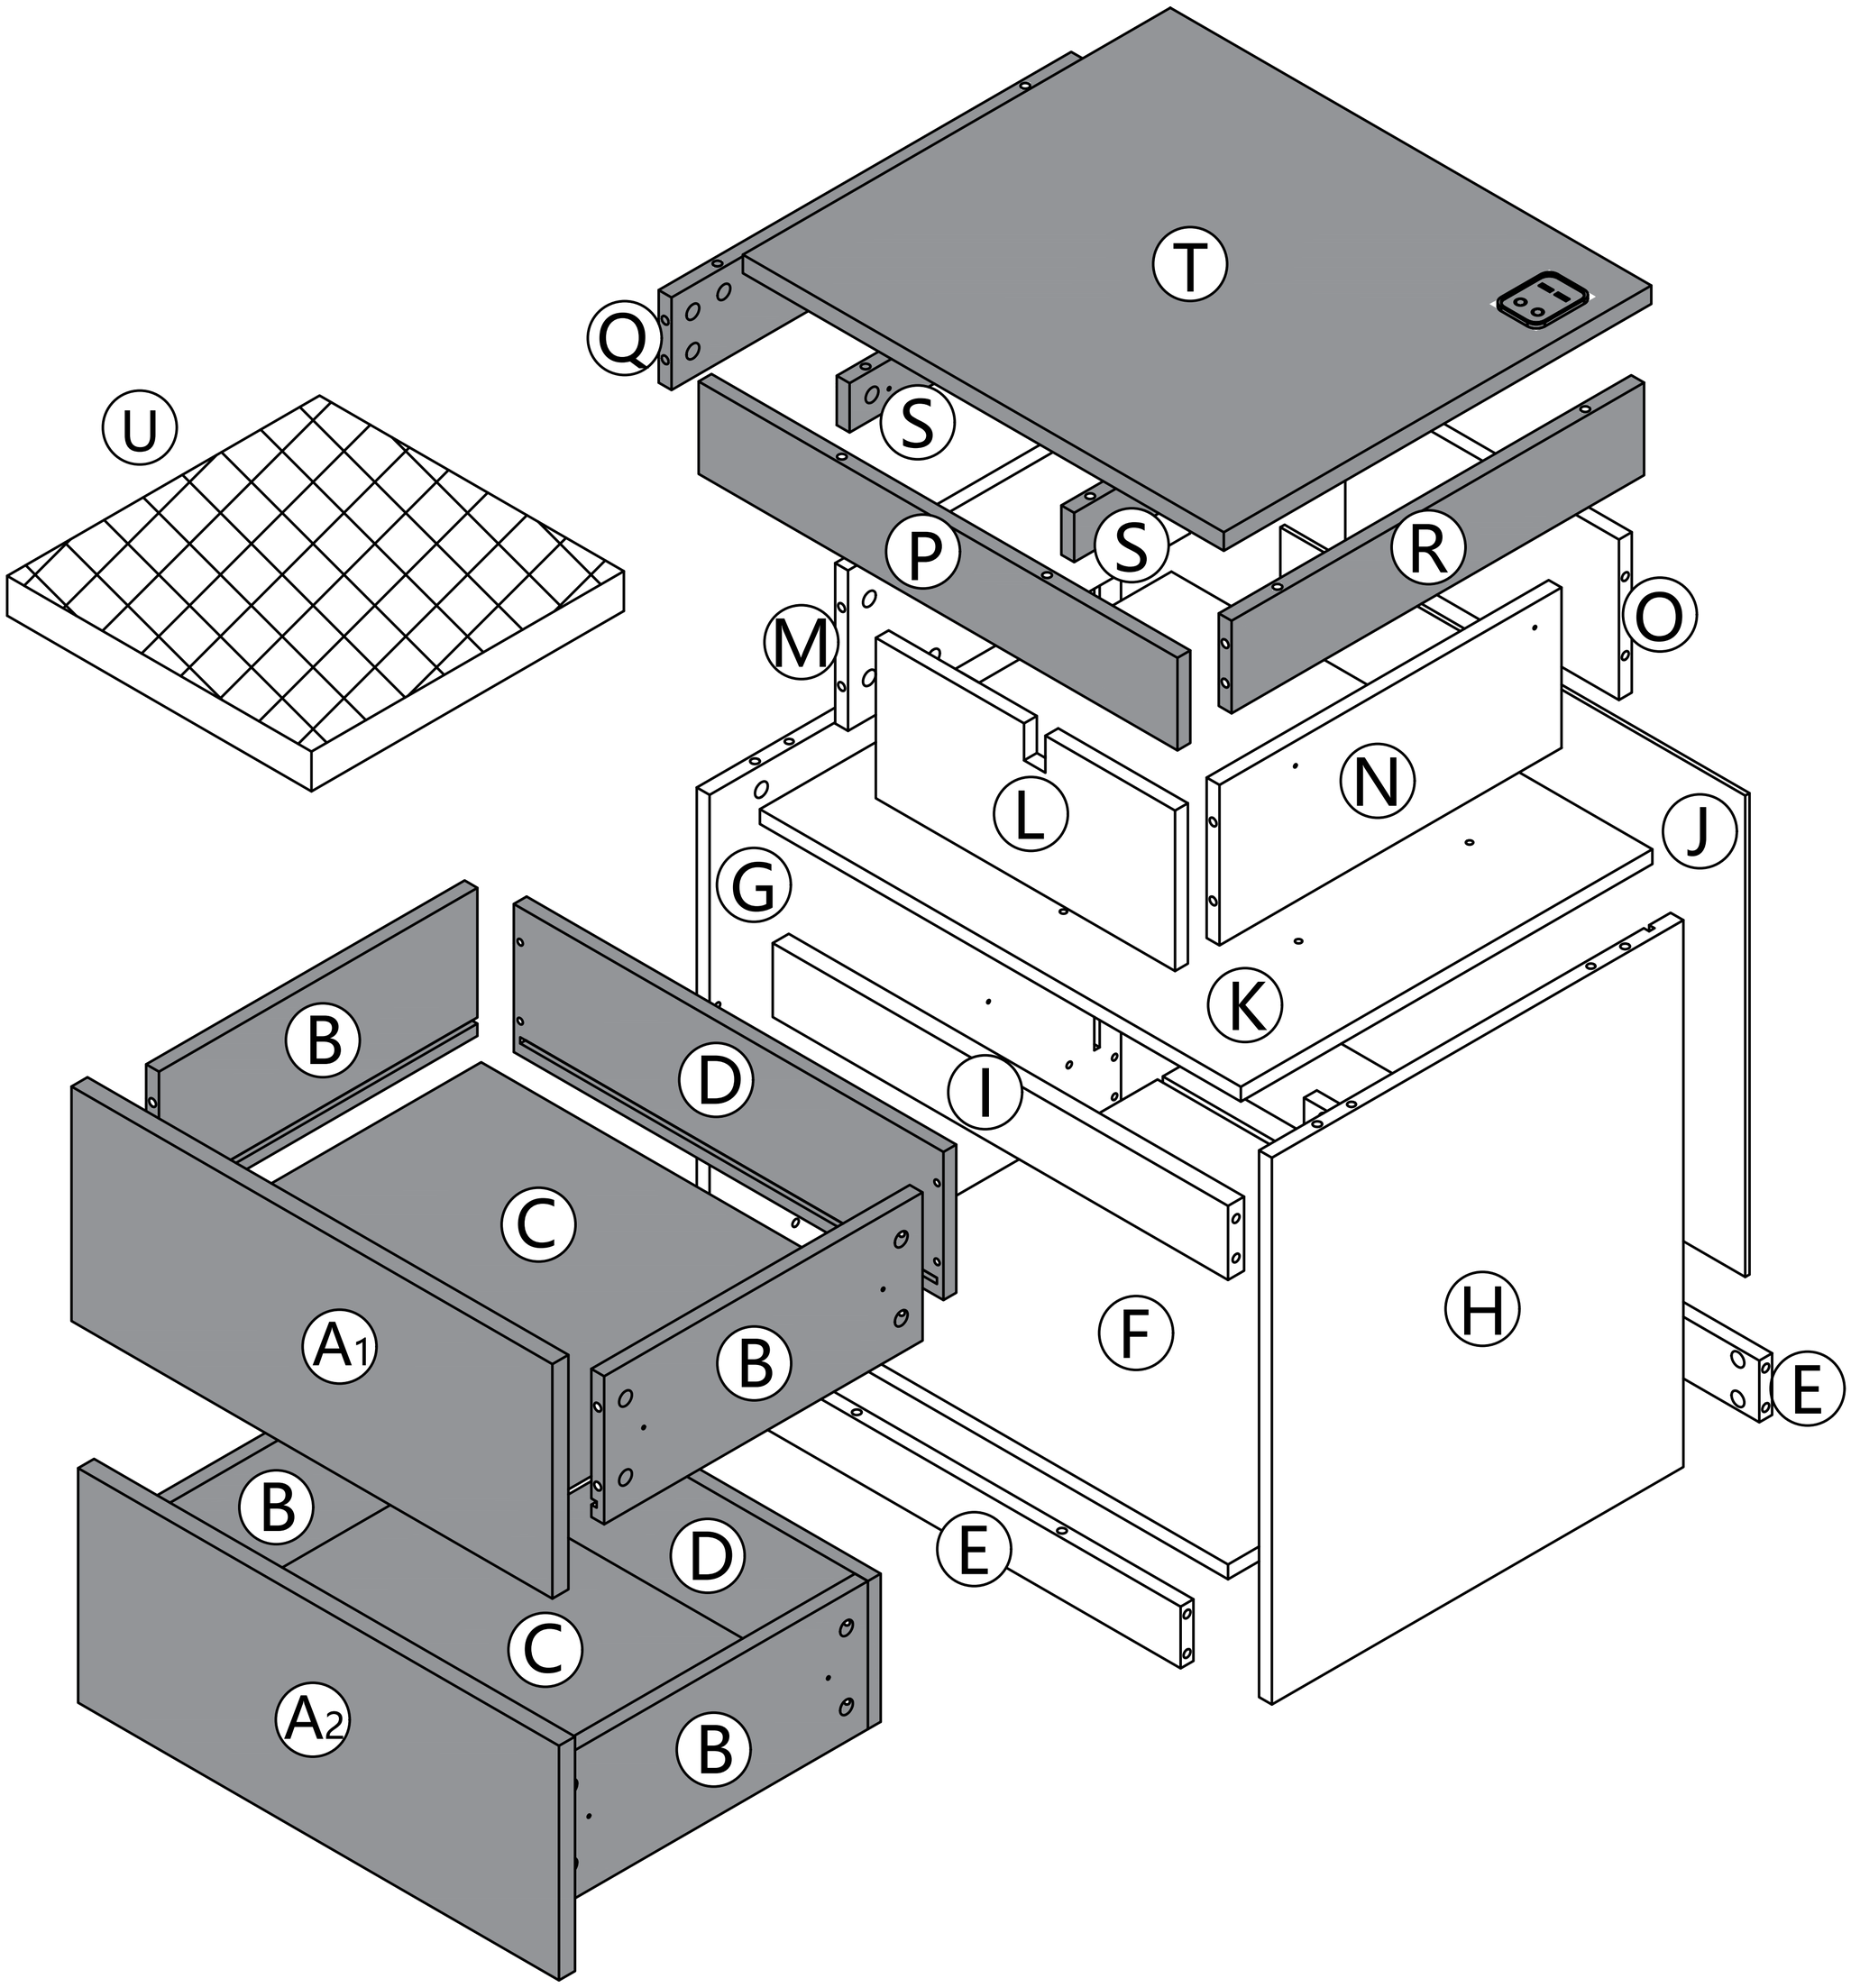


Use parts ① and ②


Step1

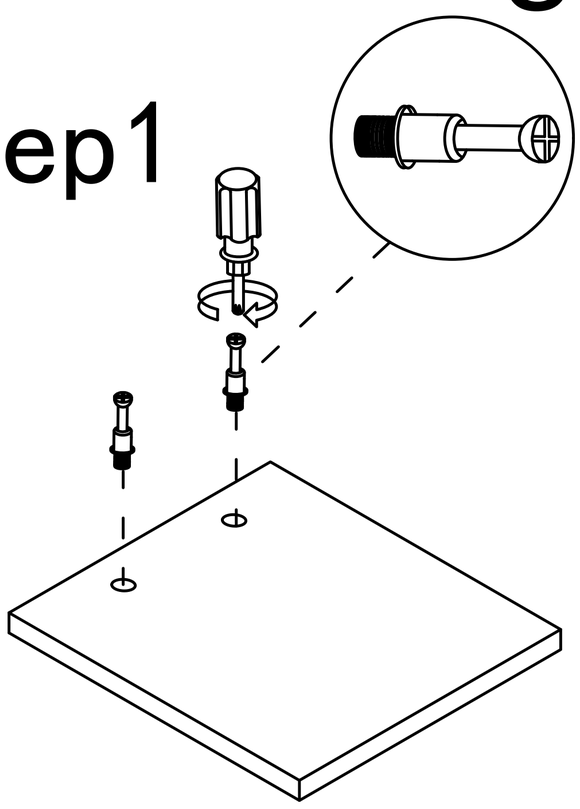


Step2

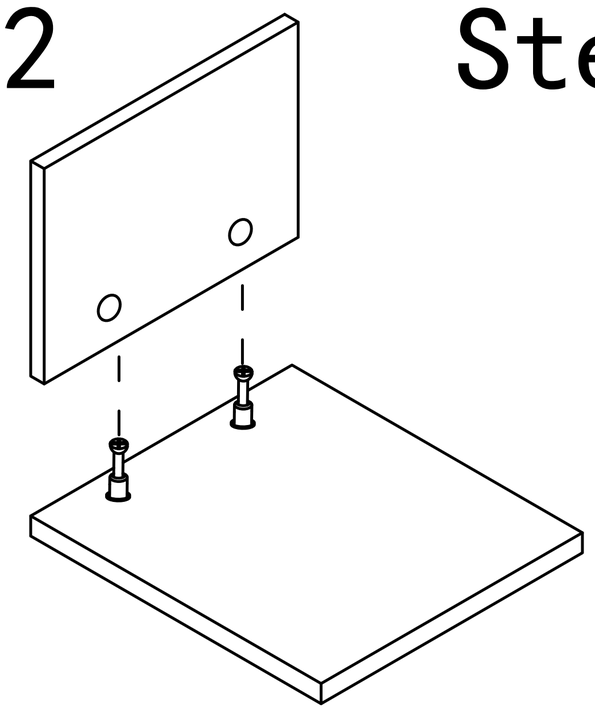


Step3

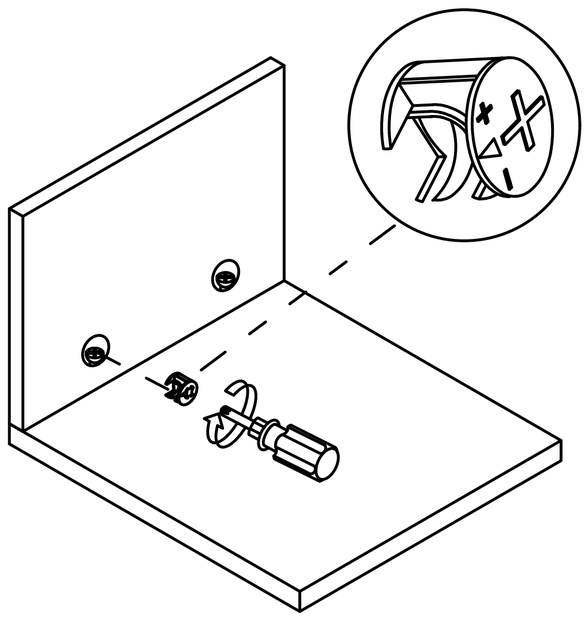

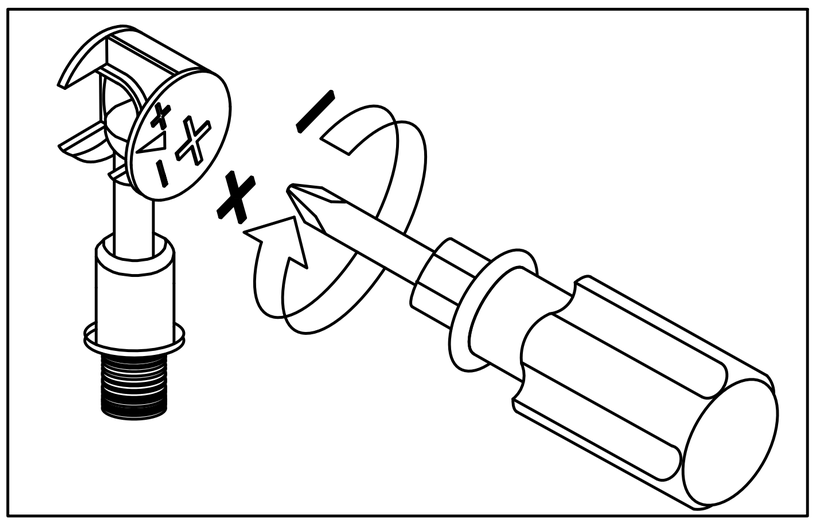



Use a screwdriver to lock in the direction of the "+" sign

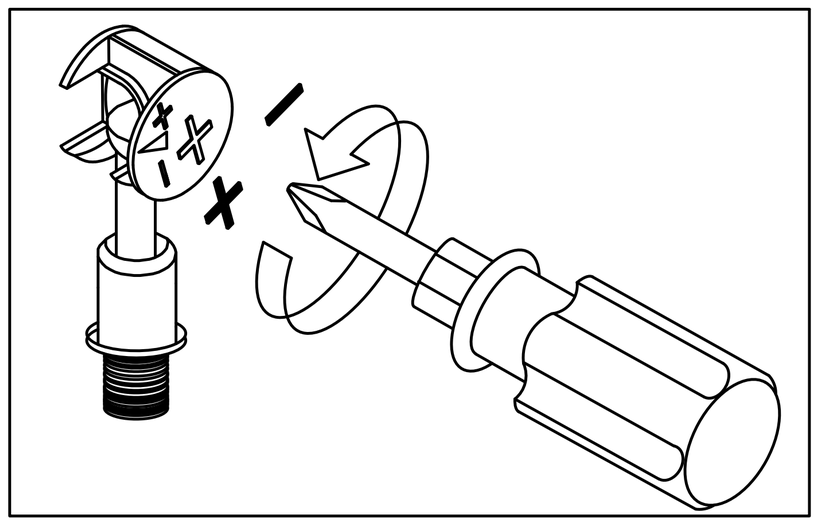

Disassemble along the direction of "-" sign


Step 1

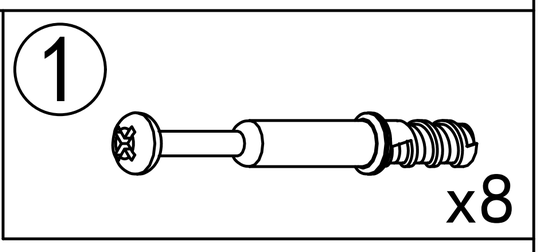

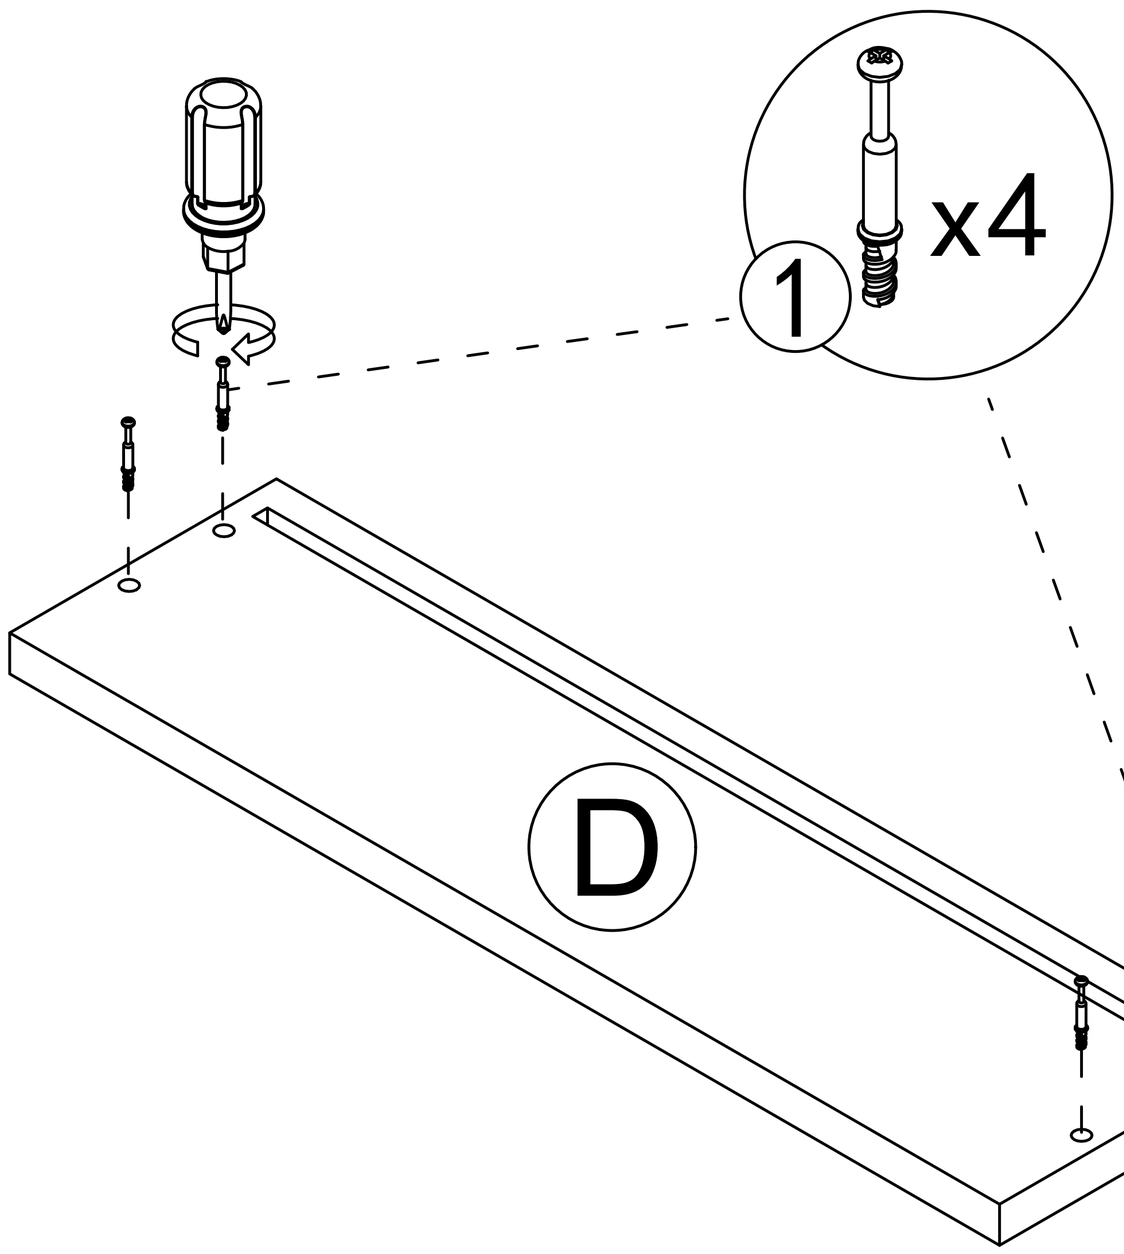


x2

Step 2

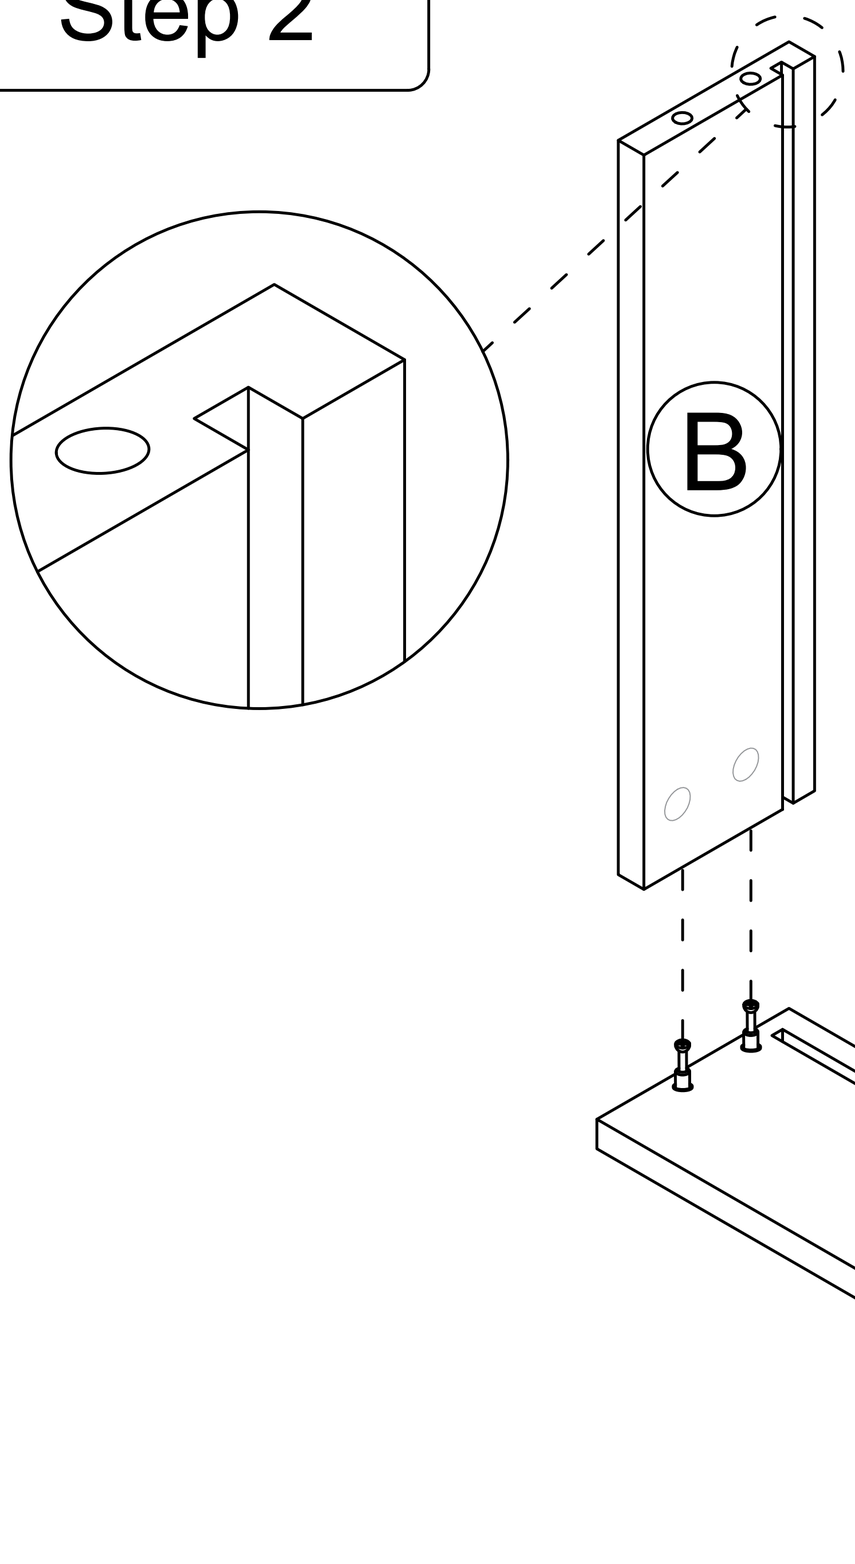


x2

Step 3

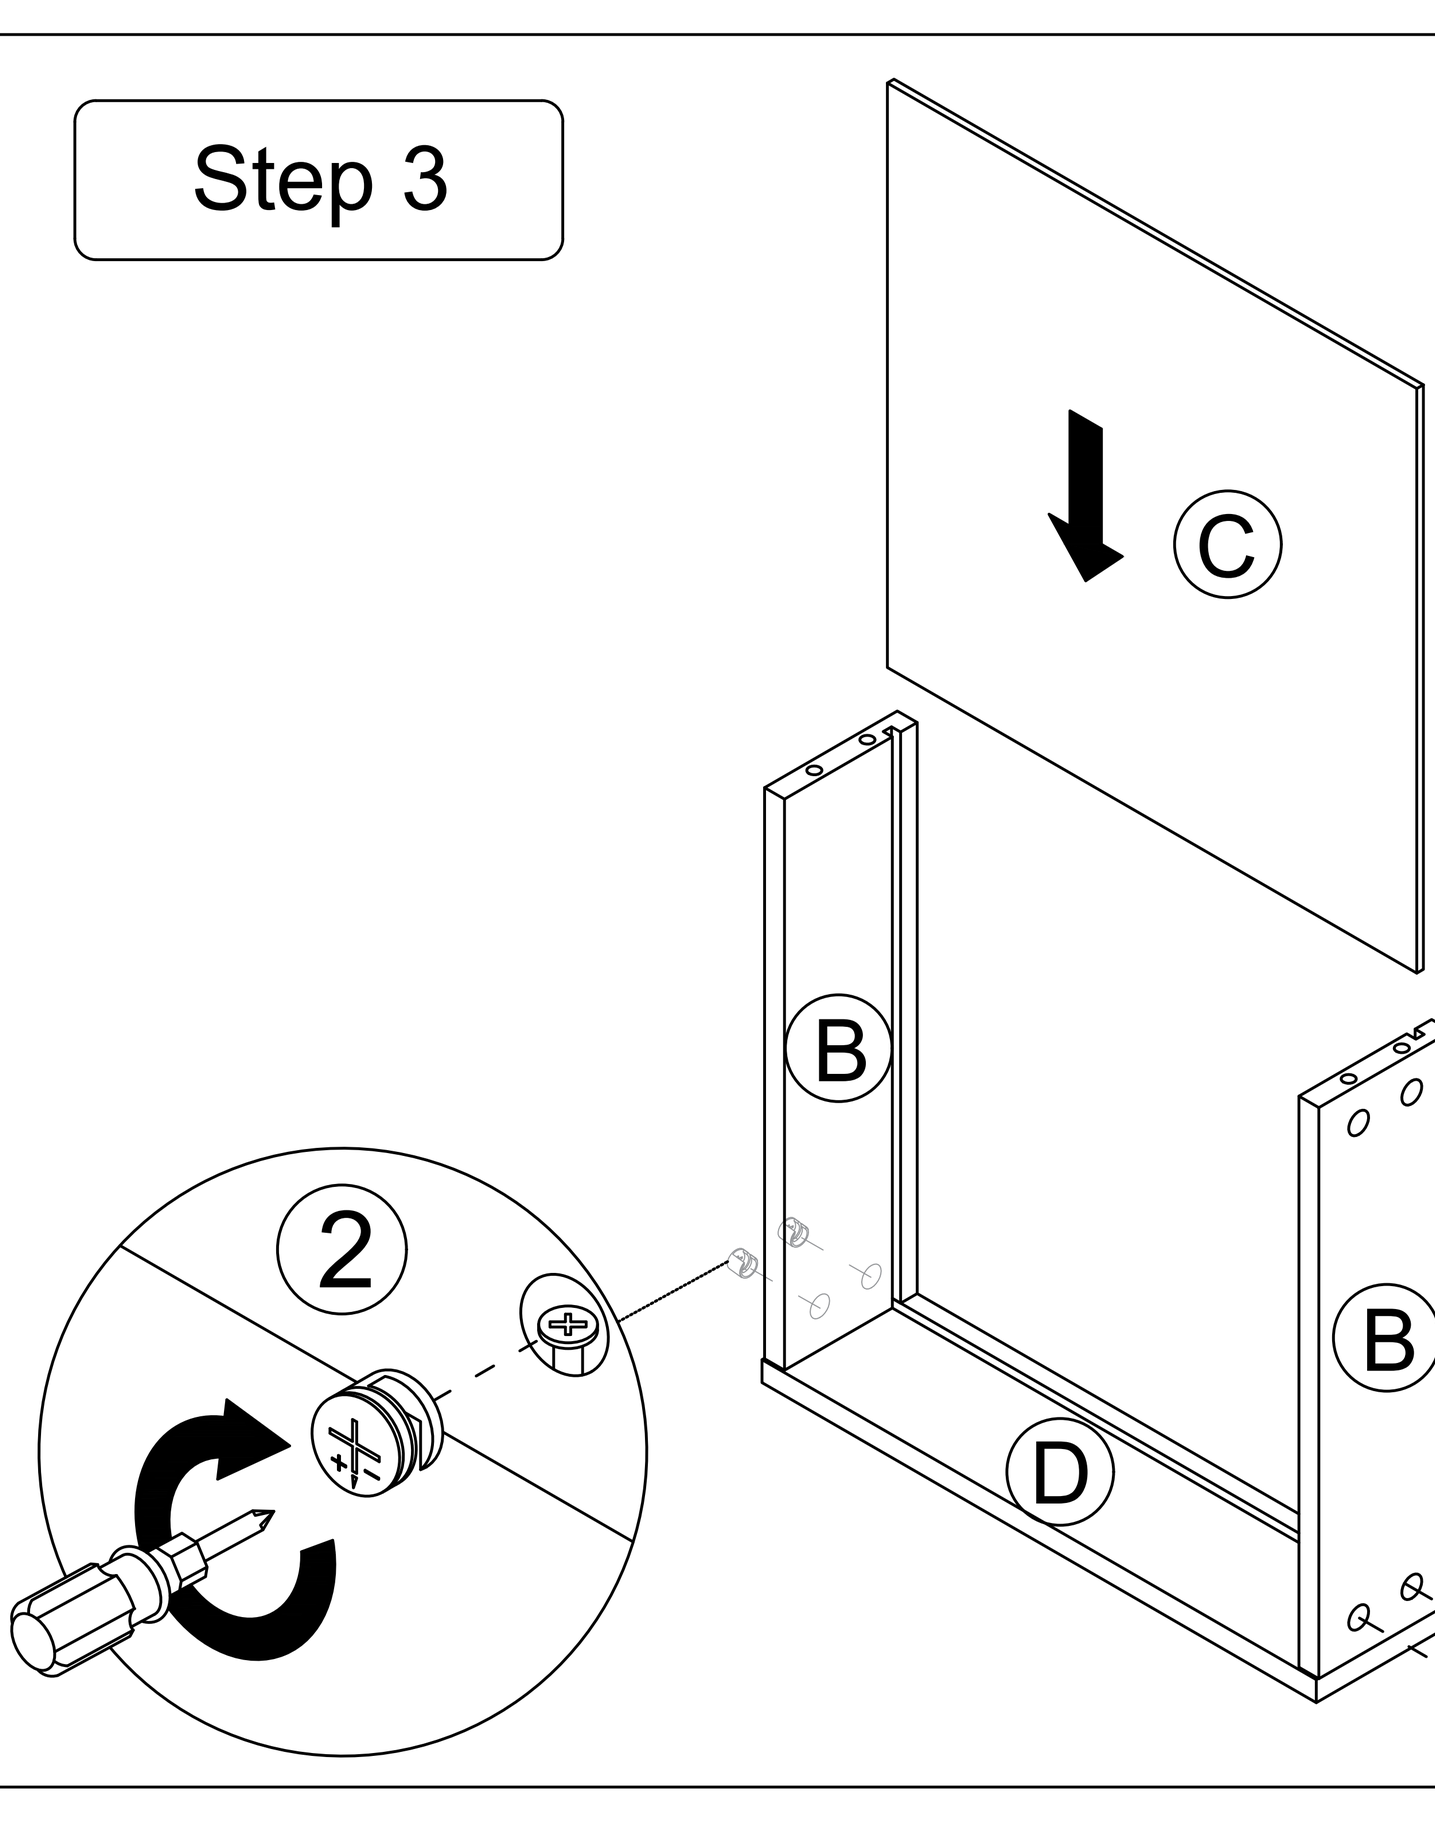


2 x8


x2

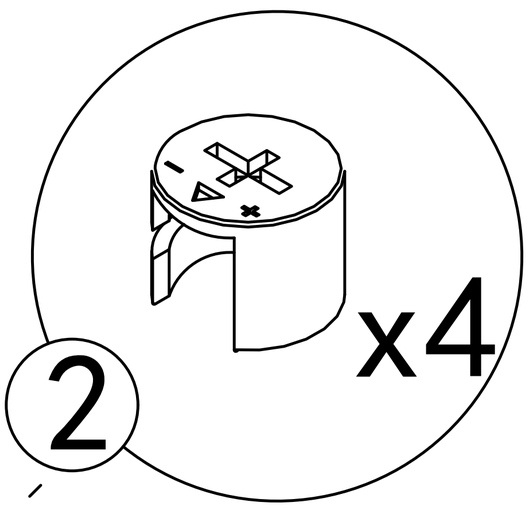

6


Step 4

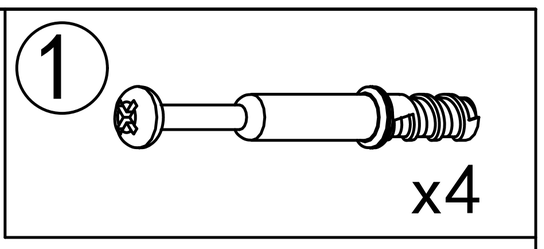


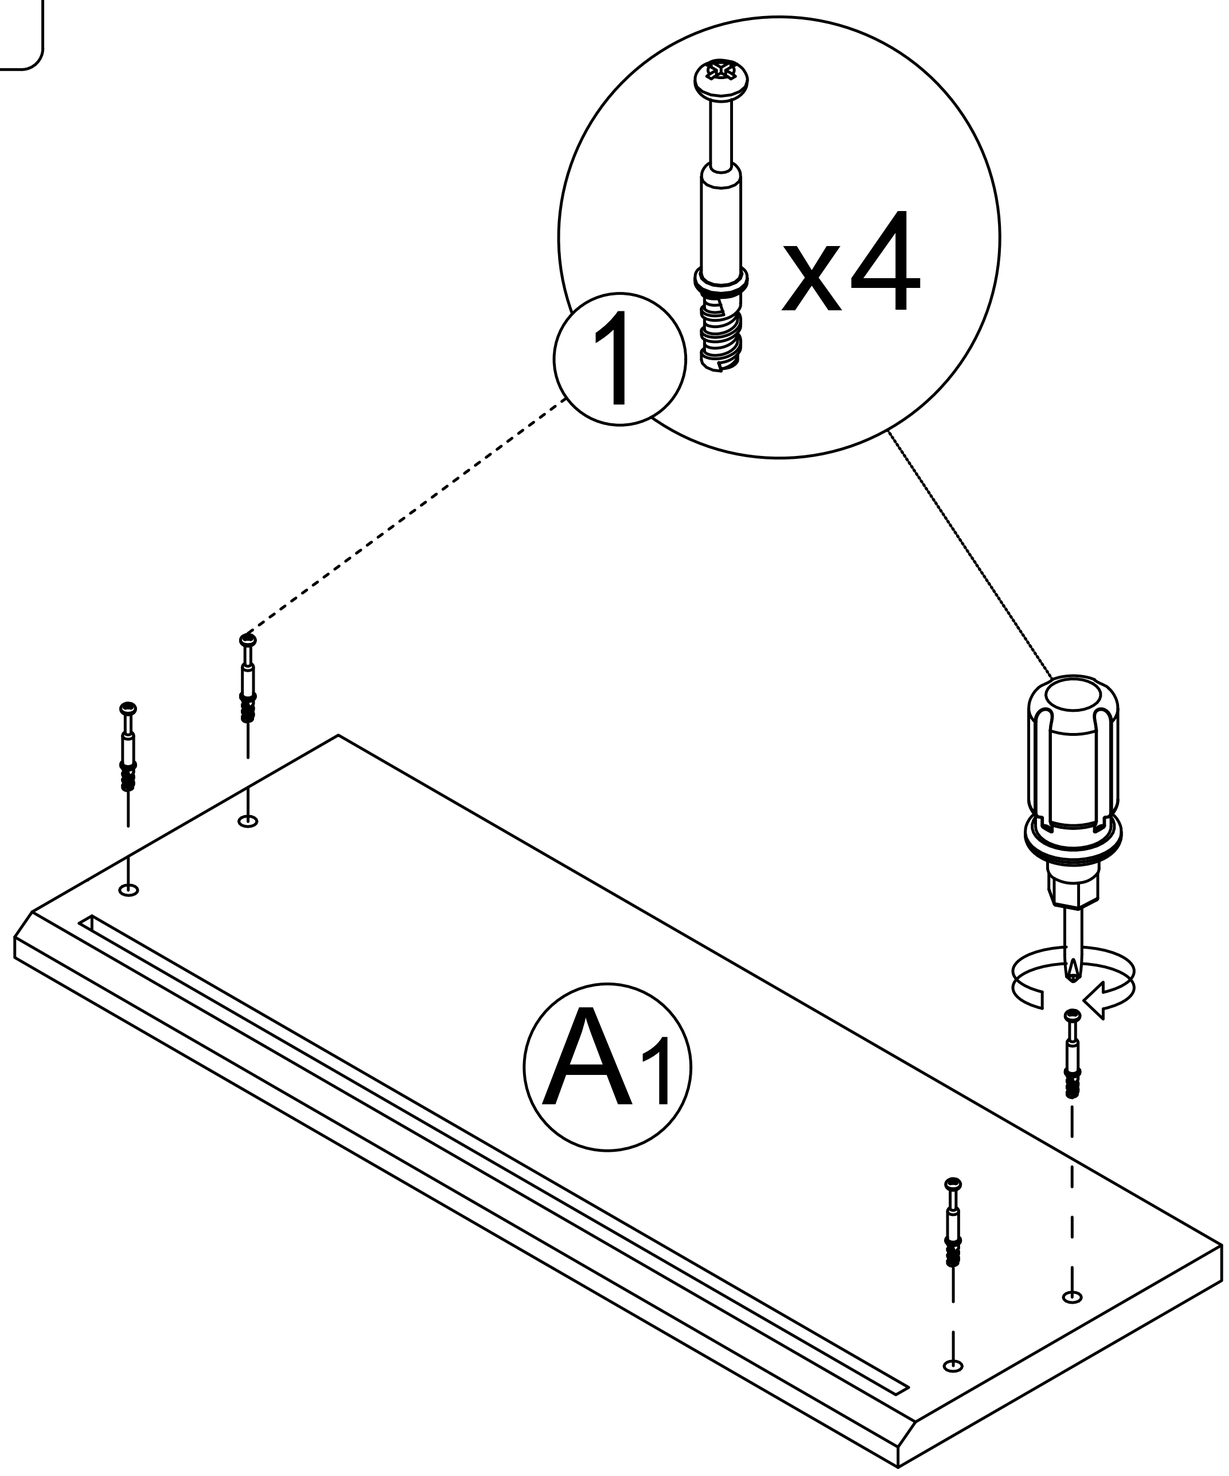


Step 5

Step 6

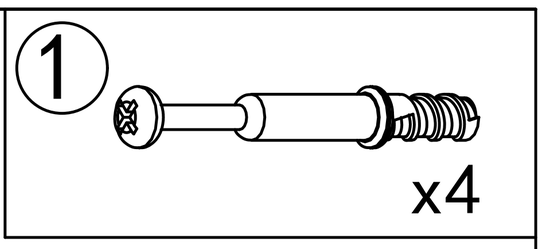


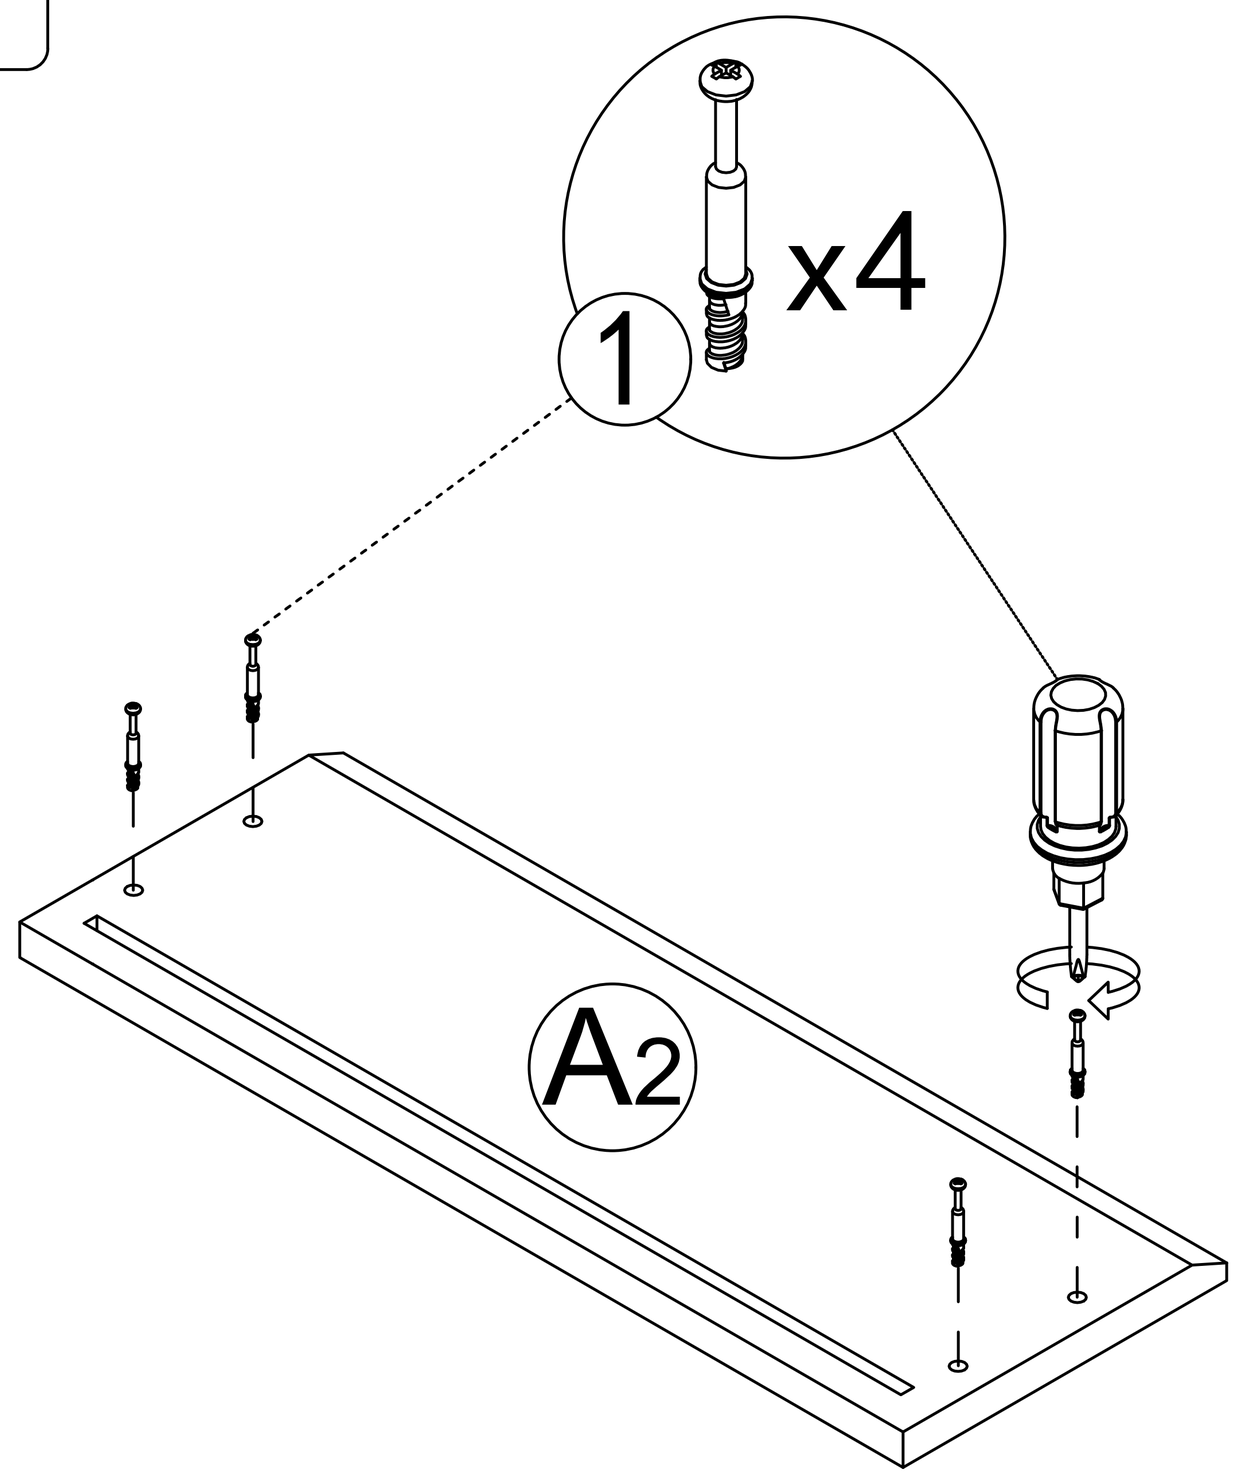

Step 7

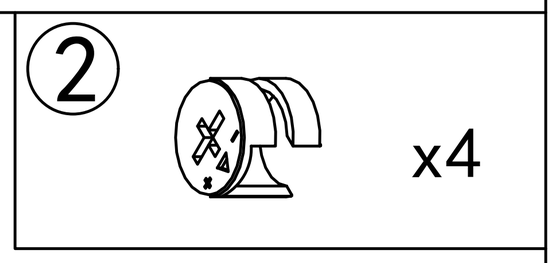


Drawer rail breakdown diagram

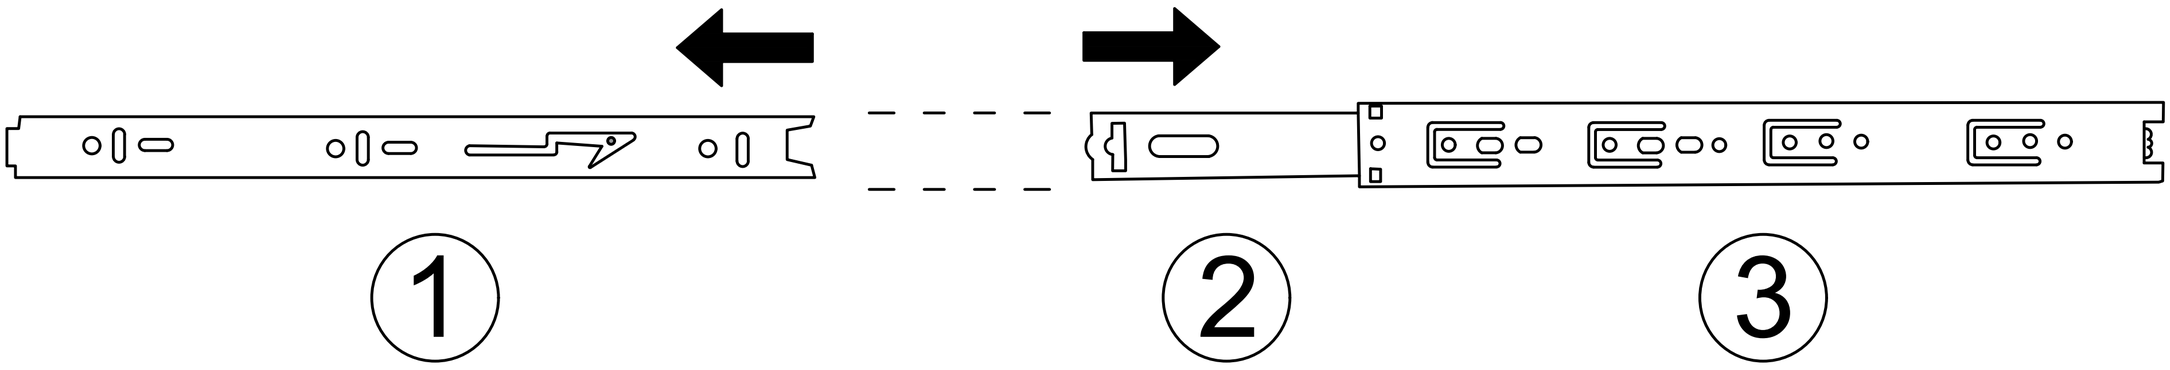


① Dismantle the schematic diagram


Step 1 : Pull the rails apart

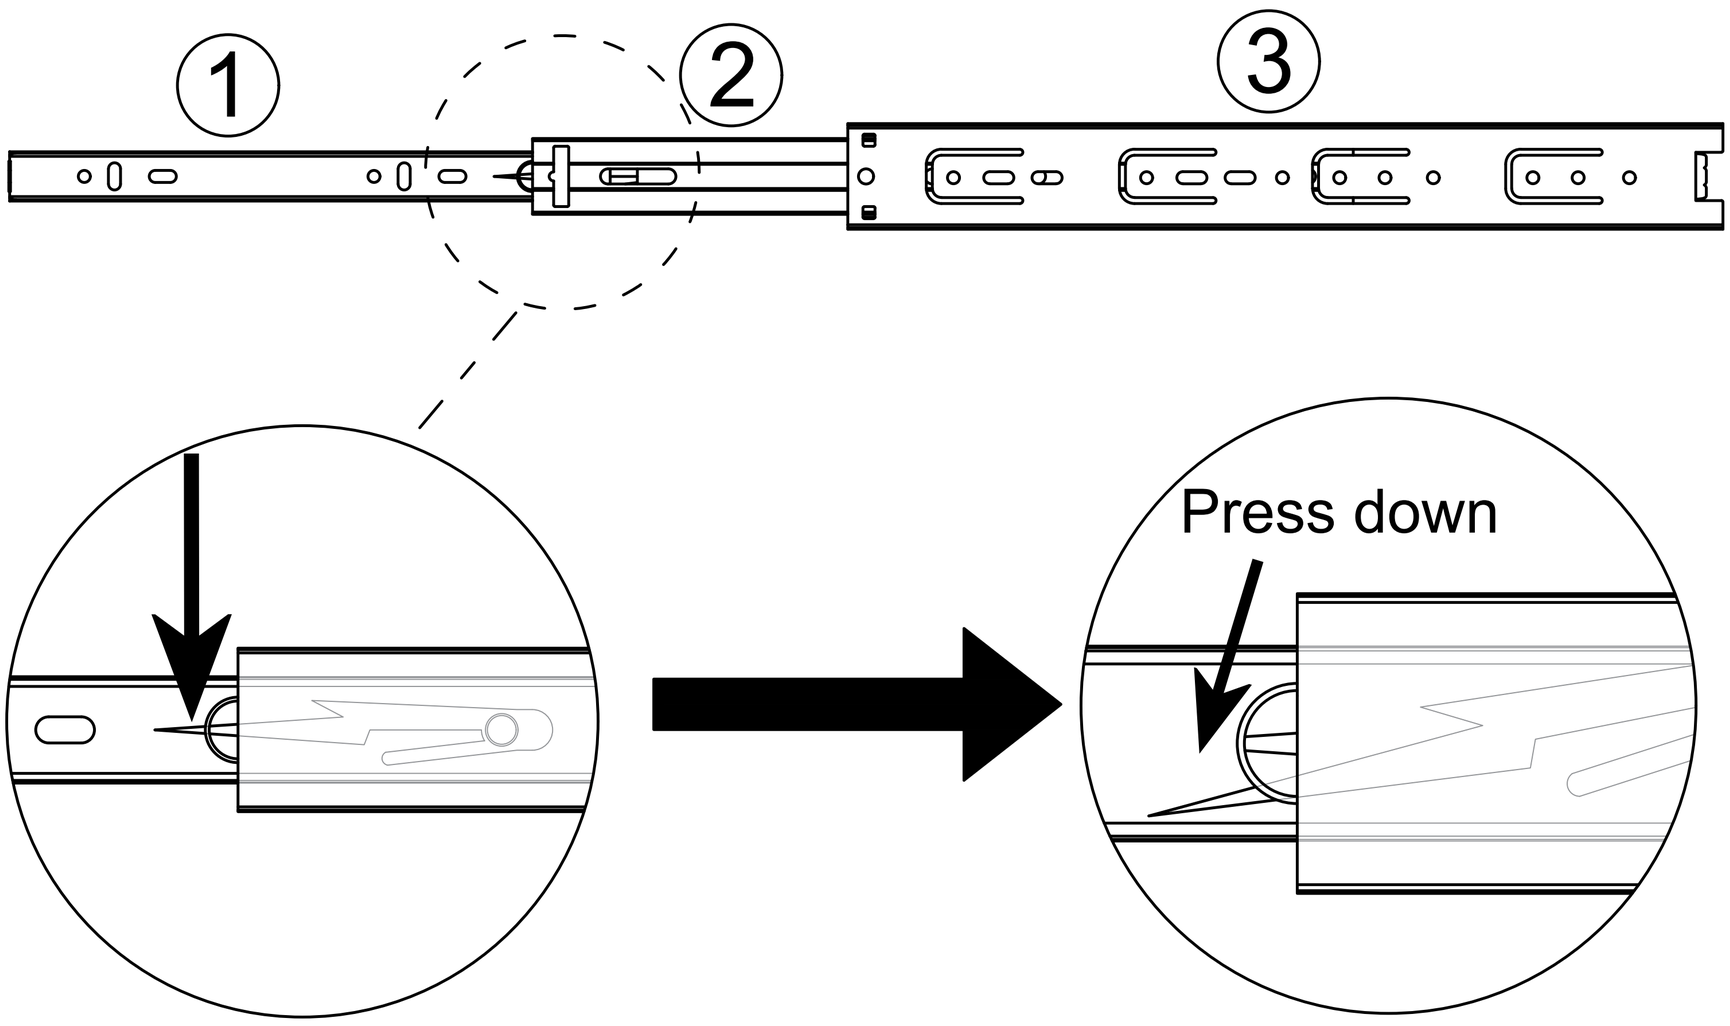


Step 2 : Press the nylon button and pull out ①.


Drawer rail decomposition completed schematic diagram

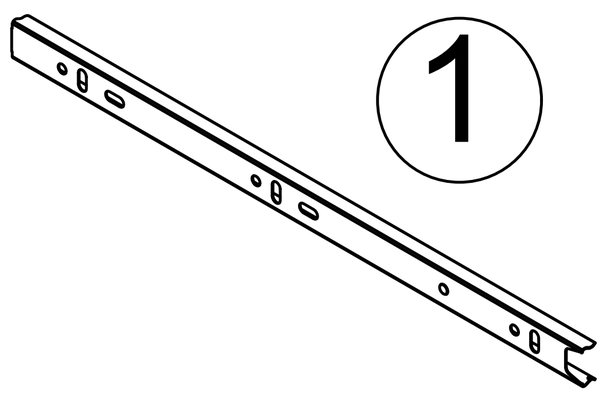


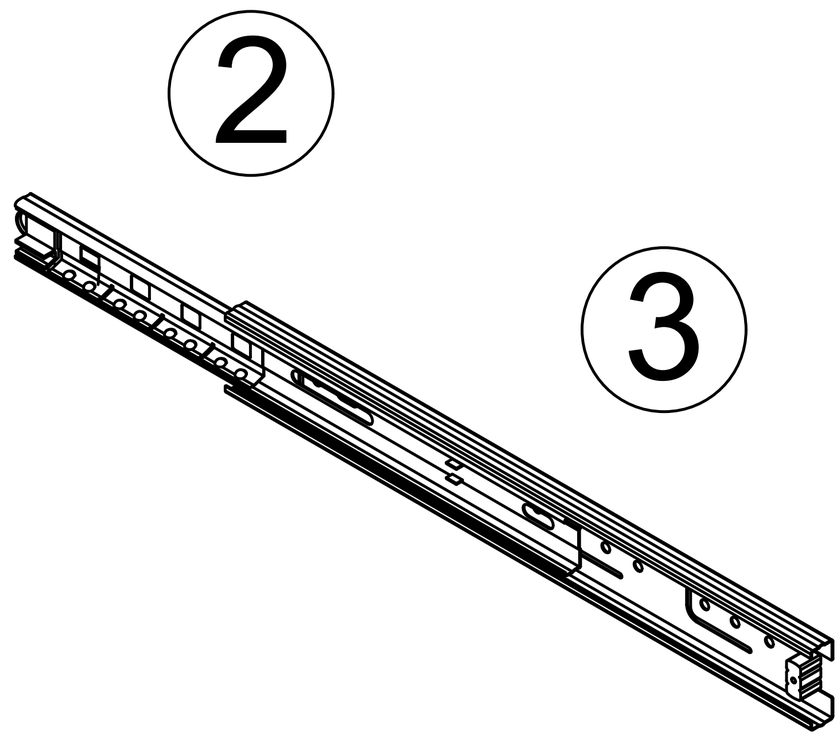


Step 8

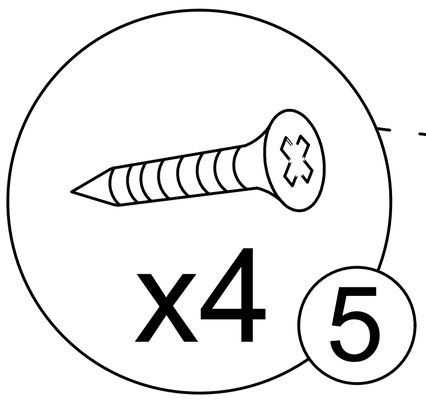


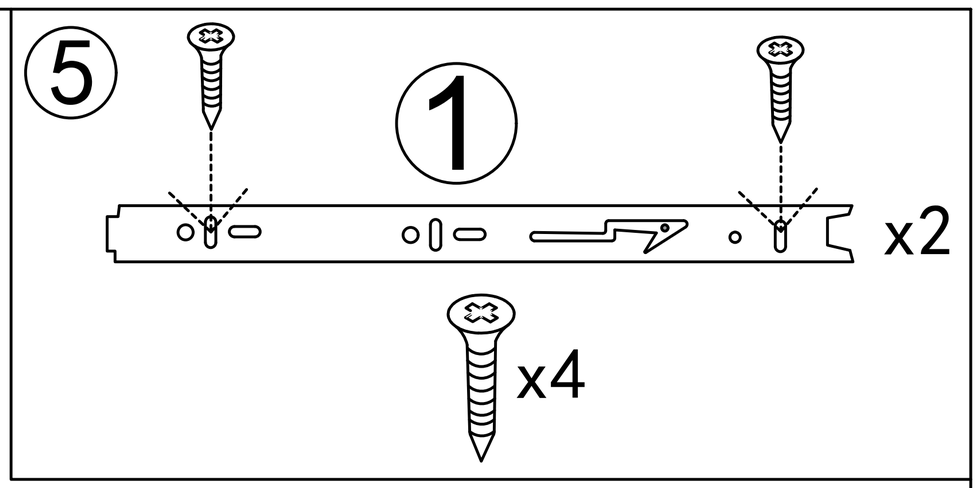


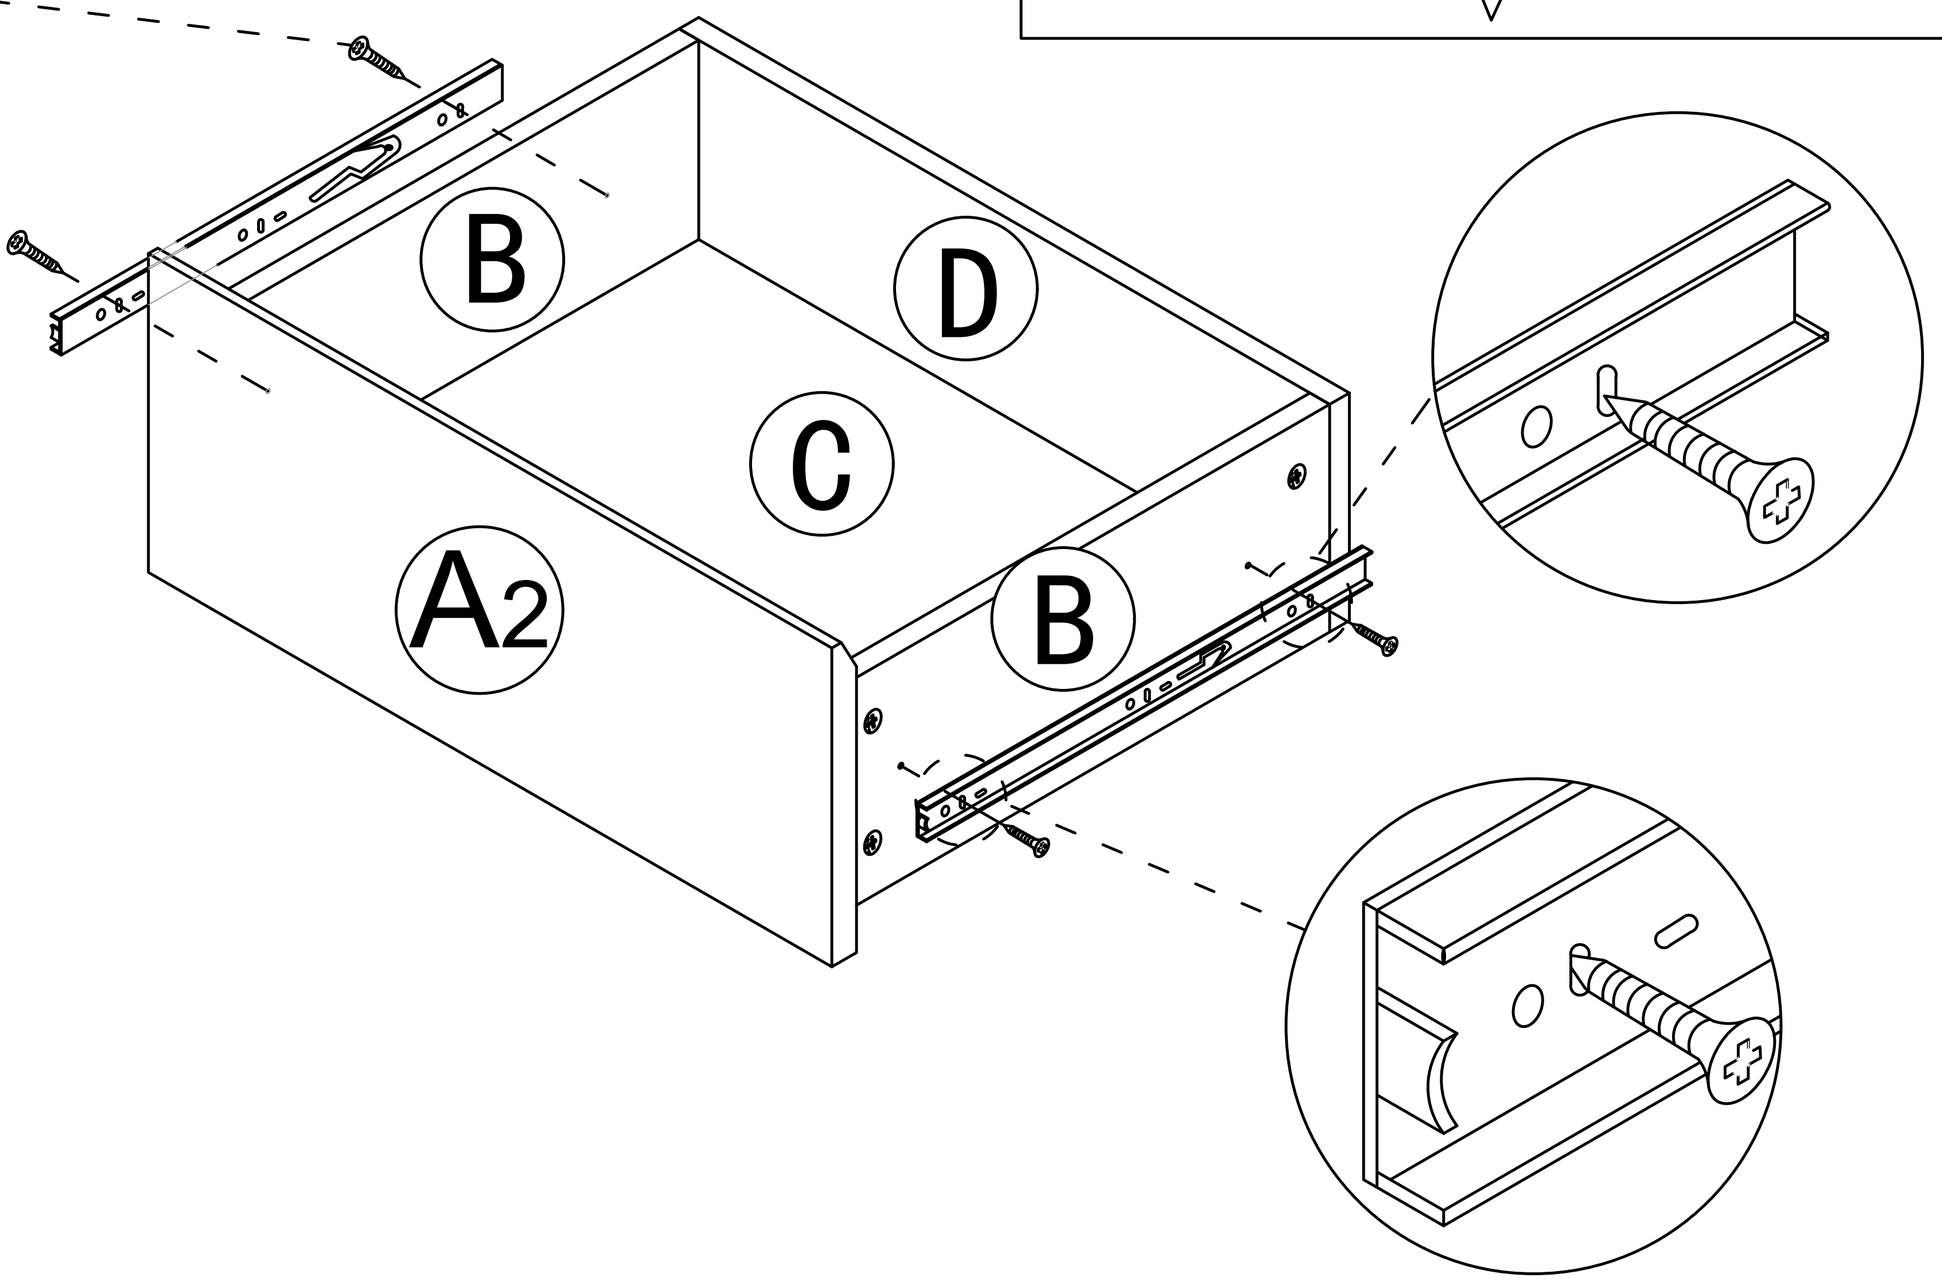

Step 9

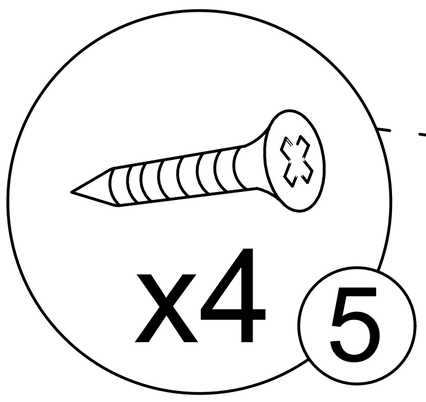


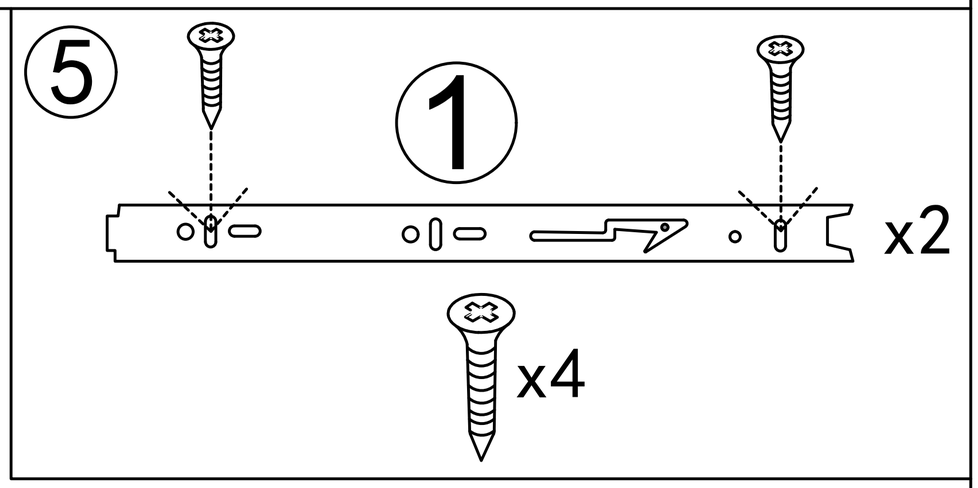


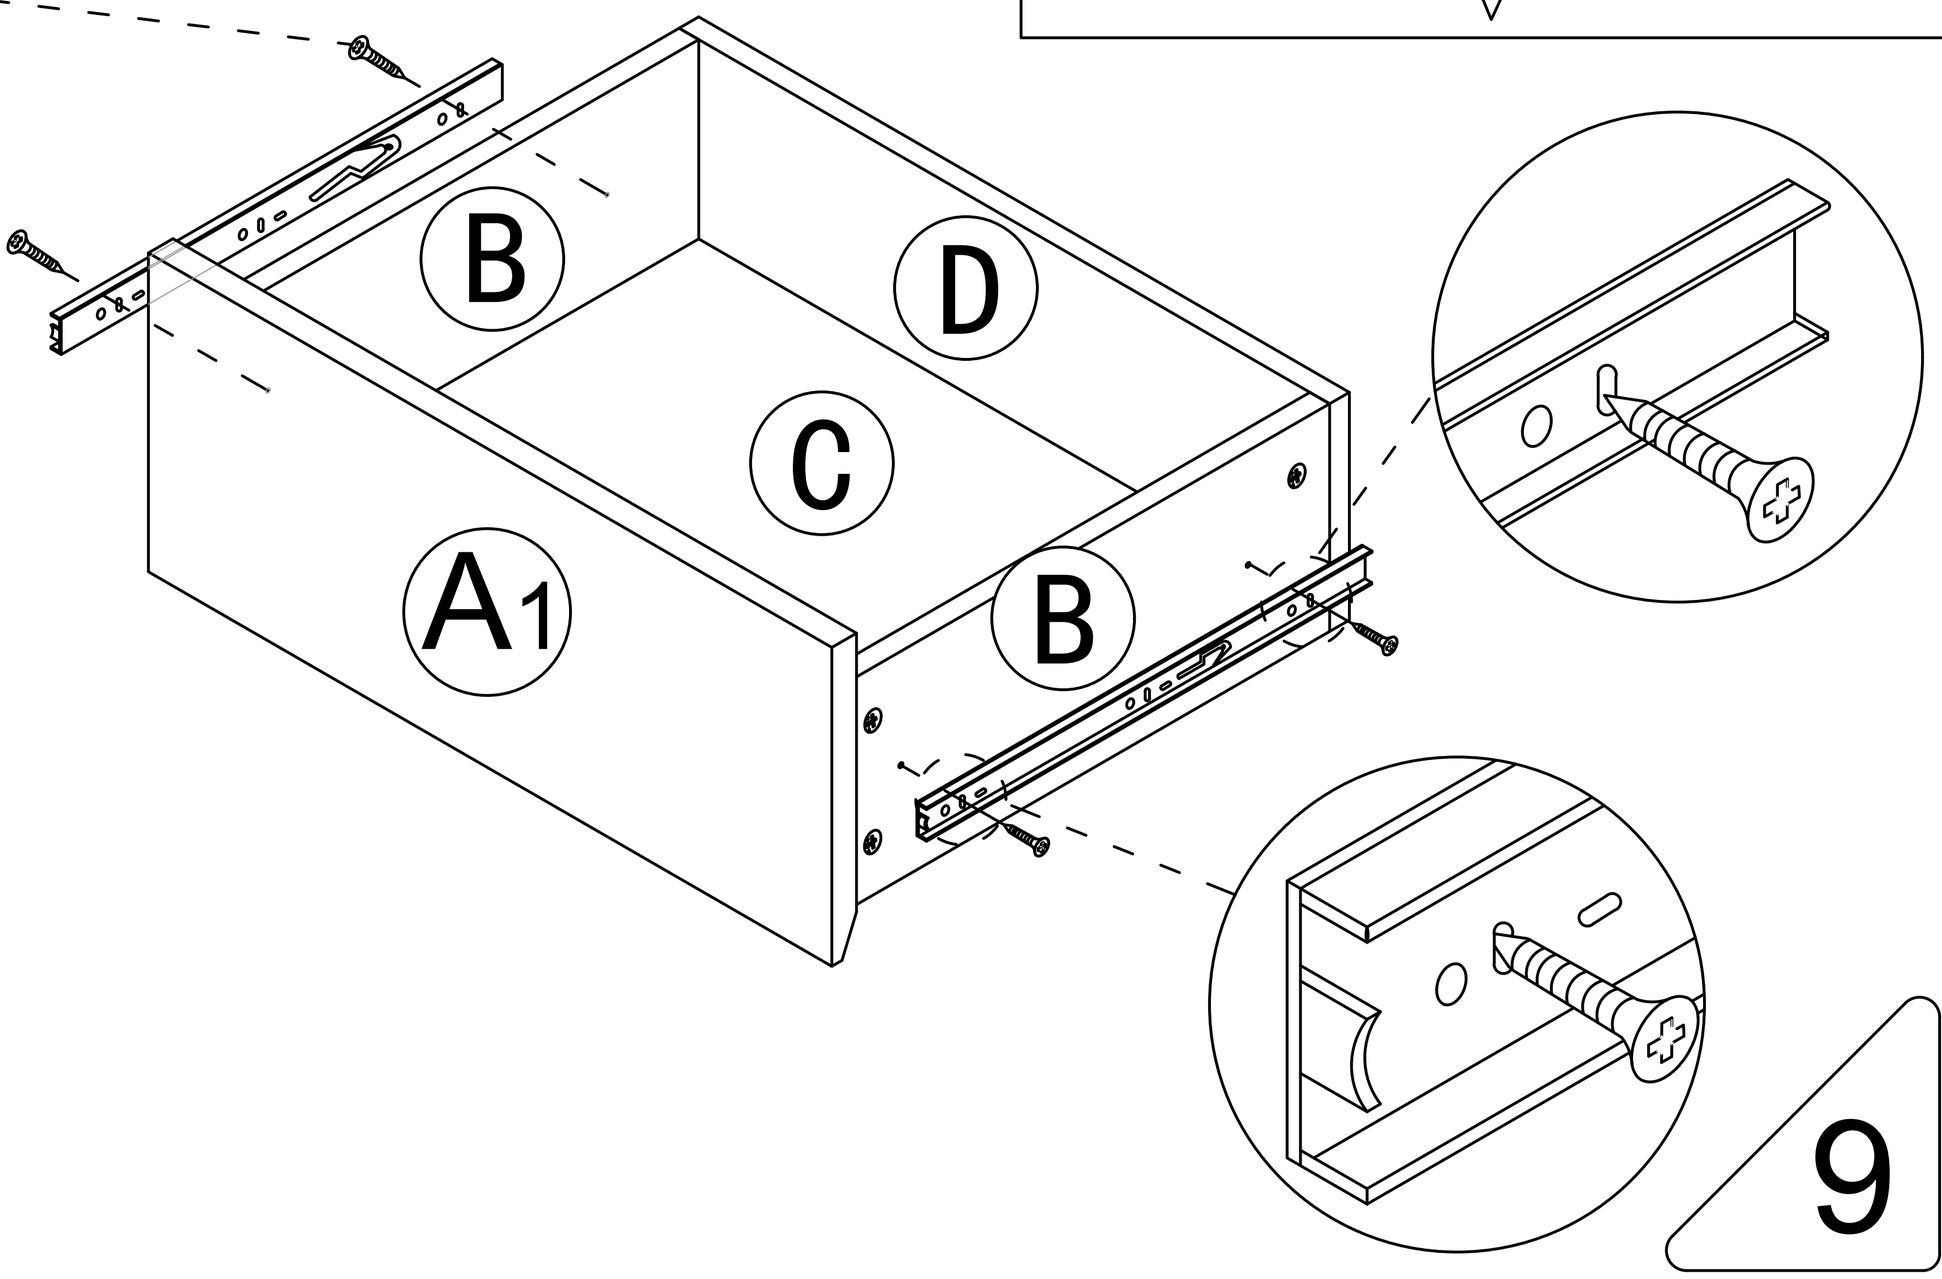


9


Step 10

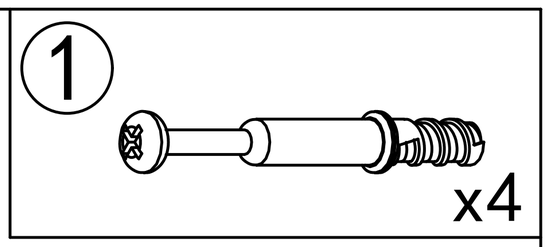

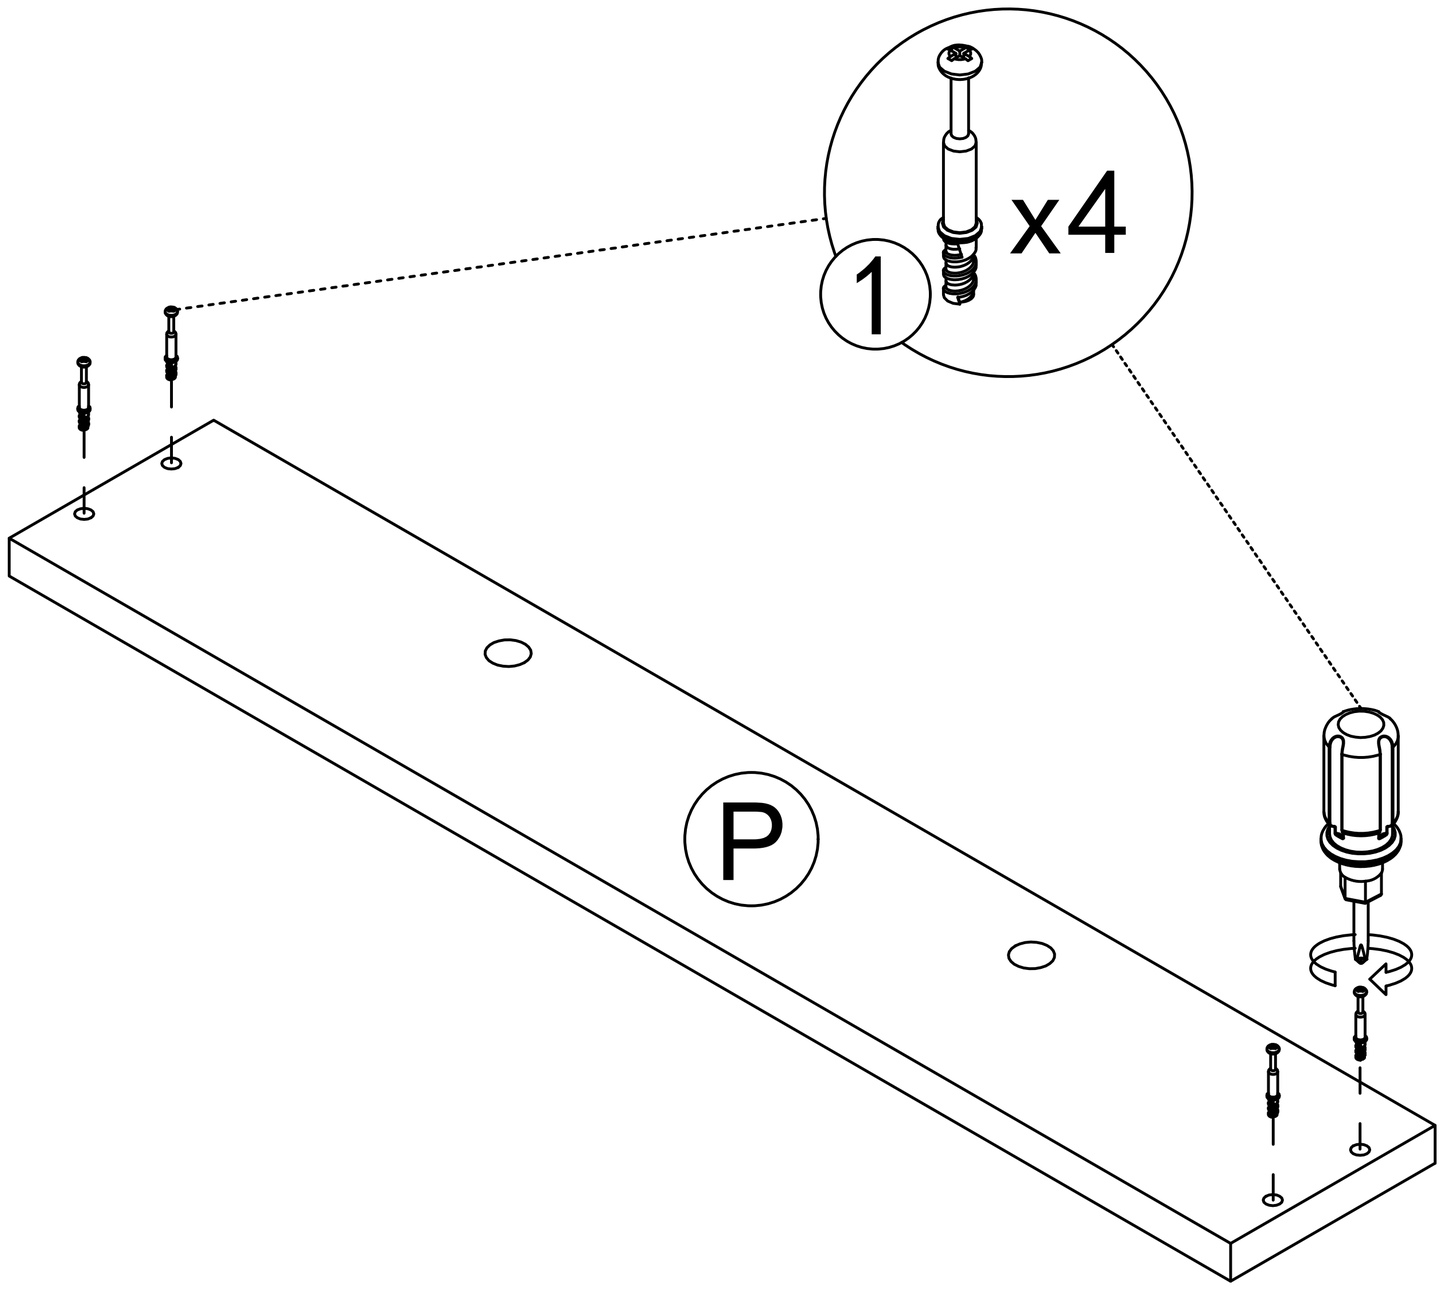


Step 11

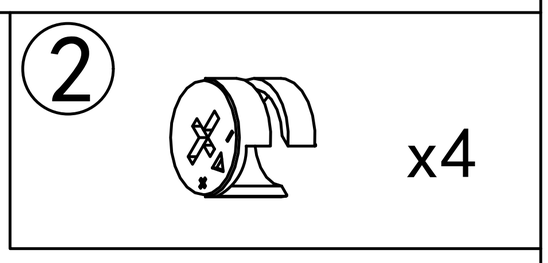

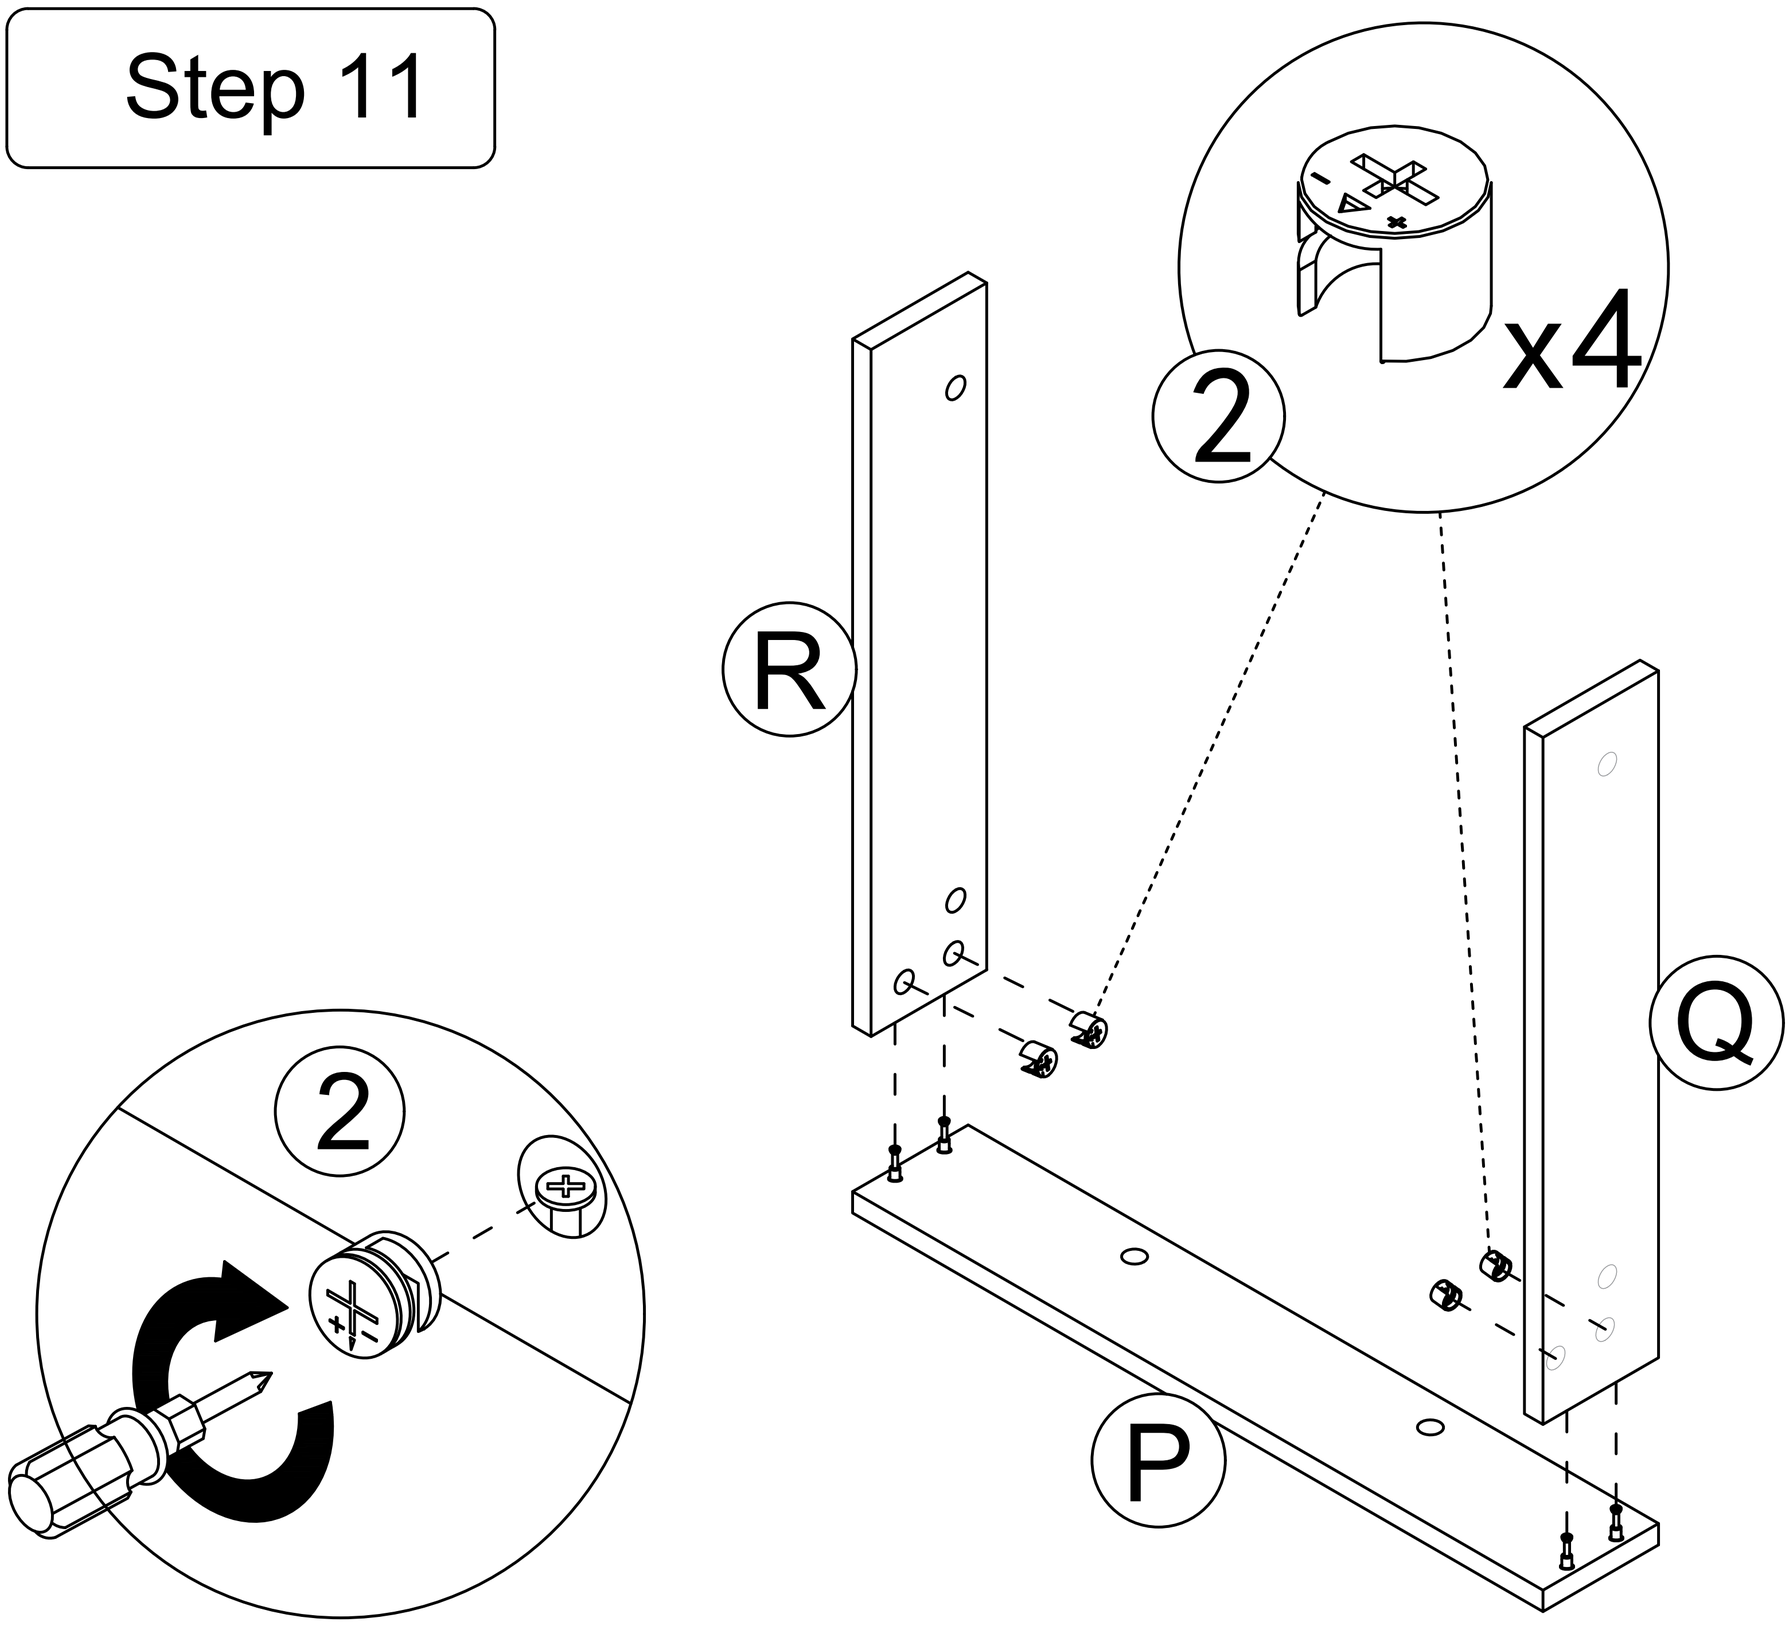


Step 12


Pay attention to the installation direction of the hidden lock

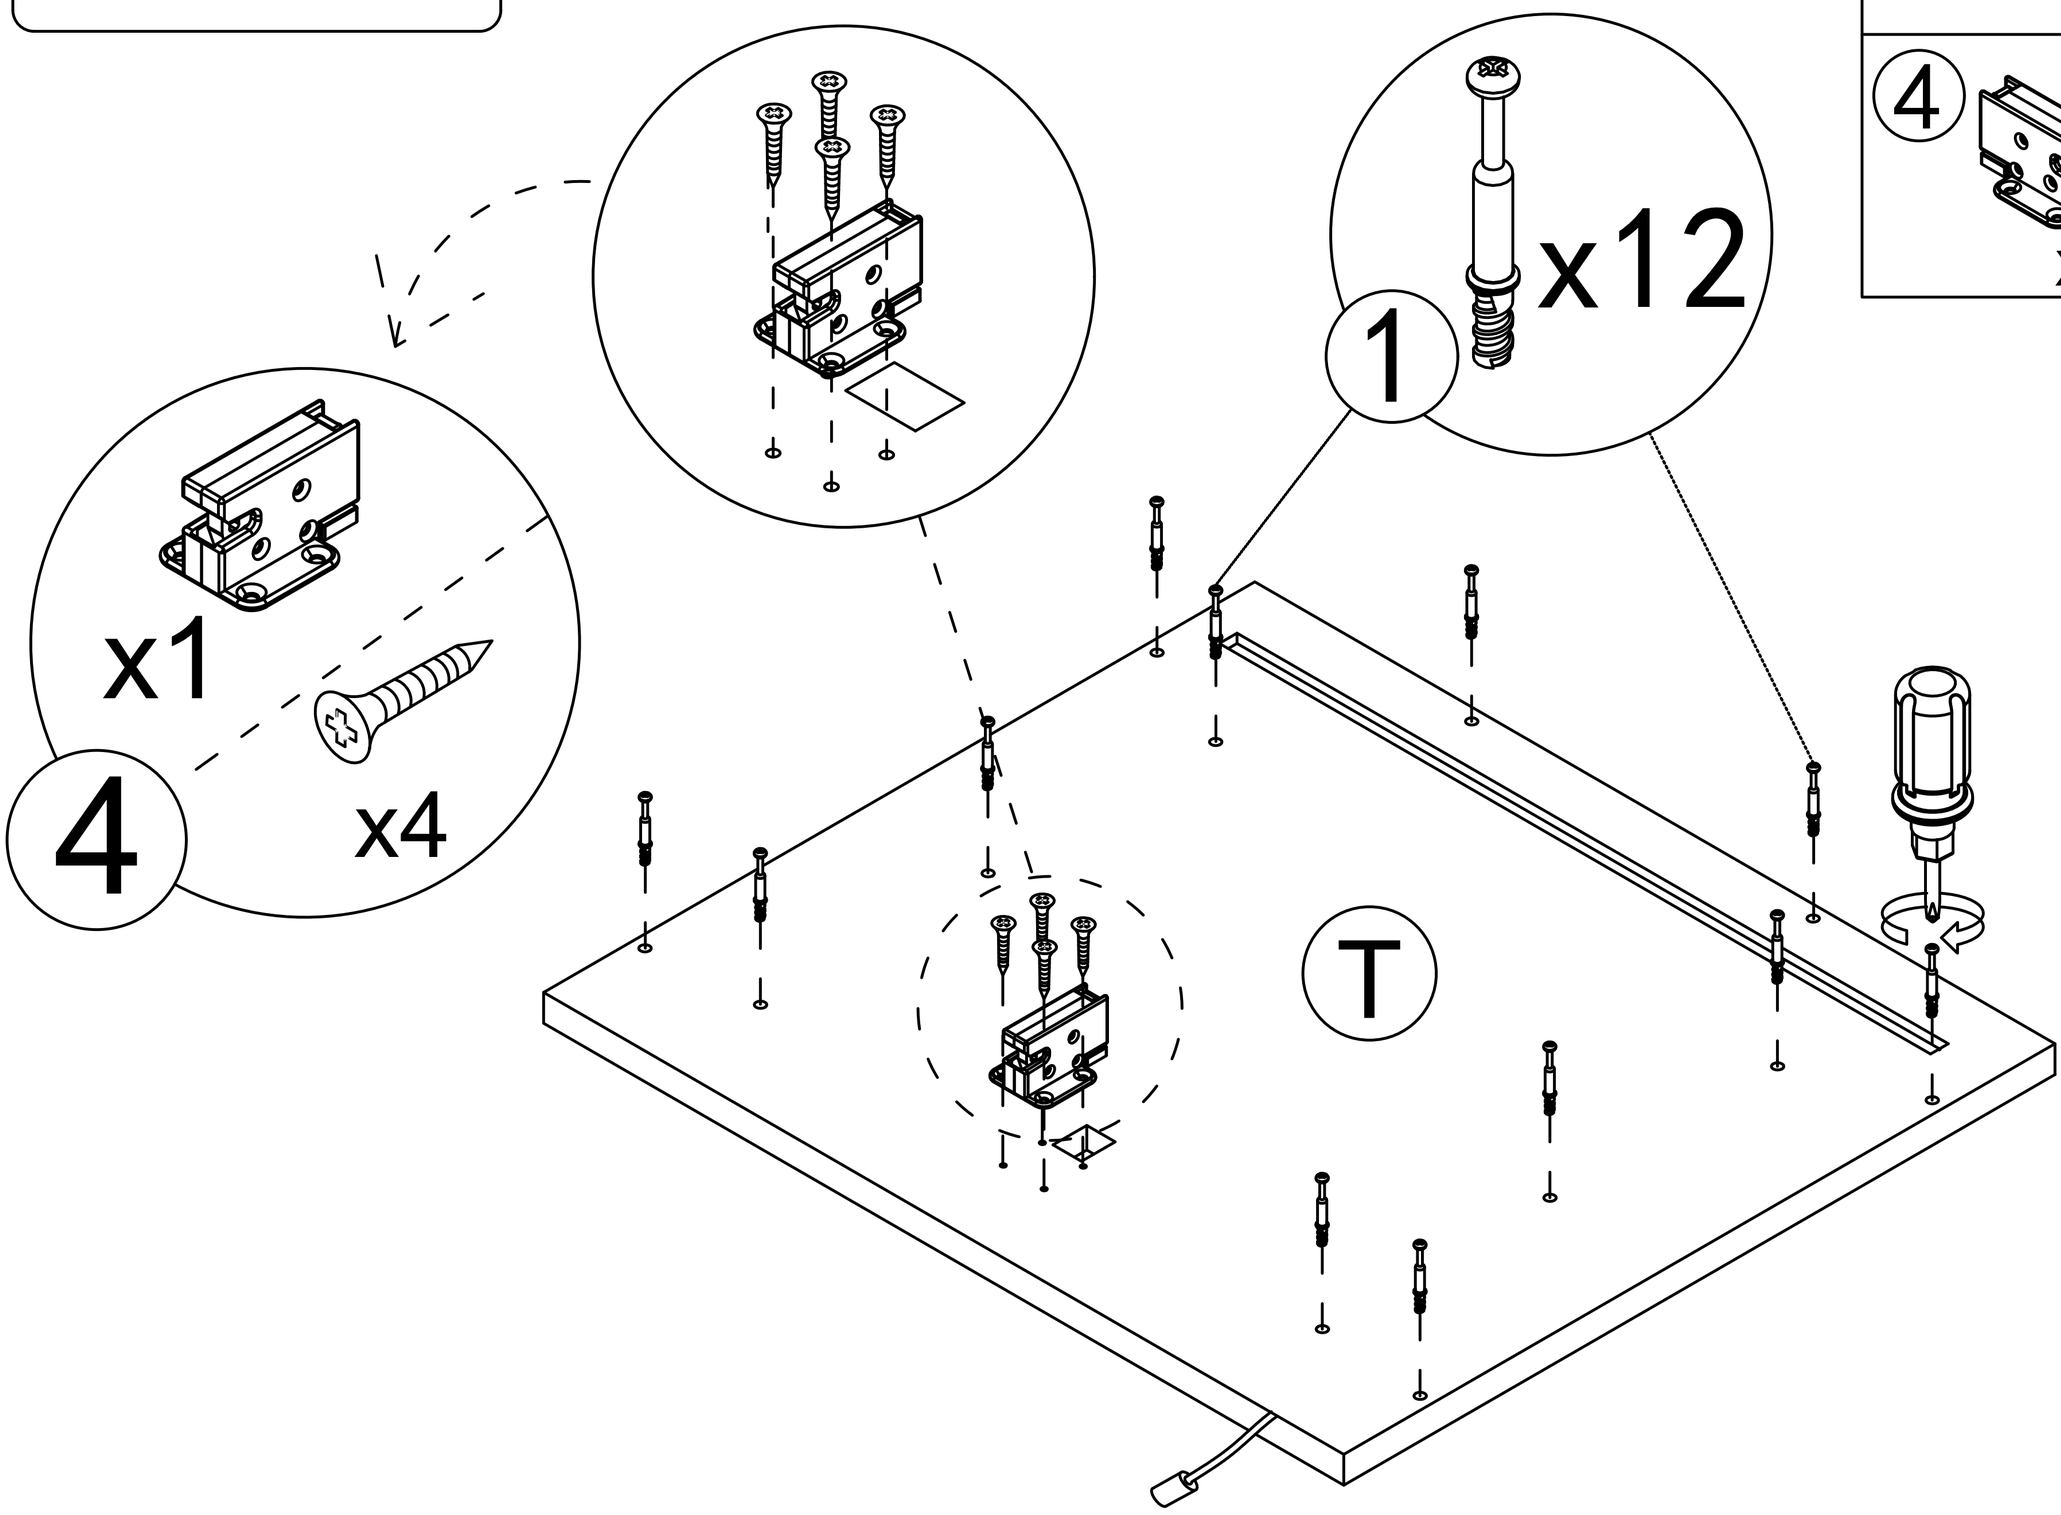


Step 13

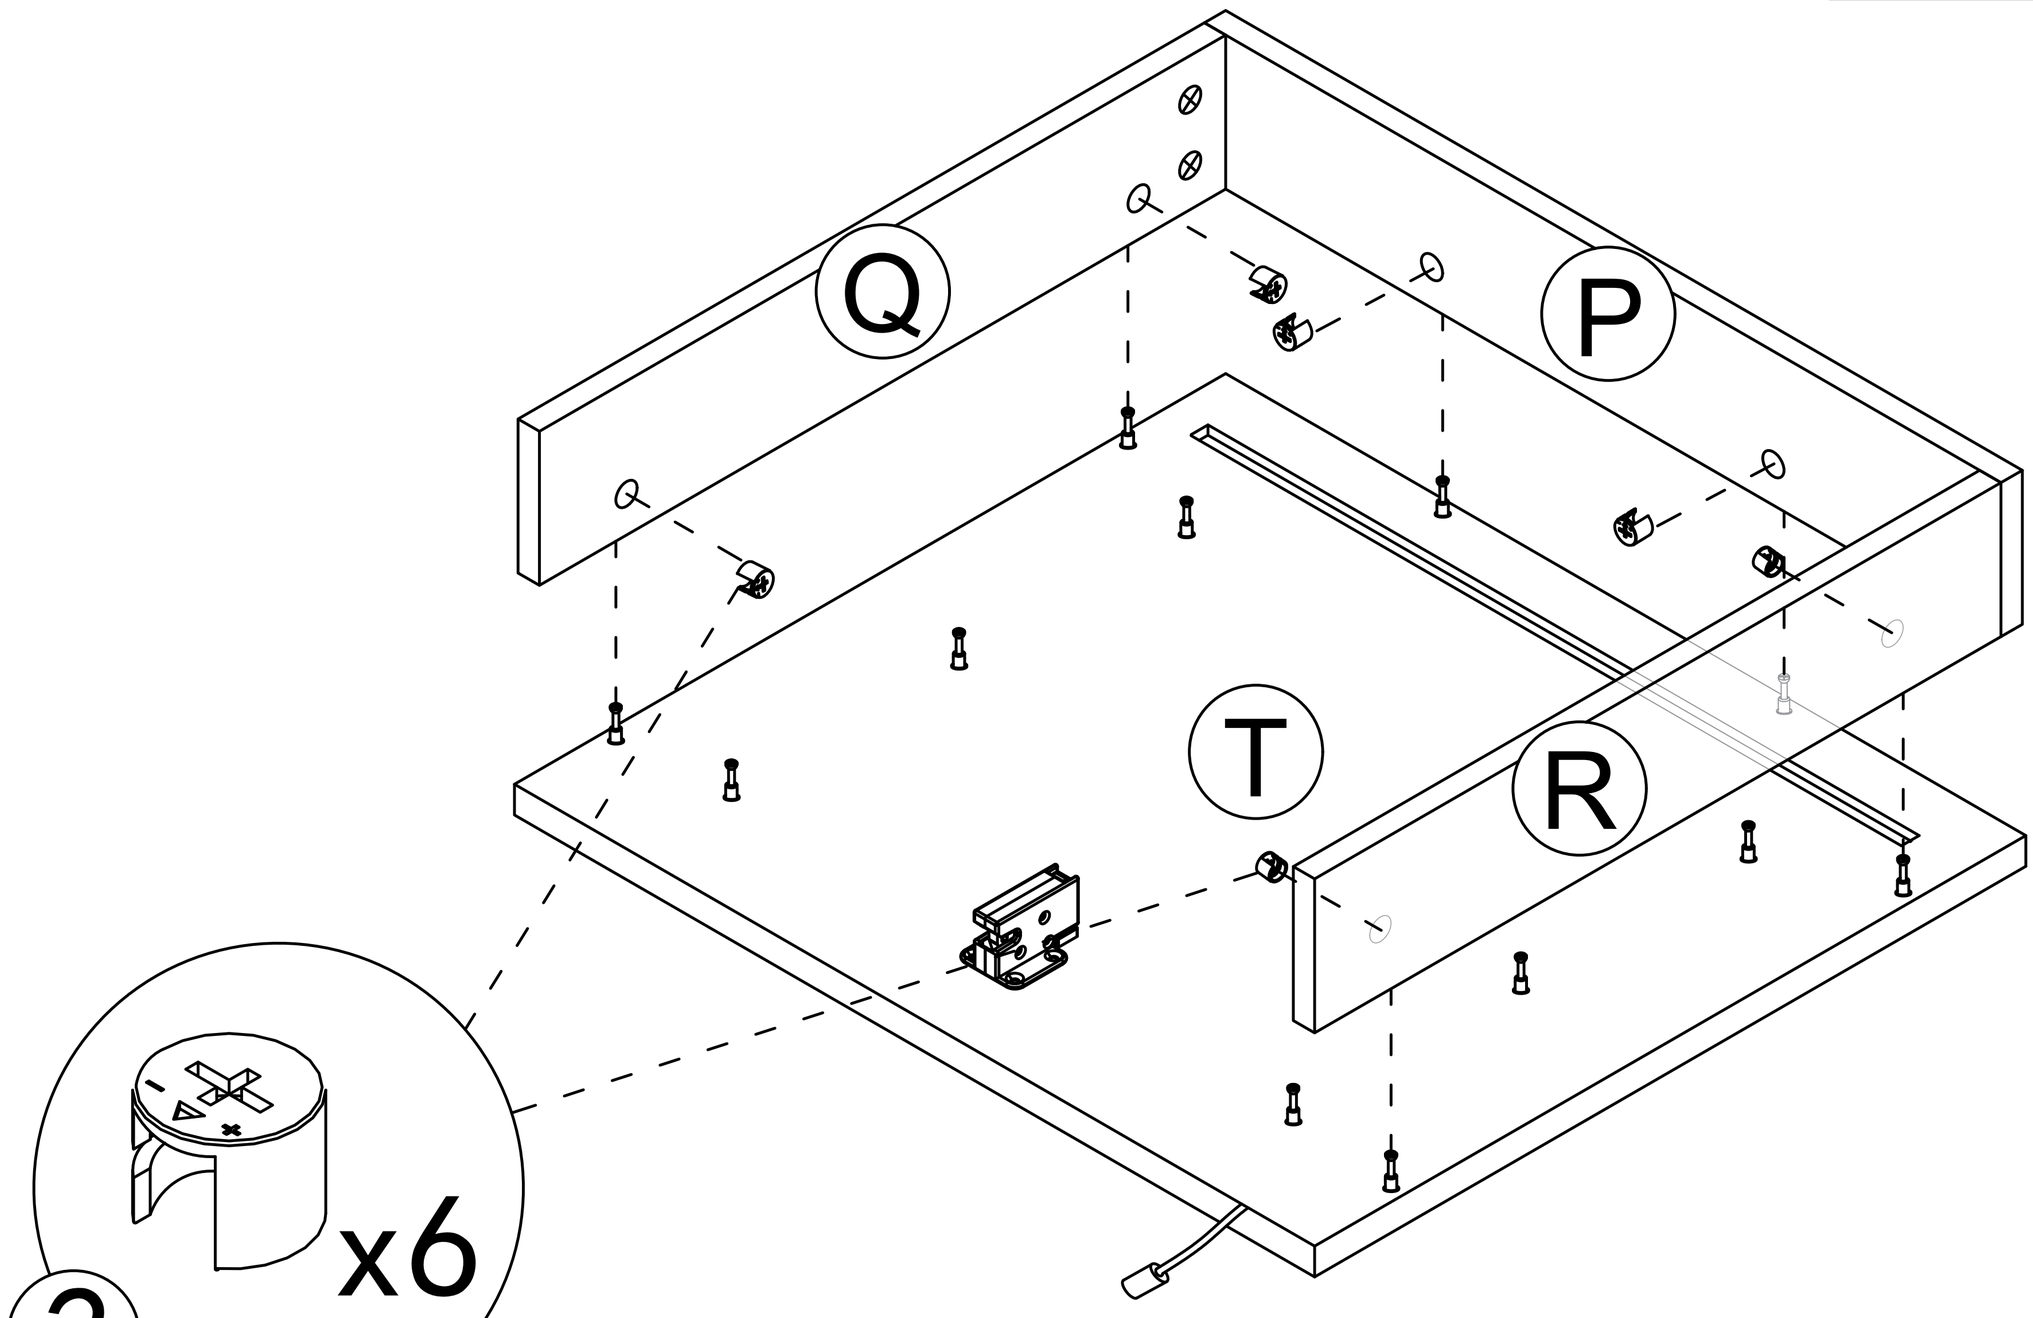







Step 14

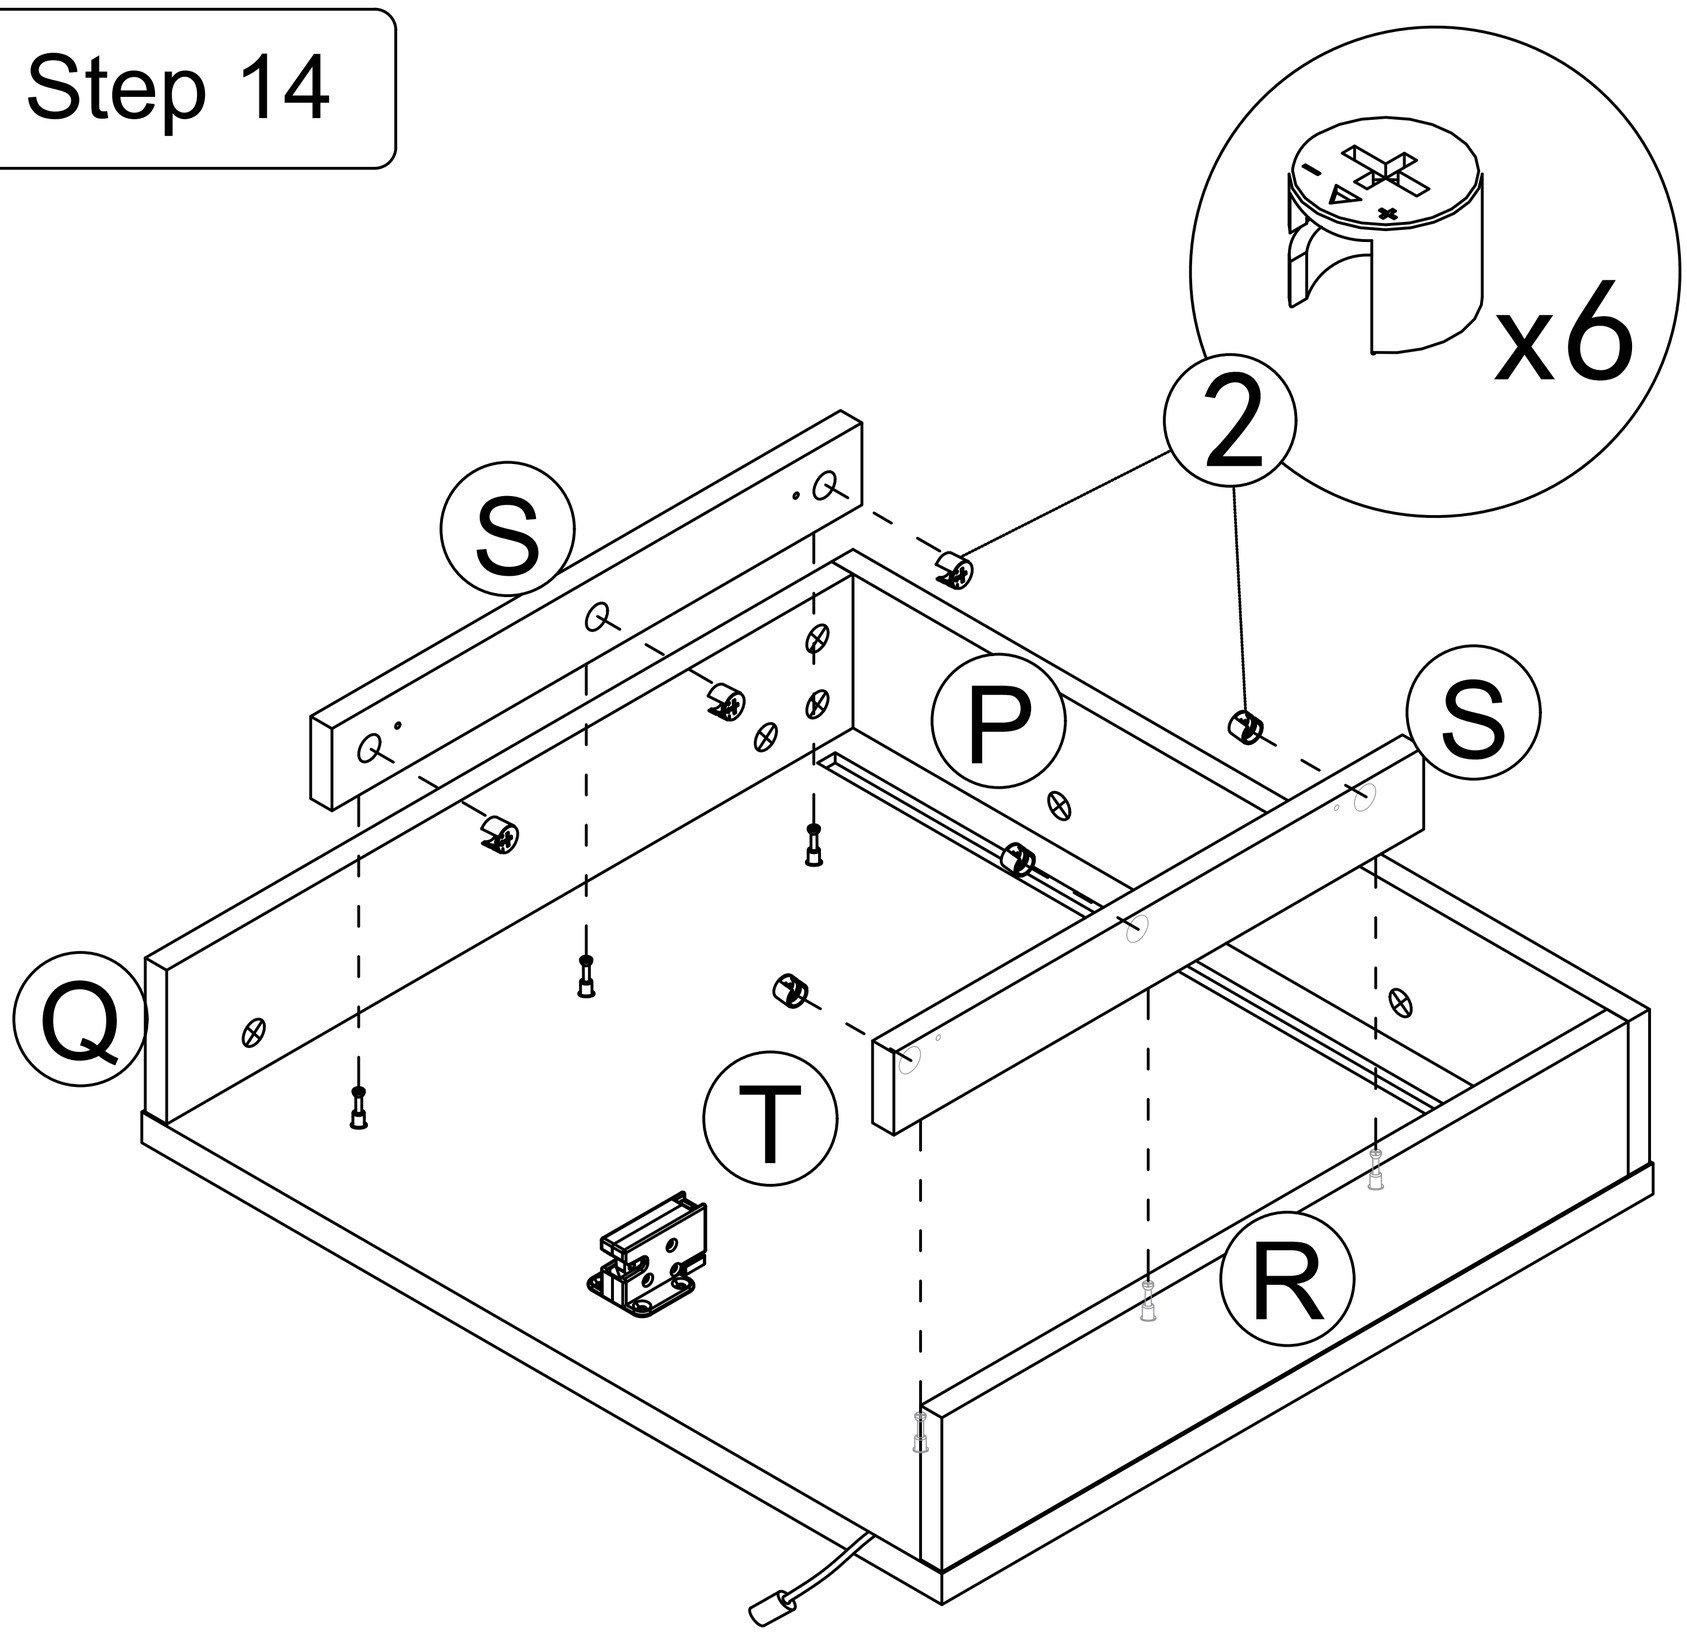


Step 15

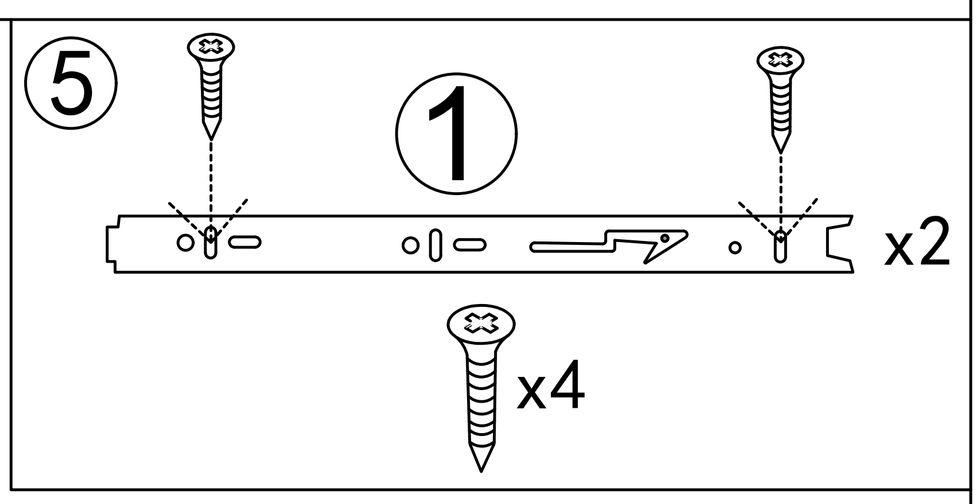


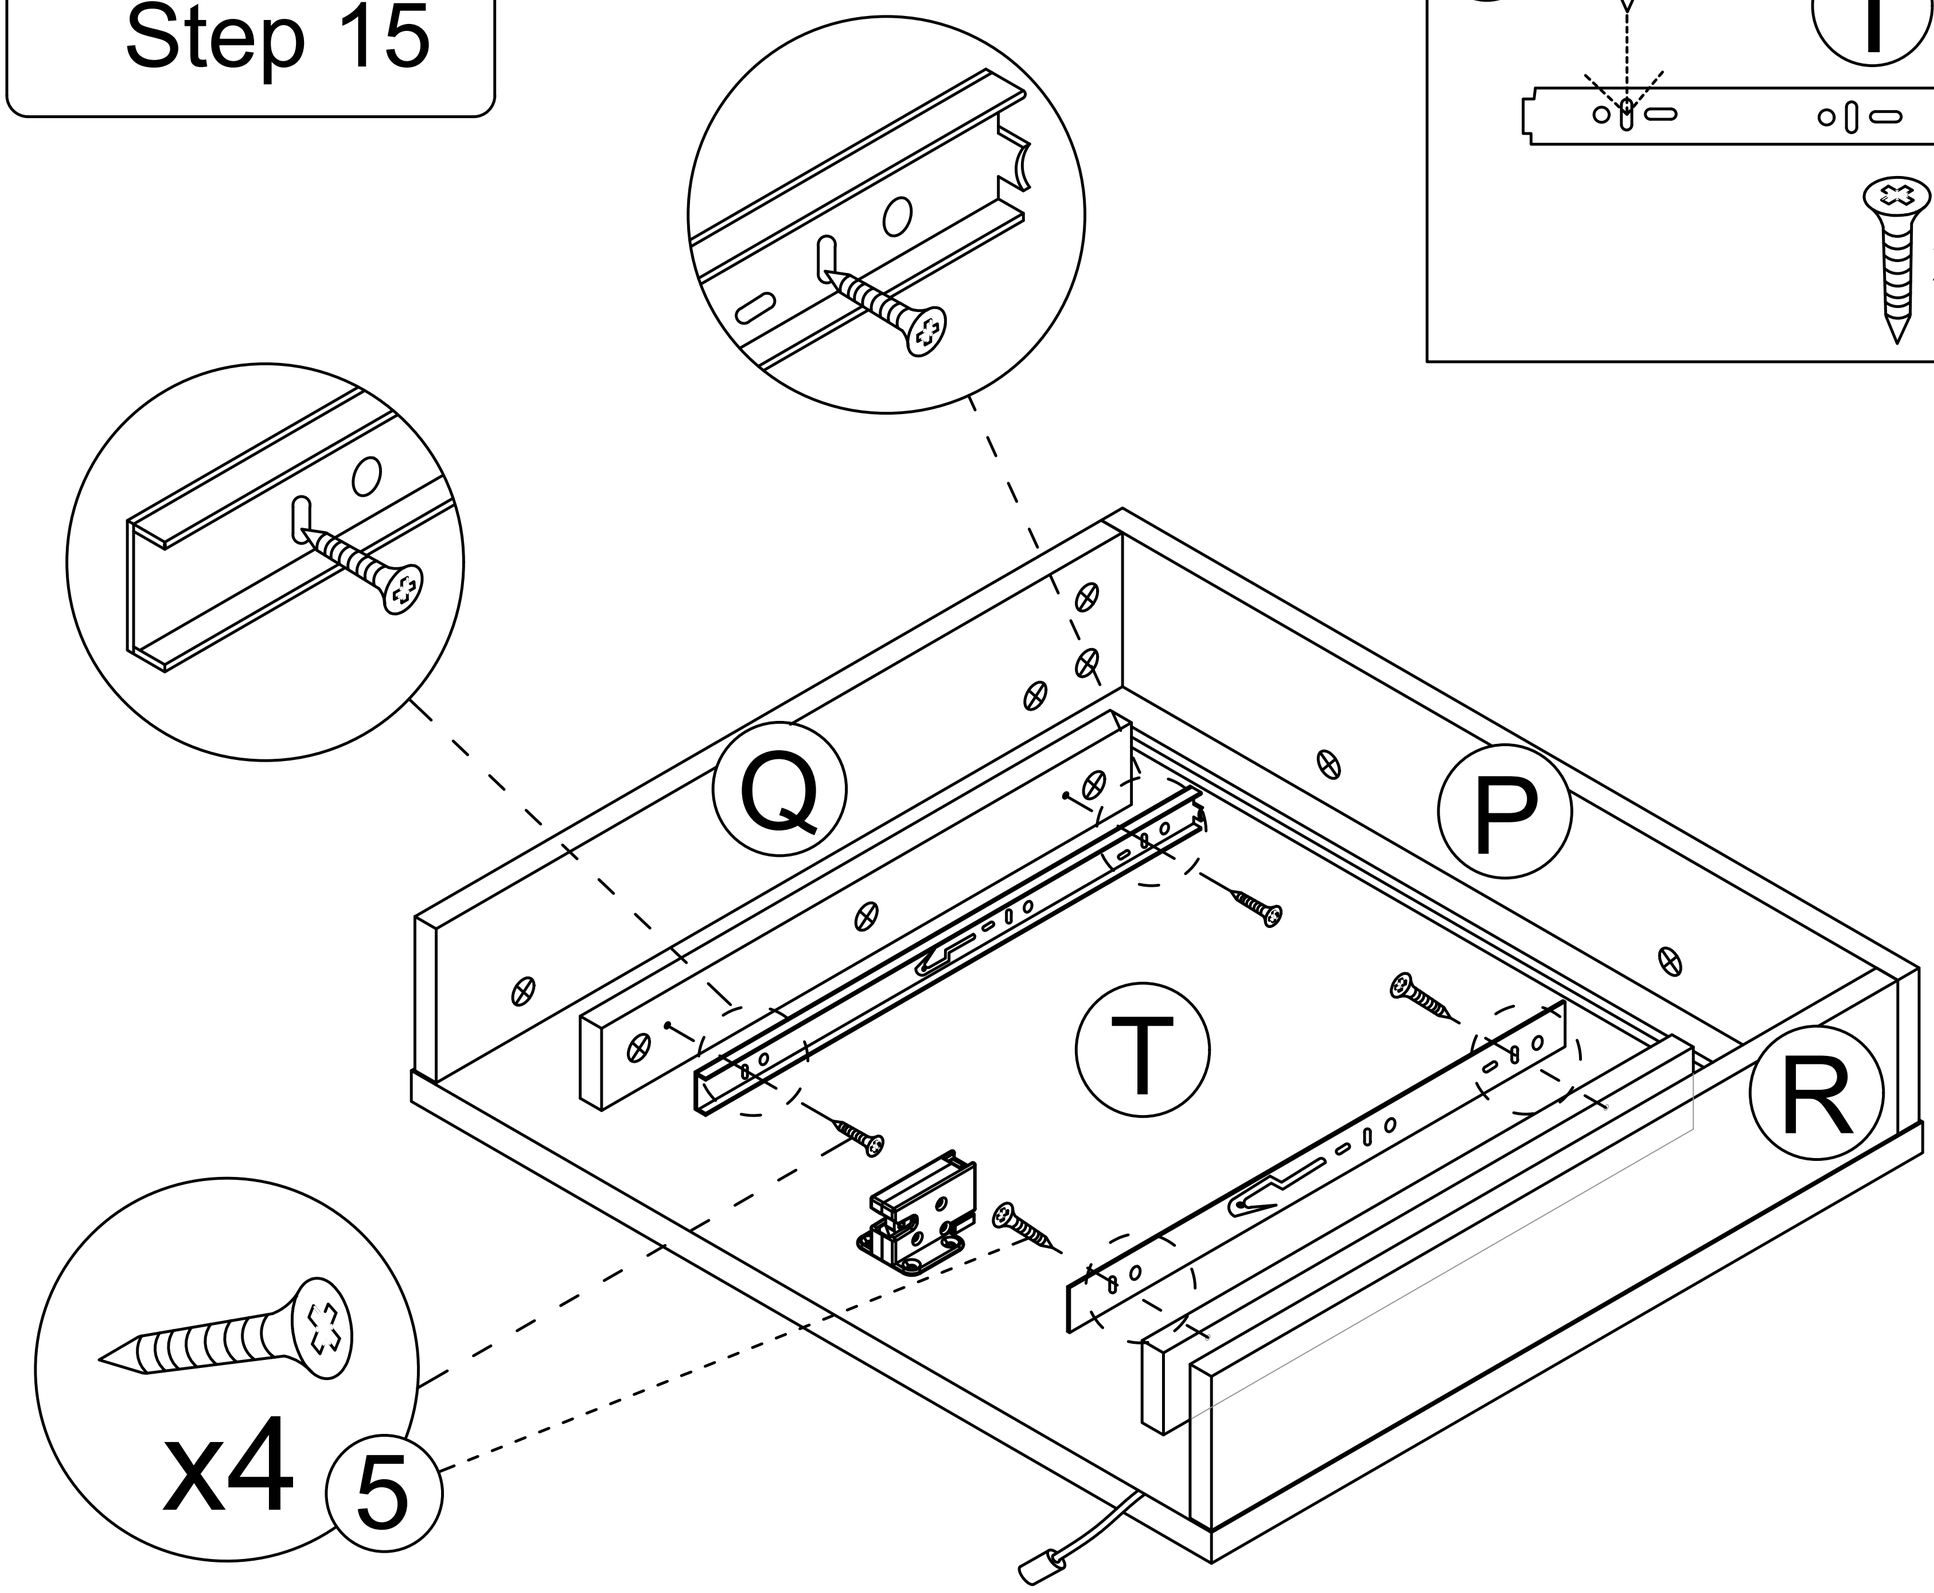


1		38pcs	2		38pcs	3		8pcs
4	 1pcs  3pcs		5	 6pcs  18pcs		6		4pcs
7		4pcs			1pcs			

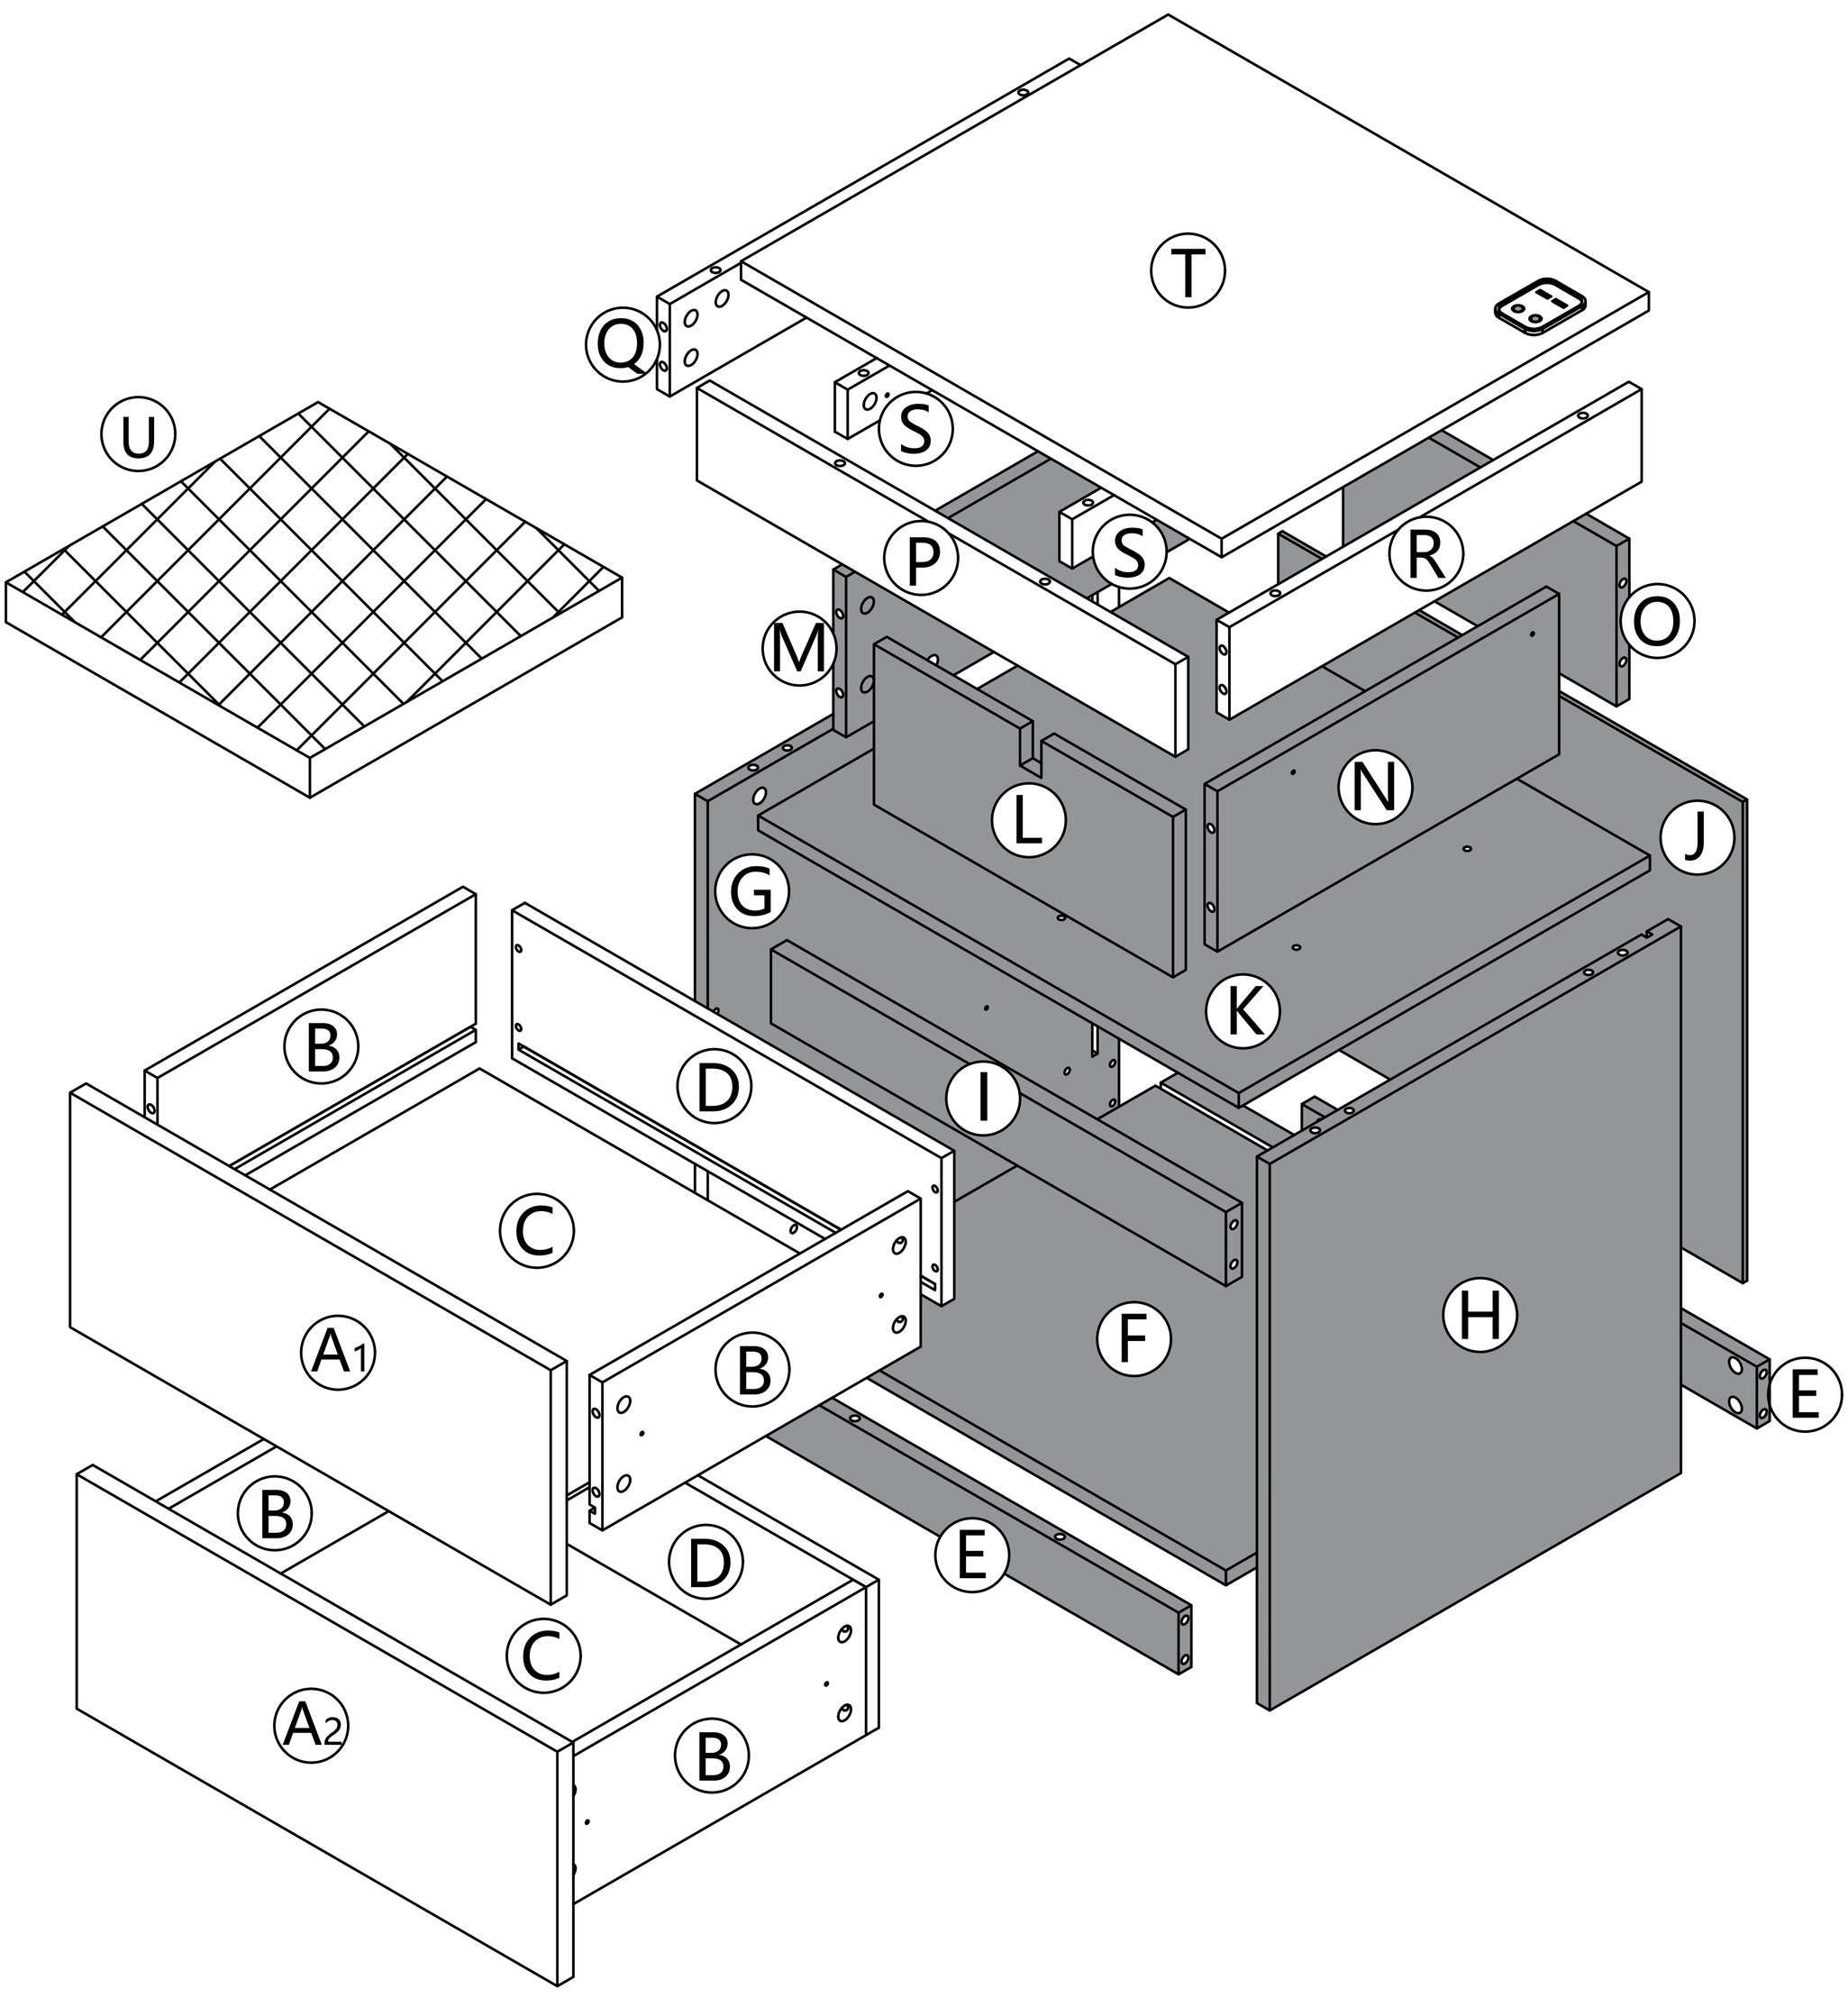



Step 16

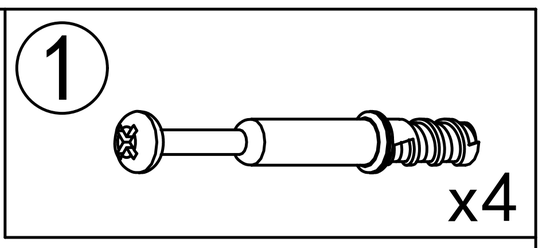

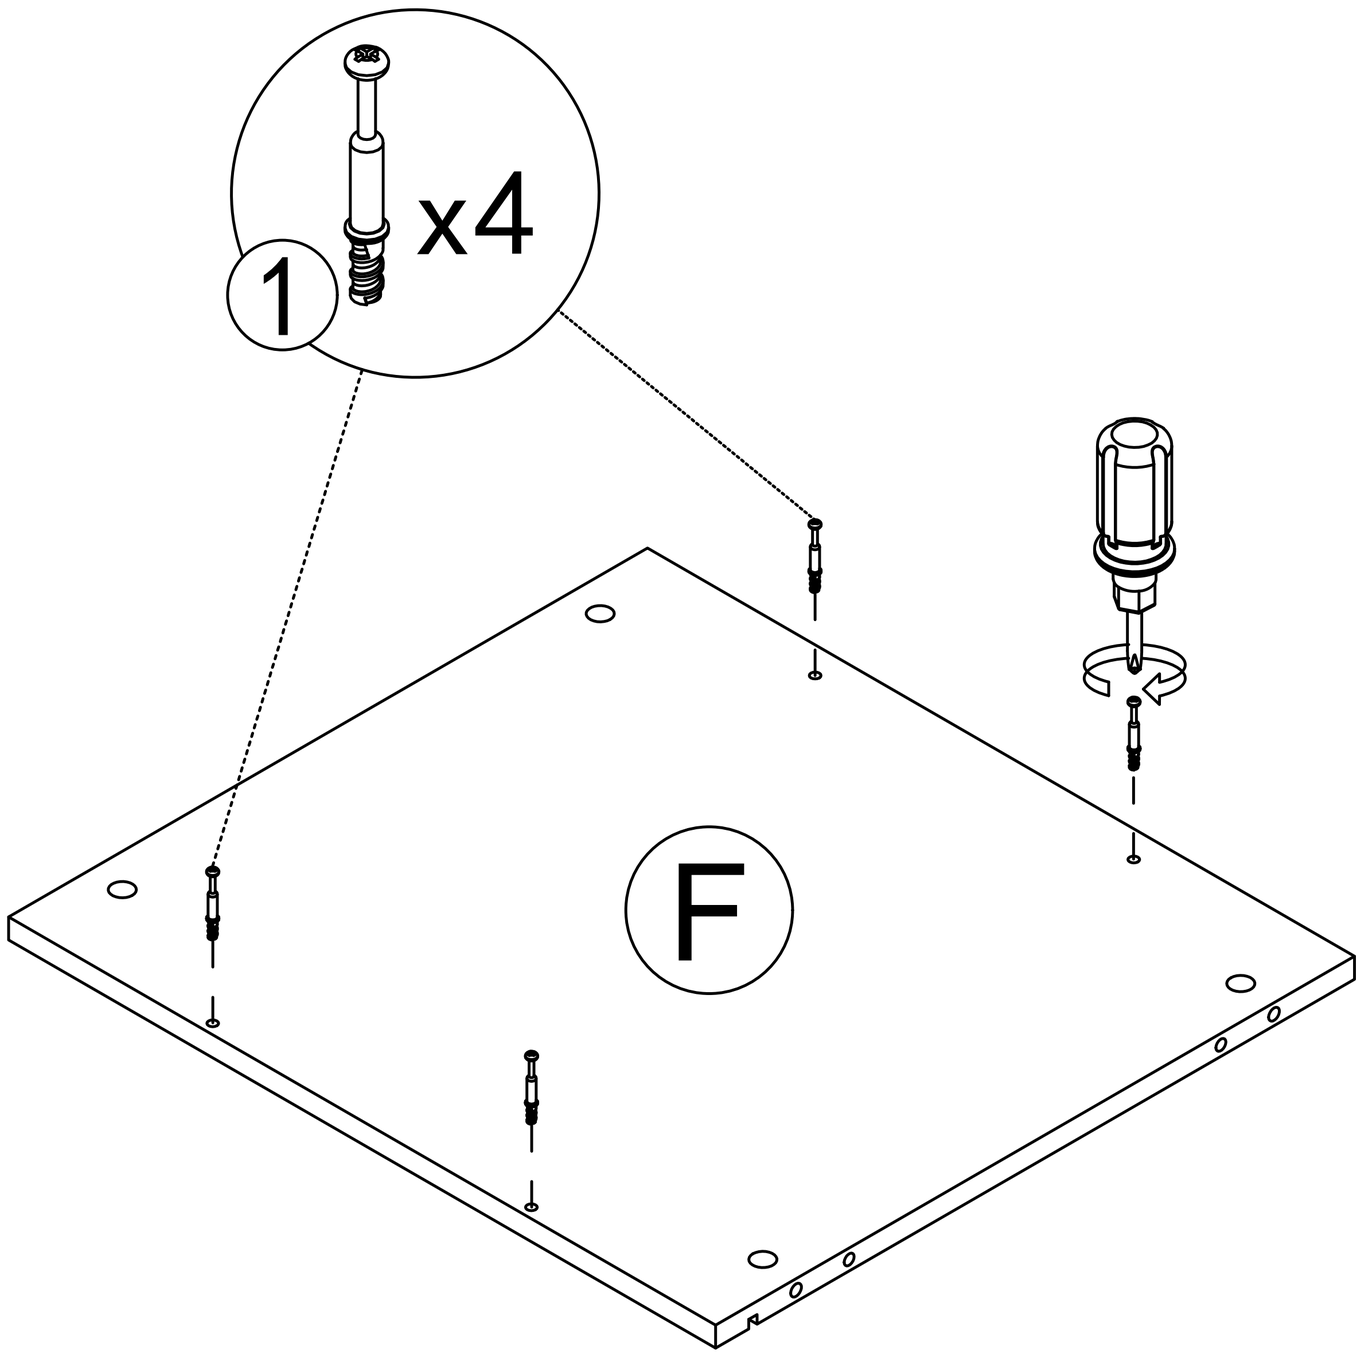



Step 17

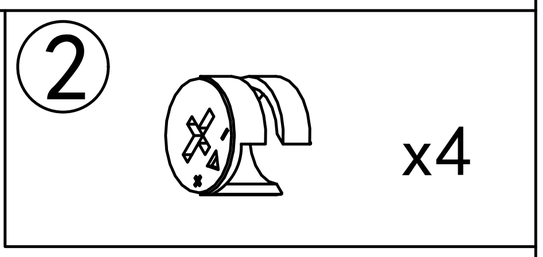

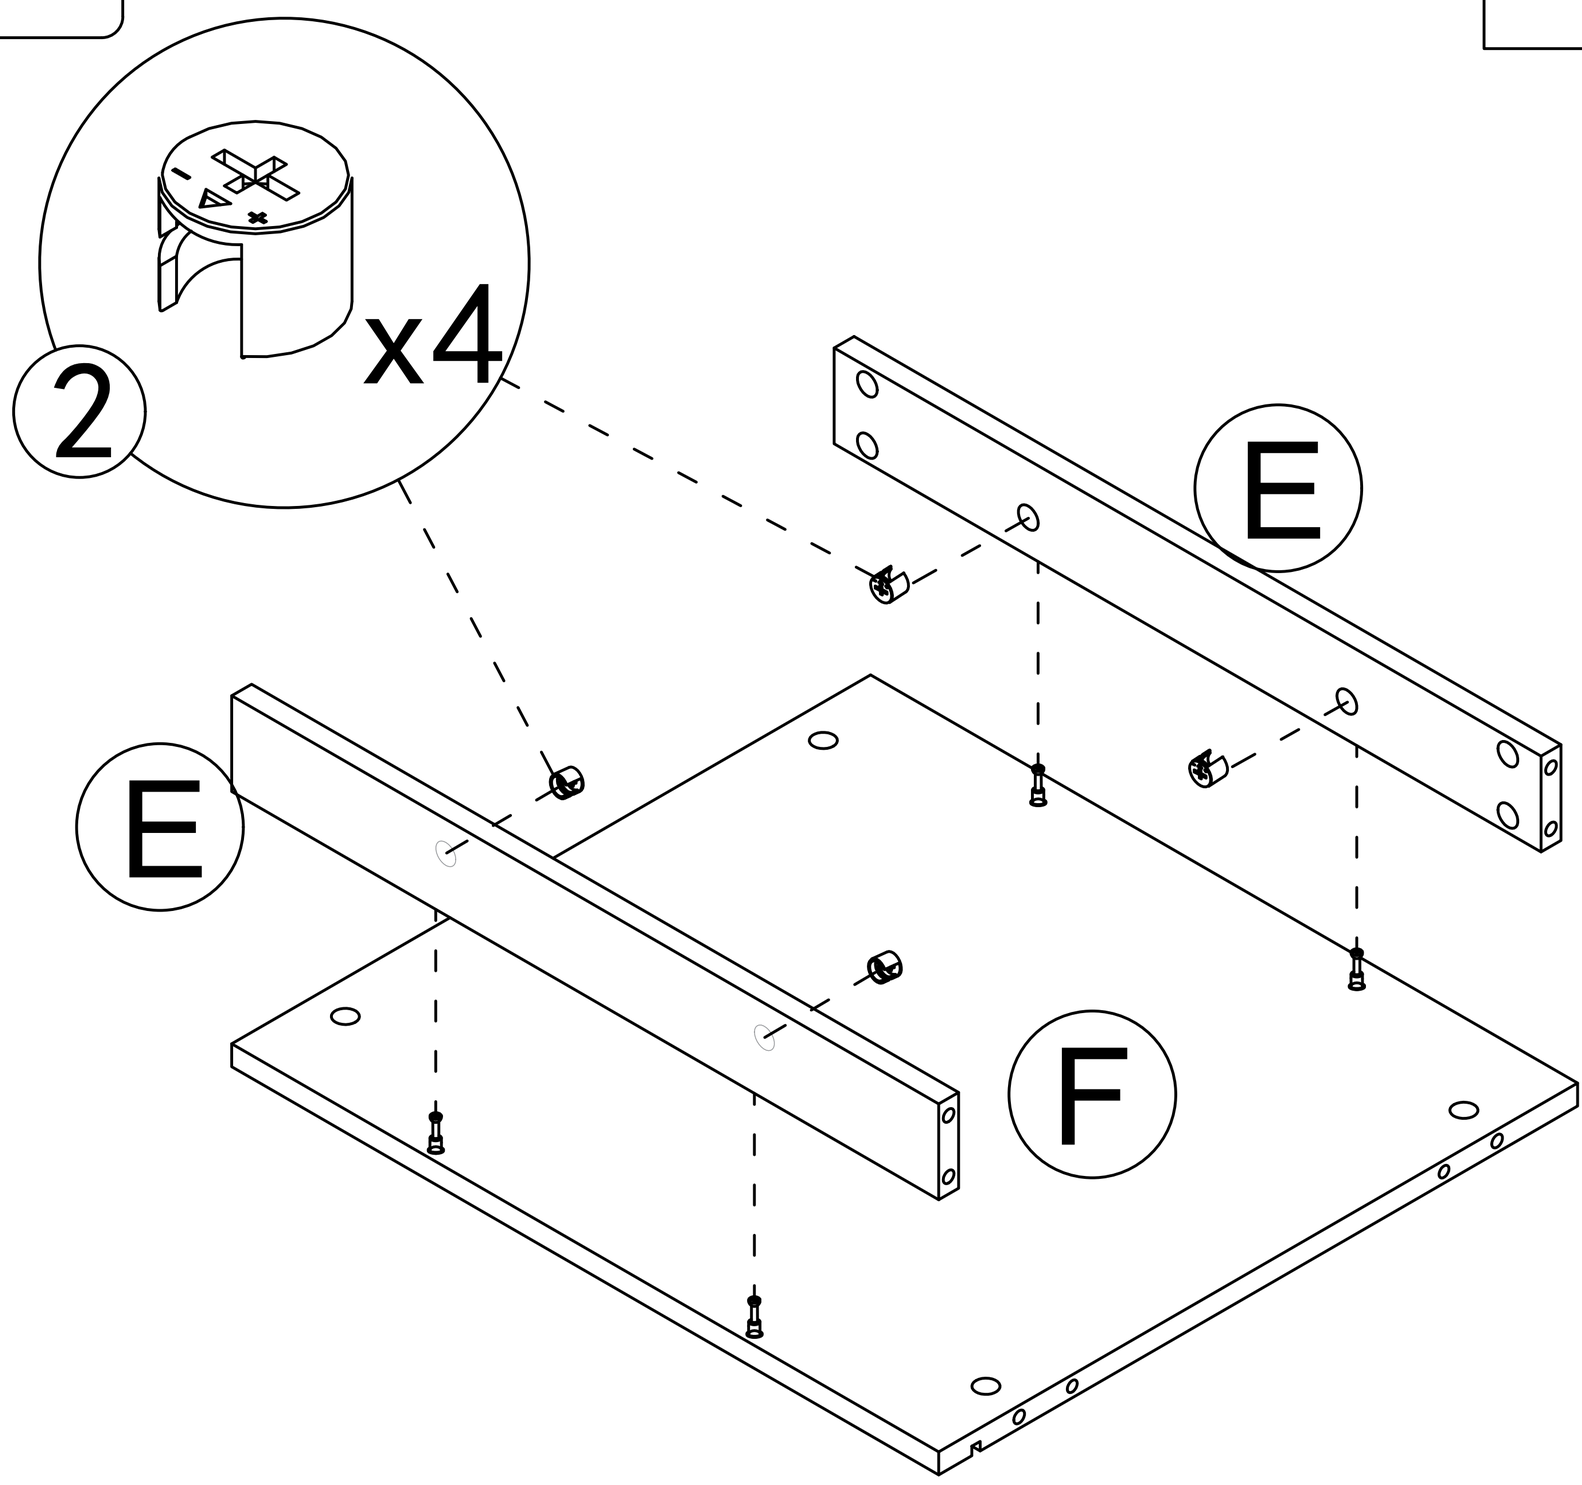



Step 18

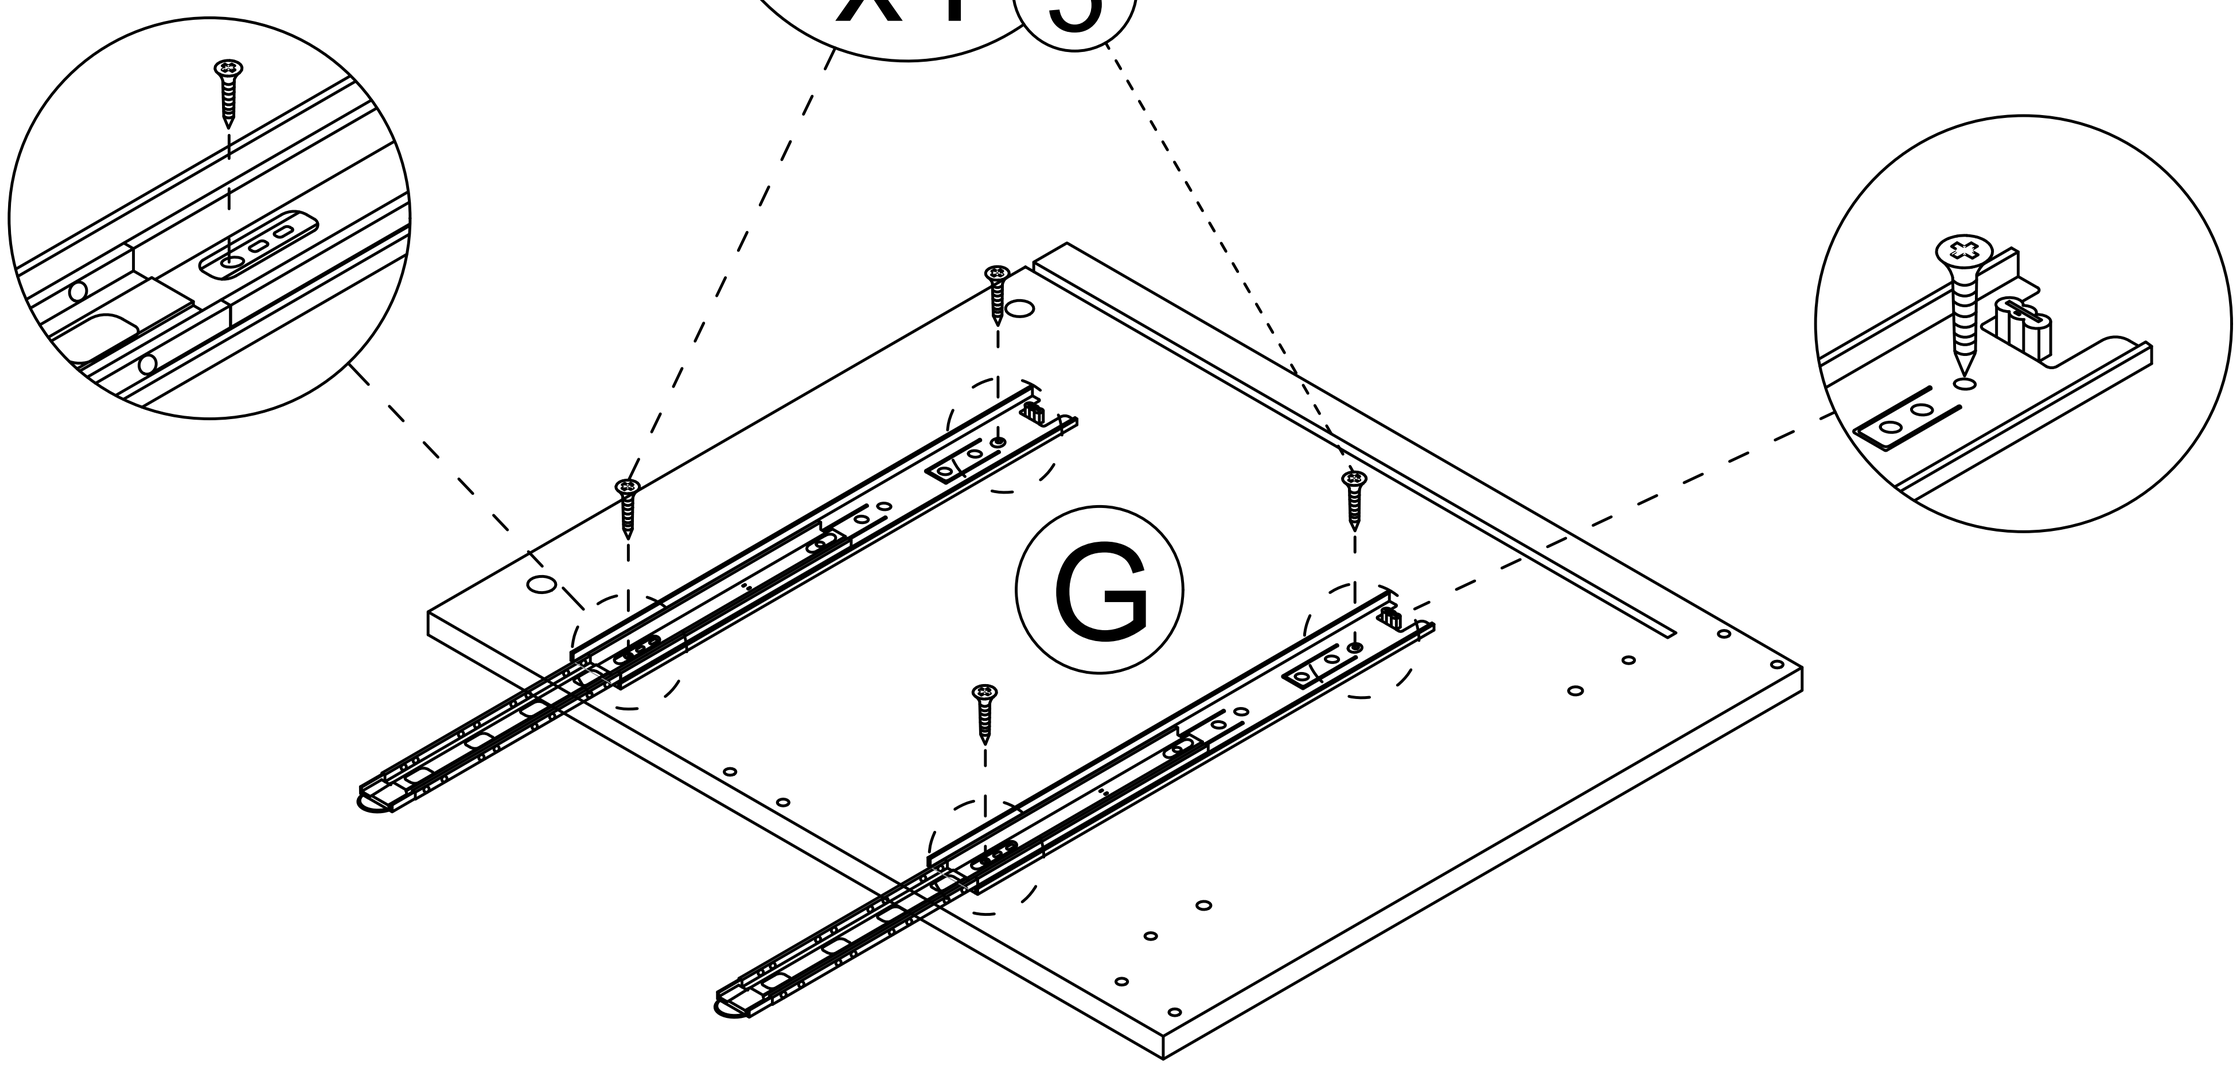

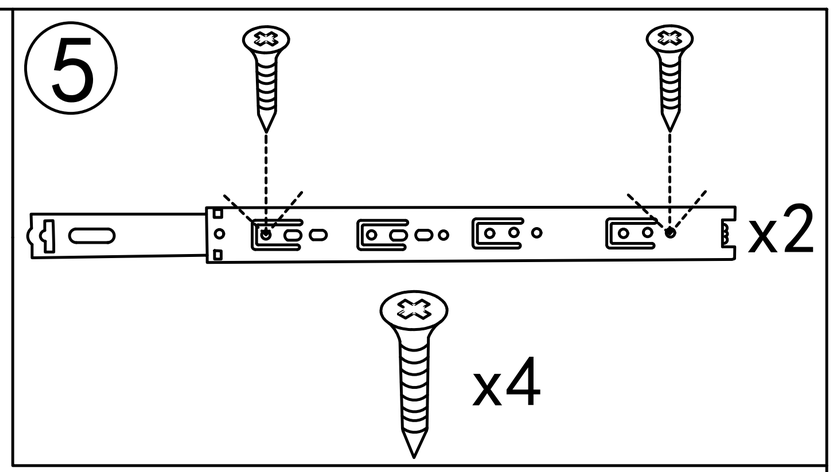


Step 19

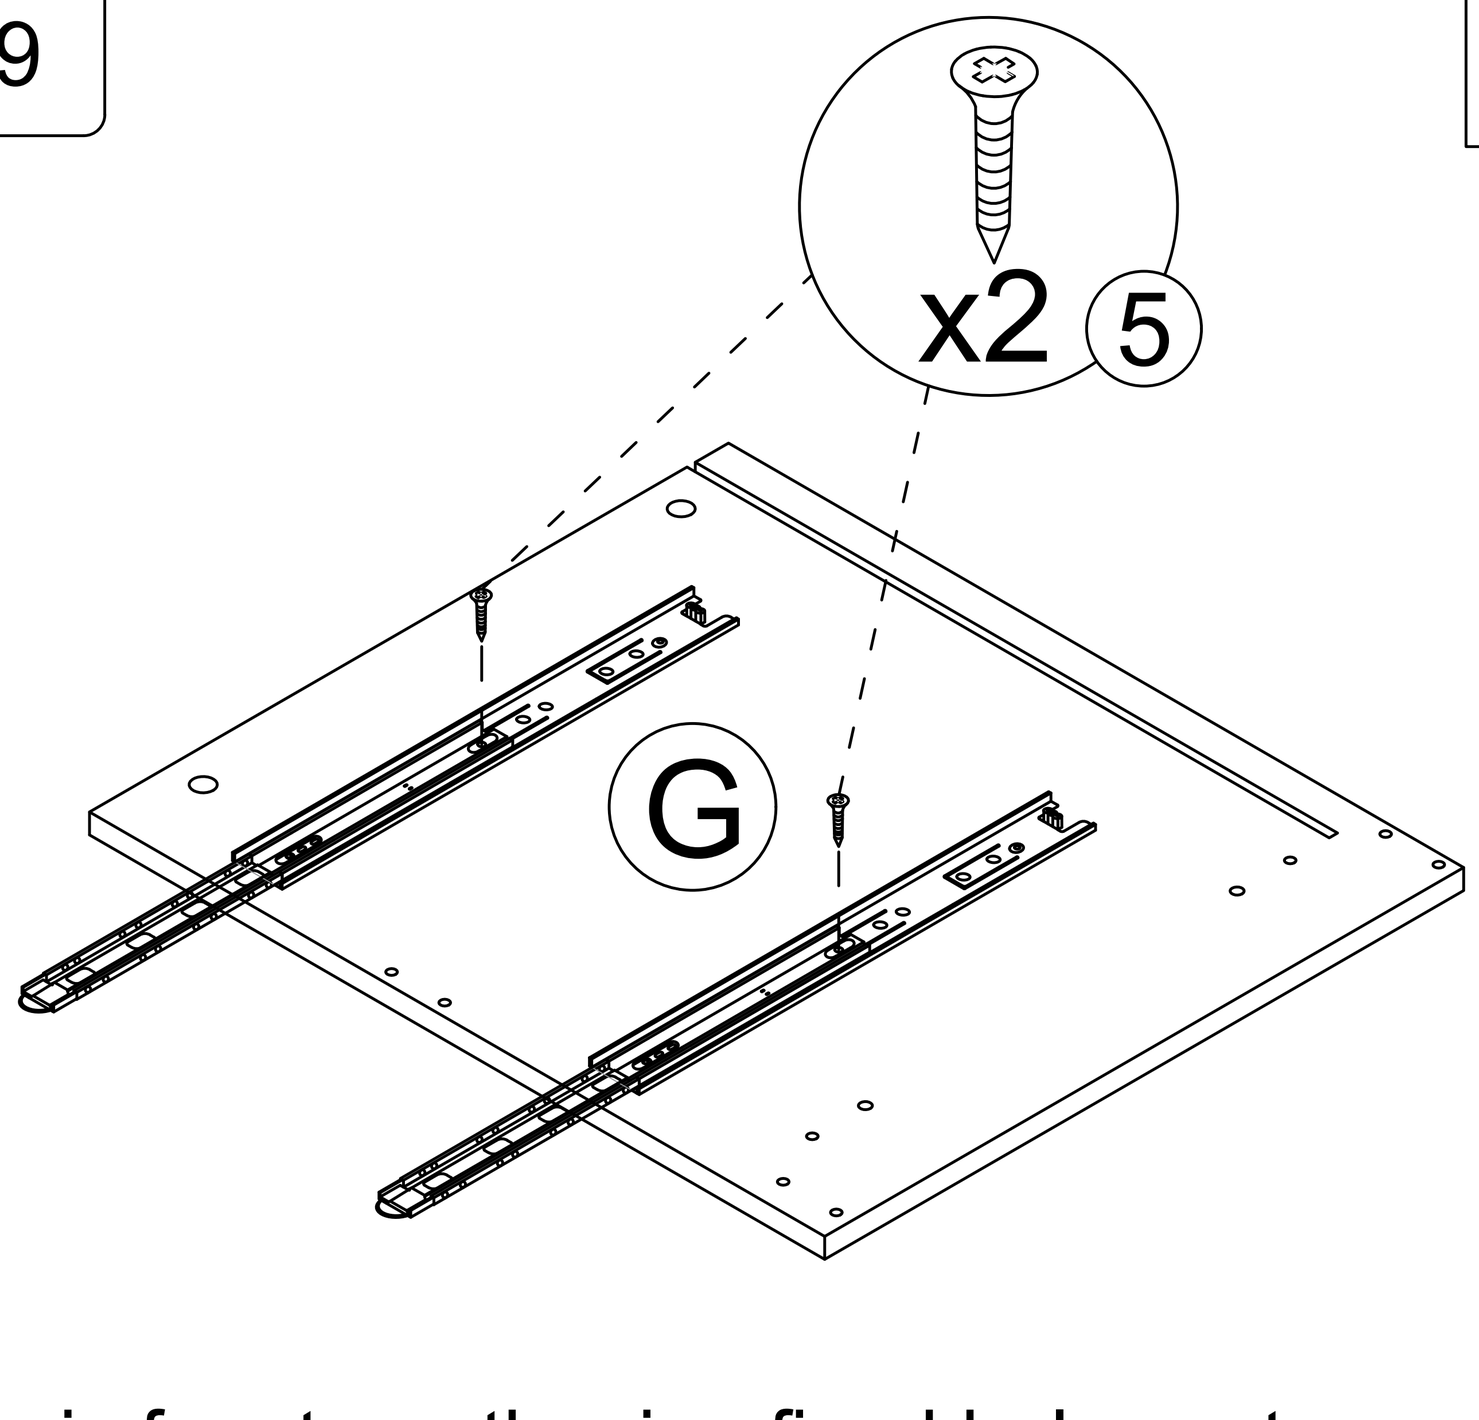


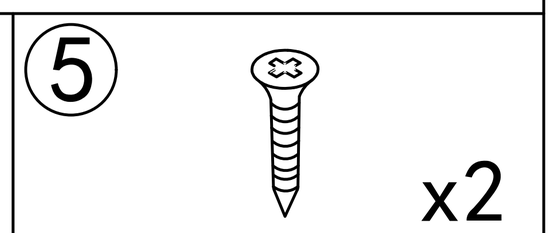



This hole is for strengthening fixed hole customers can choose to install according to their needs.


Step 20

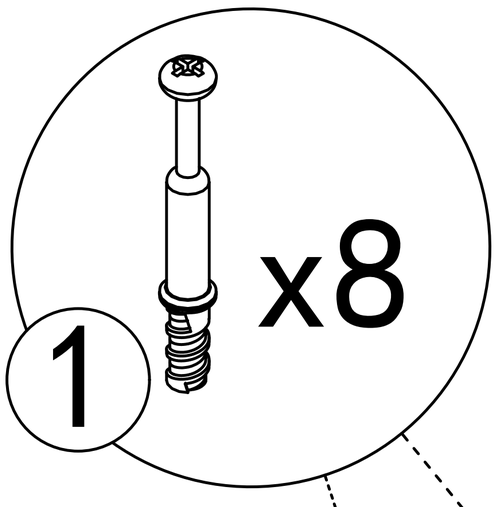

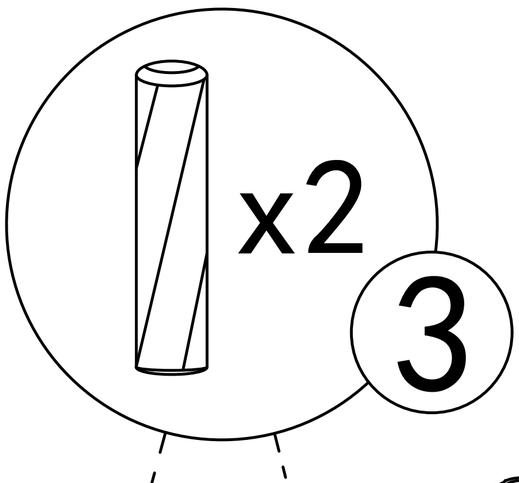


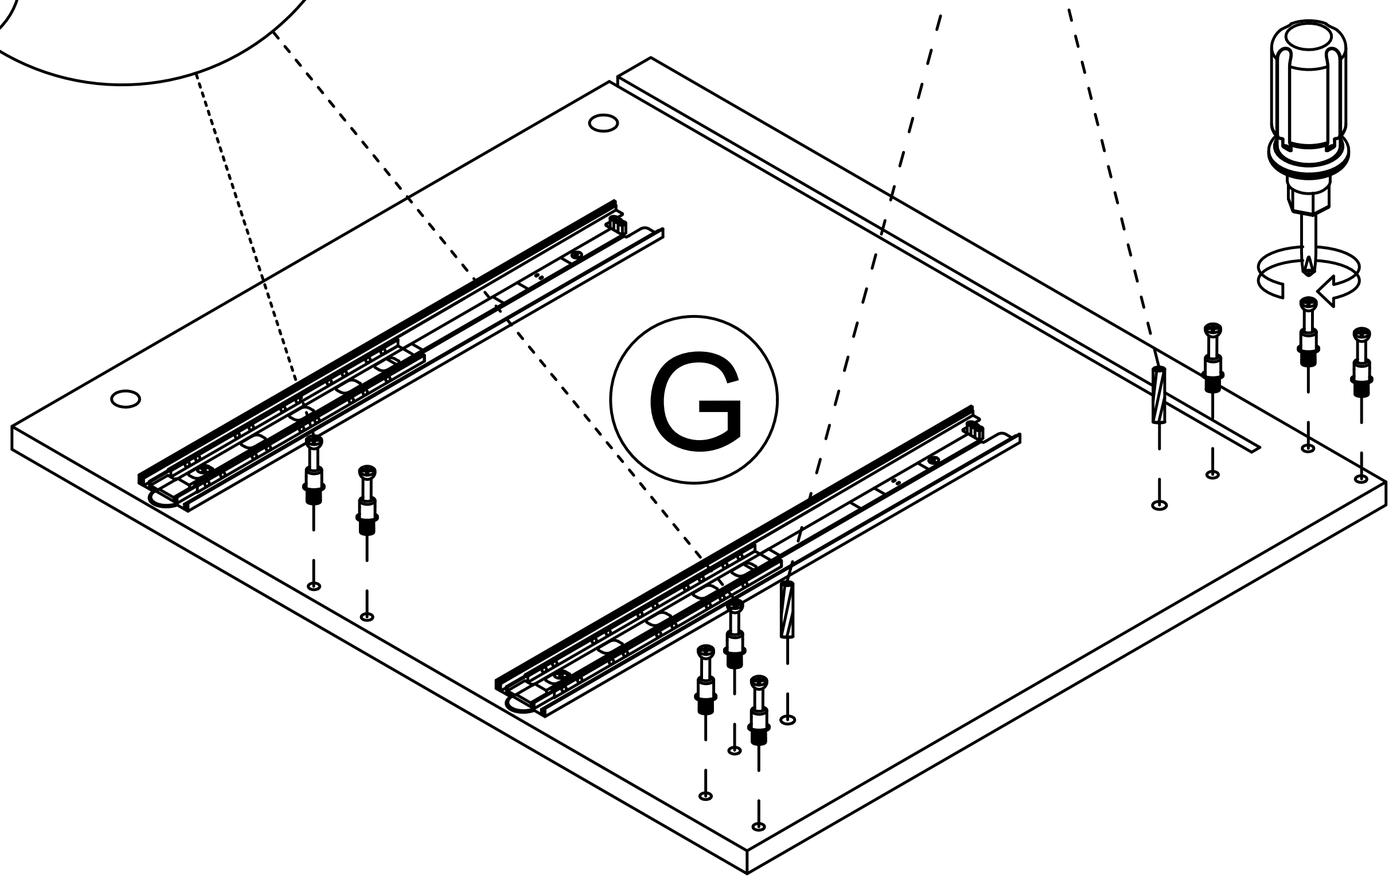


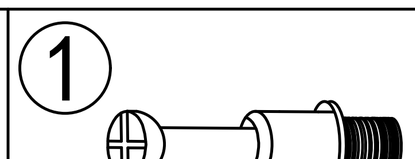


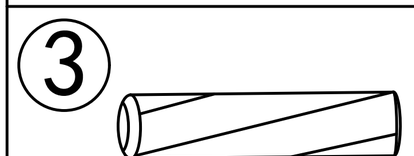


Step 21

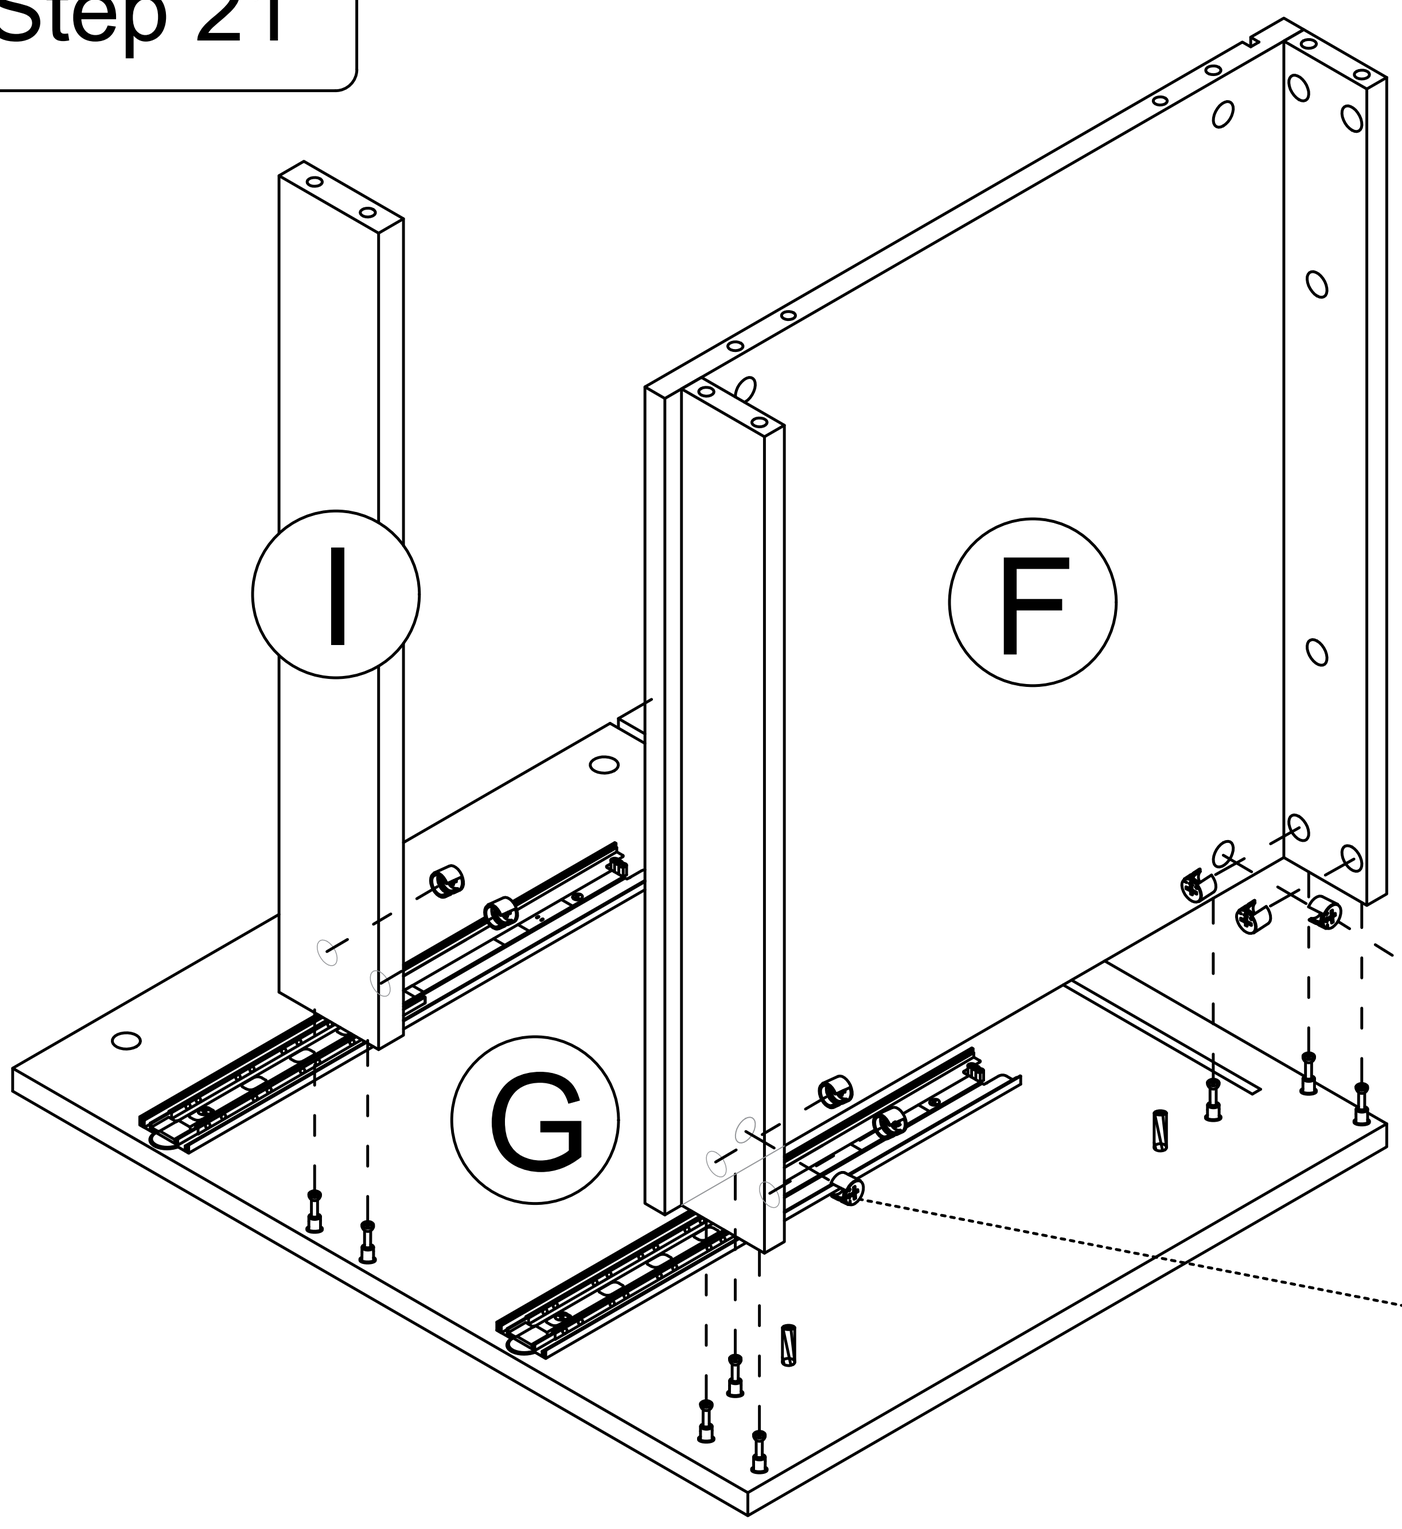

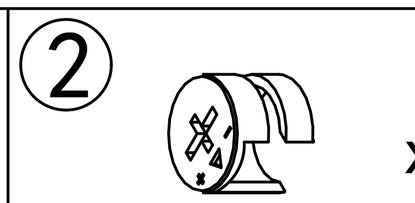


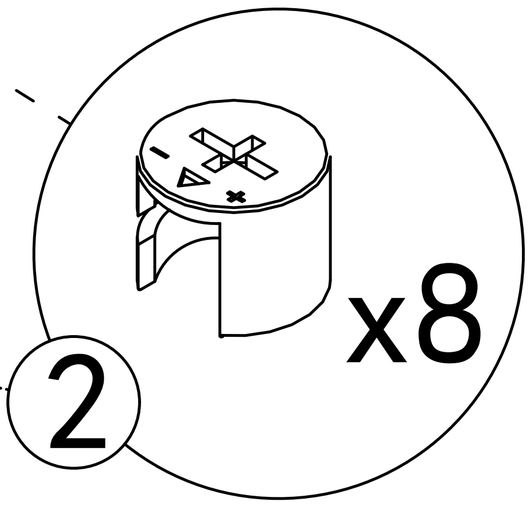


Step 22

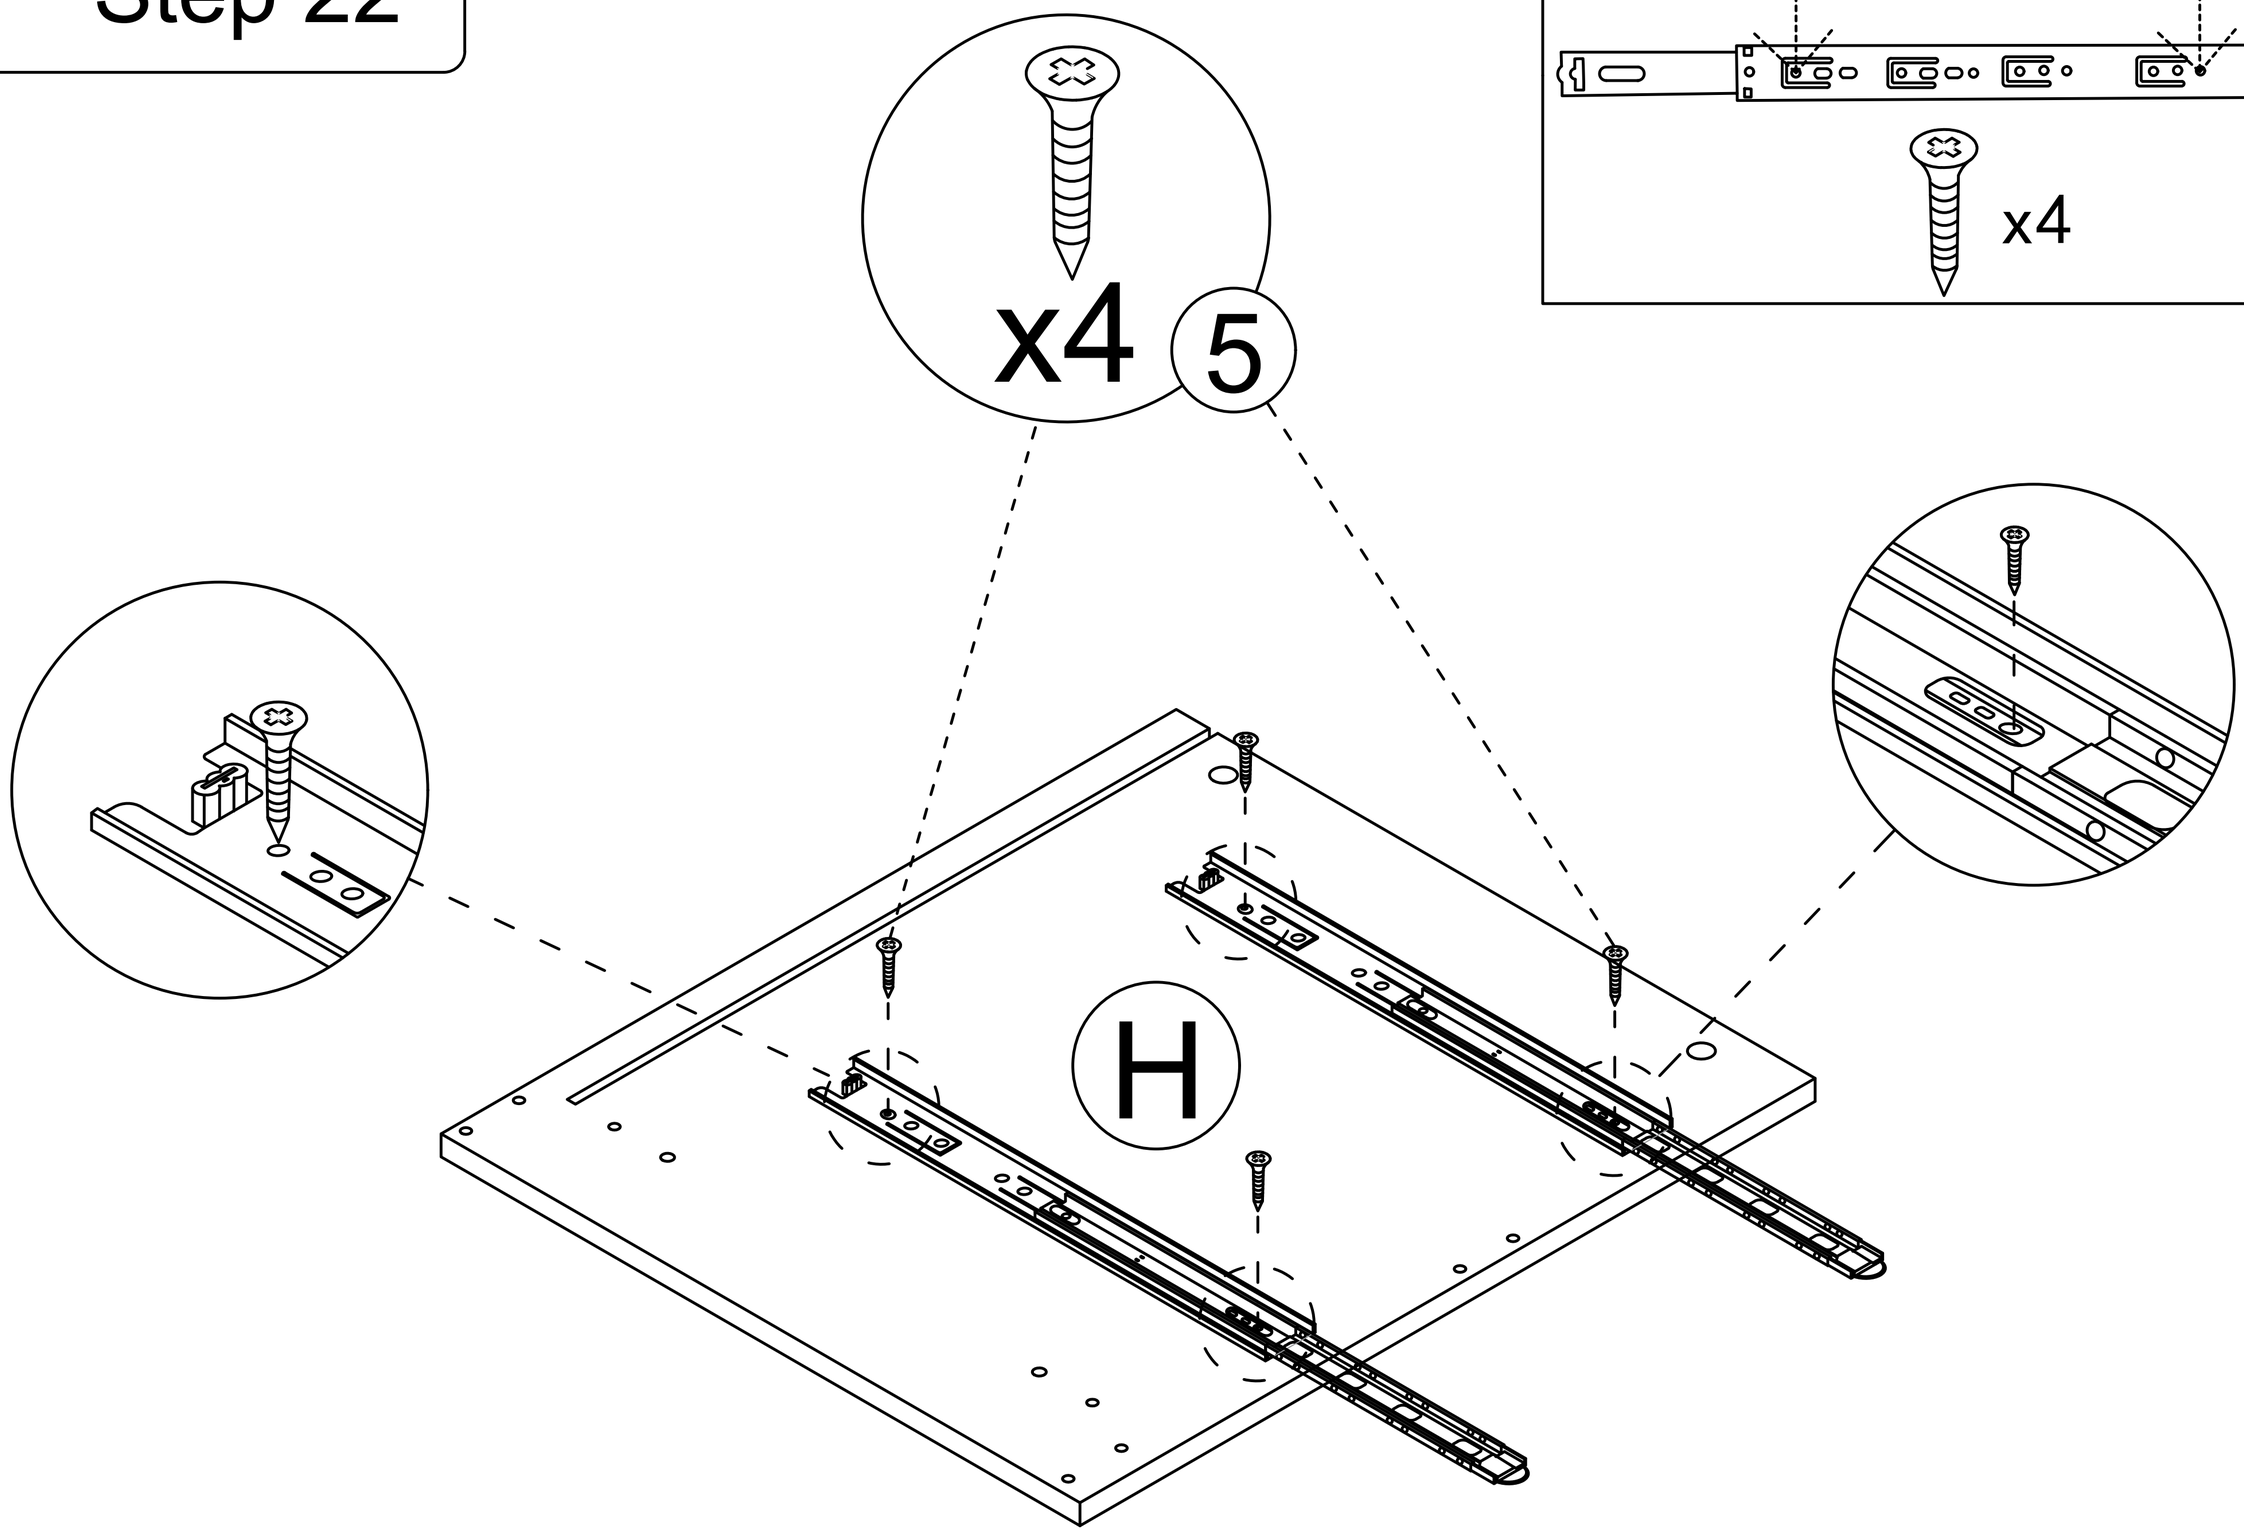


Step 23

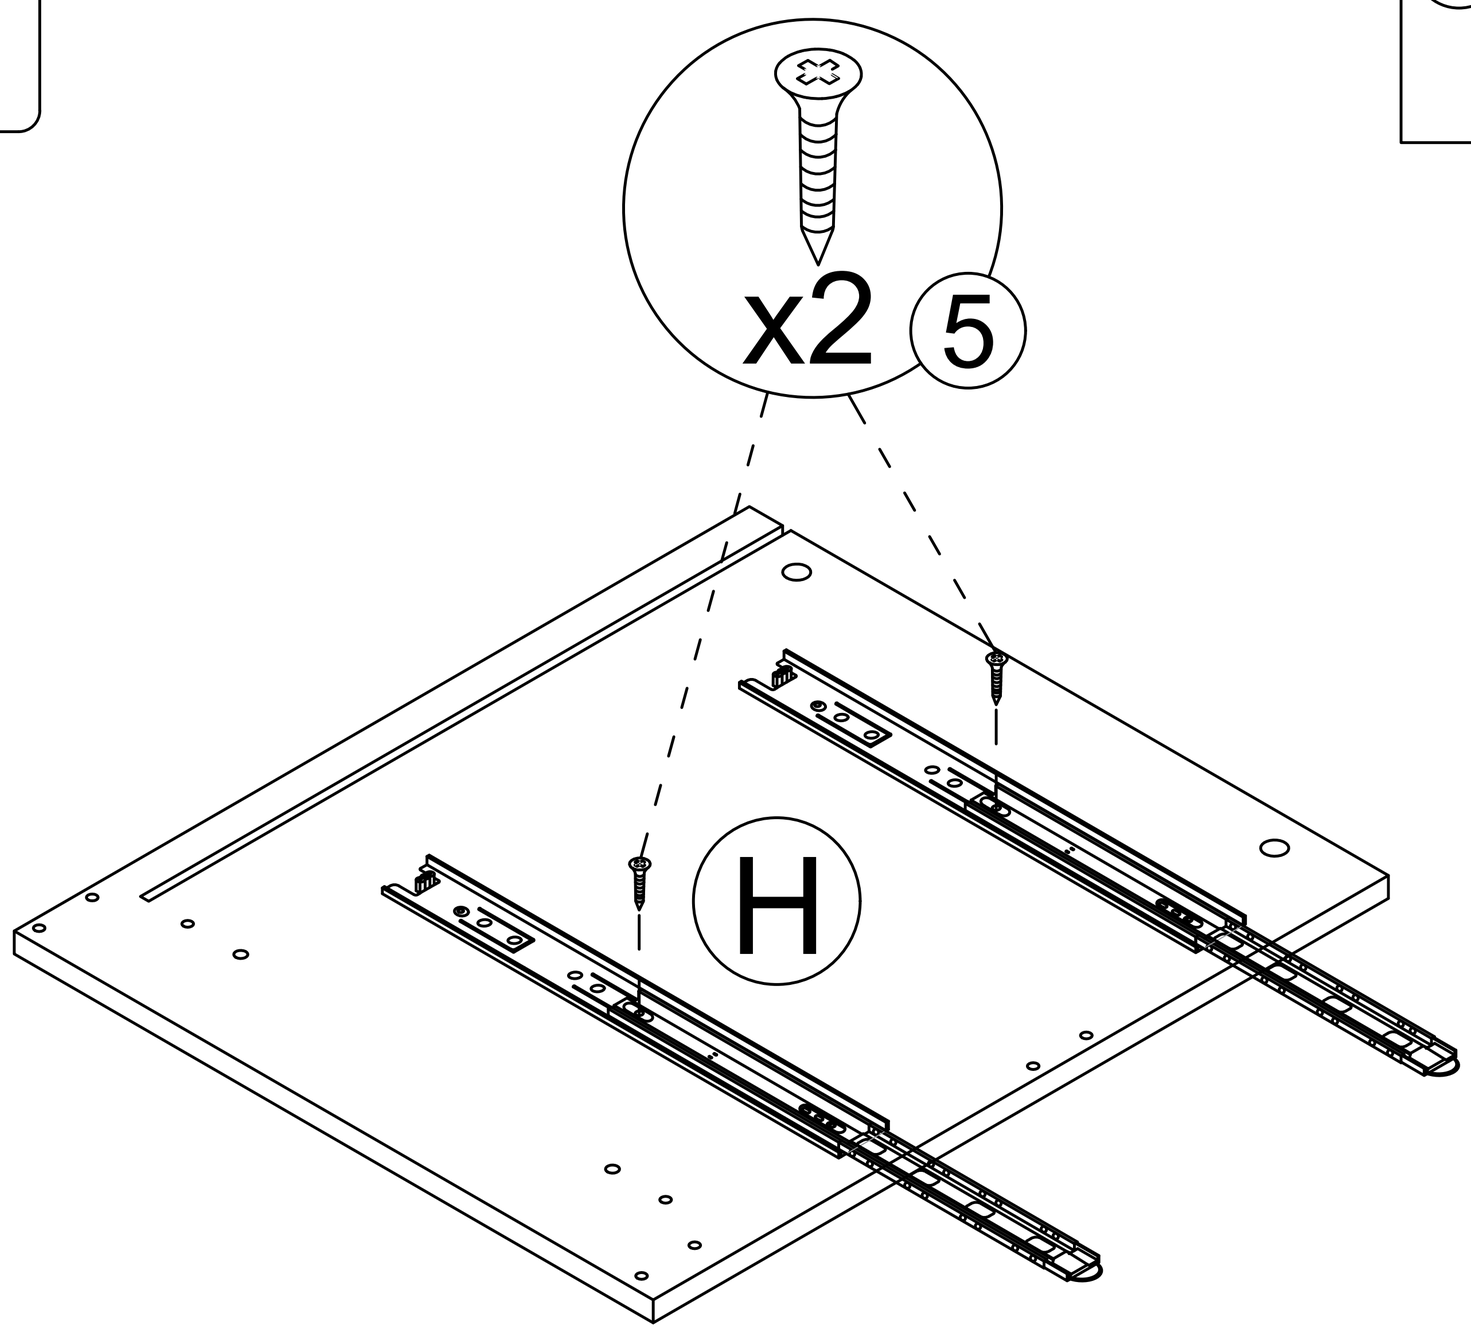


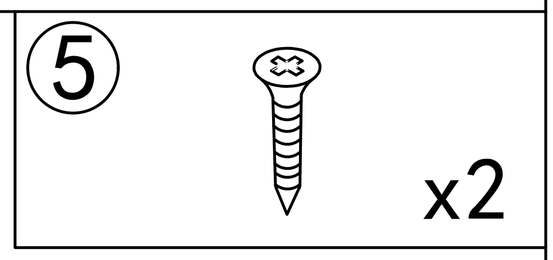


This hole is for strengthening fixed hole customers can choose to install according to their needs.

Step 24

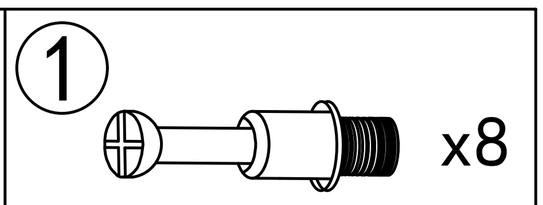


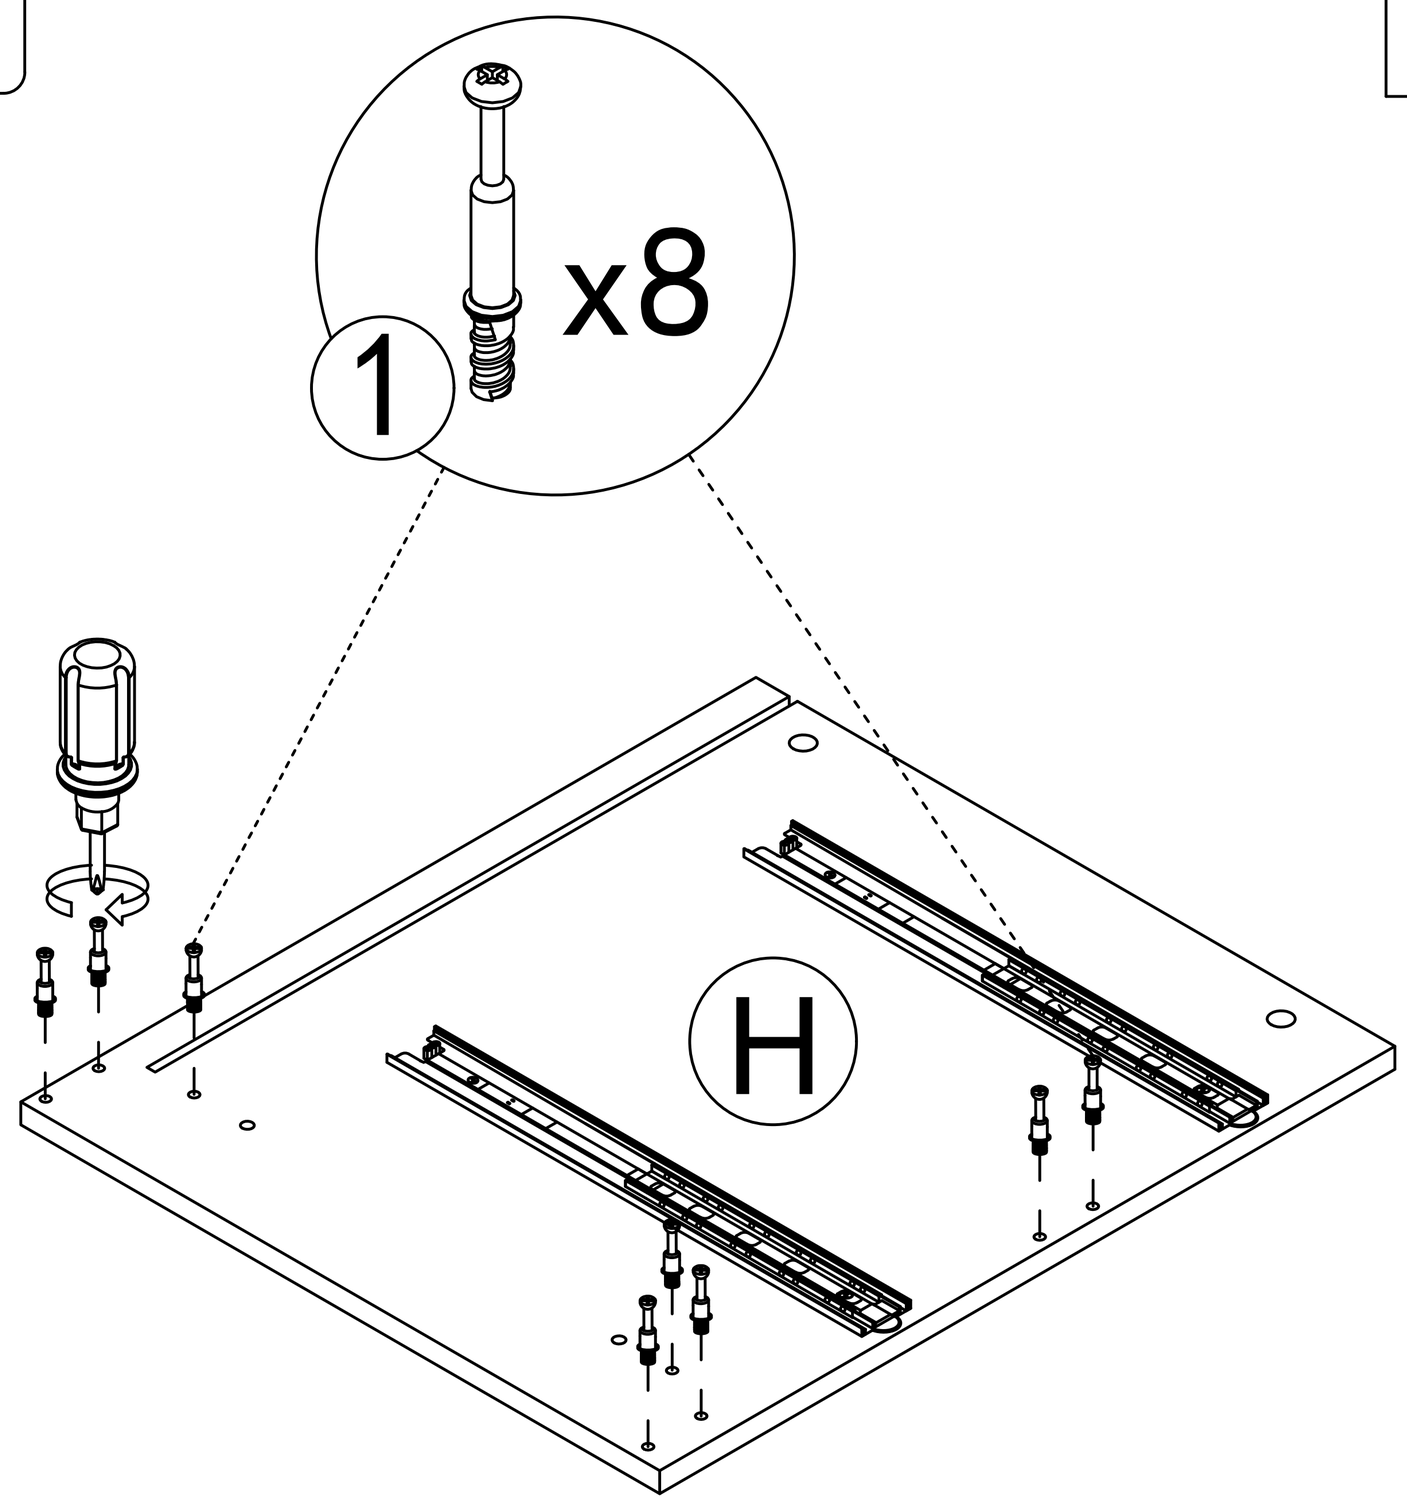

Step 25

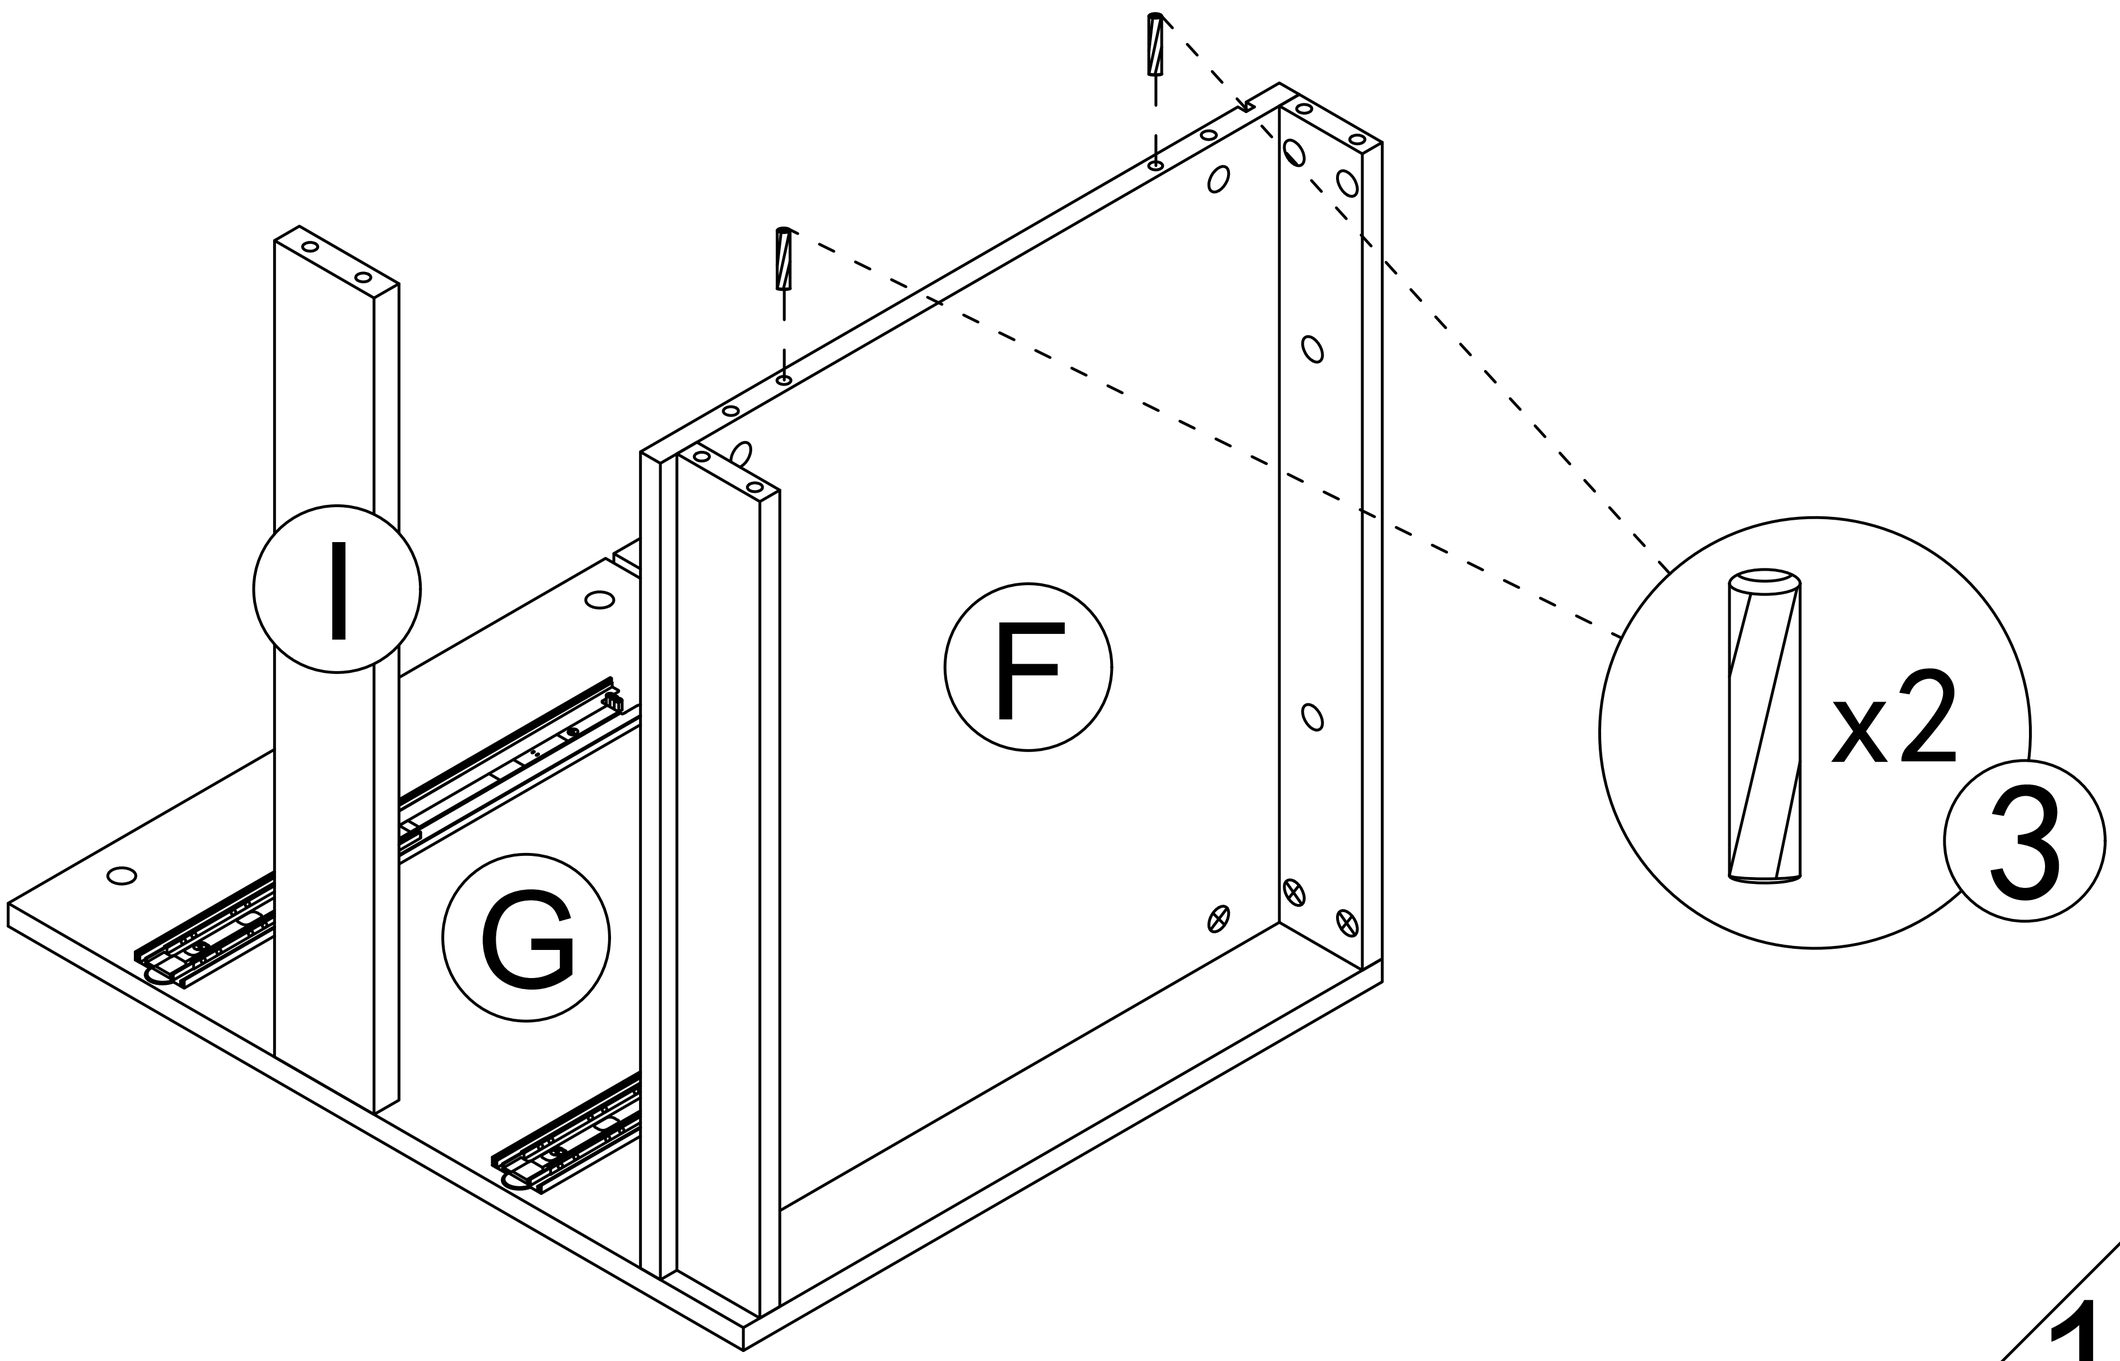


Step 26

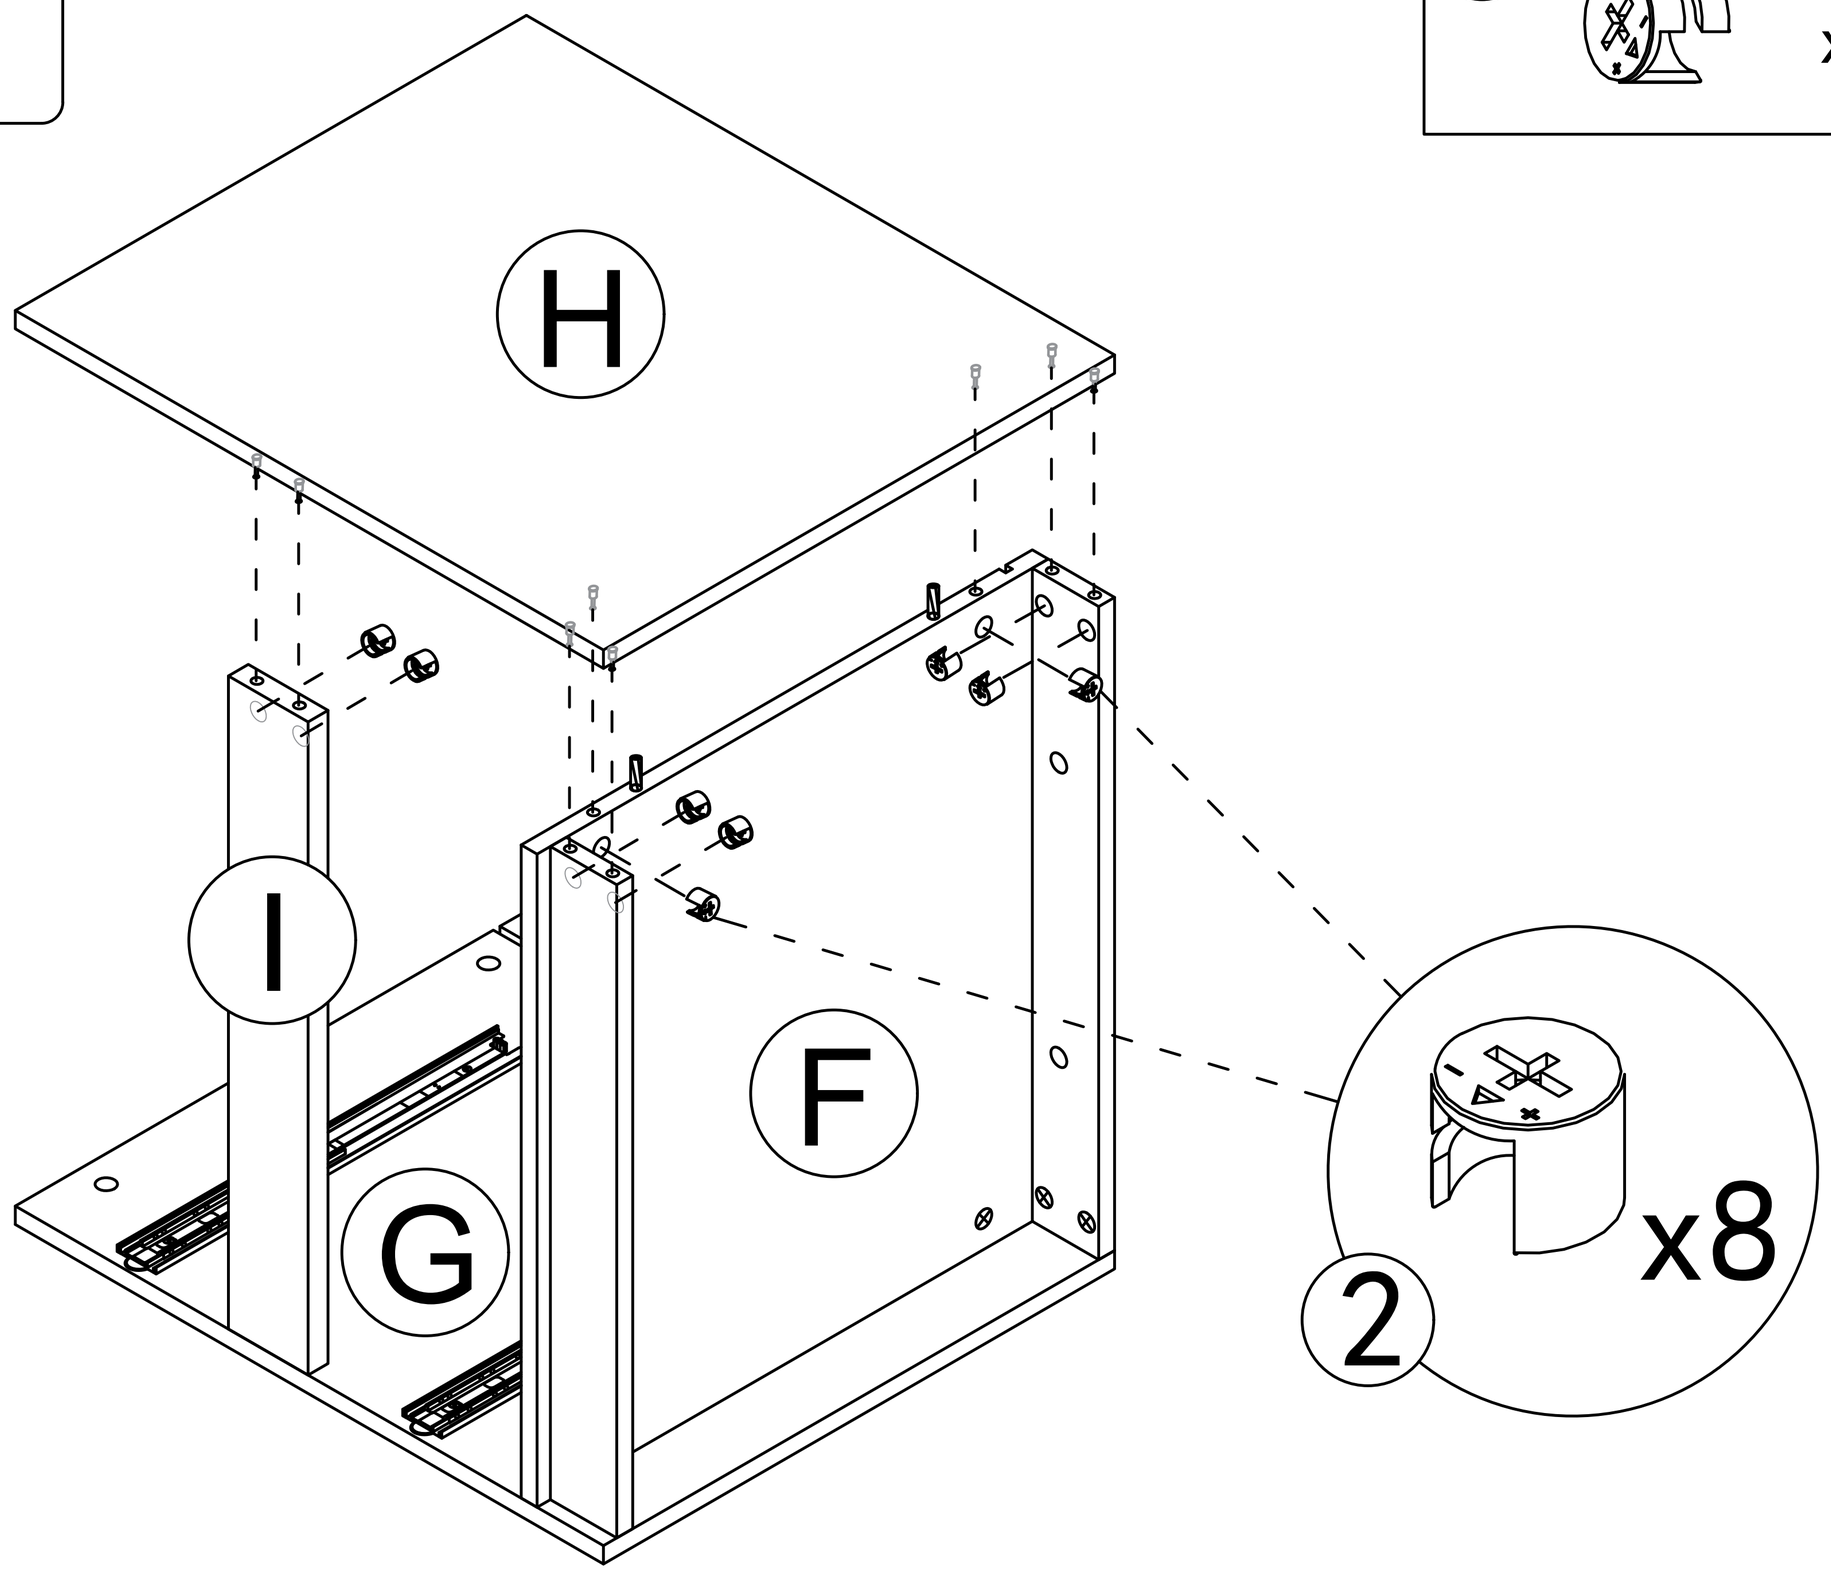

2 x8


Step 27

Tear off release paper and stick the black foot pad on the board

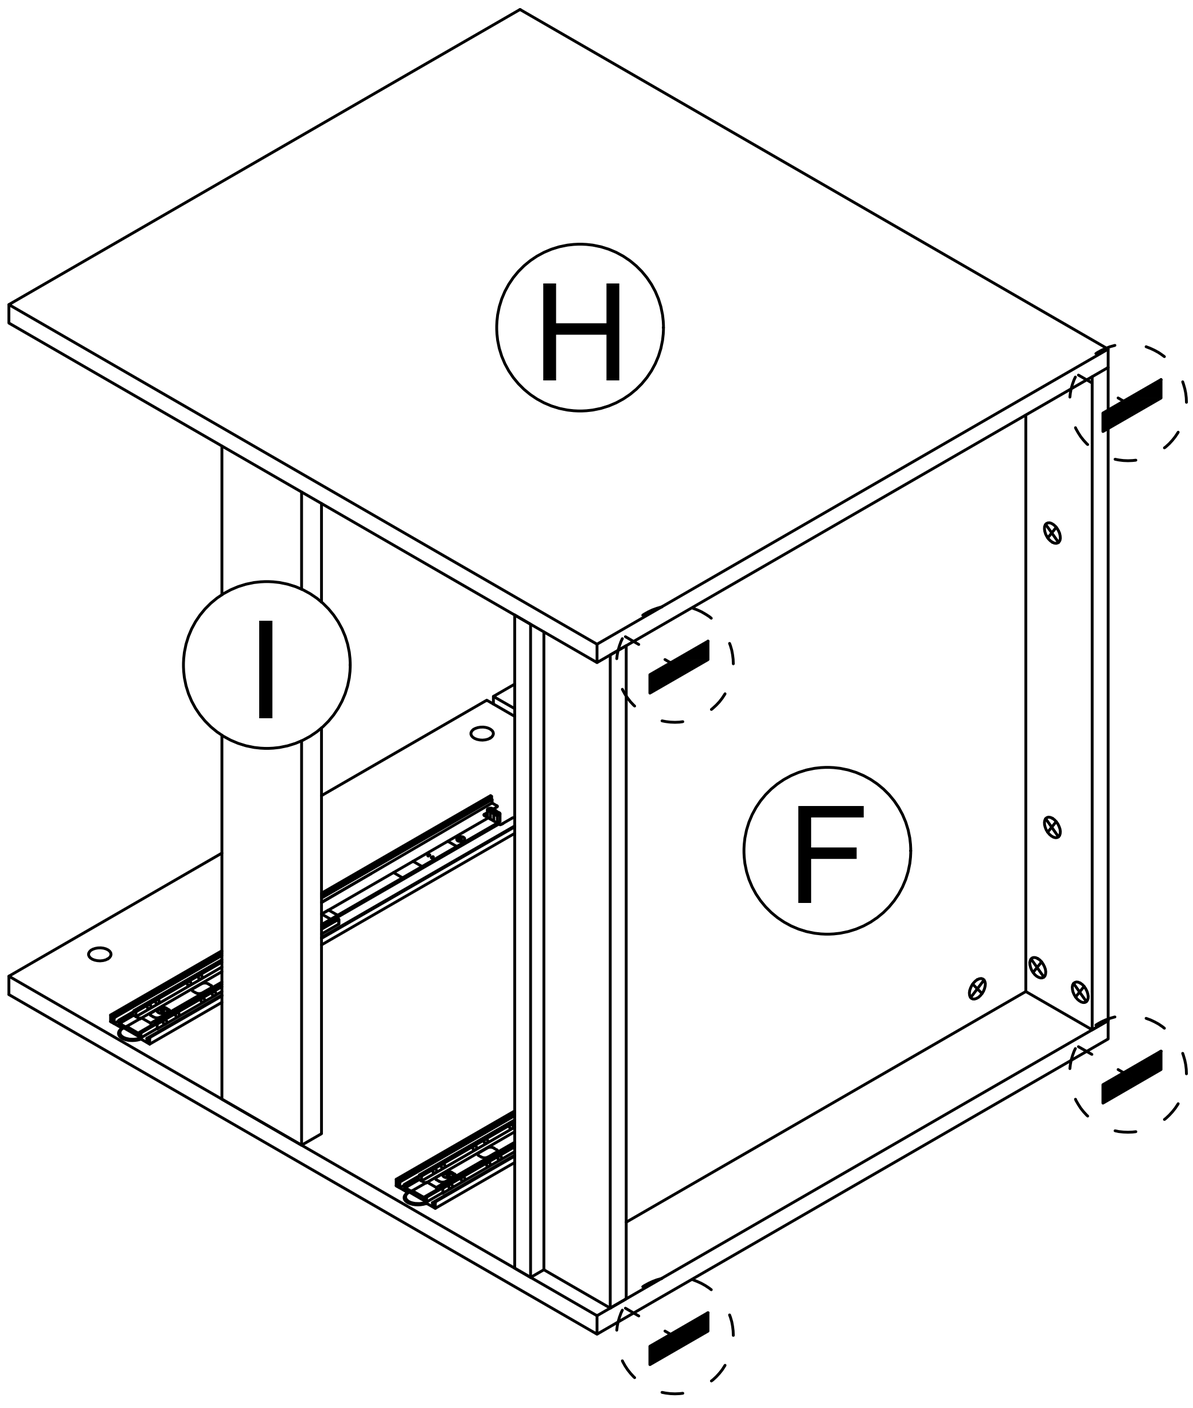

6 x4

Step 28

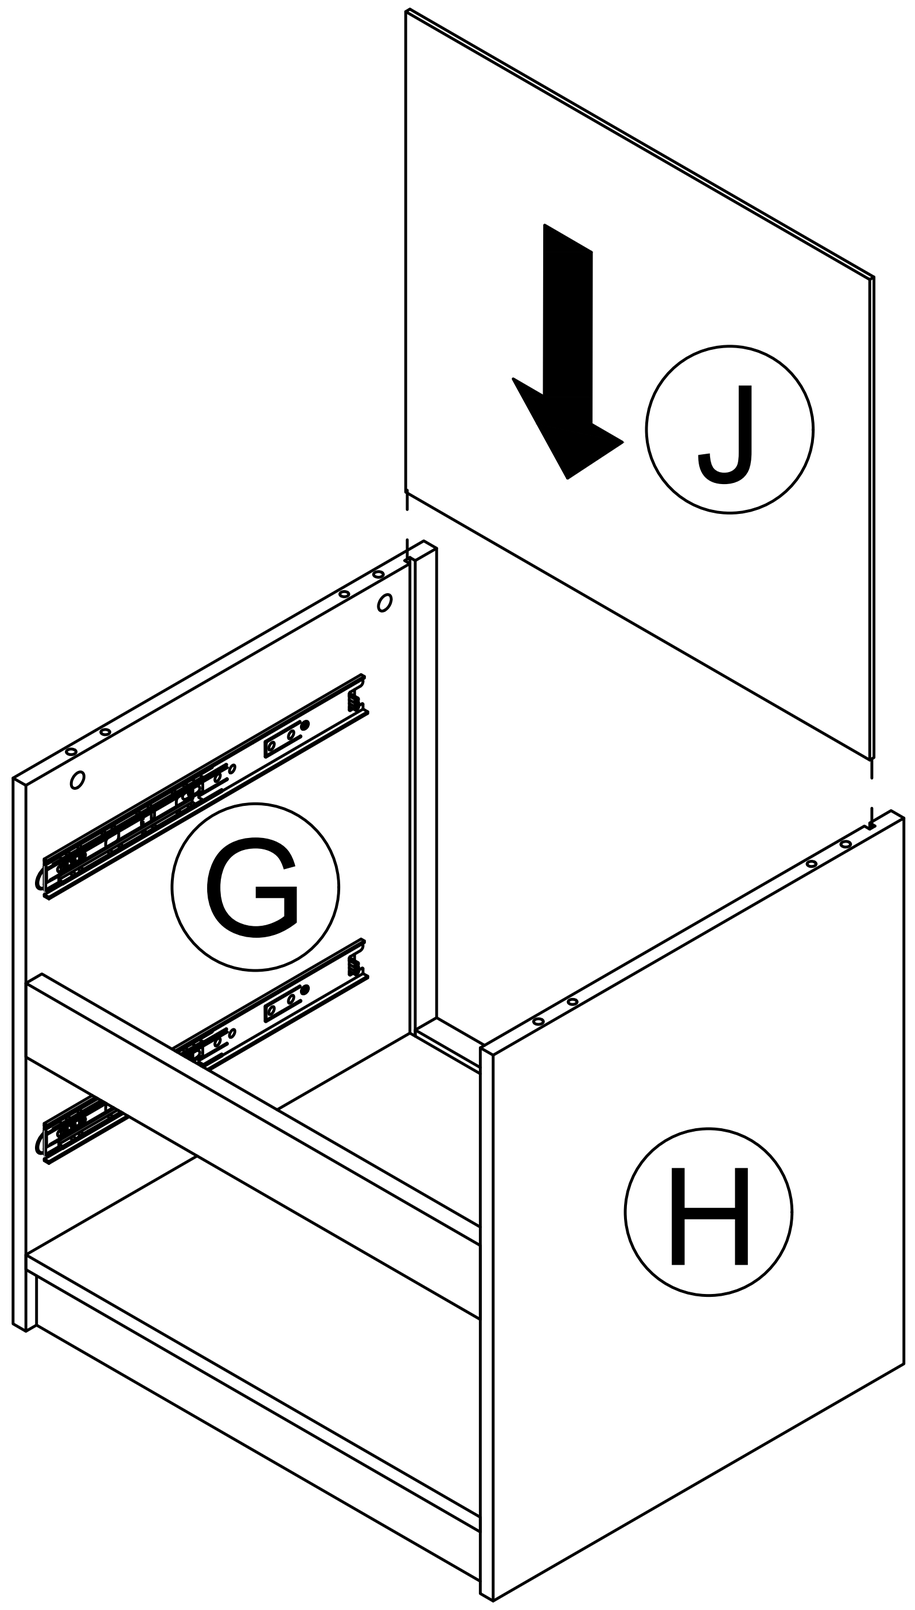


Step 29


3




x4

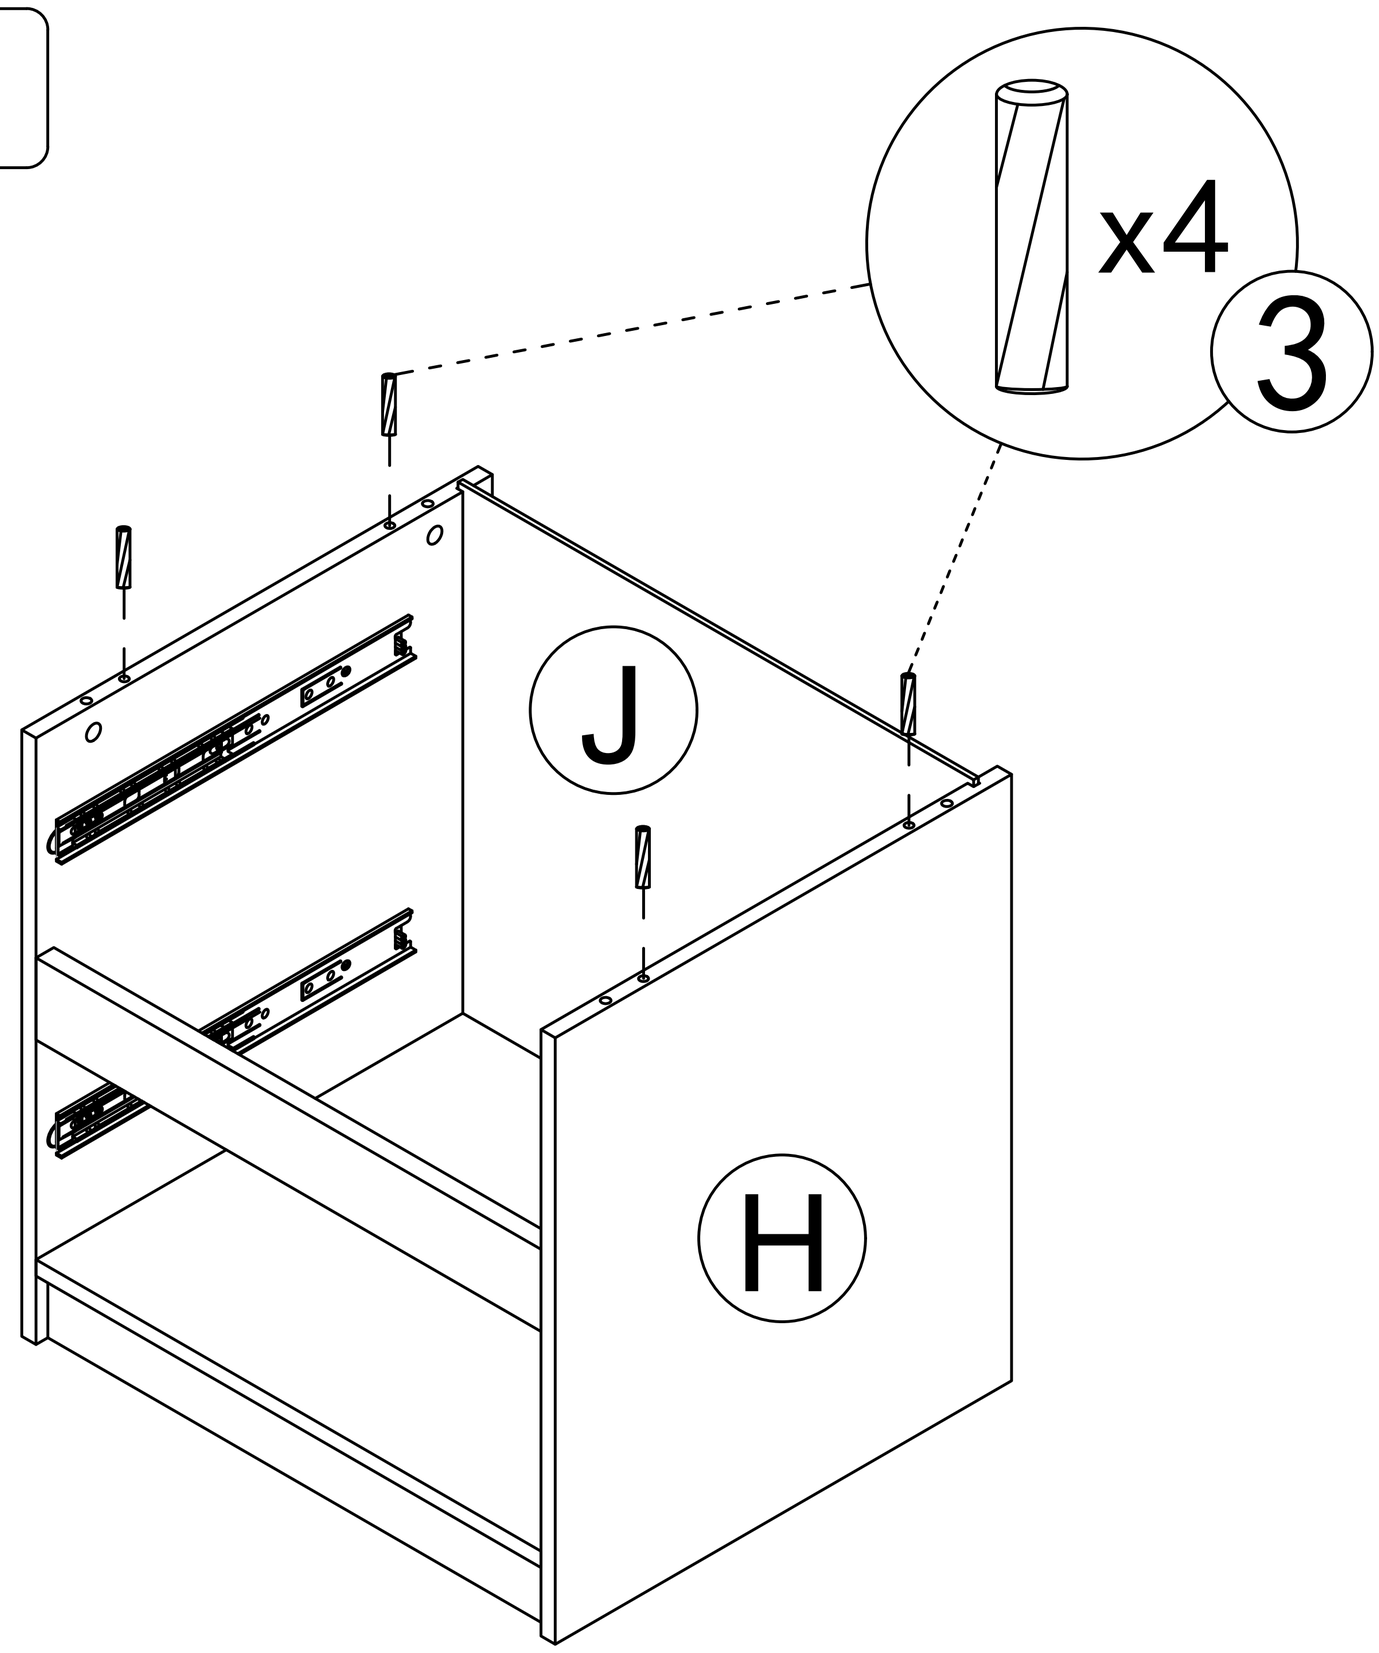



Step 30

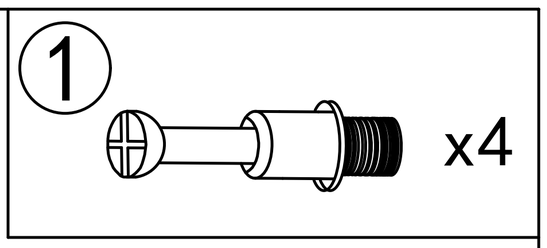

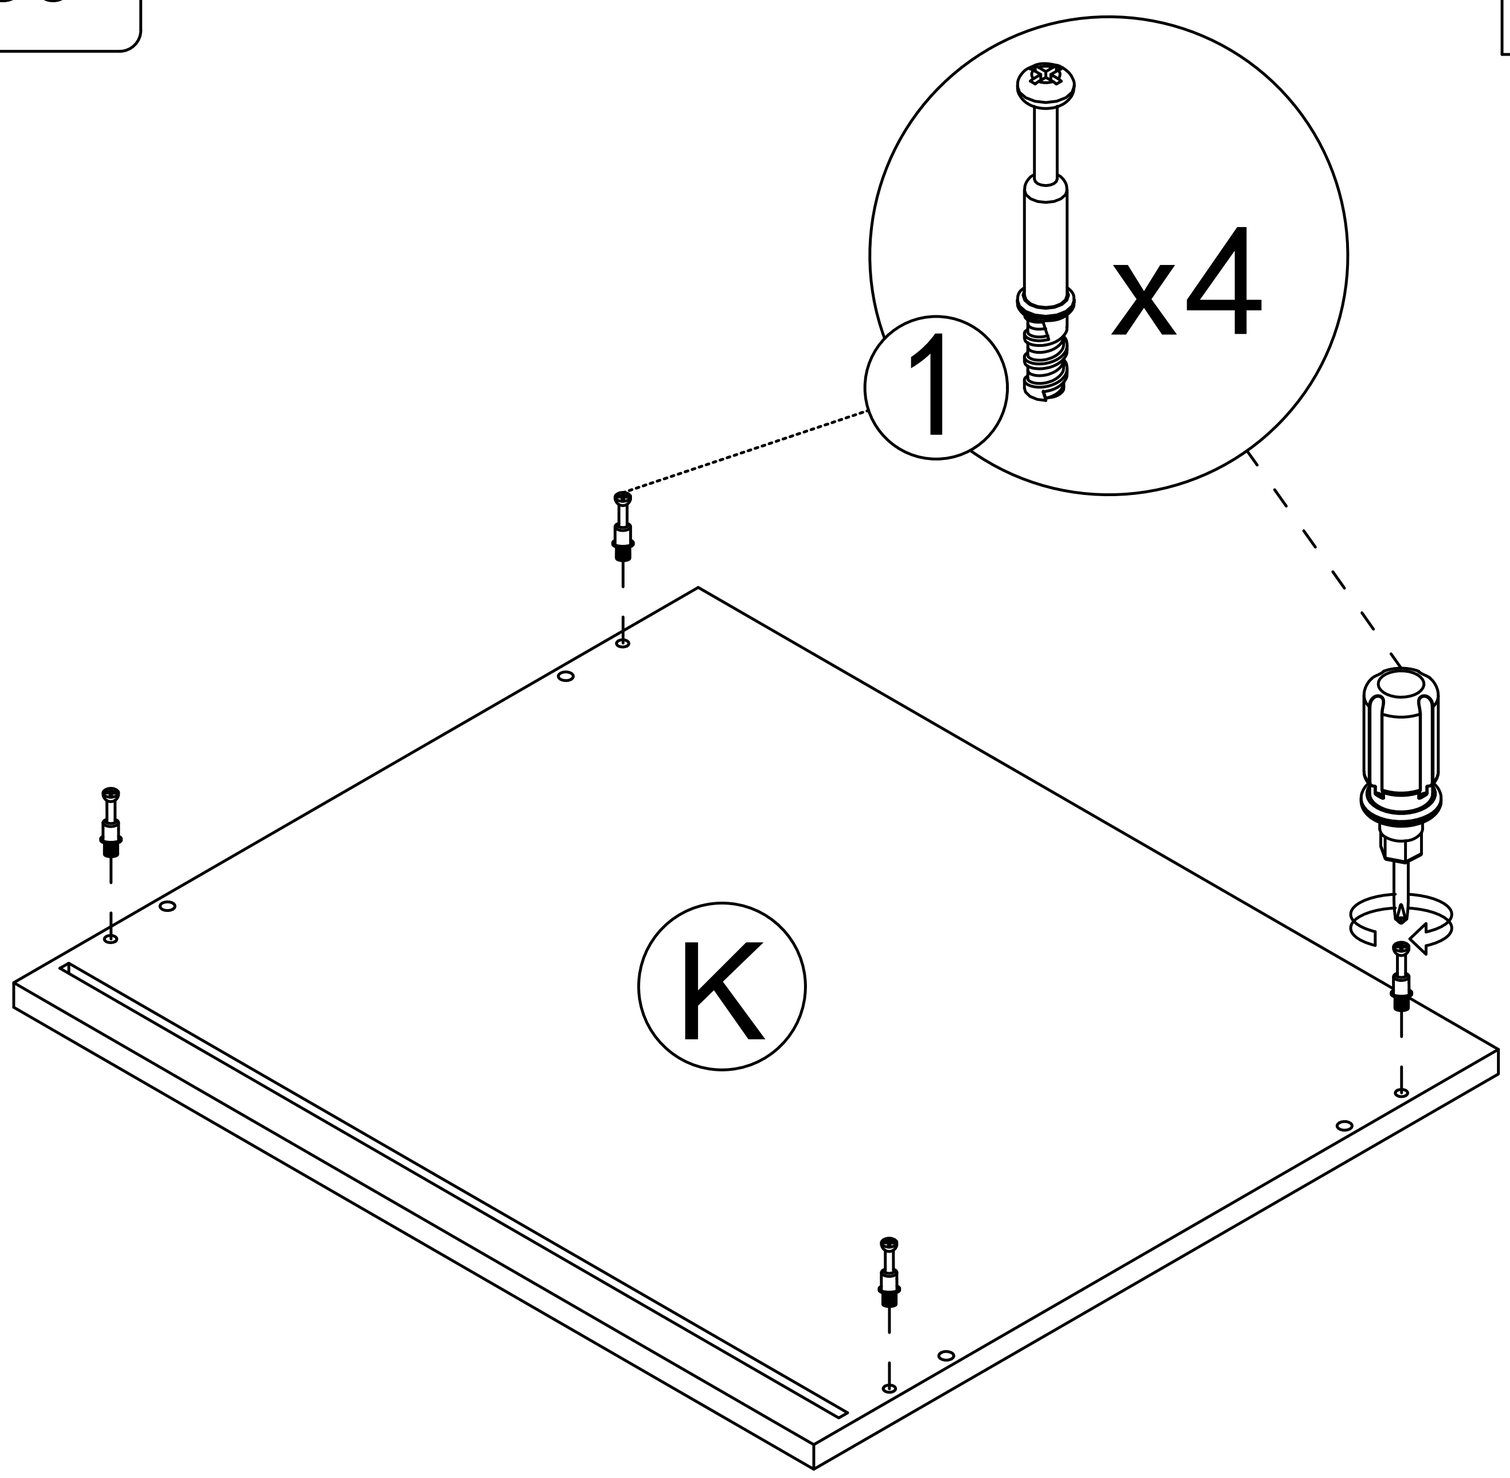



Step 31

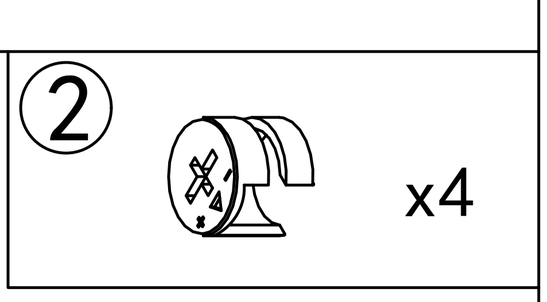

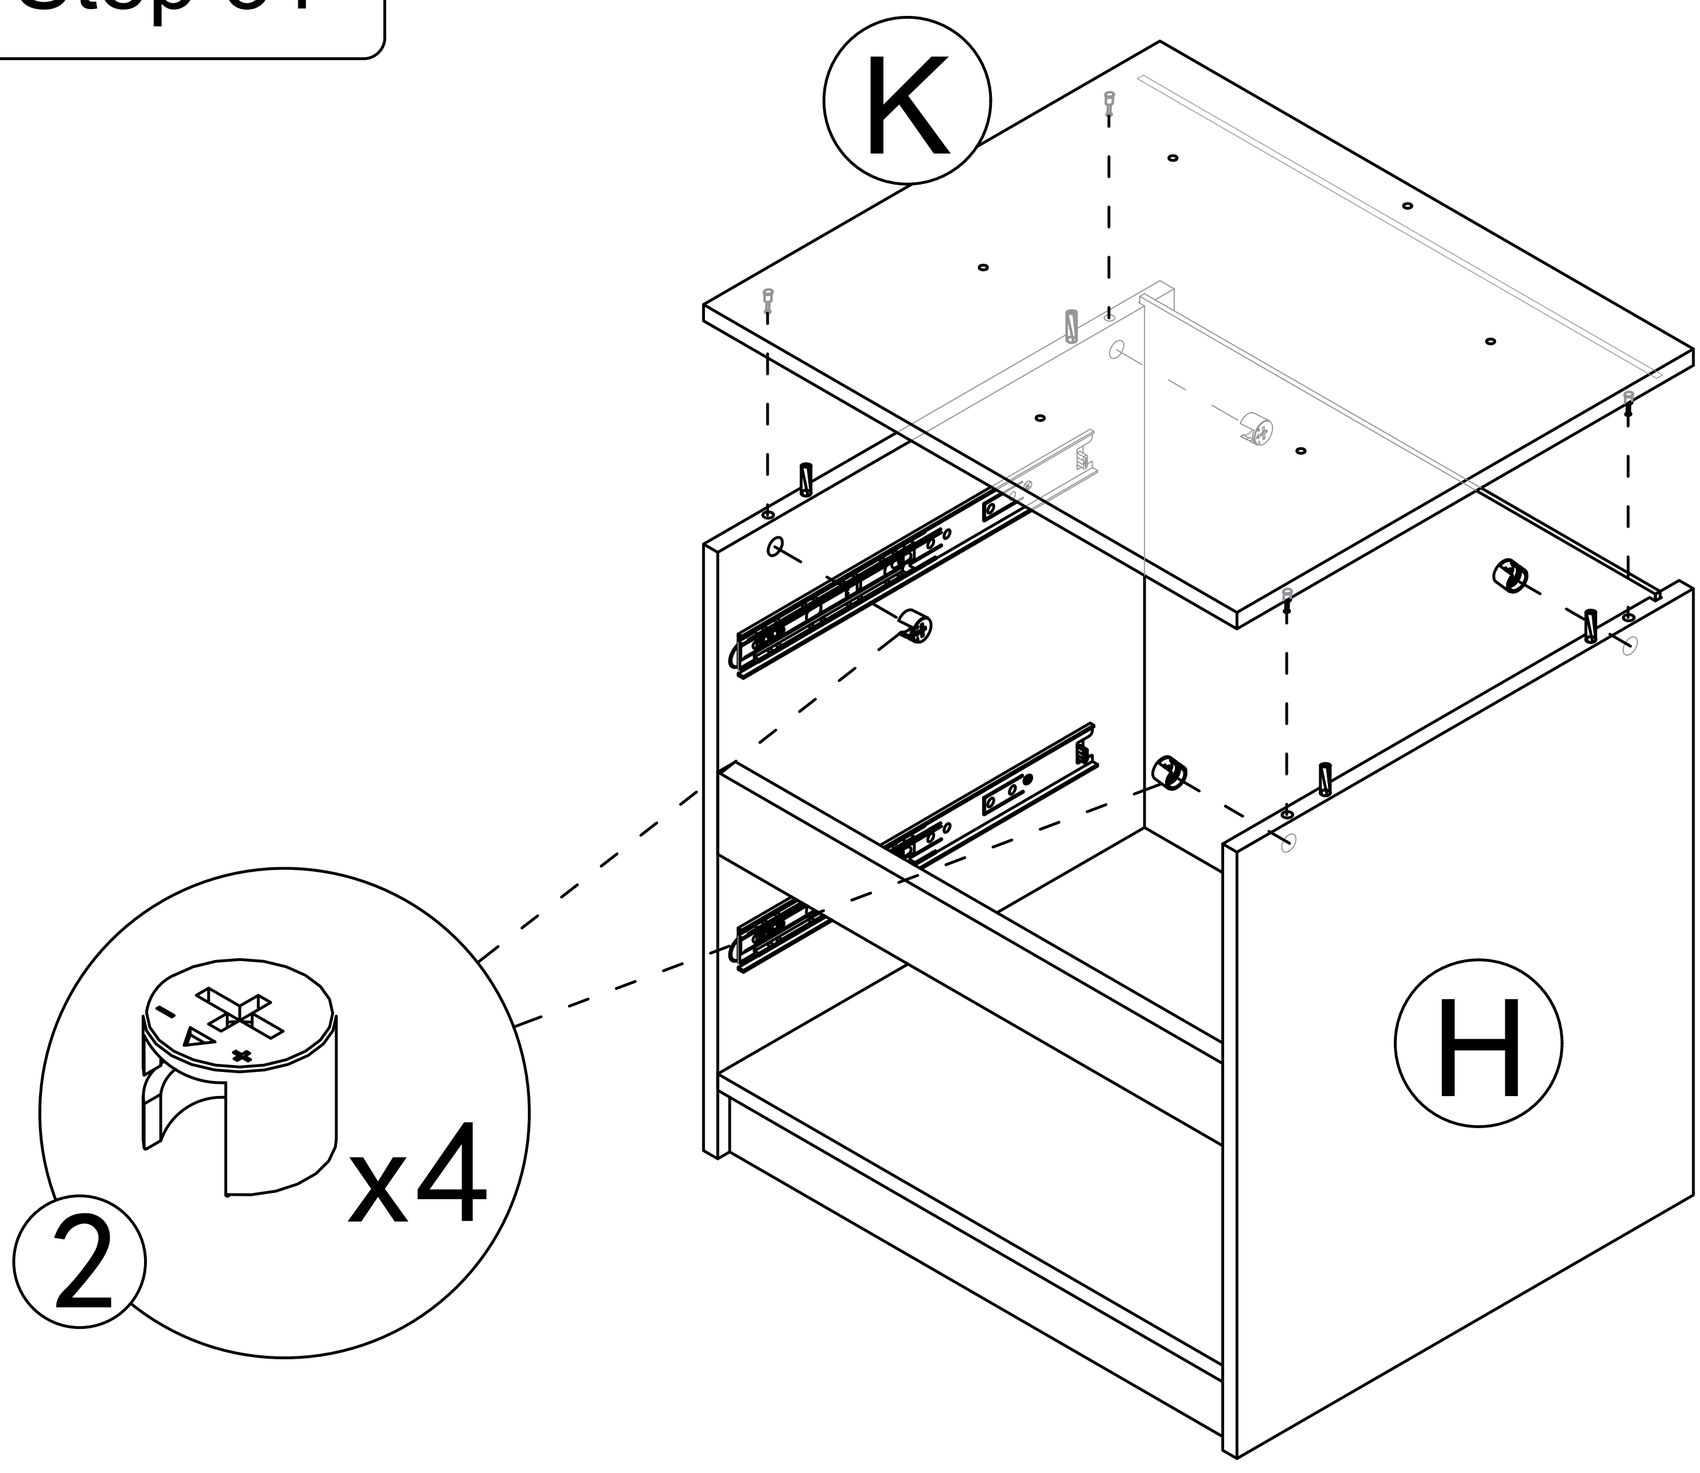


Step 32

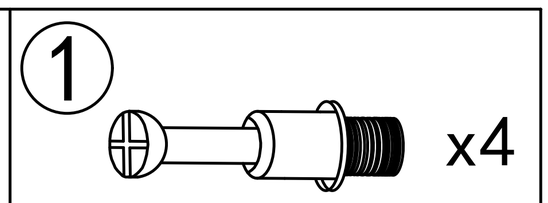


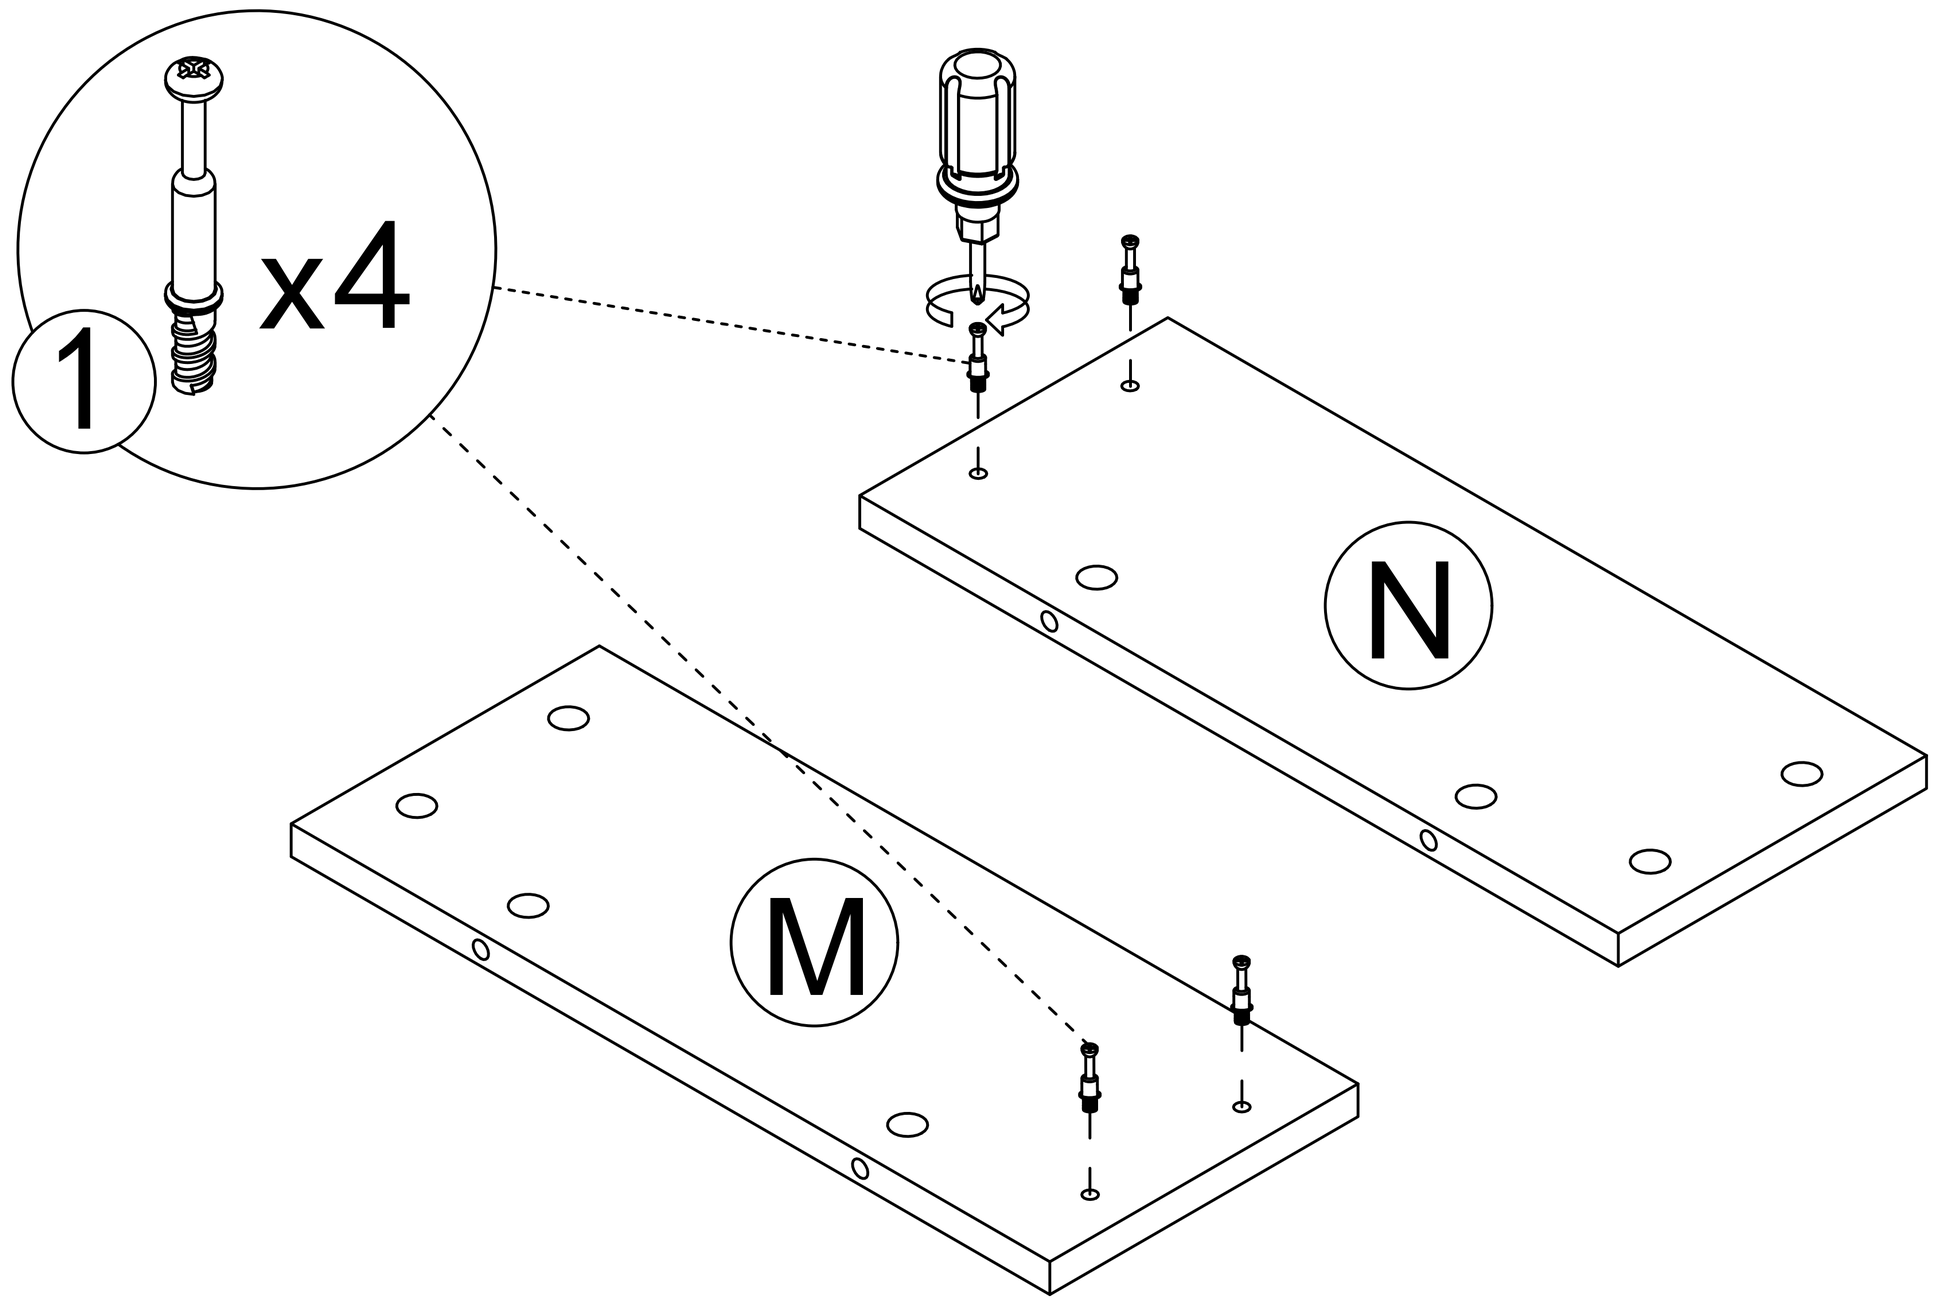


Step 33

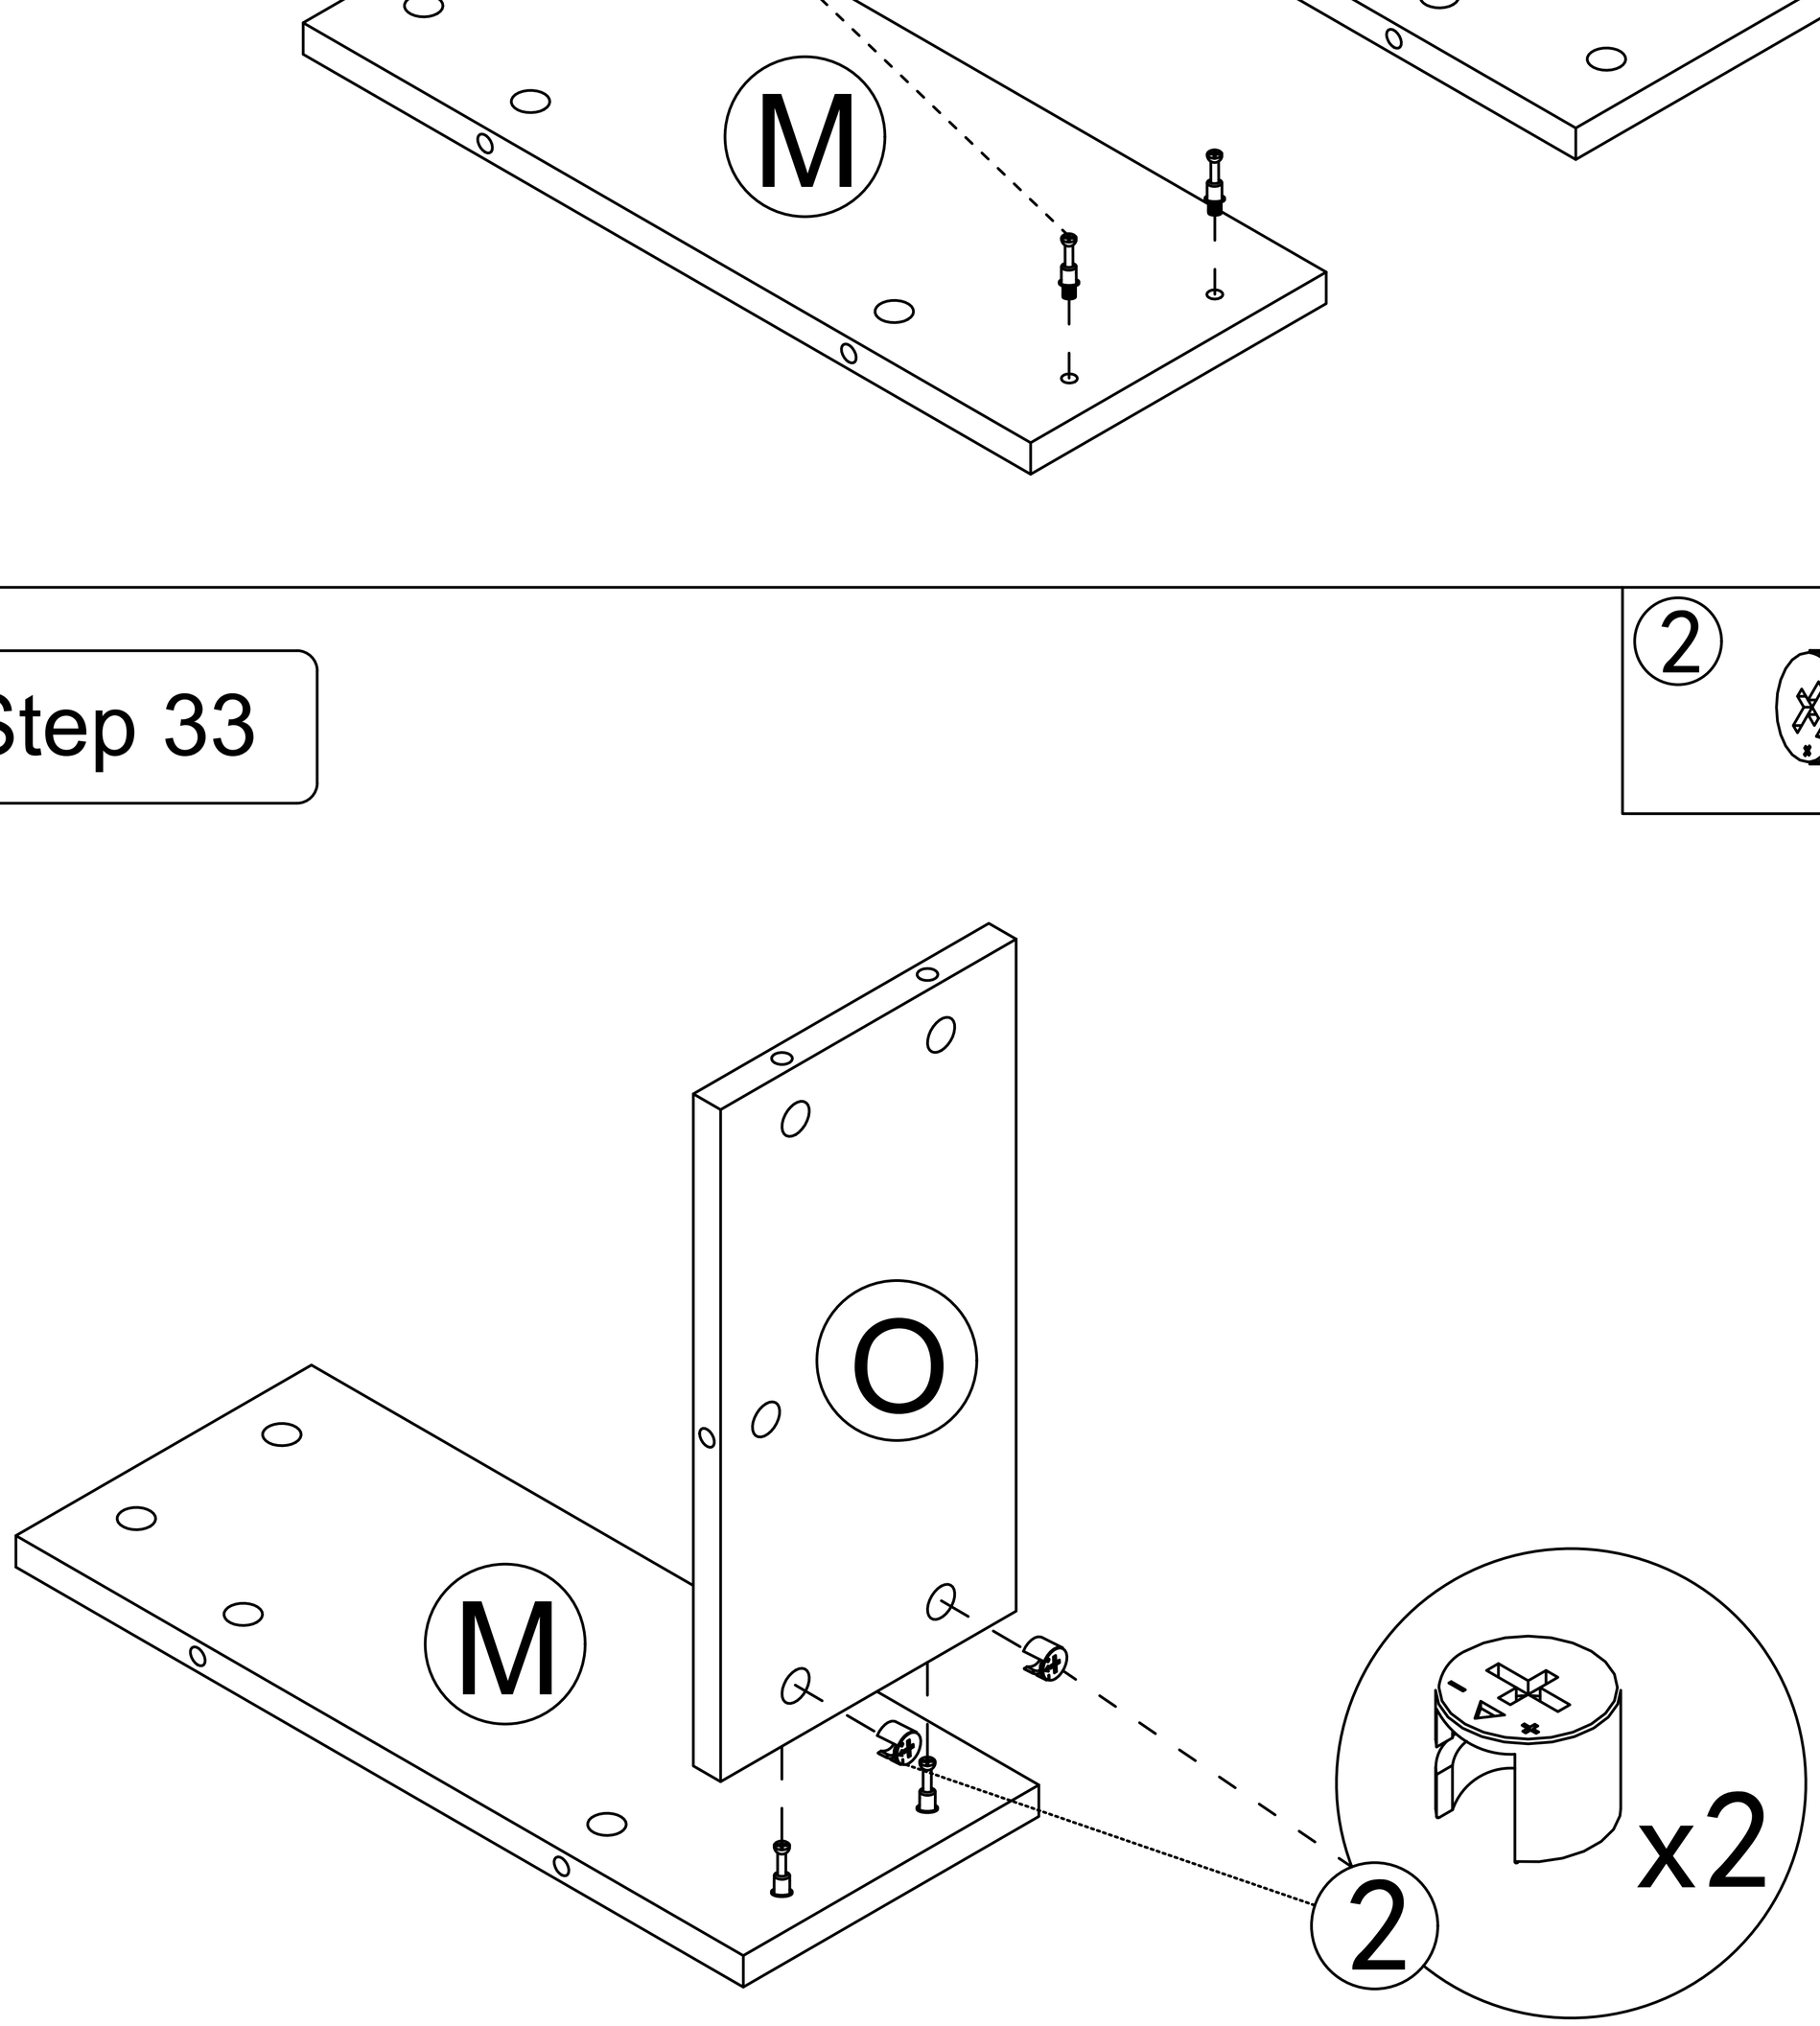


Step 34

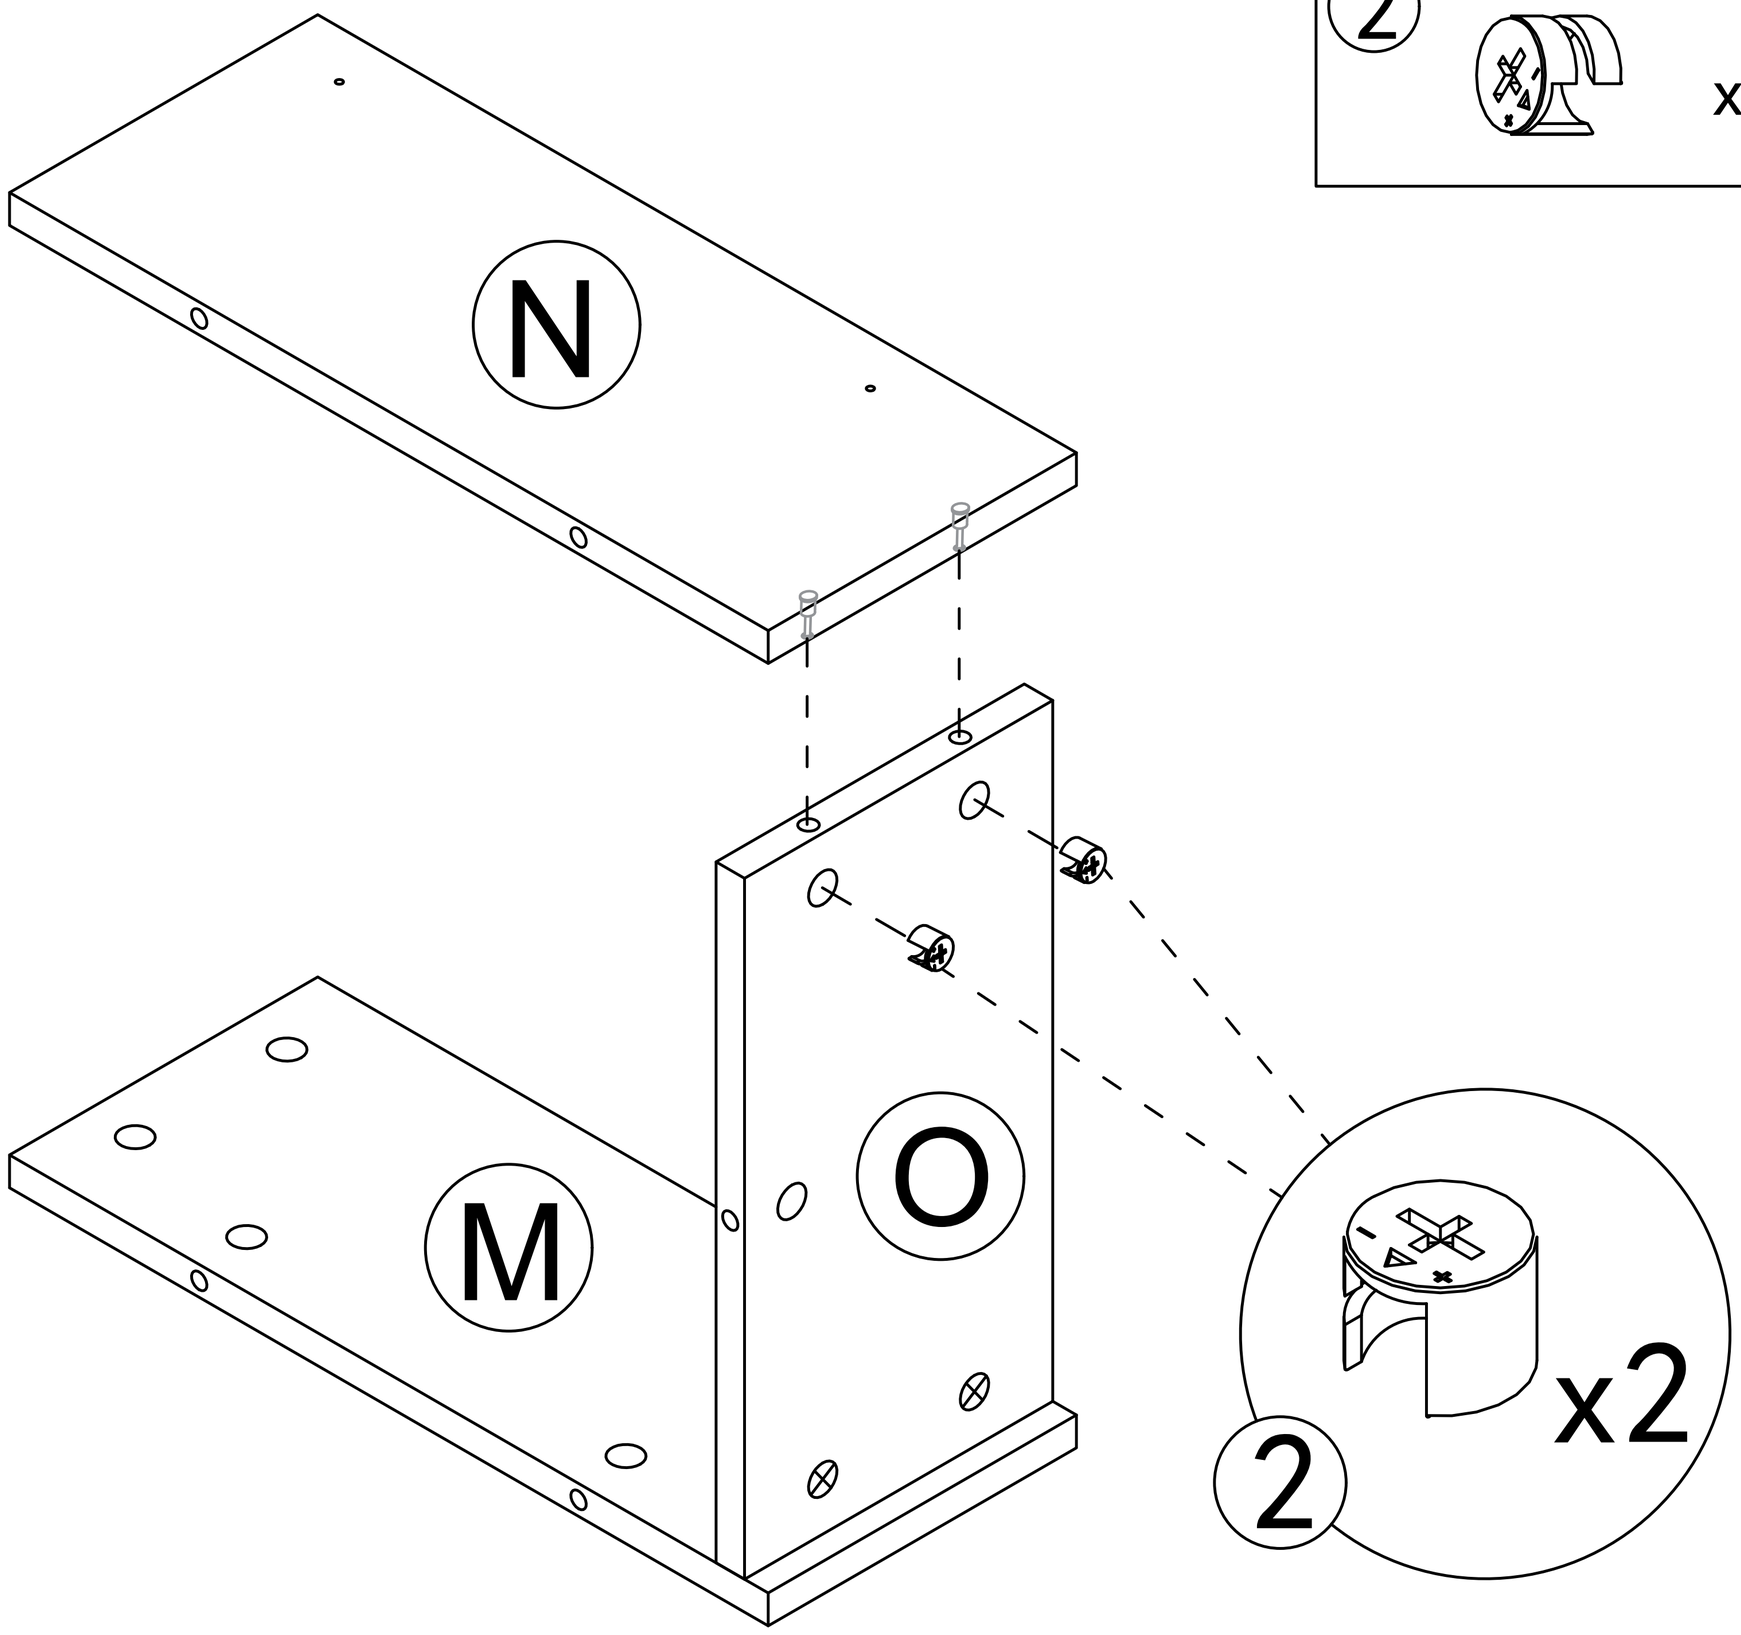

Step 35

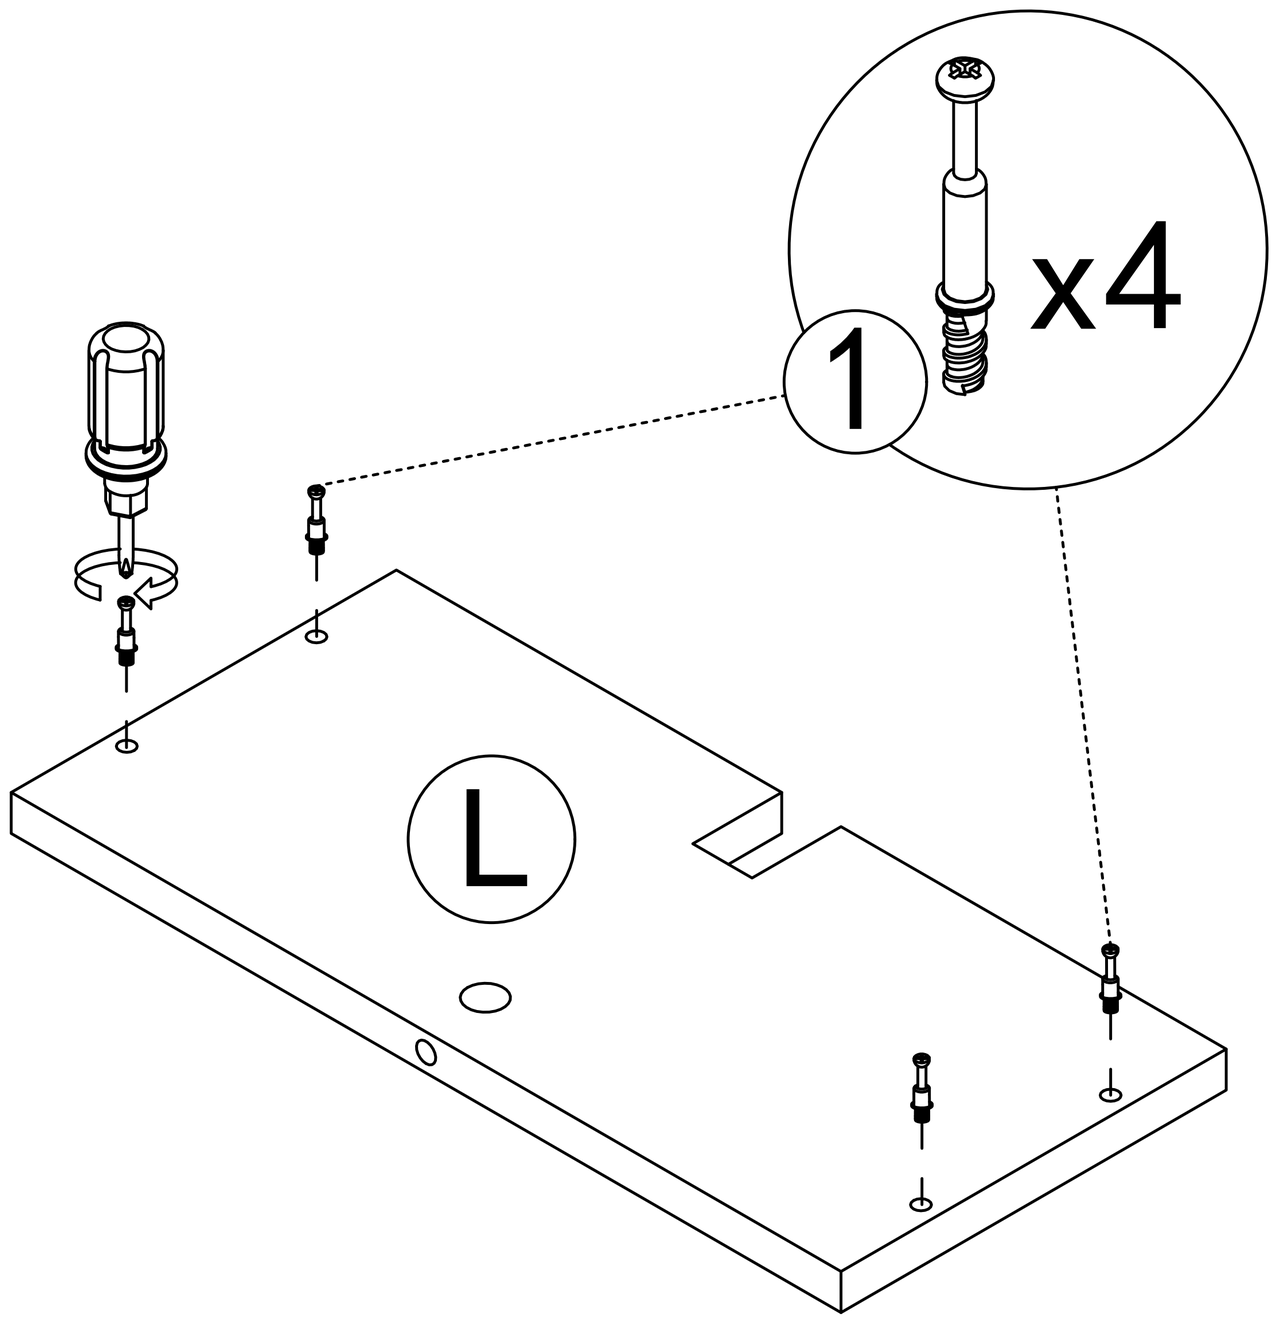


Step 36

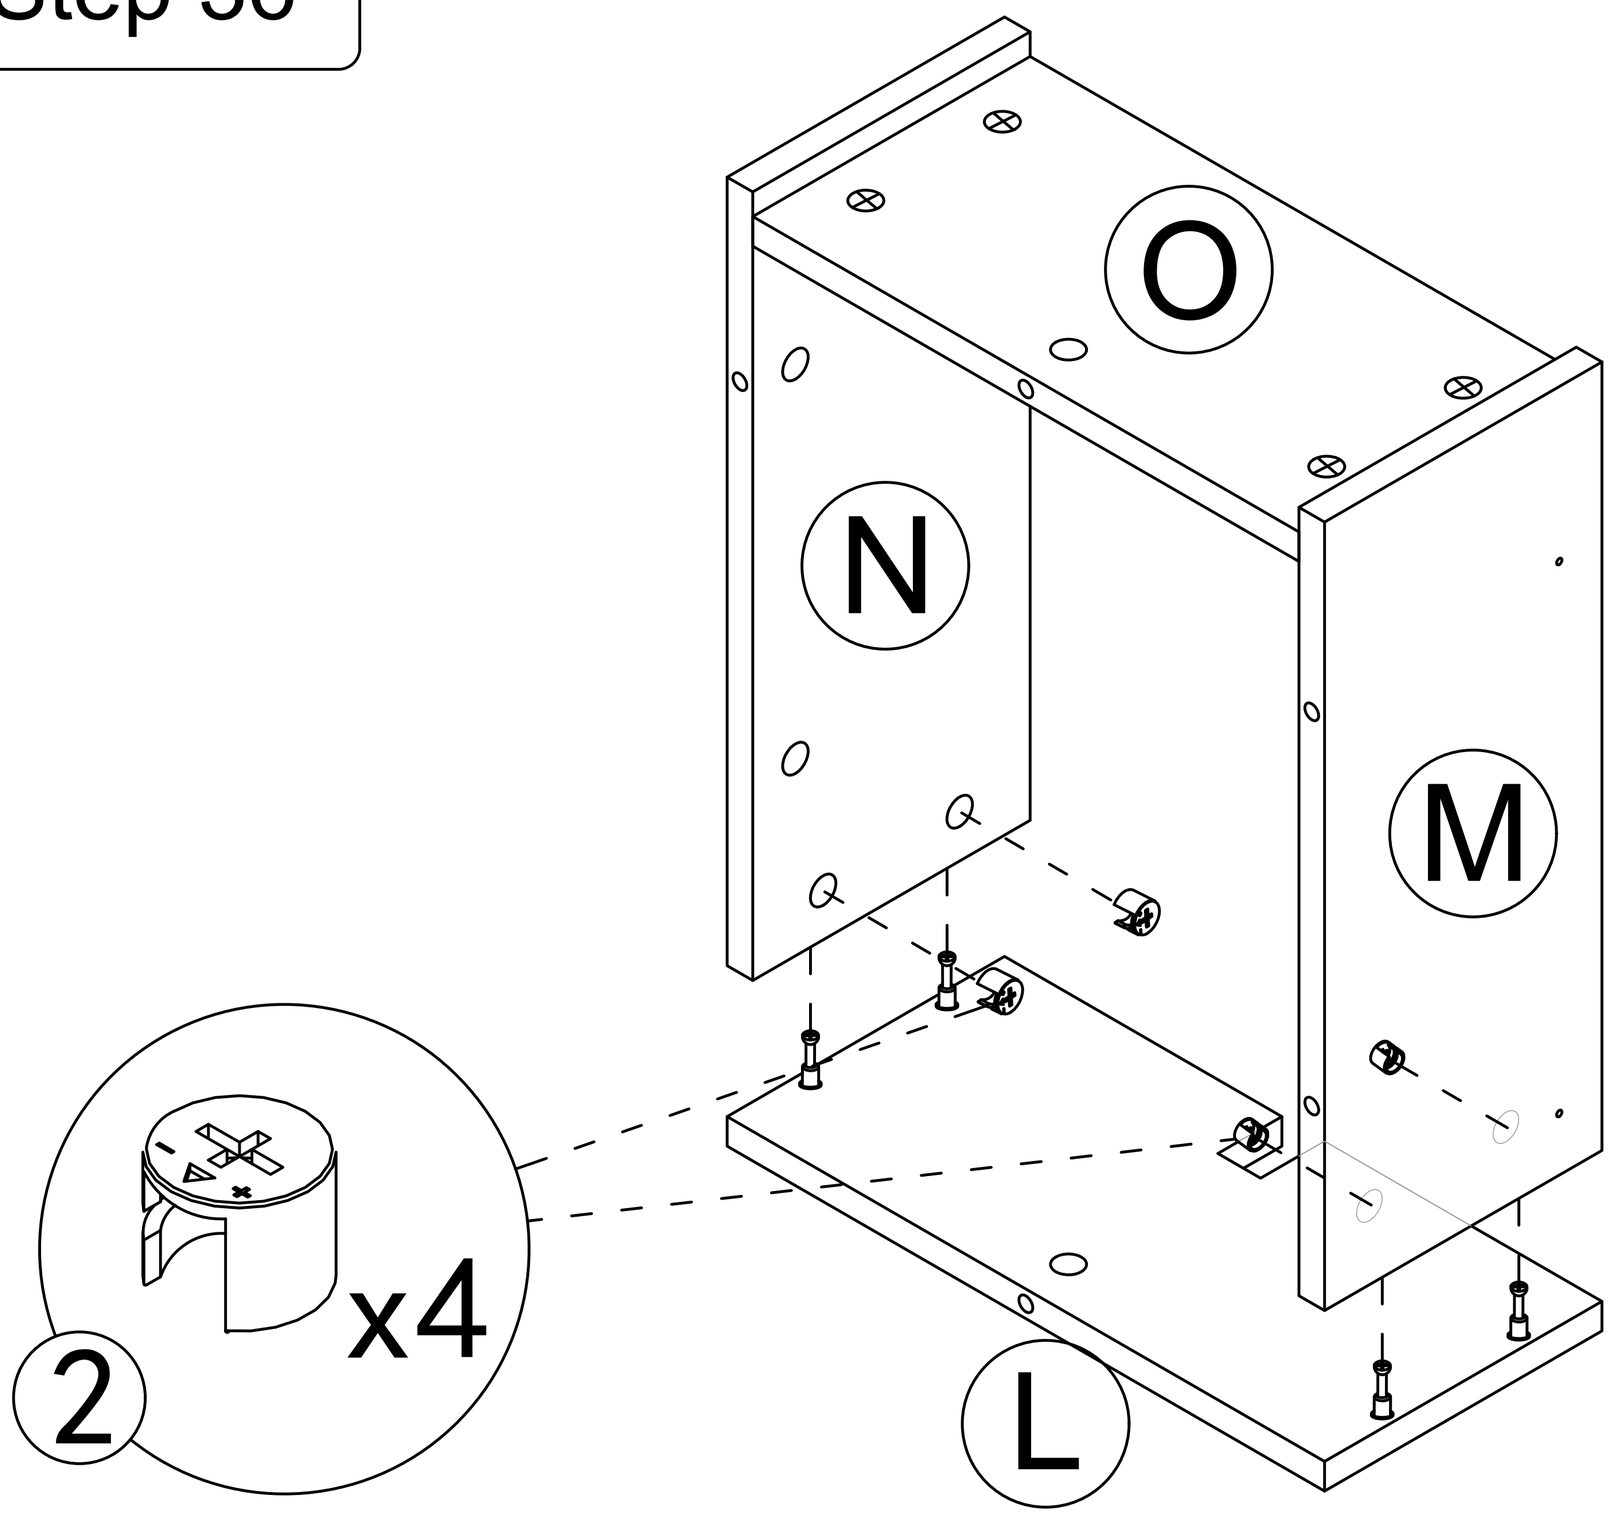


2 x4

Step 37

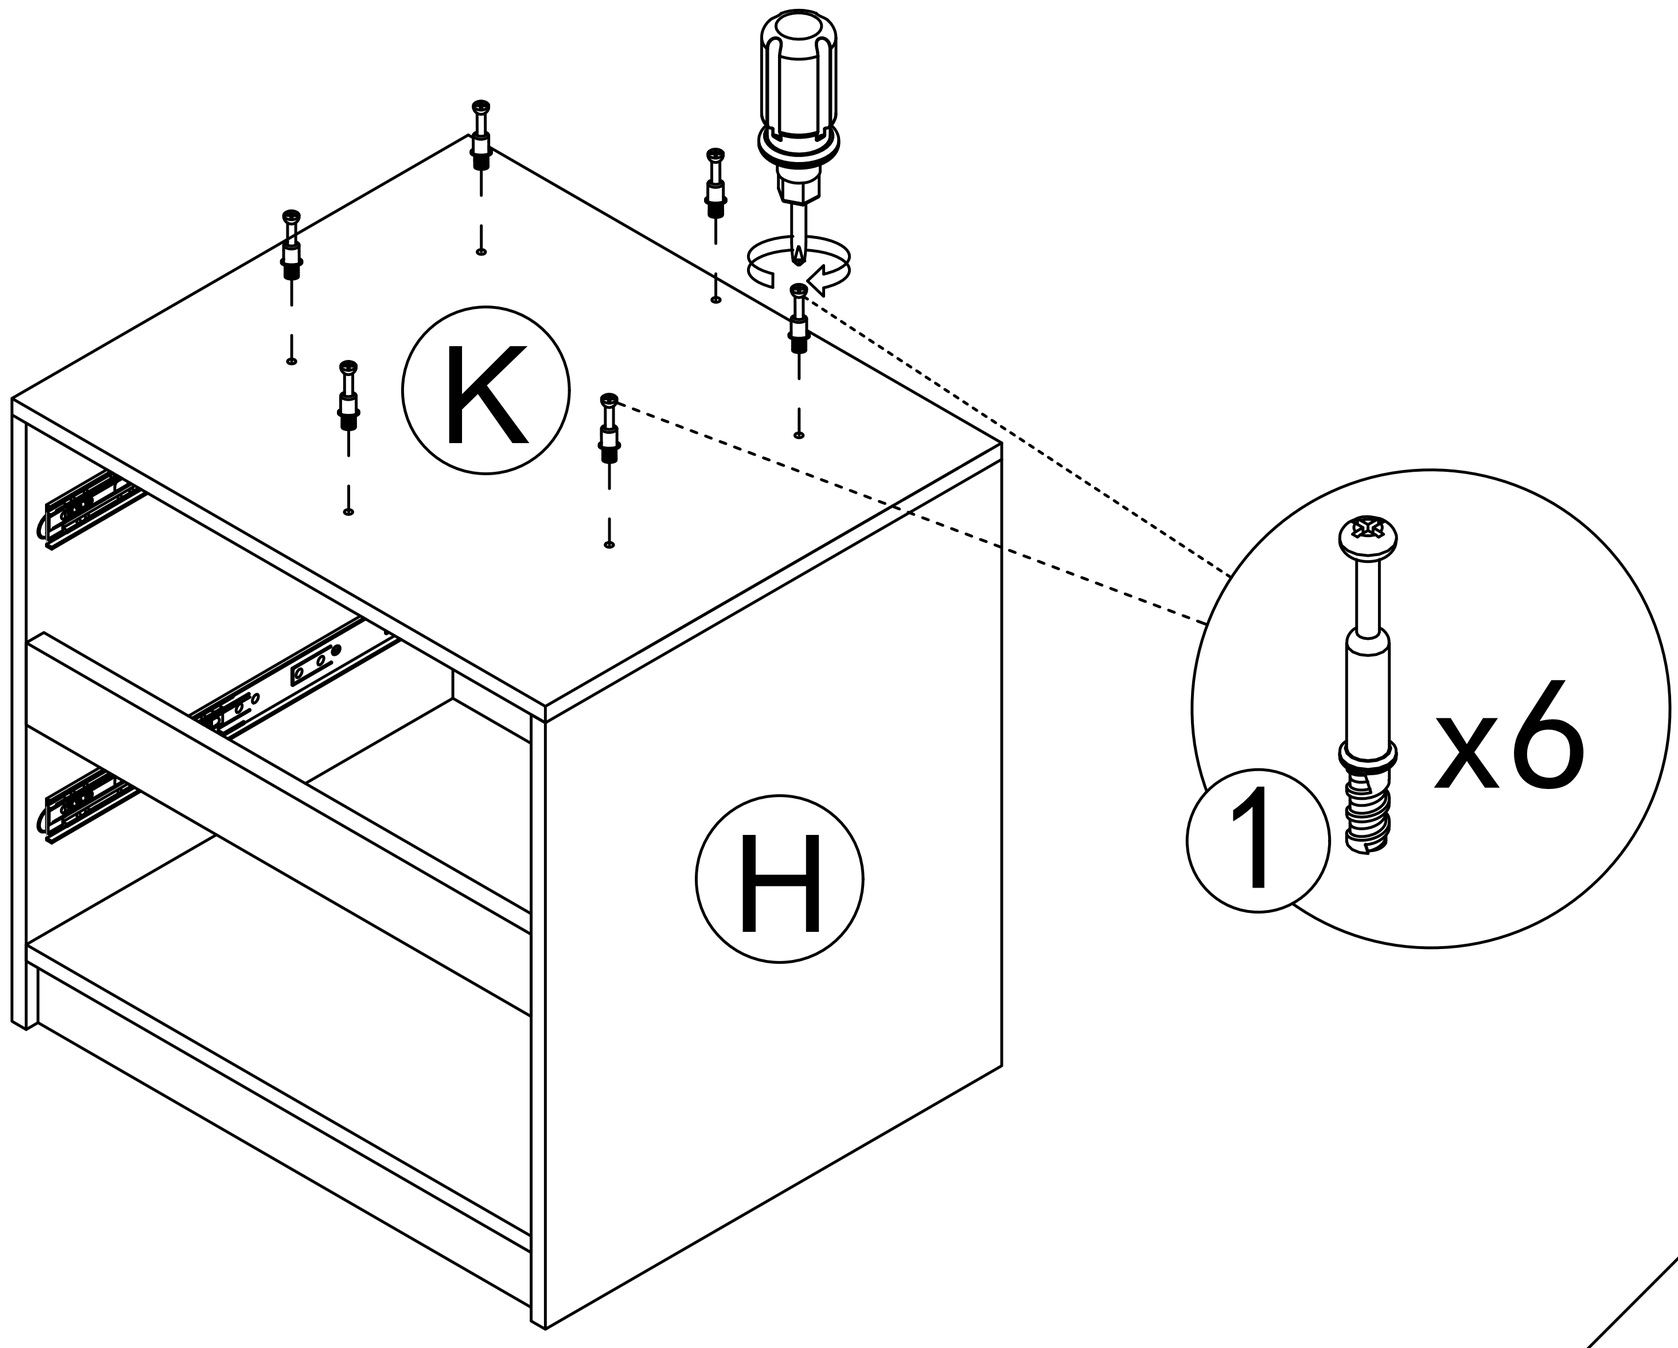


1 x6


Step 38

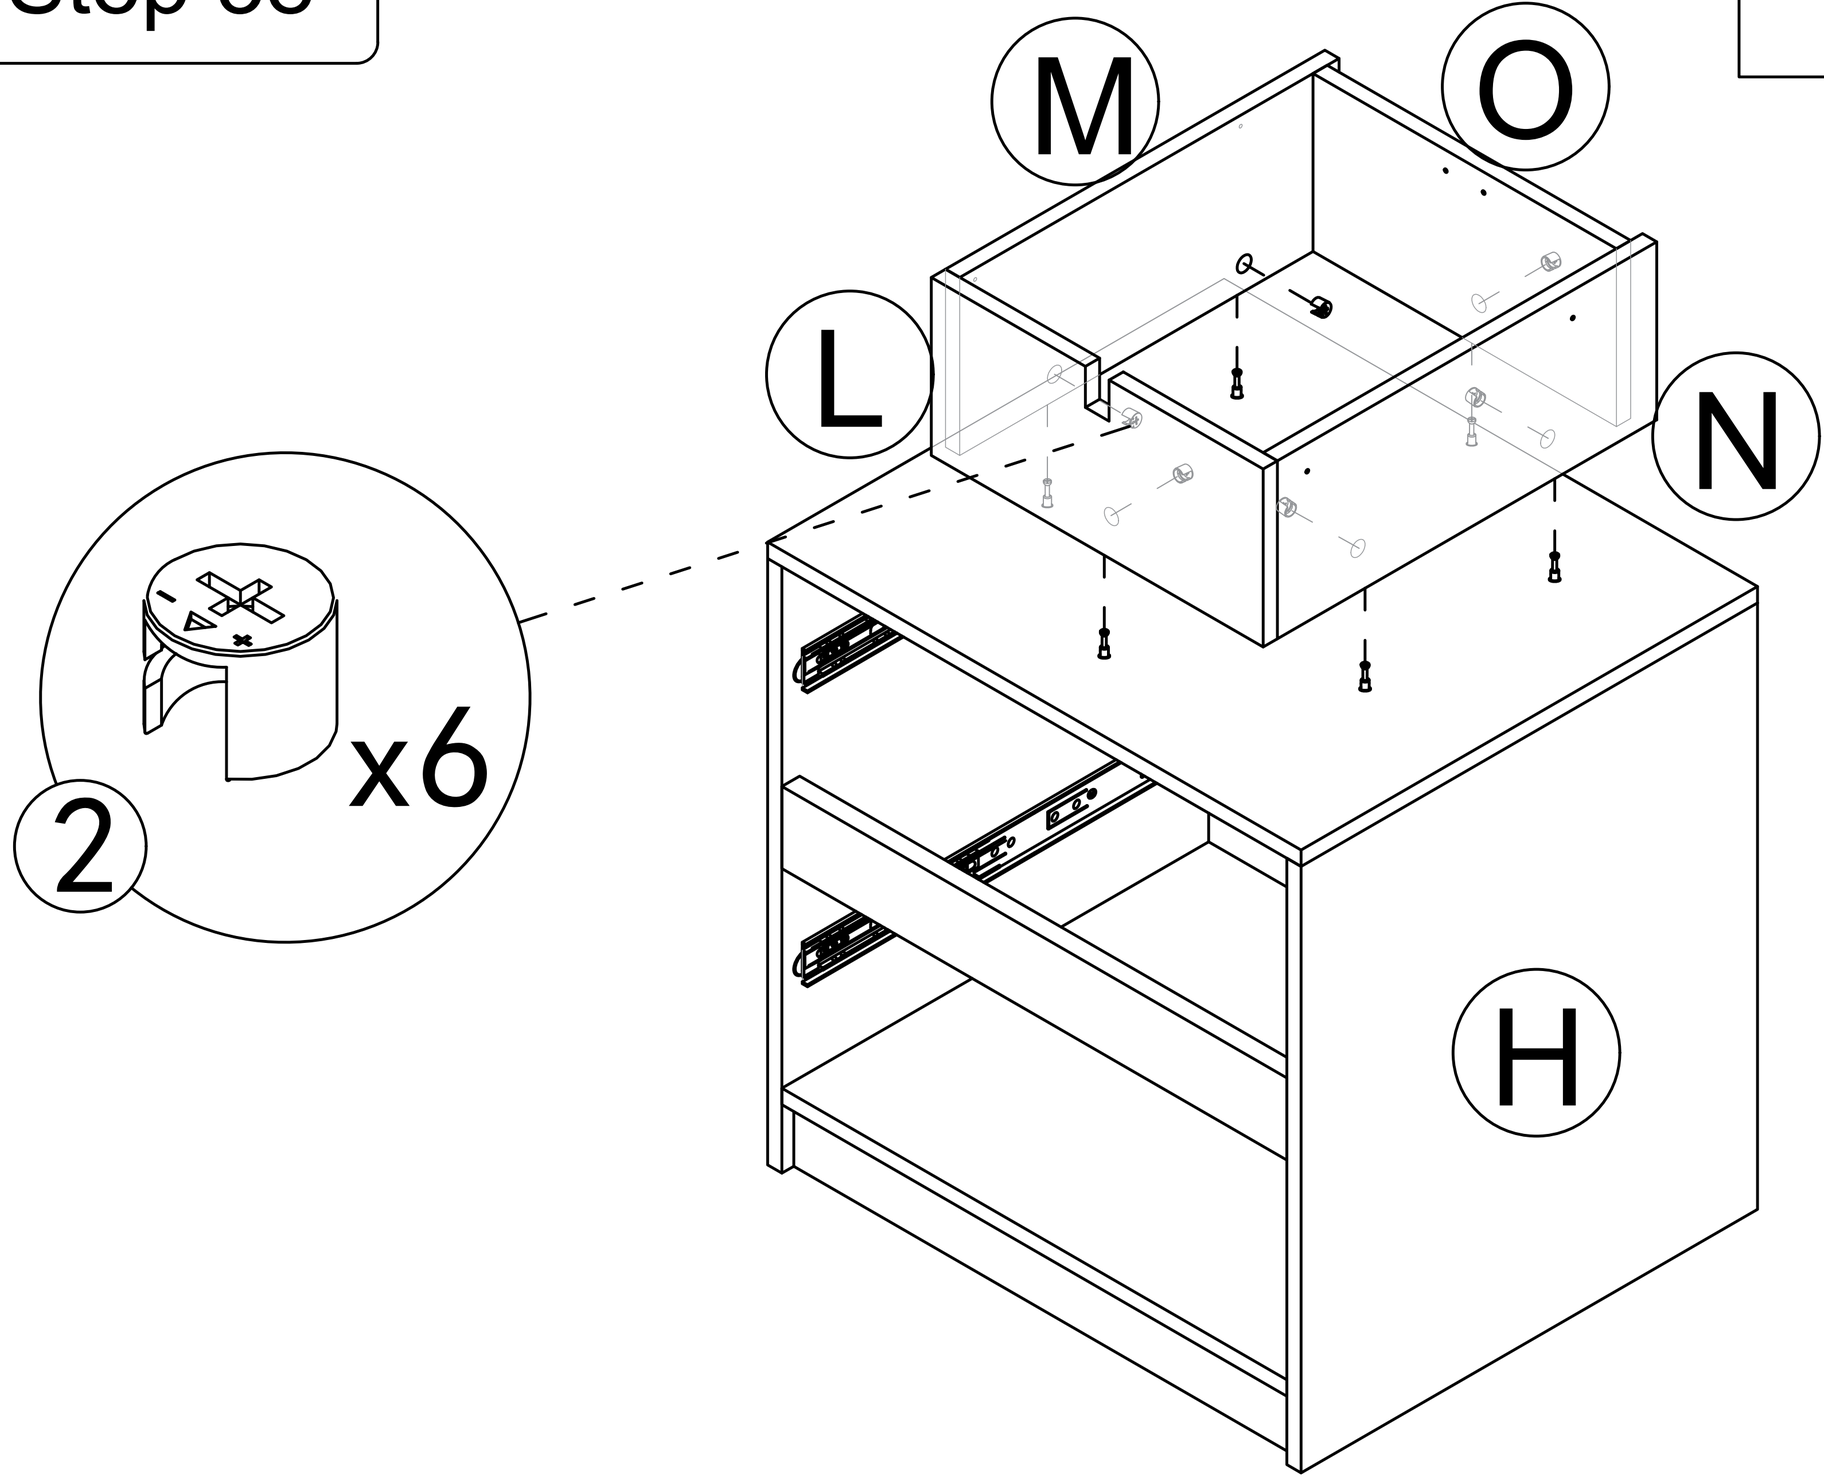

Step 39

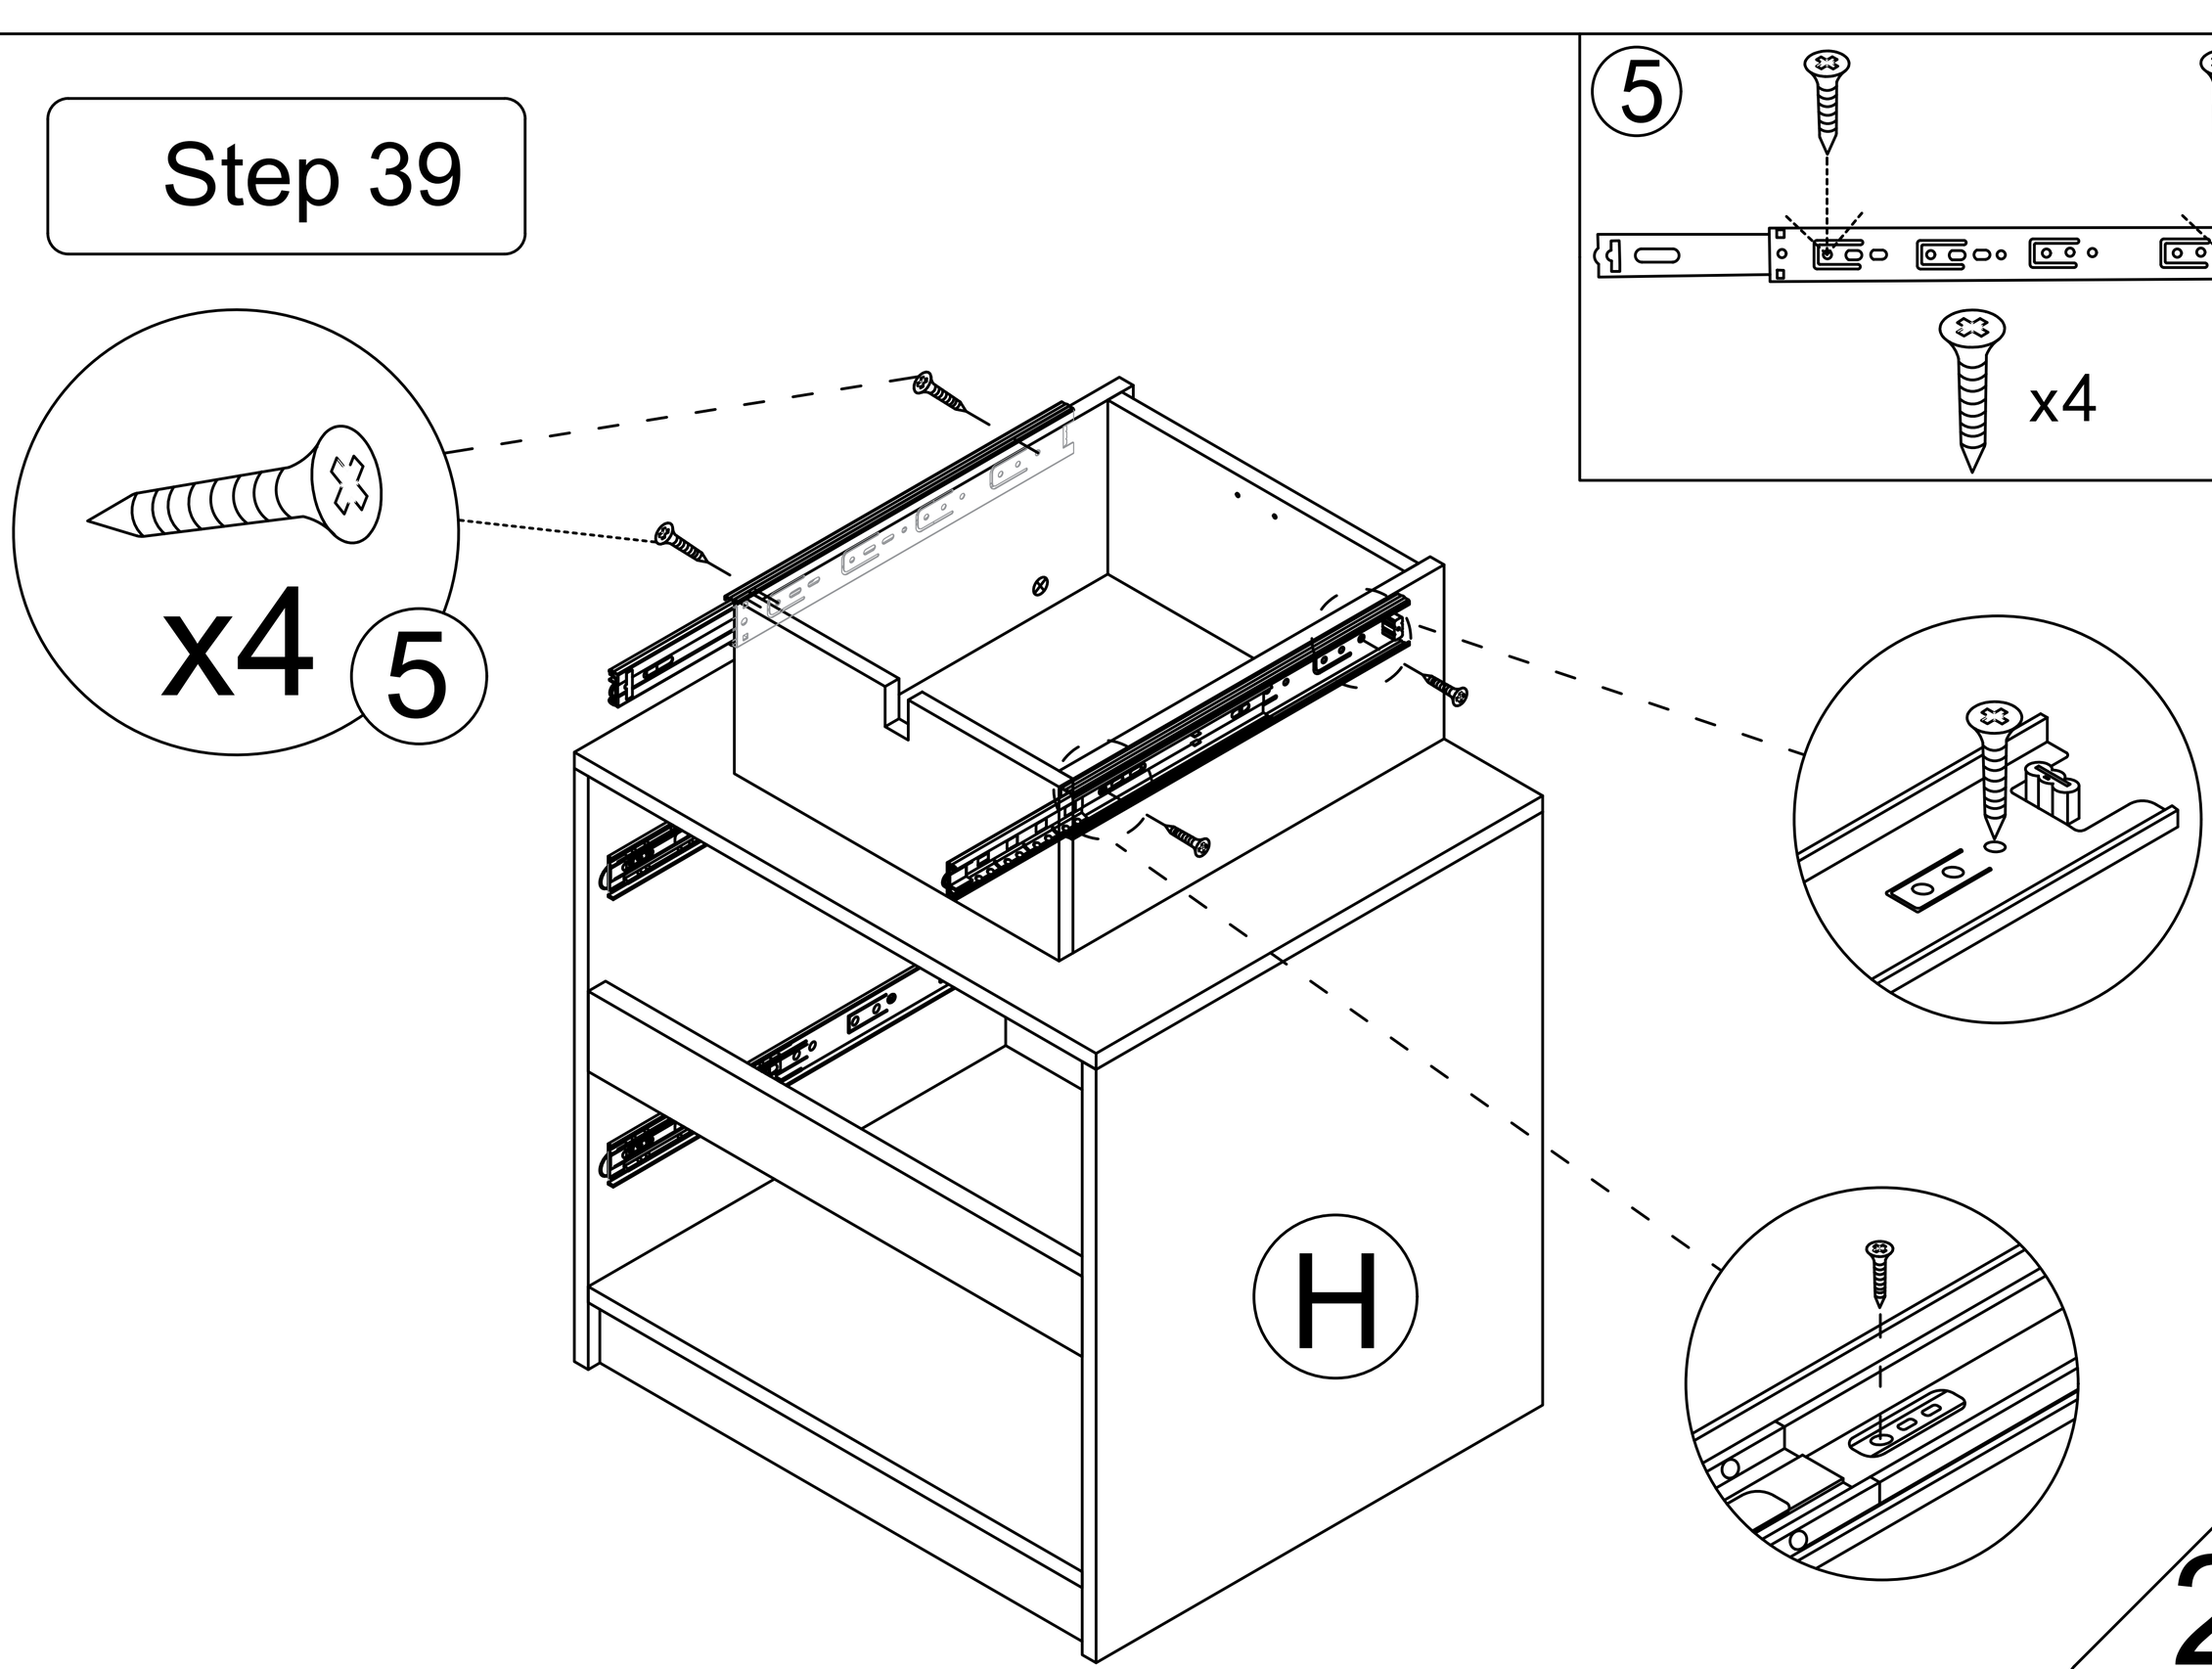


Step 40

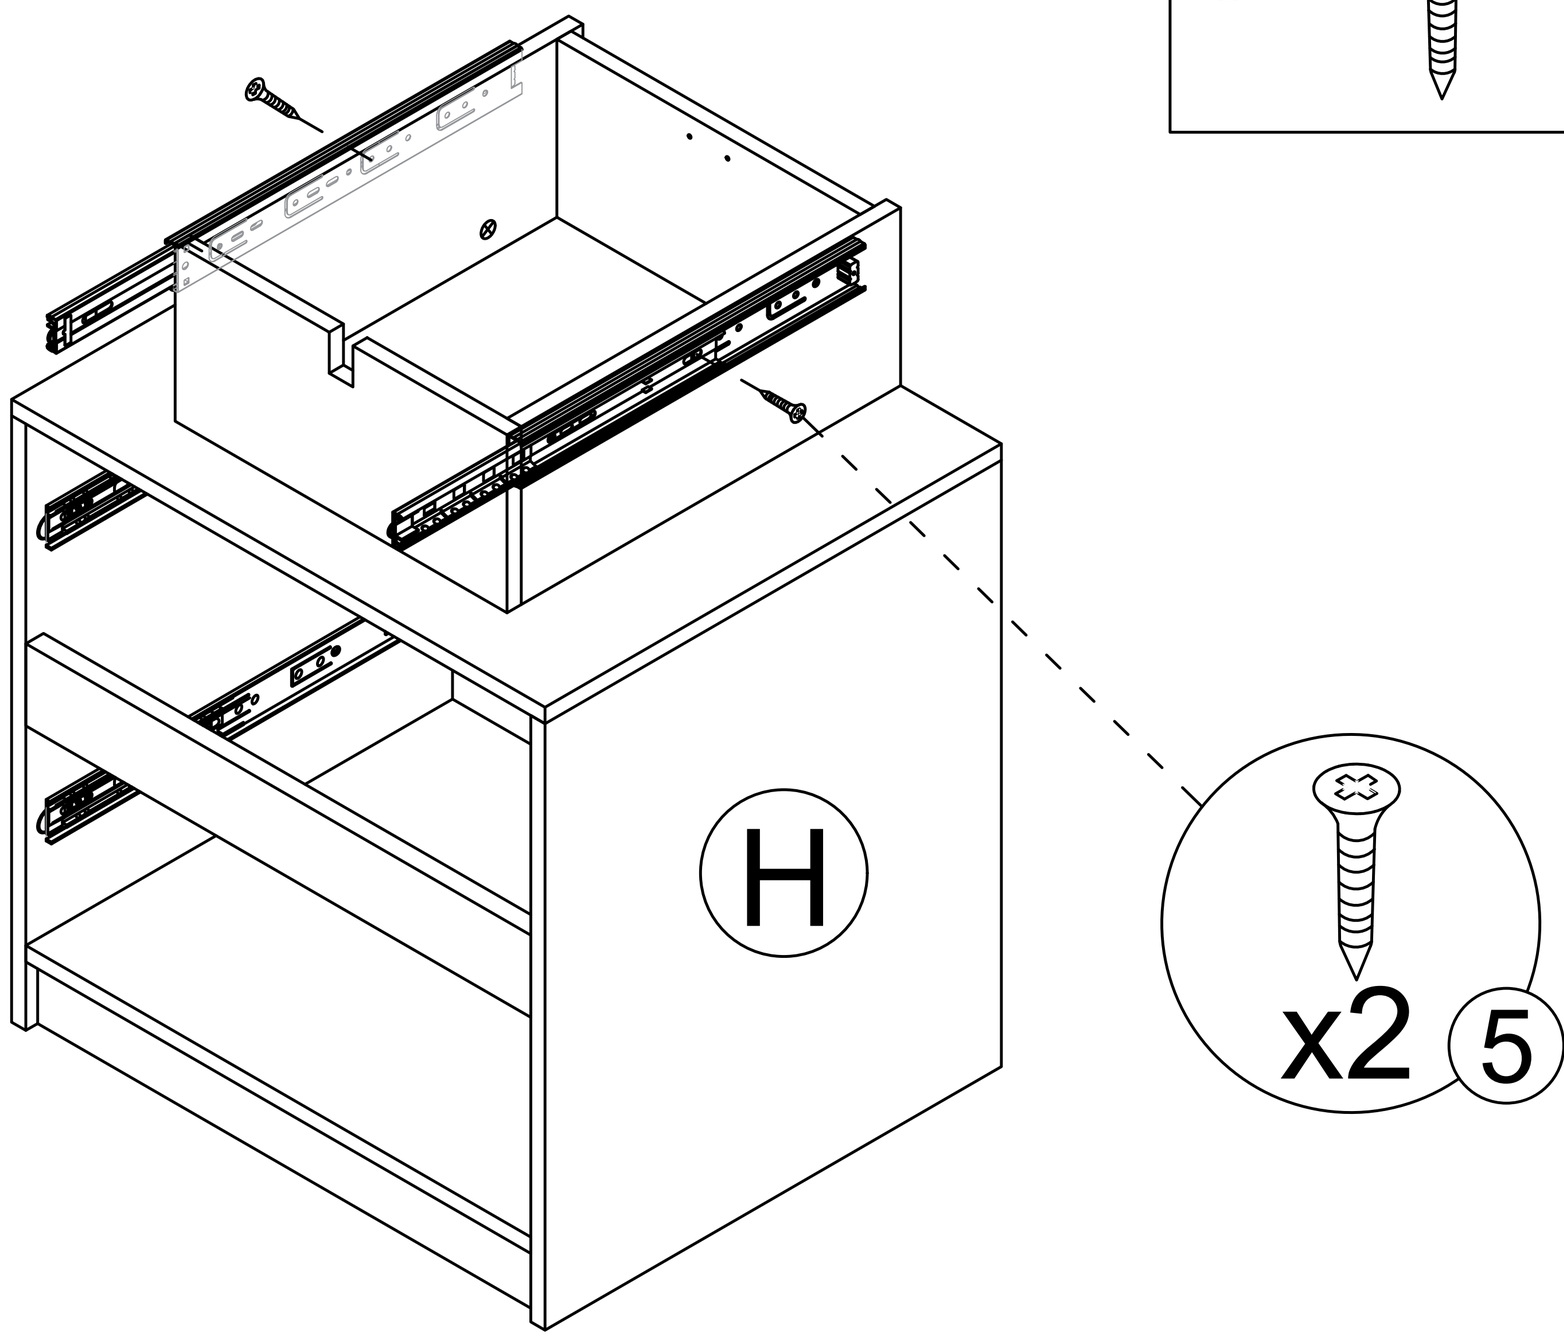

5 x2

This hole is for strengthening fixed hole customers can choose to install according to their needs.


Step 41

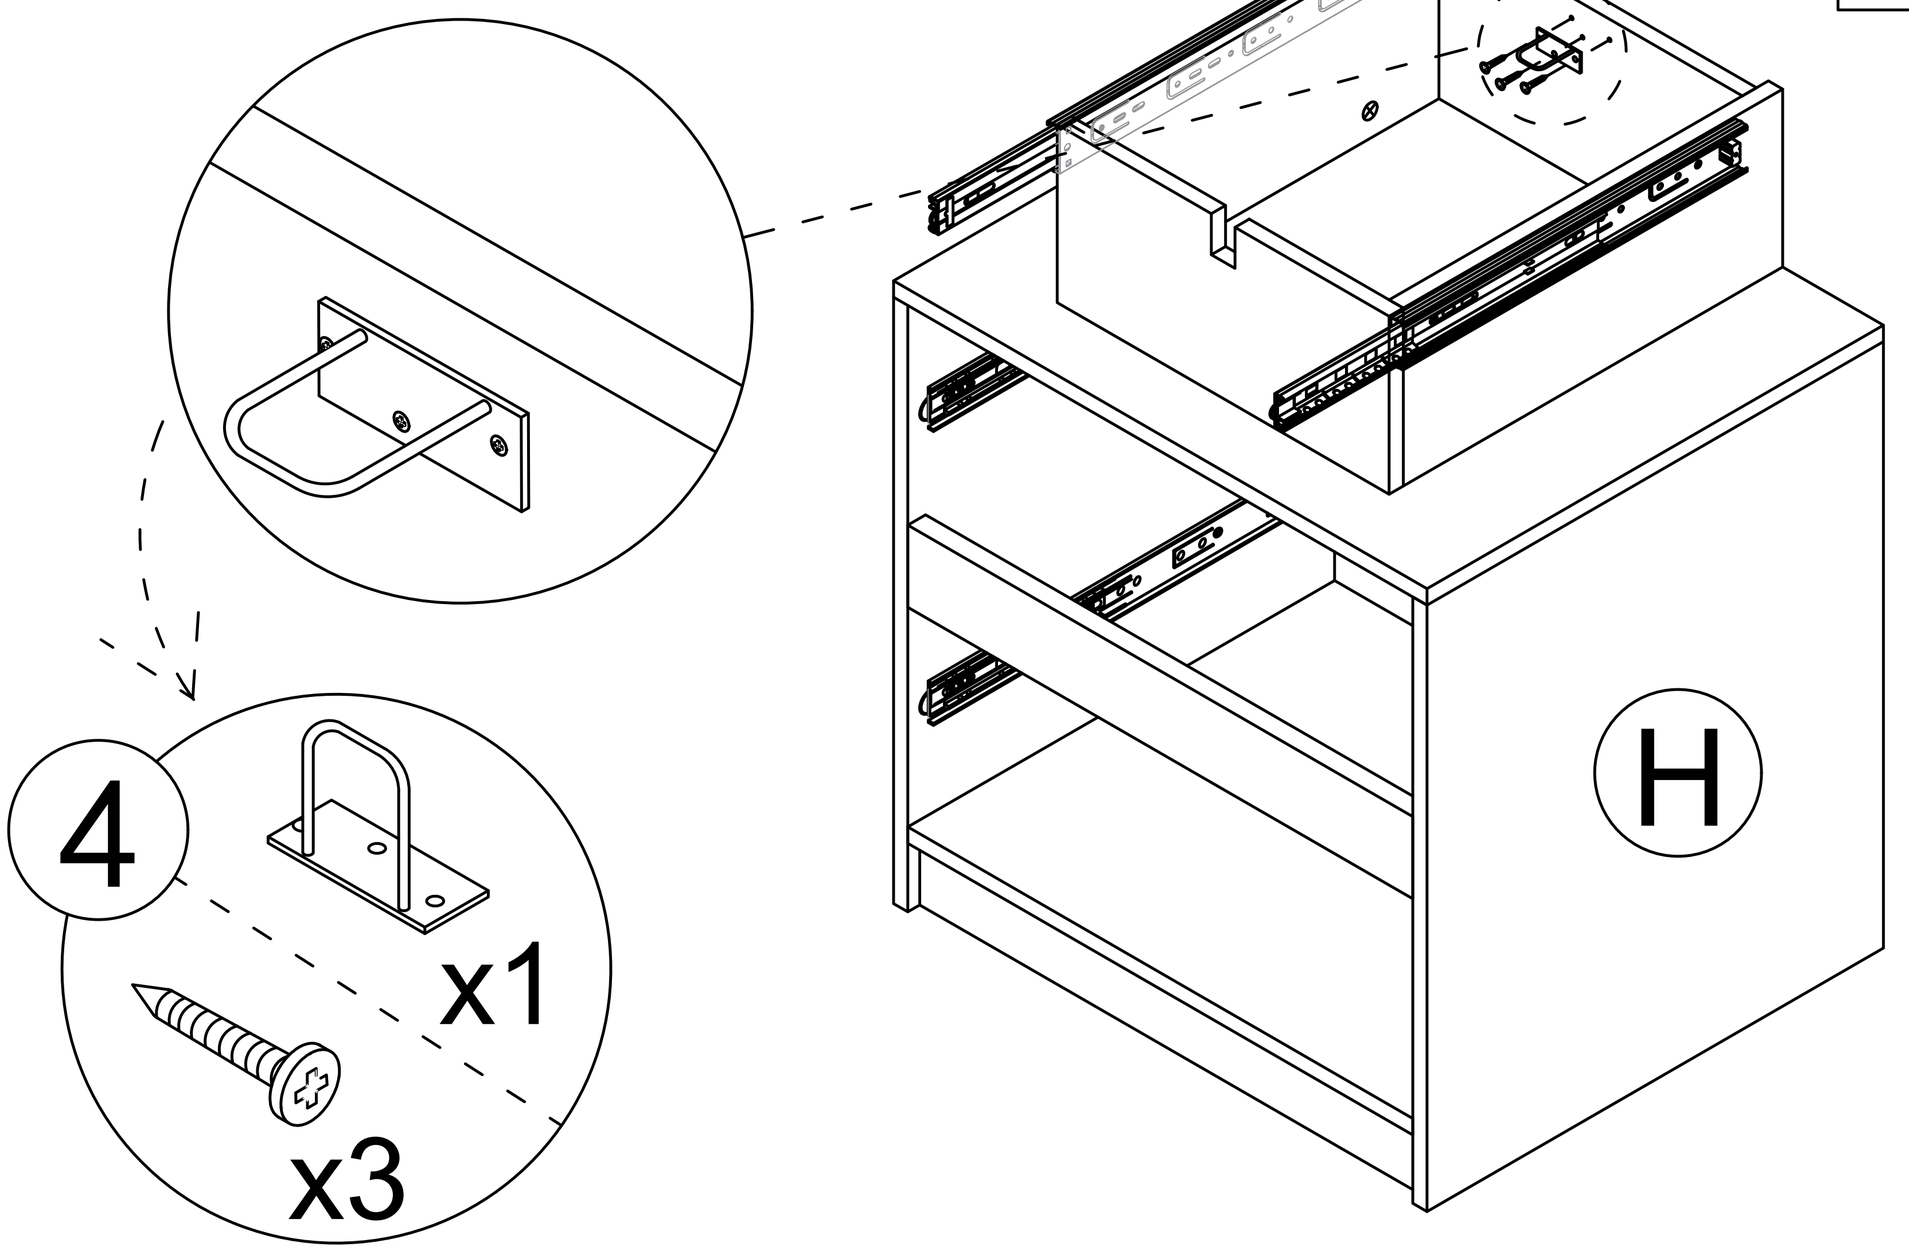

4 x1 x3


Attention: Do not install the hidden buckle upside down, otherwise the drawer will not lock properly

Step 42

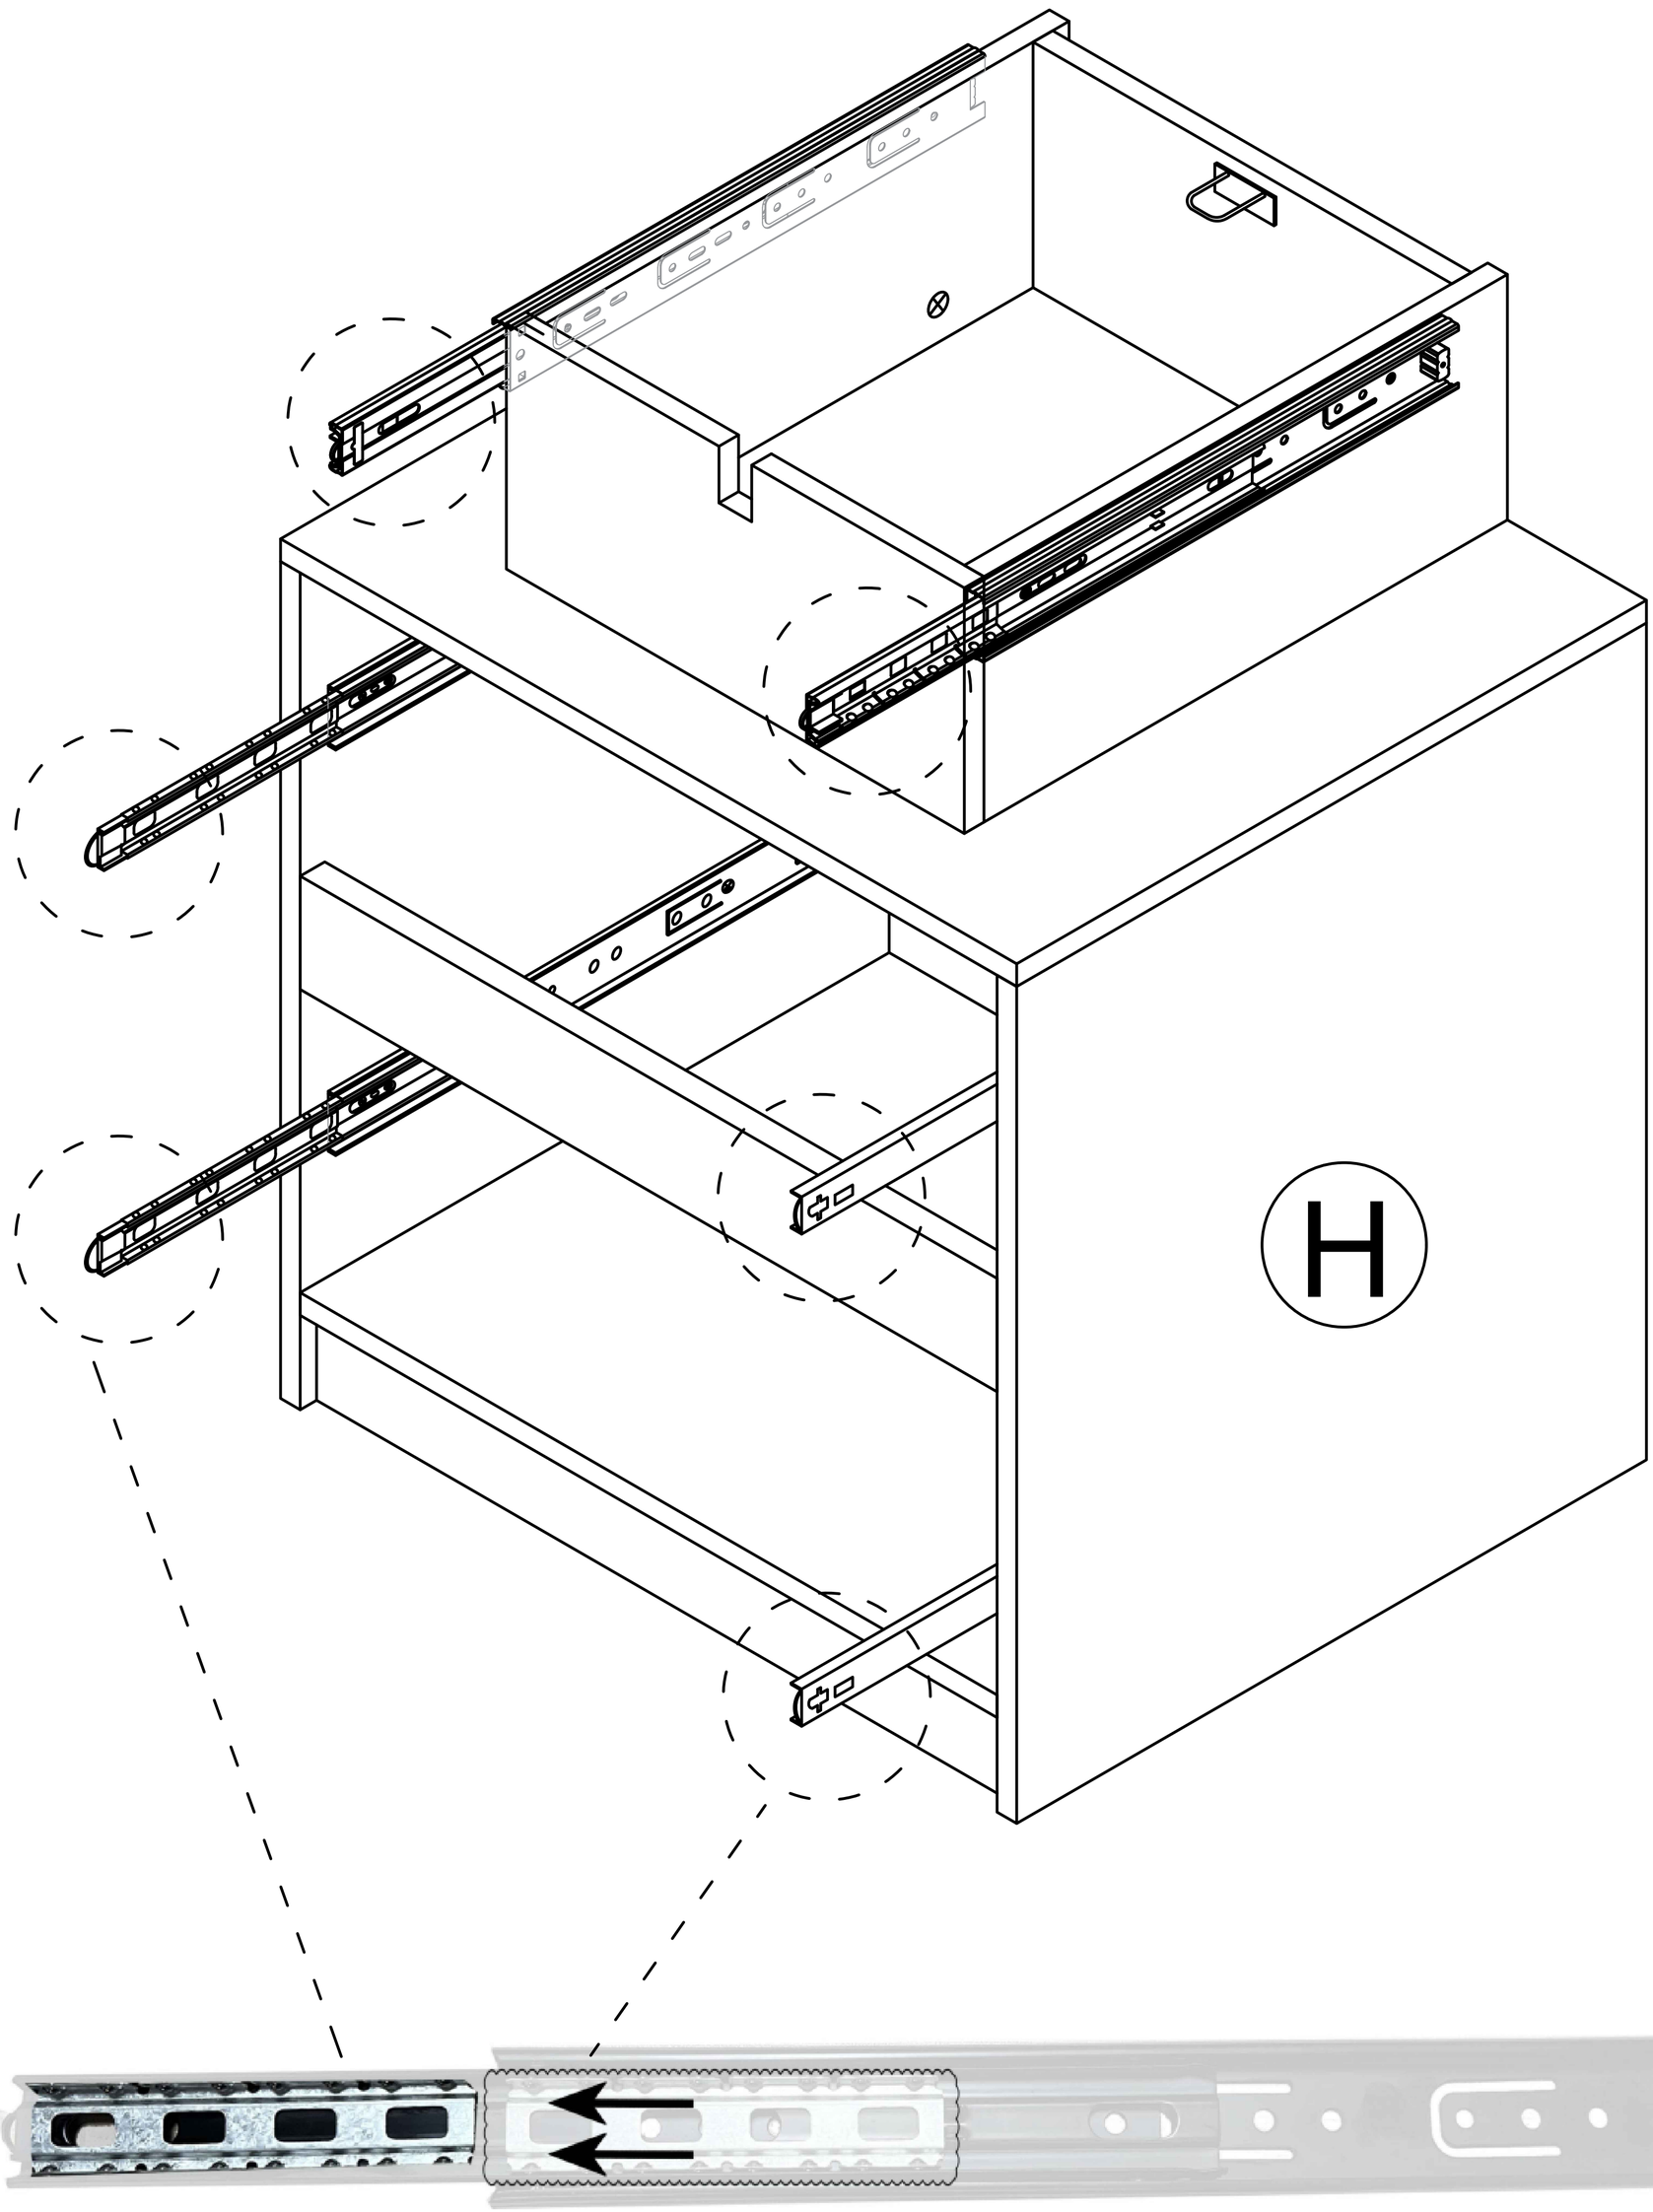


As shown，When installing the drawer,
pull the guide rail out first, Slide beads are also pulled out.

Step 43

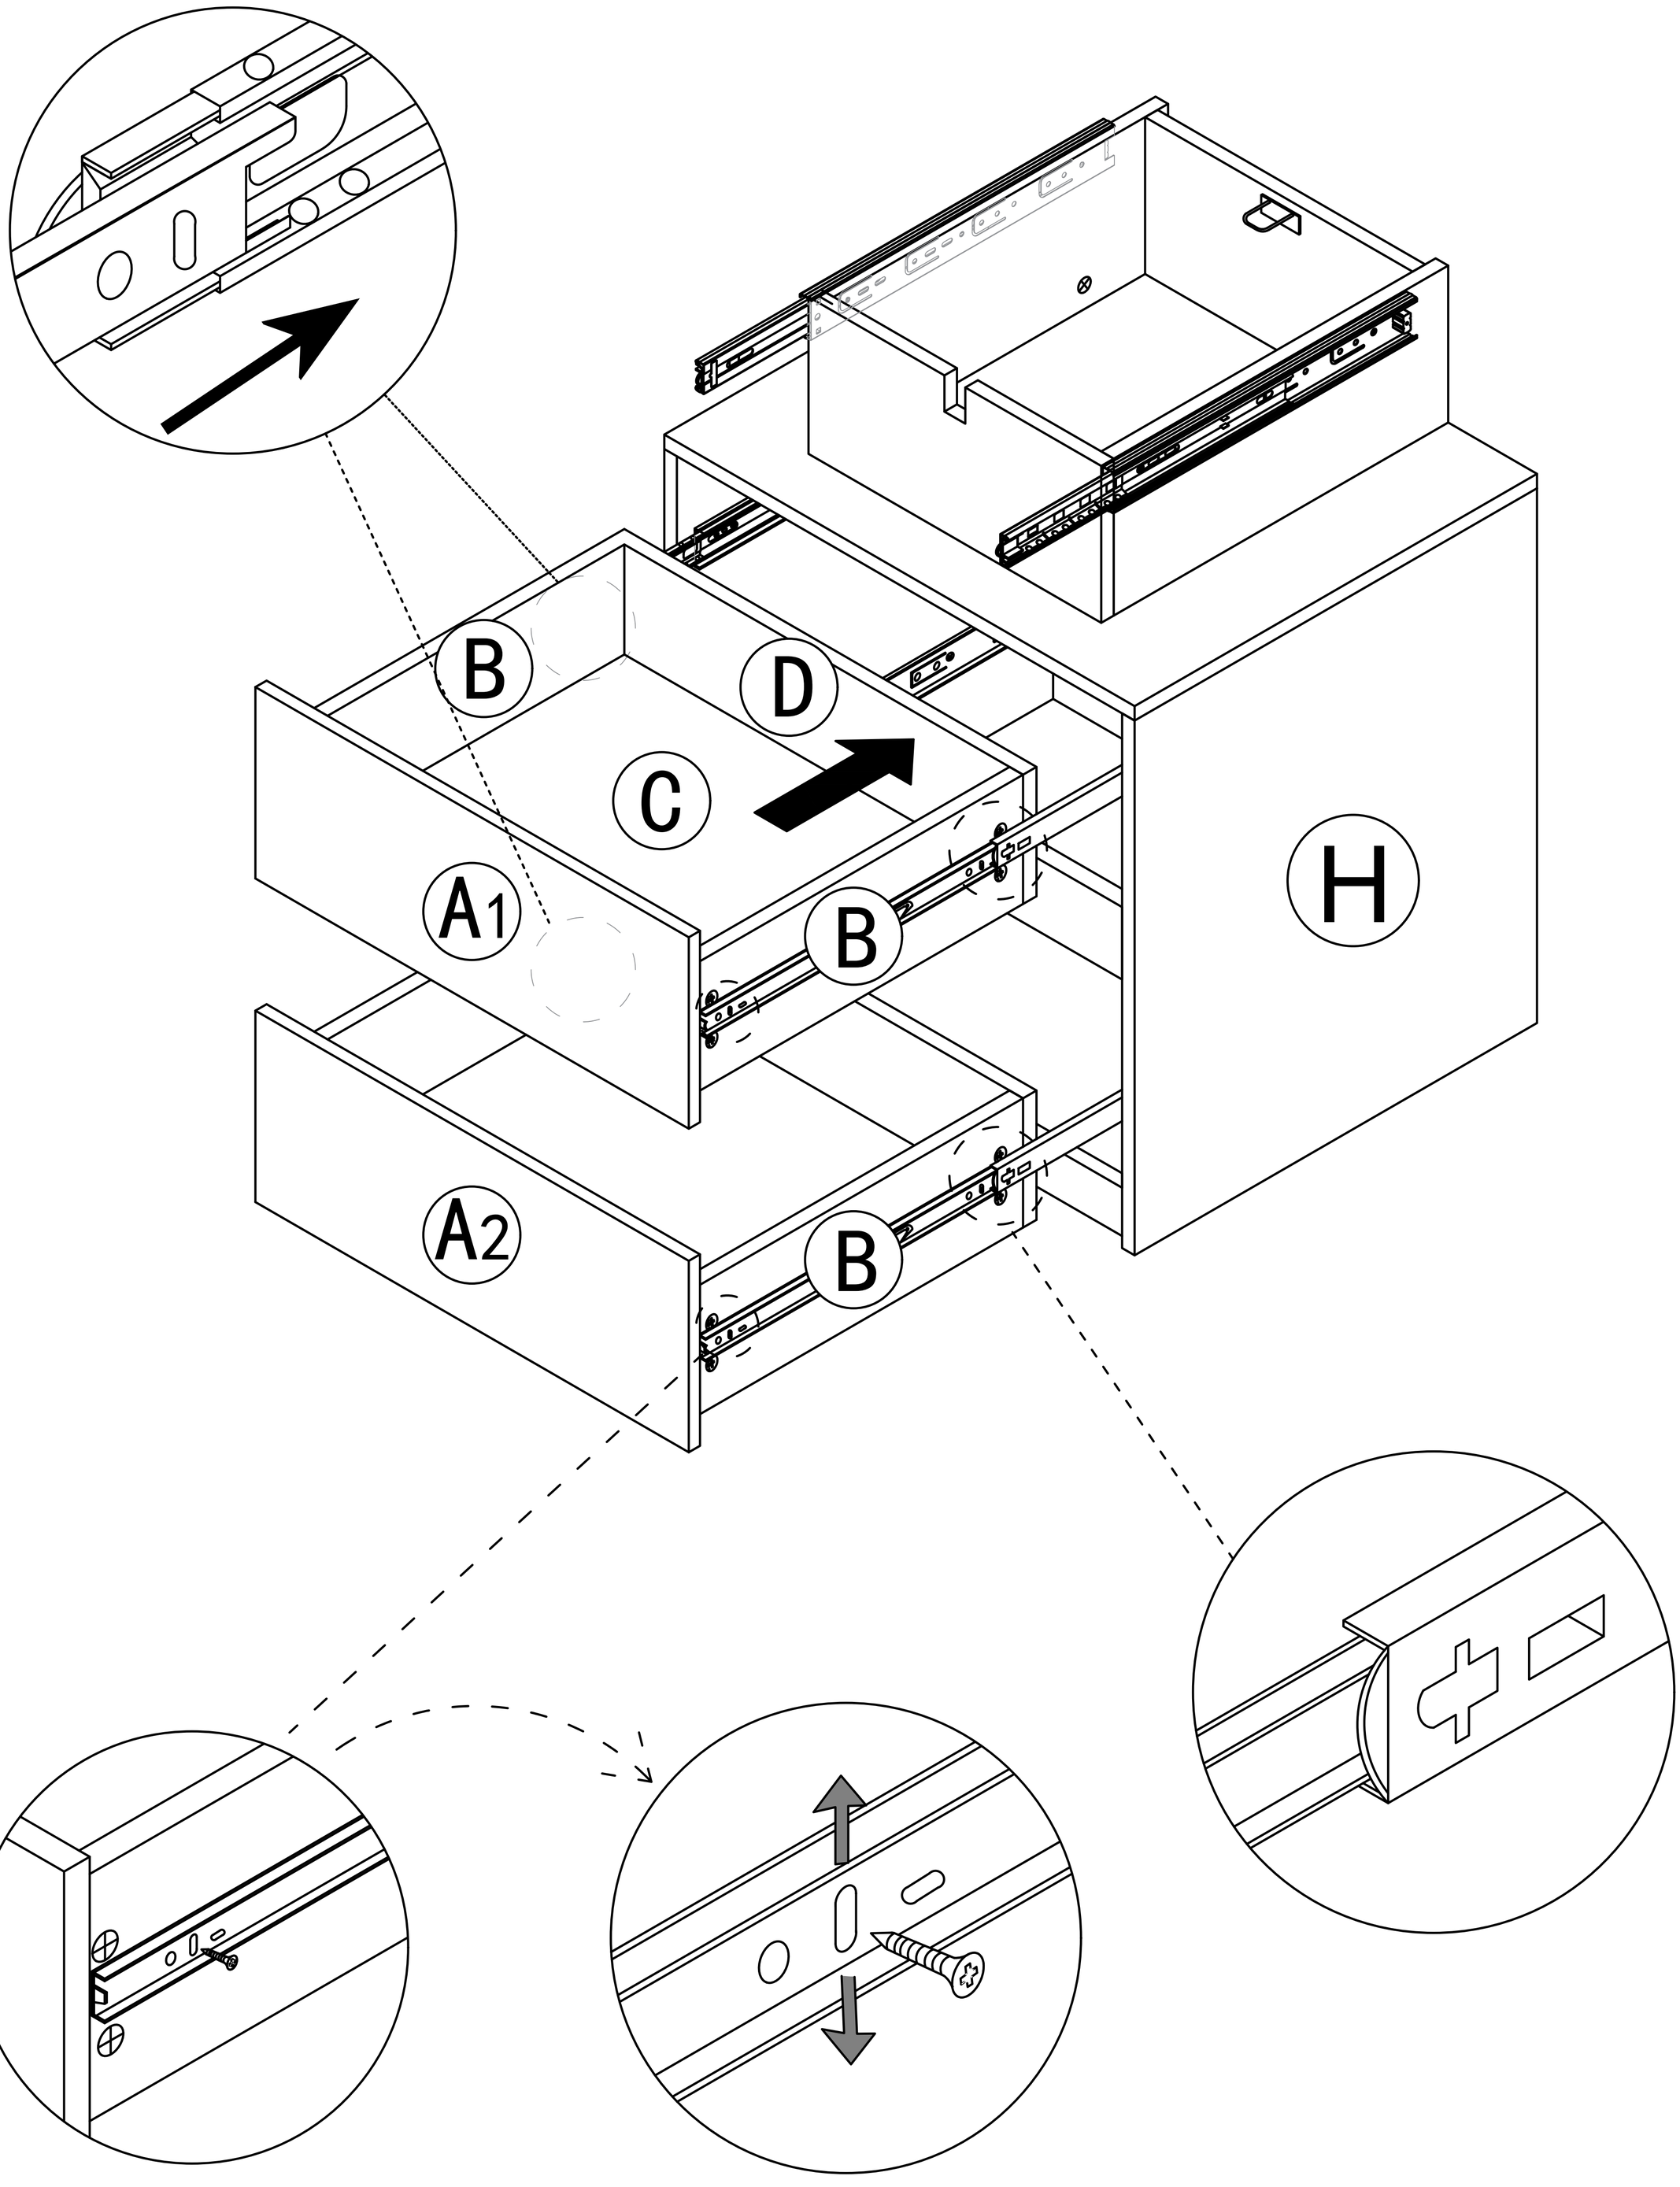


If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap


Step 44



Ux1

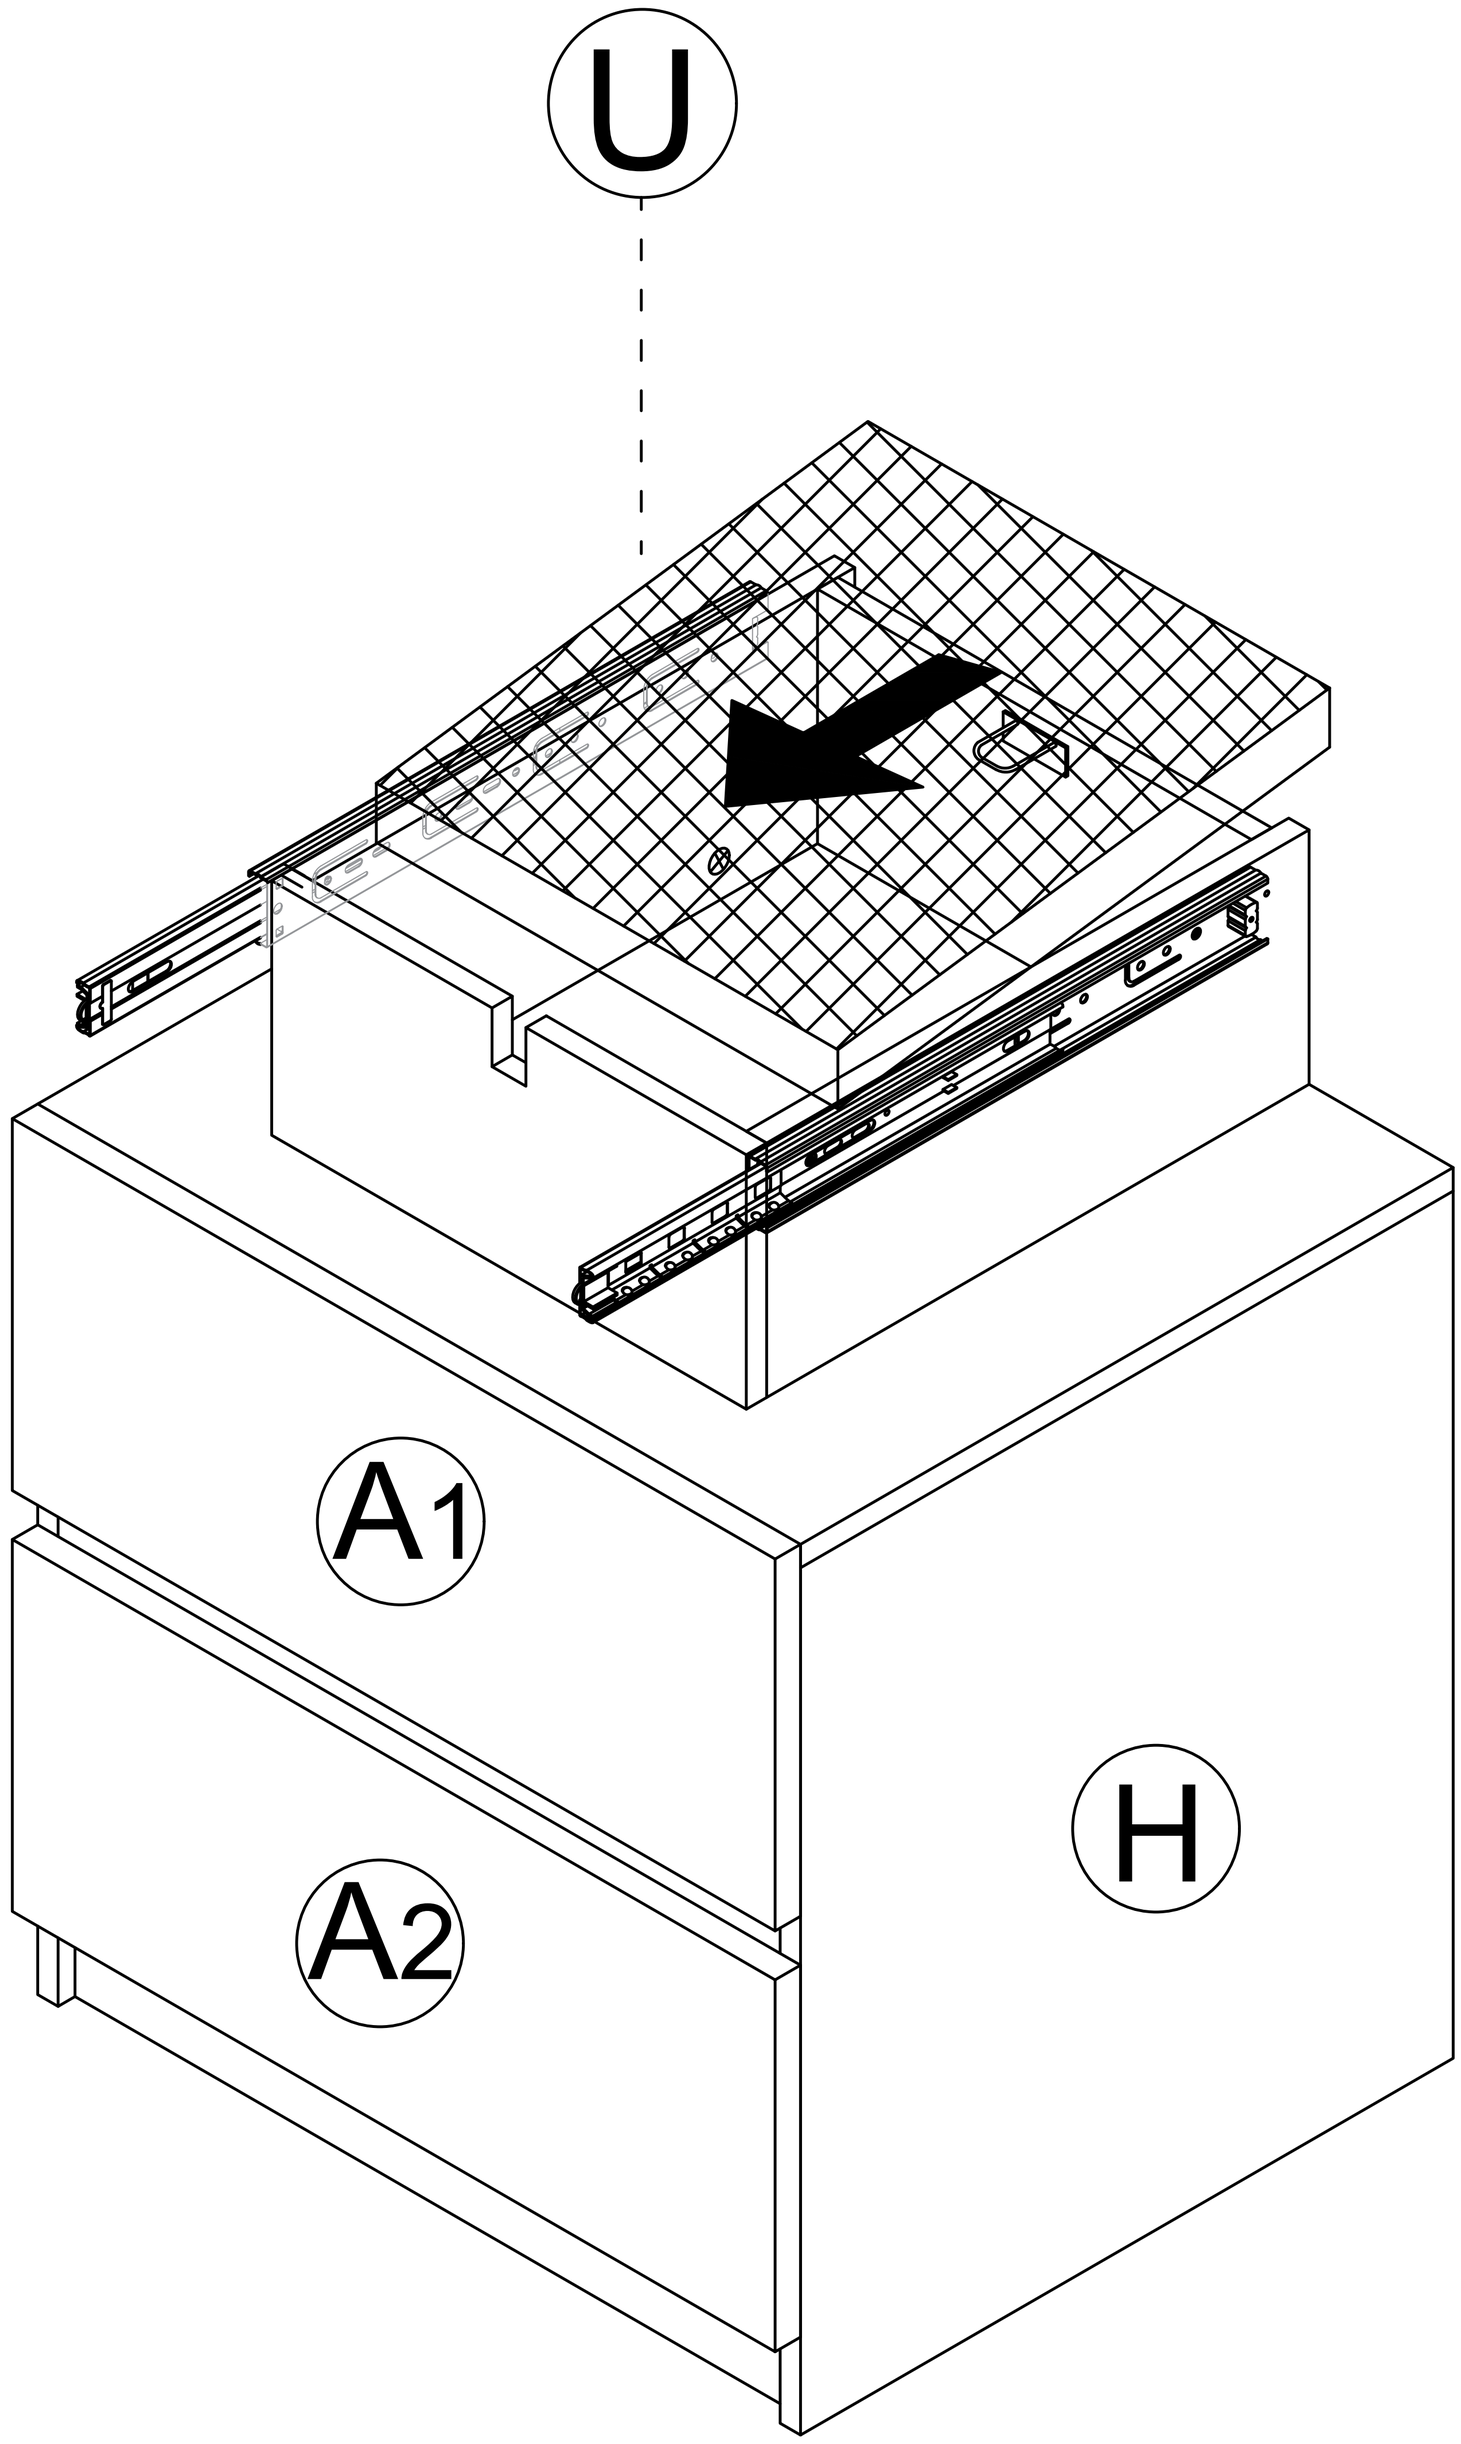


Step 45

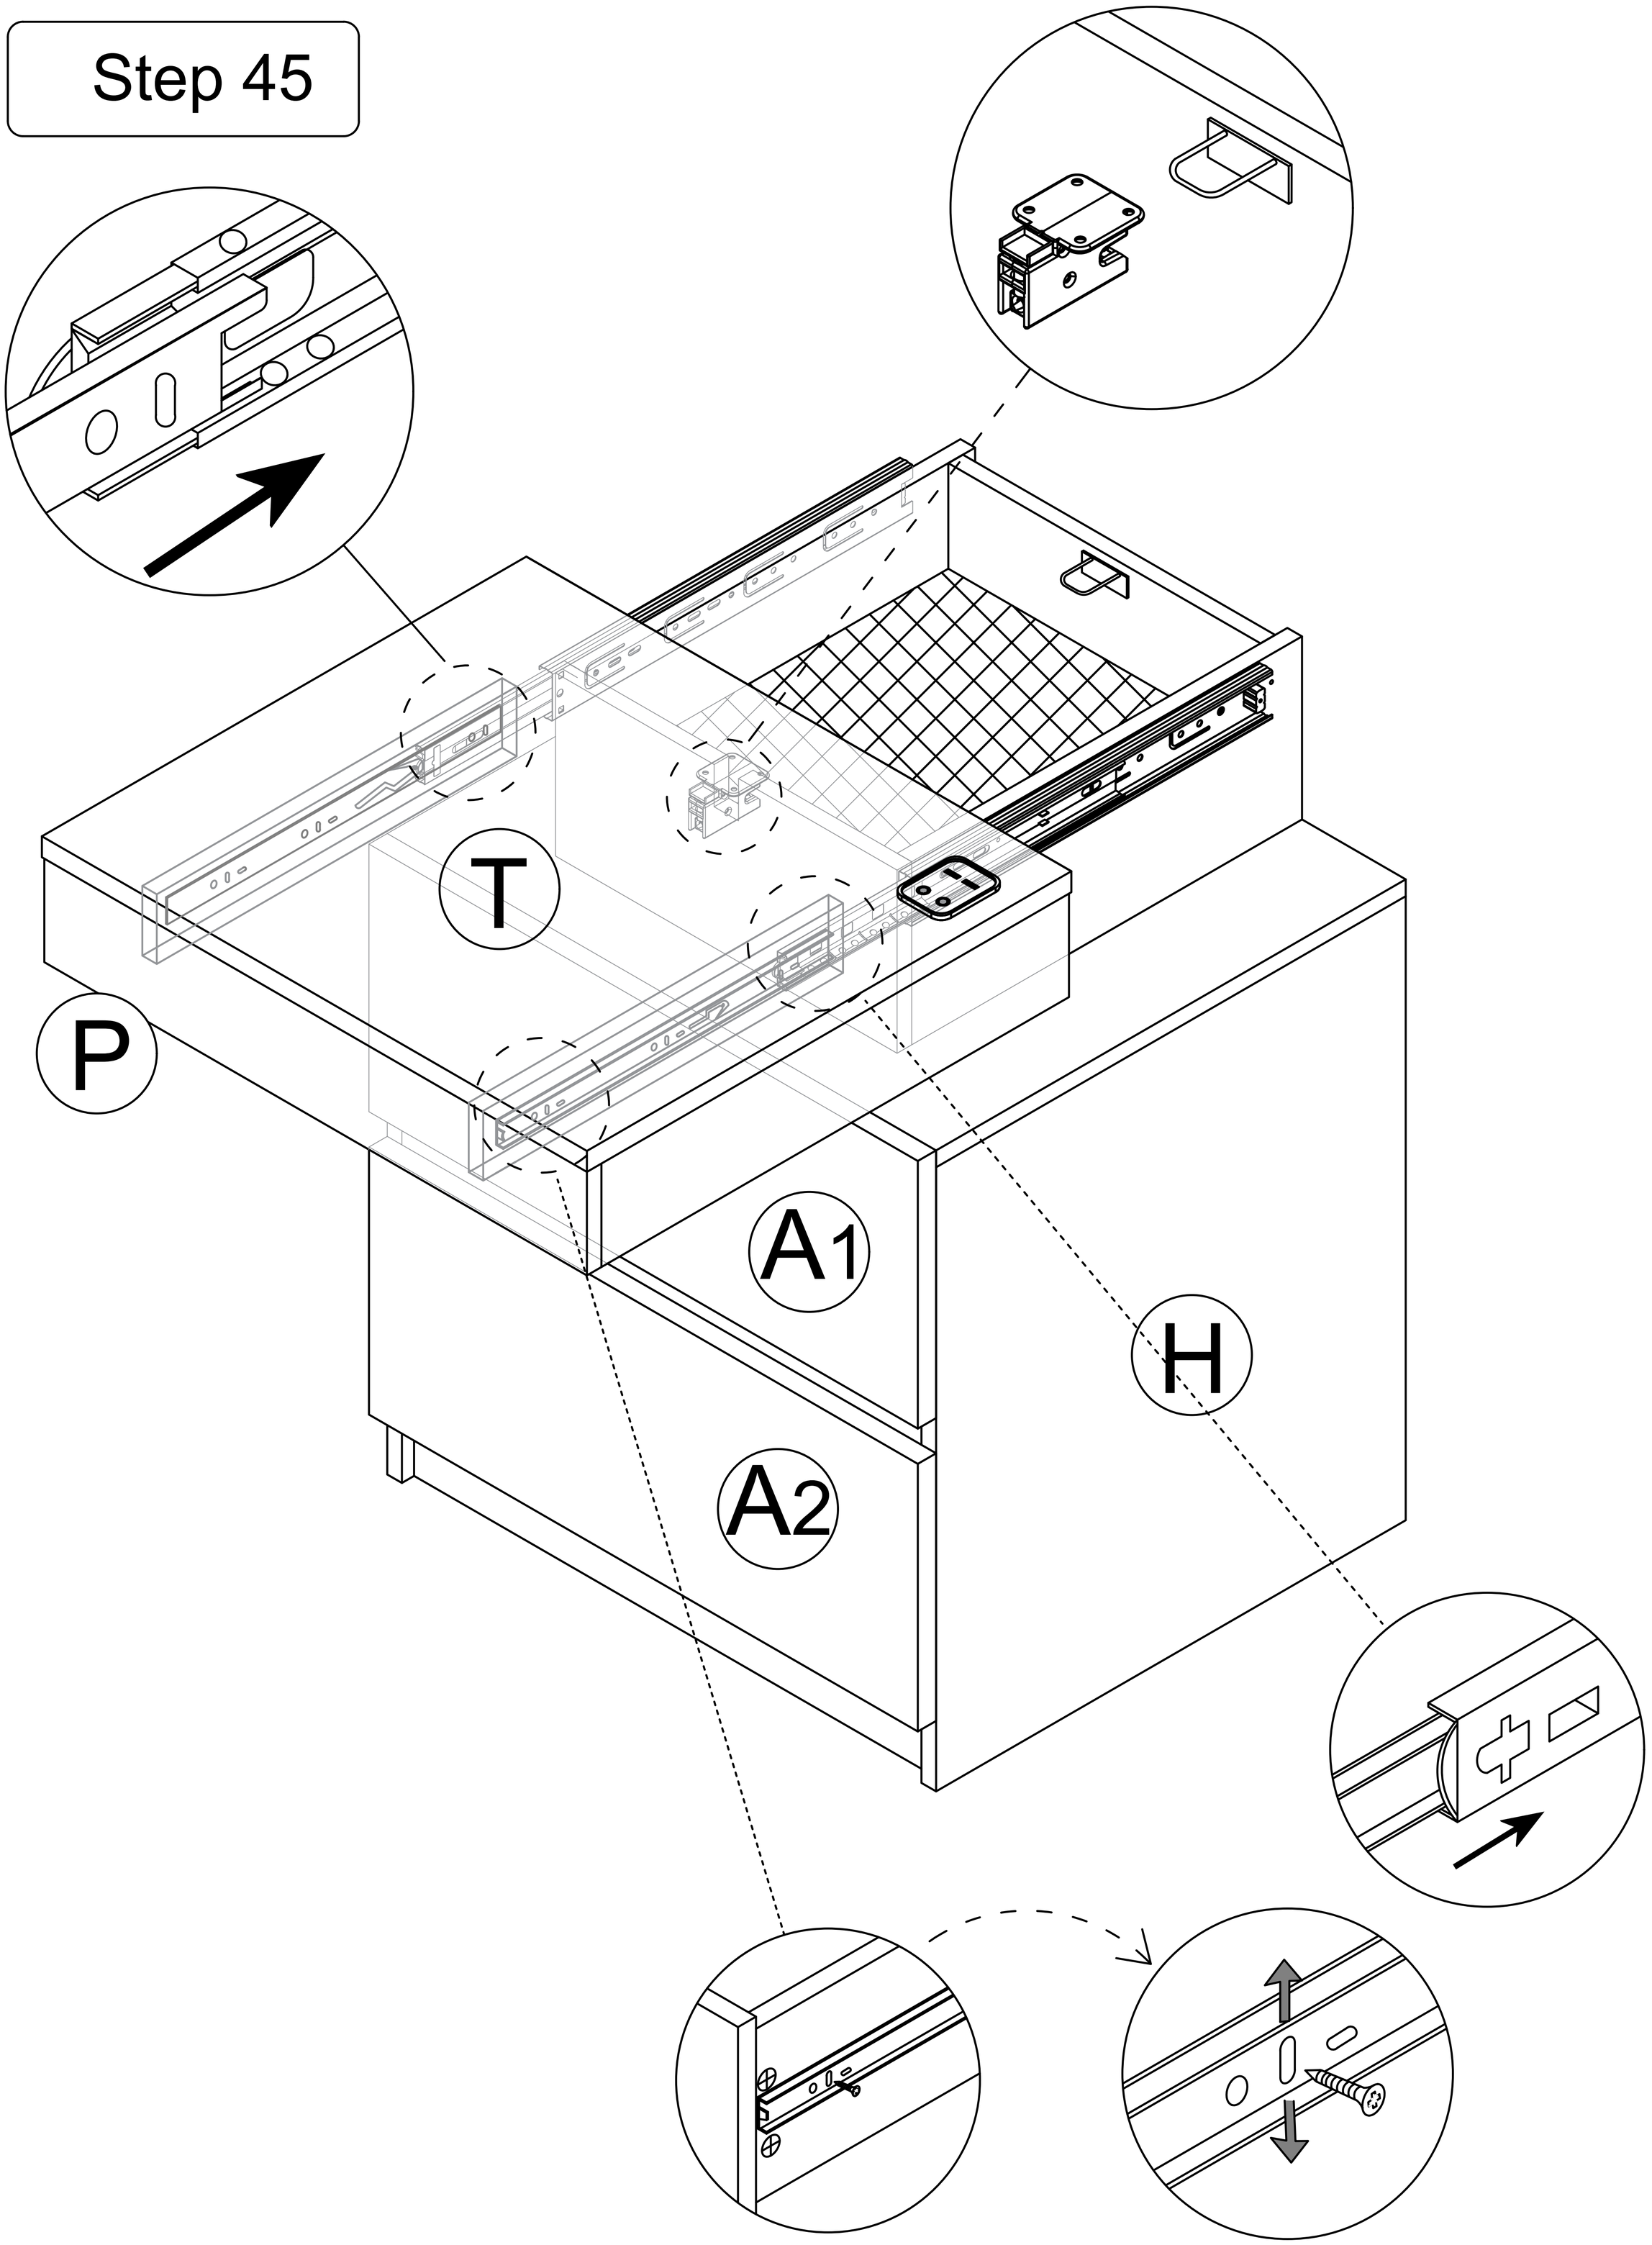


If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap


Step 46

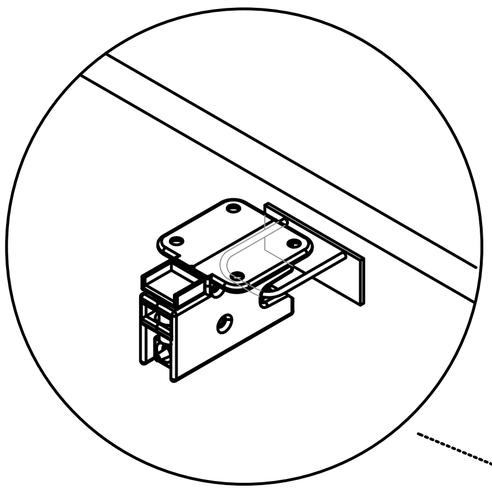

lock

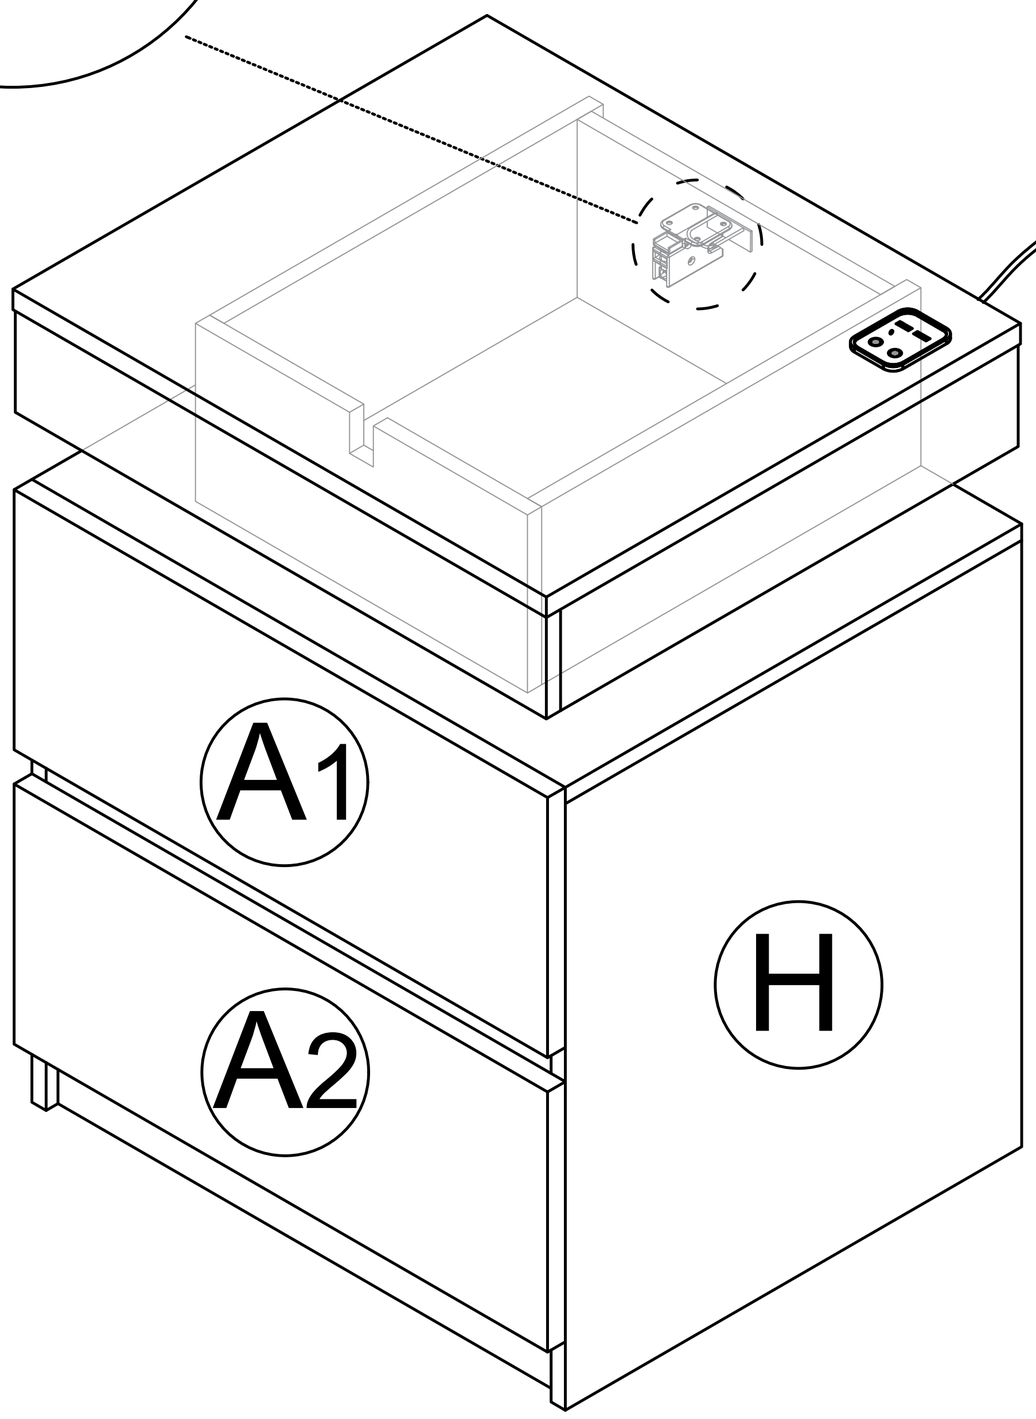


4




x1

Open lock

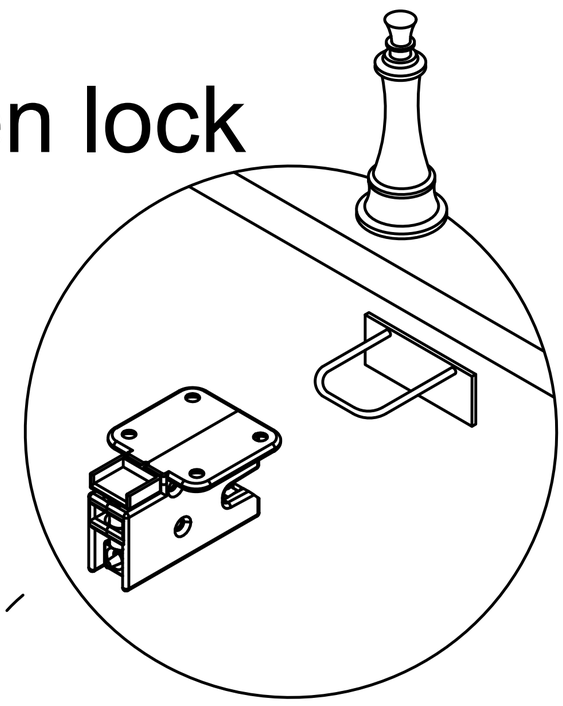


Place the magnetic key above the hidden lock

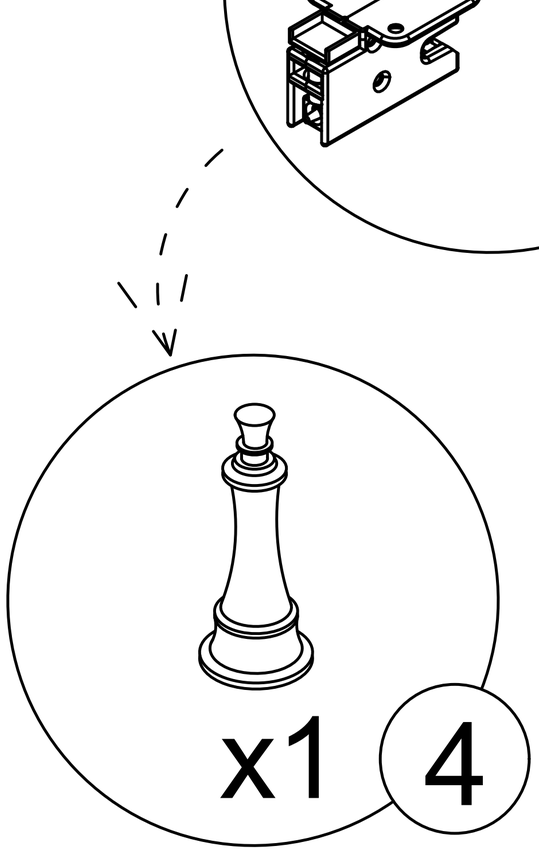



x1

4

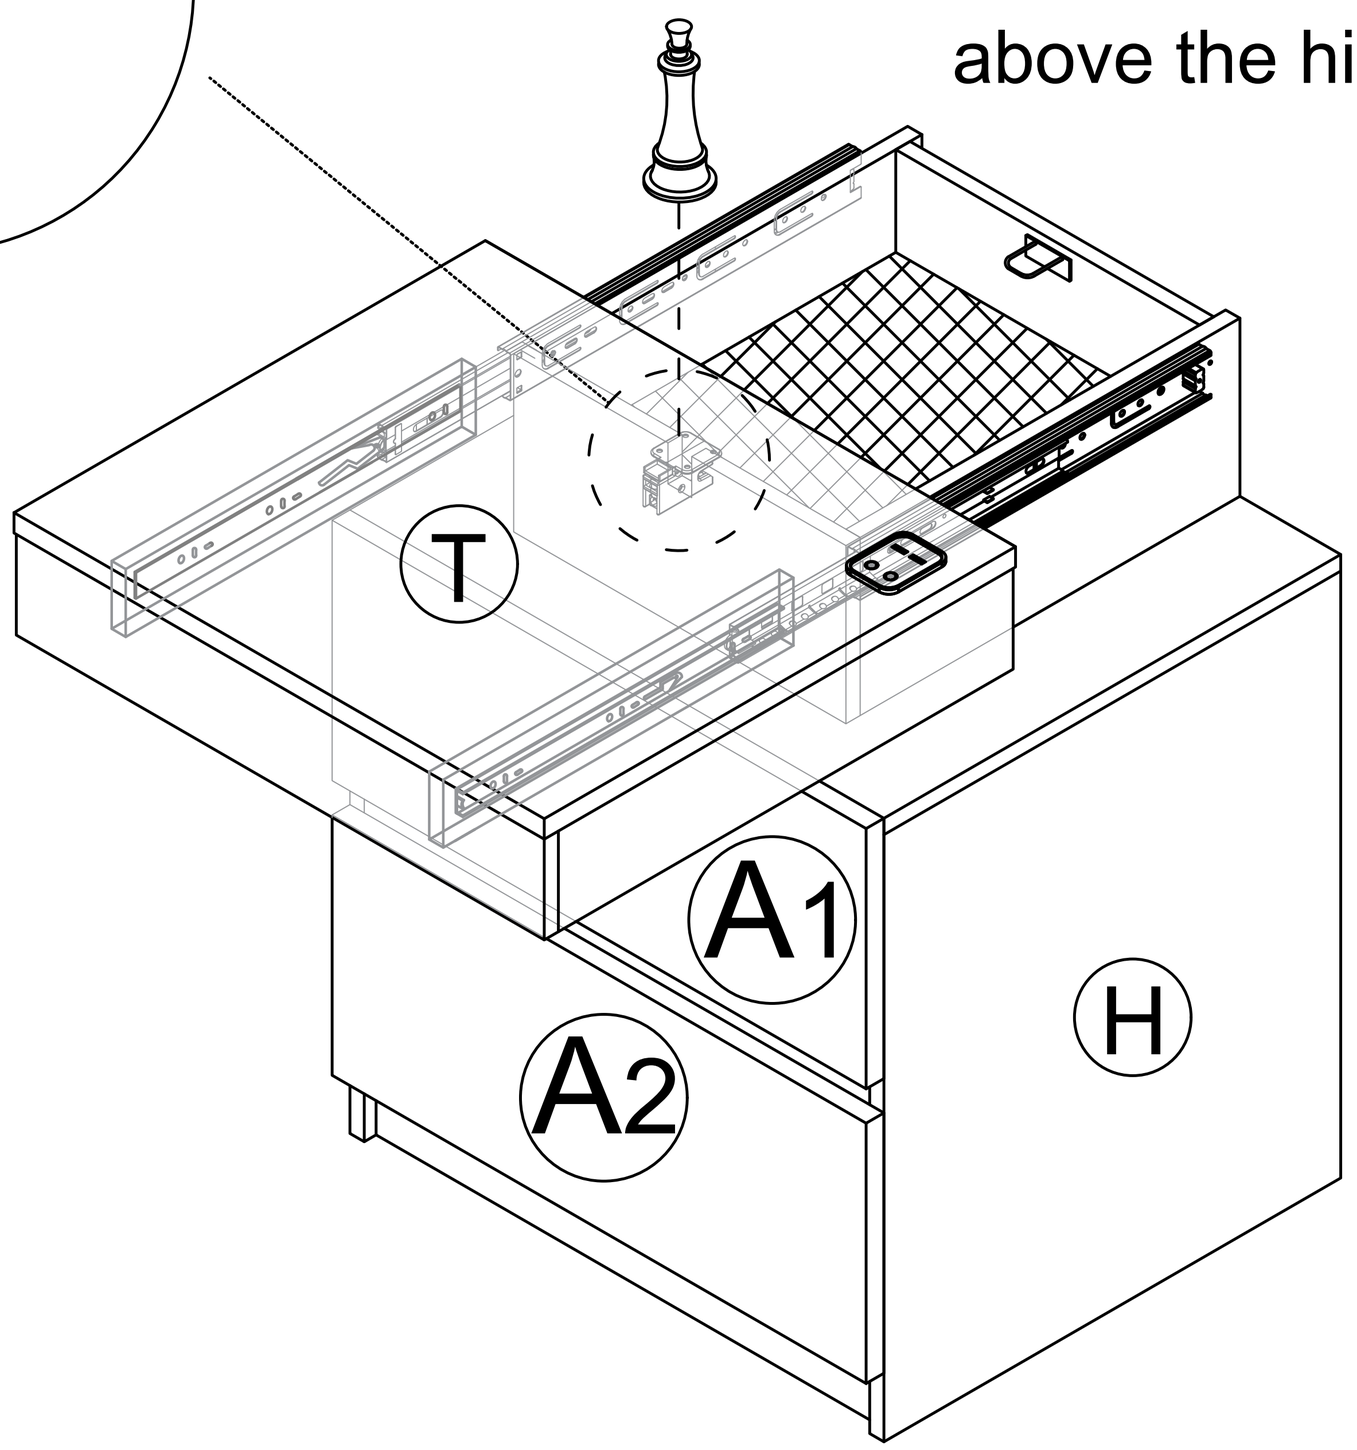


Step 47

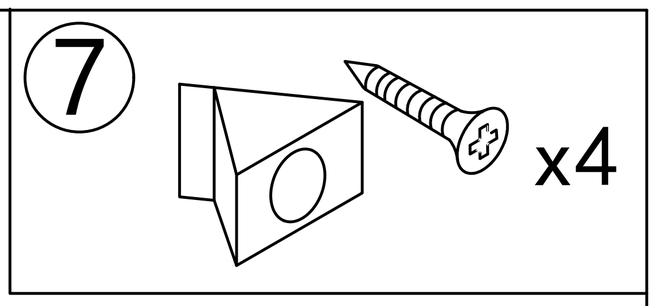


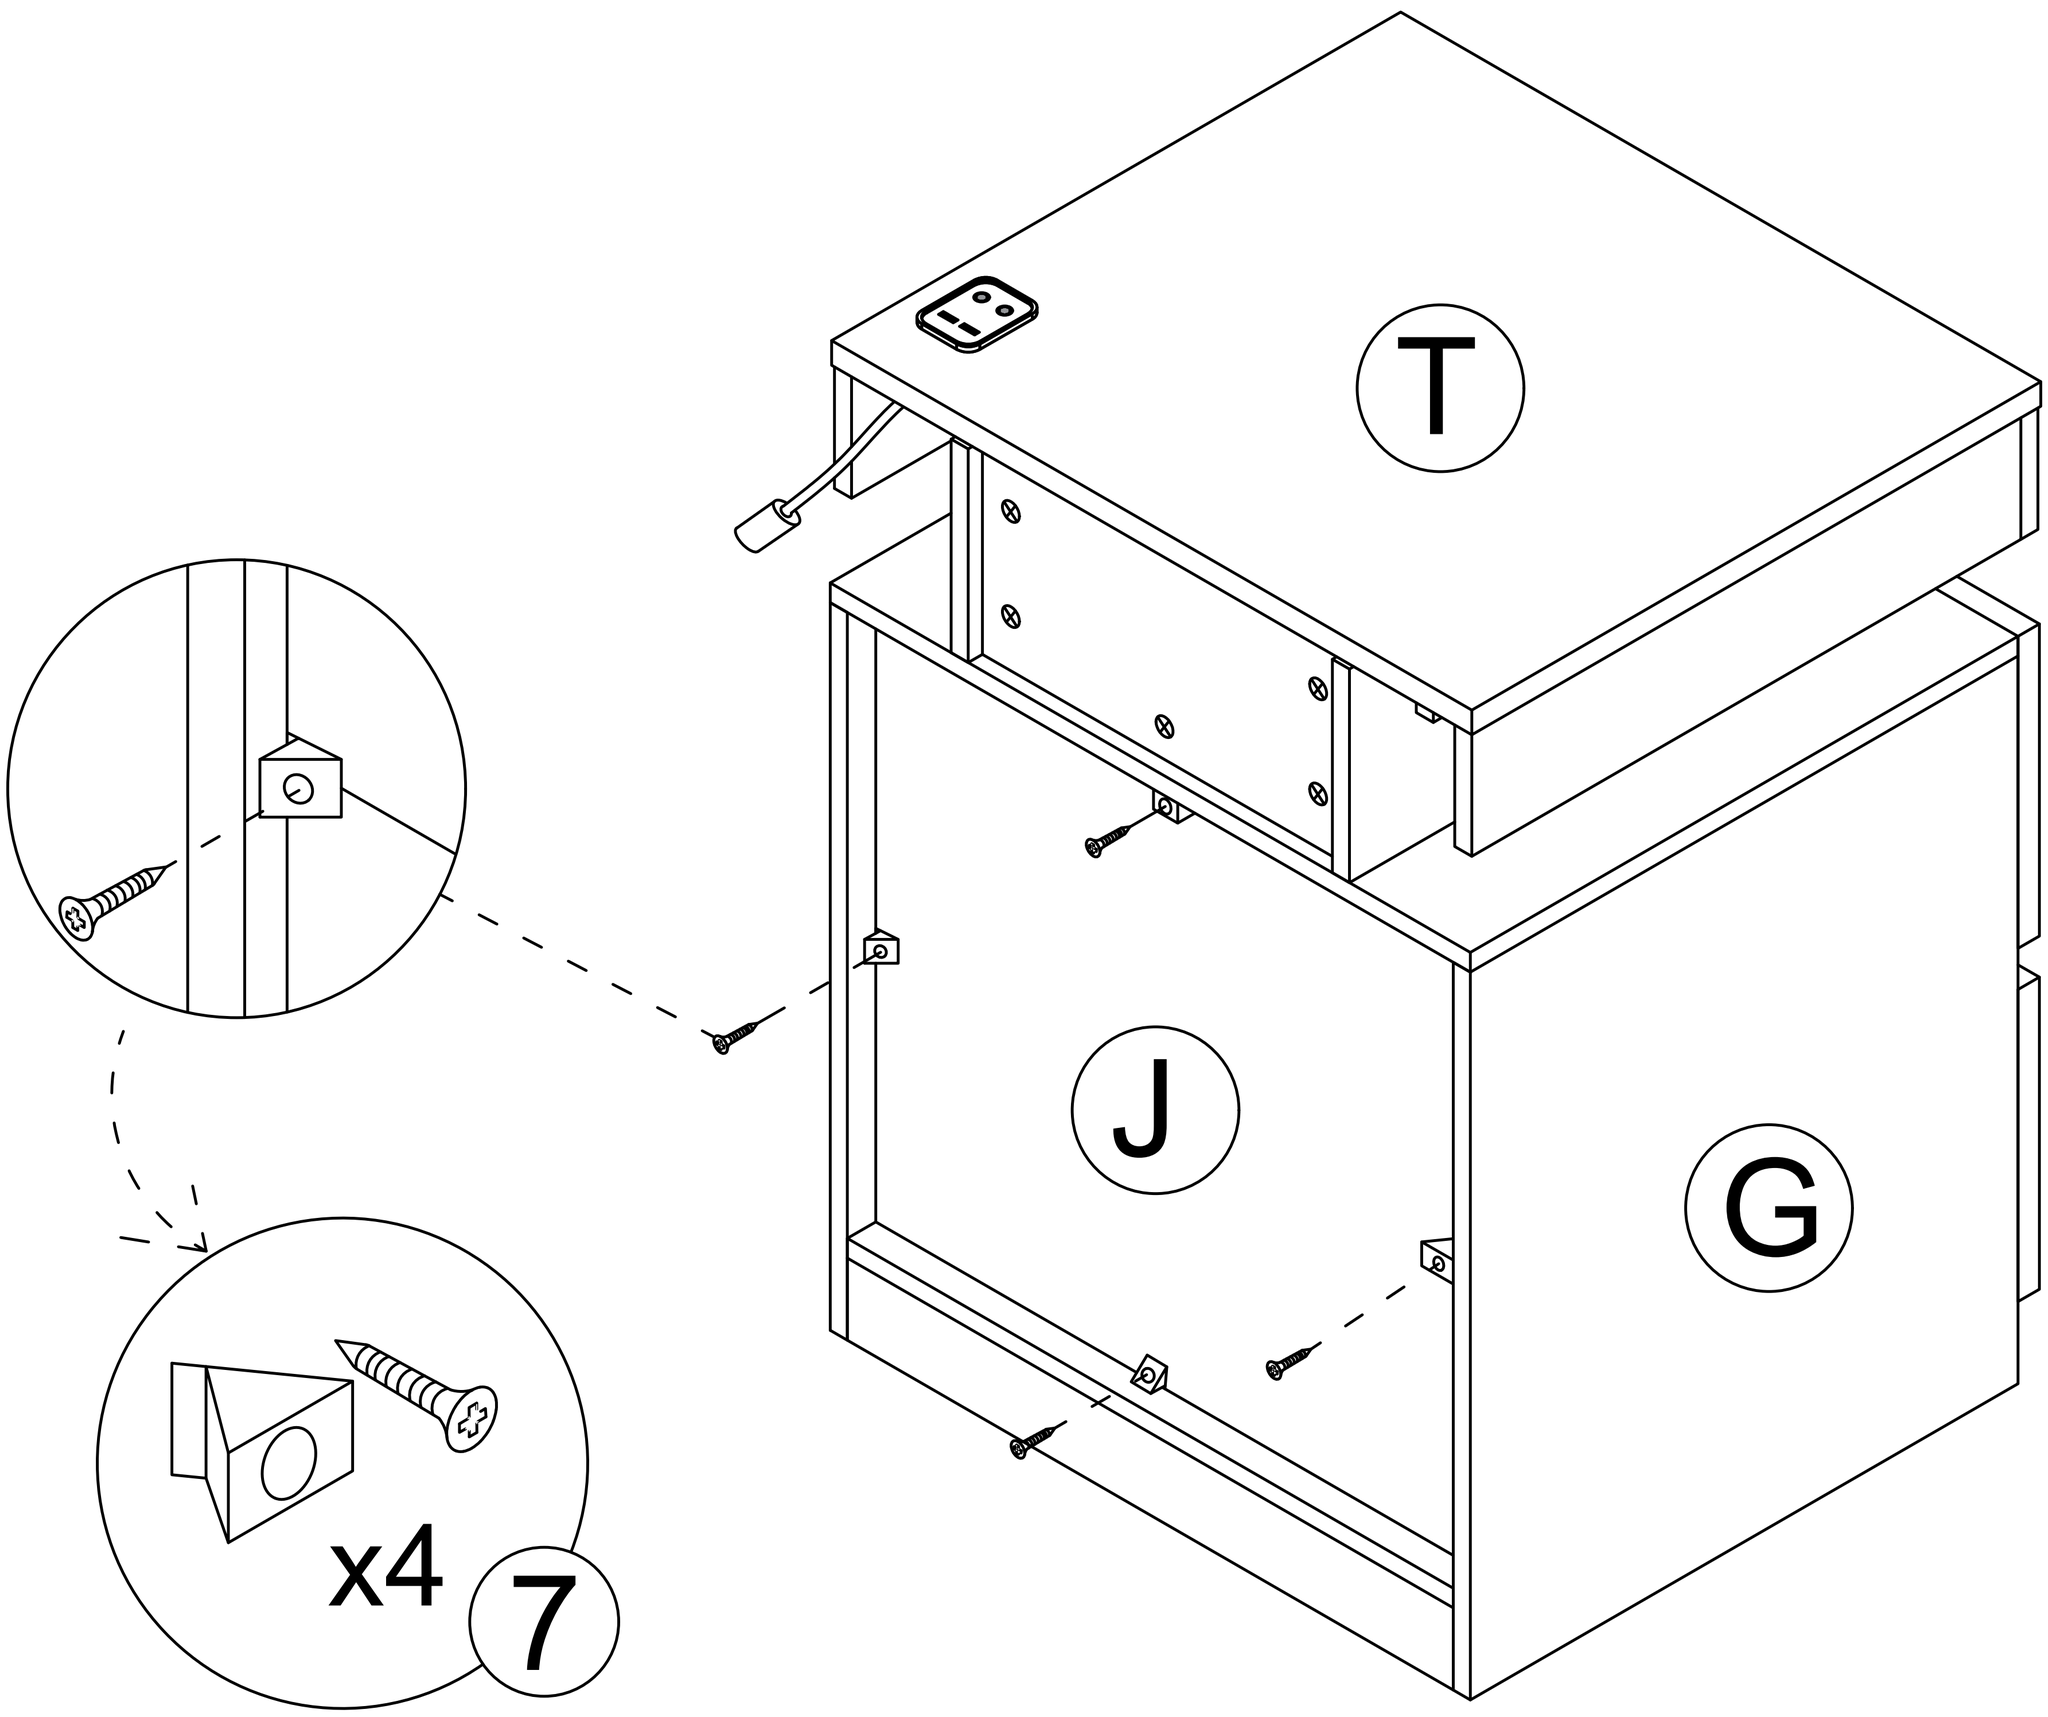

Step 48



x1

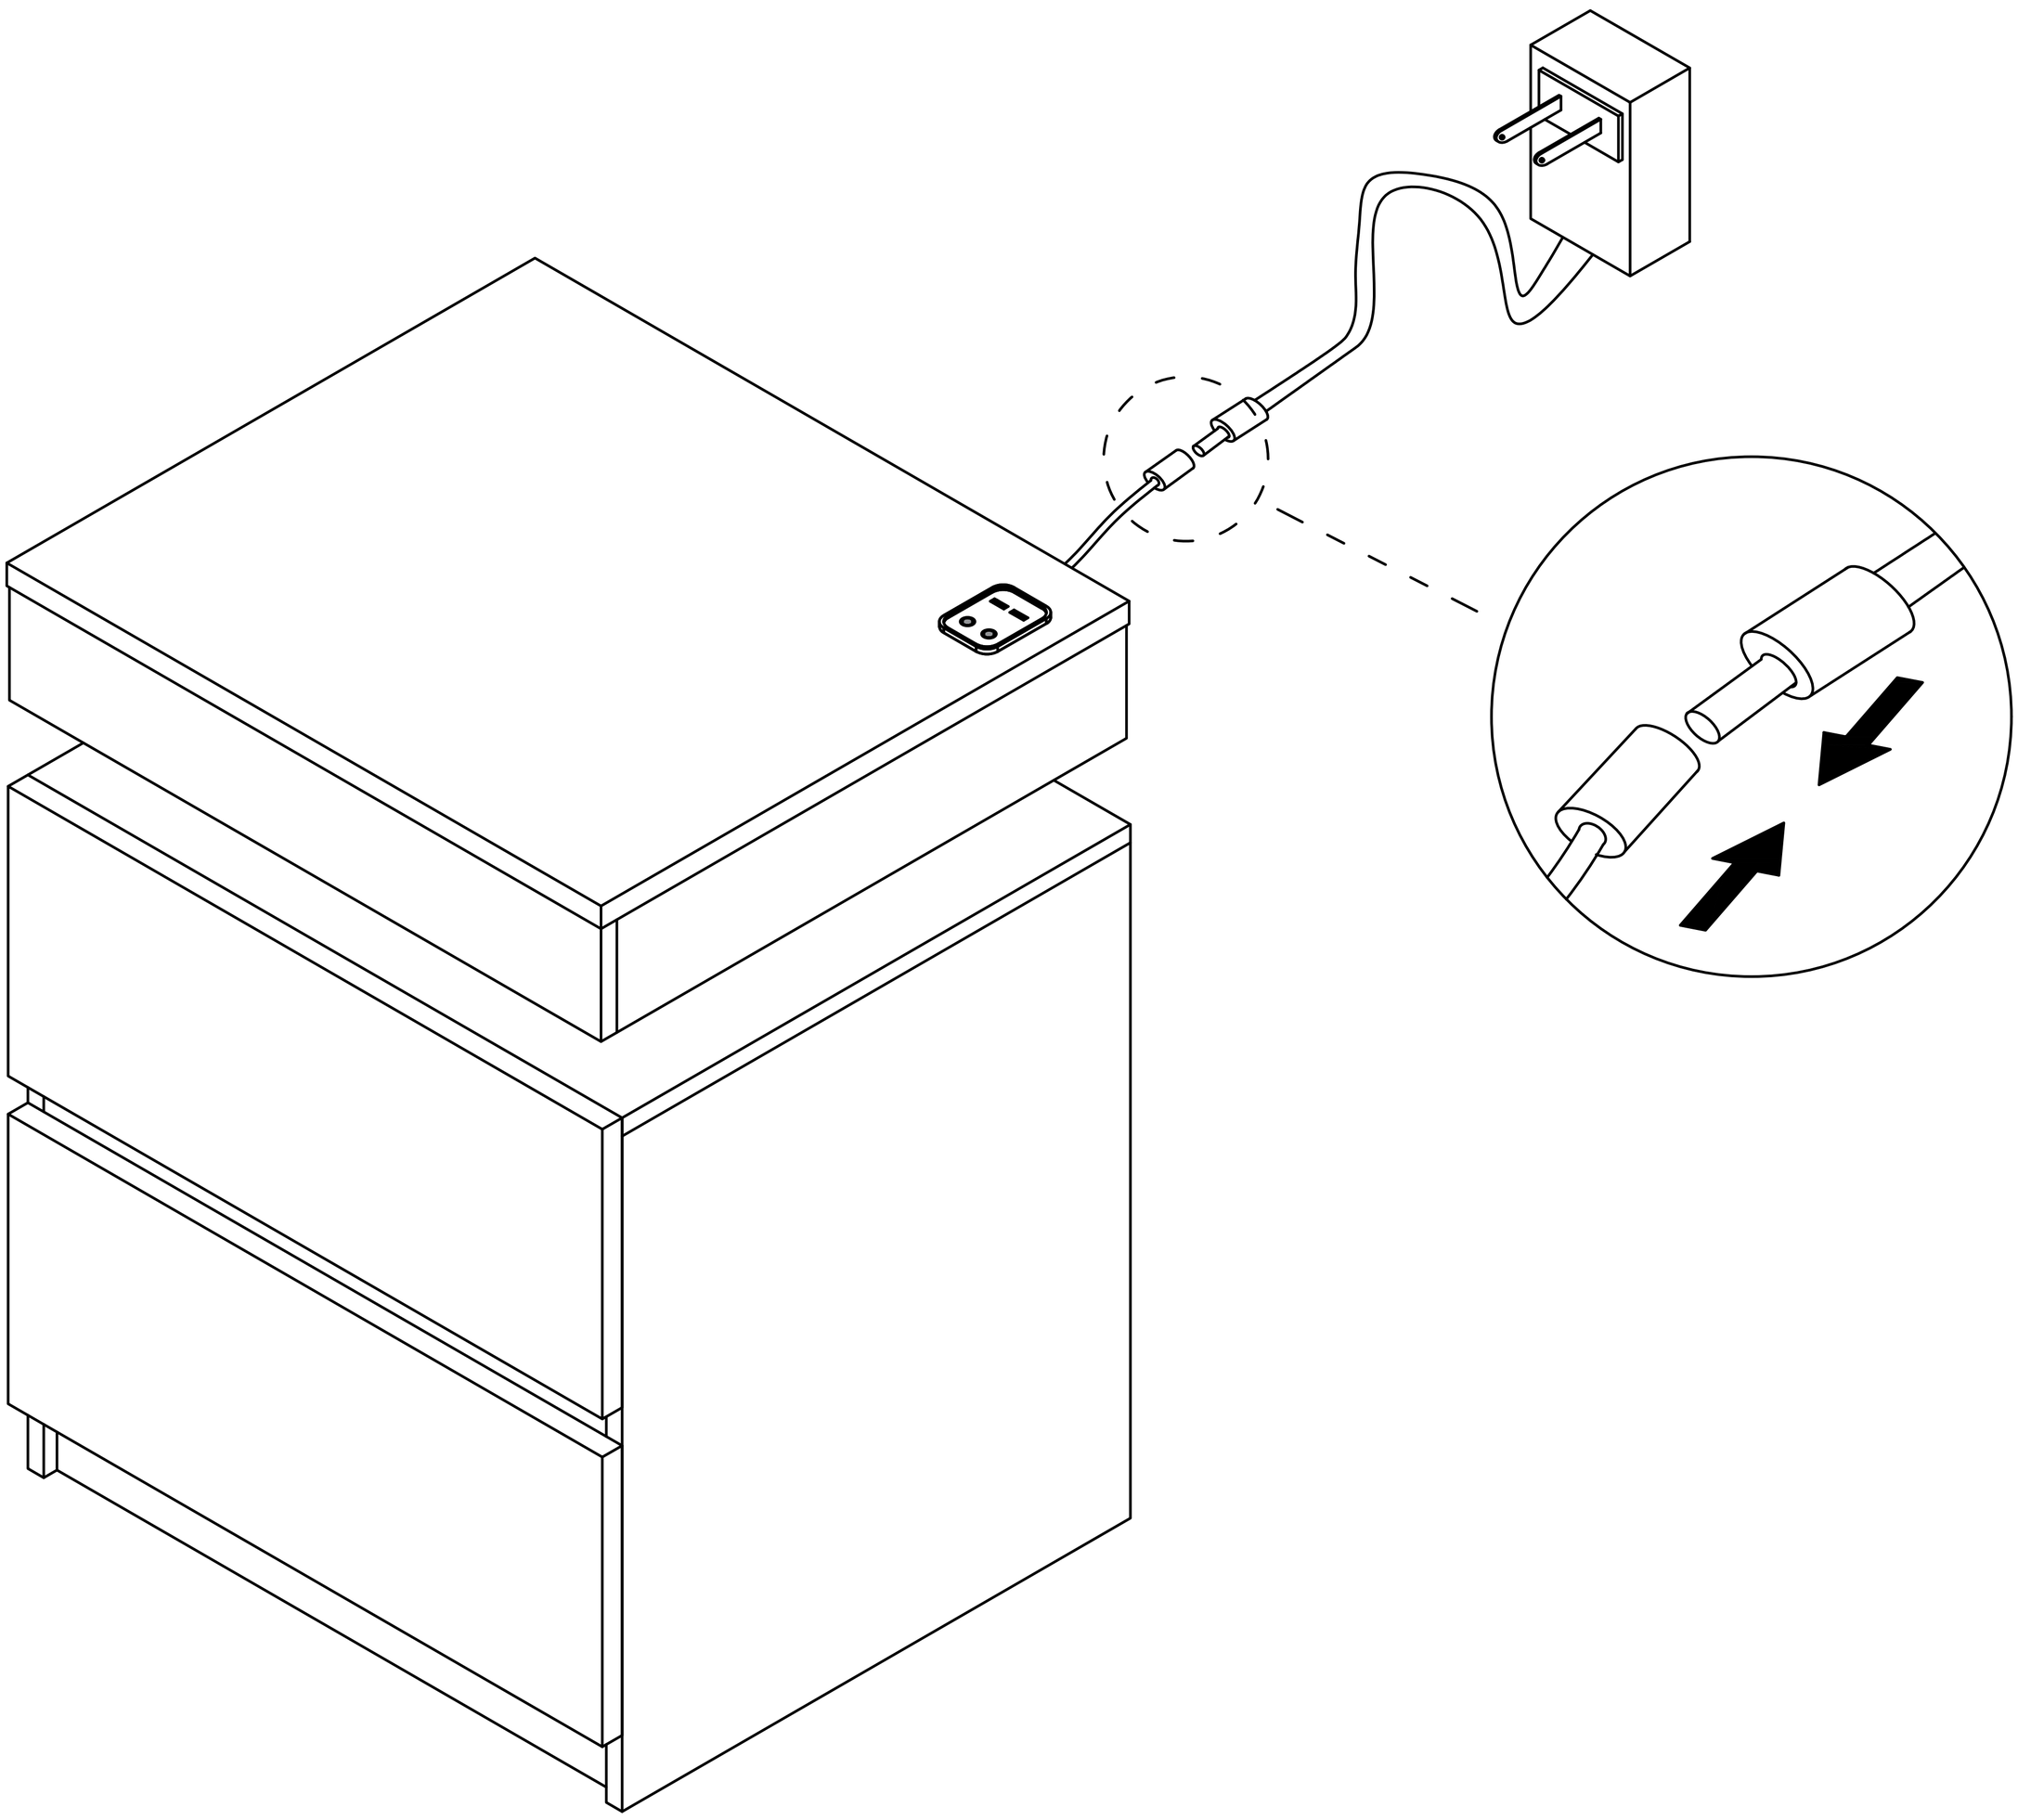


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. It has 1 USB port and 1 type-C port and can distribute the current output up to 5V DC-2A. With 2 touch buttons, it can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

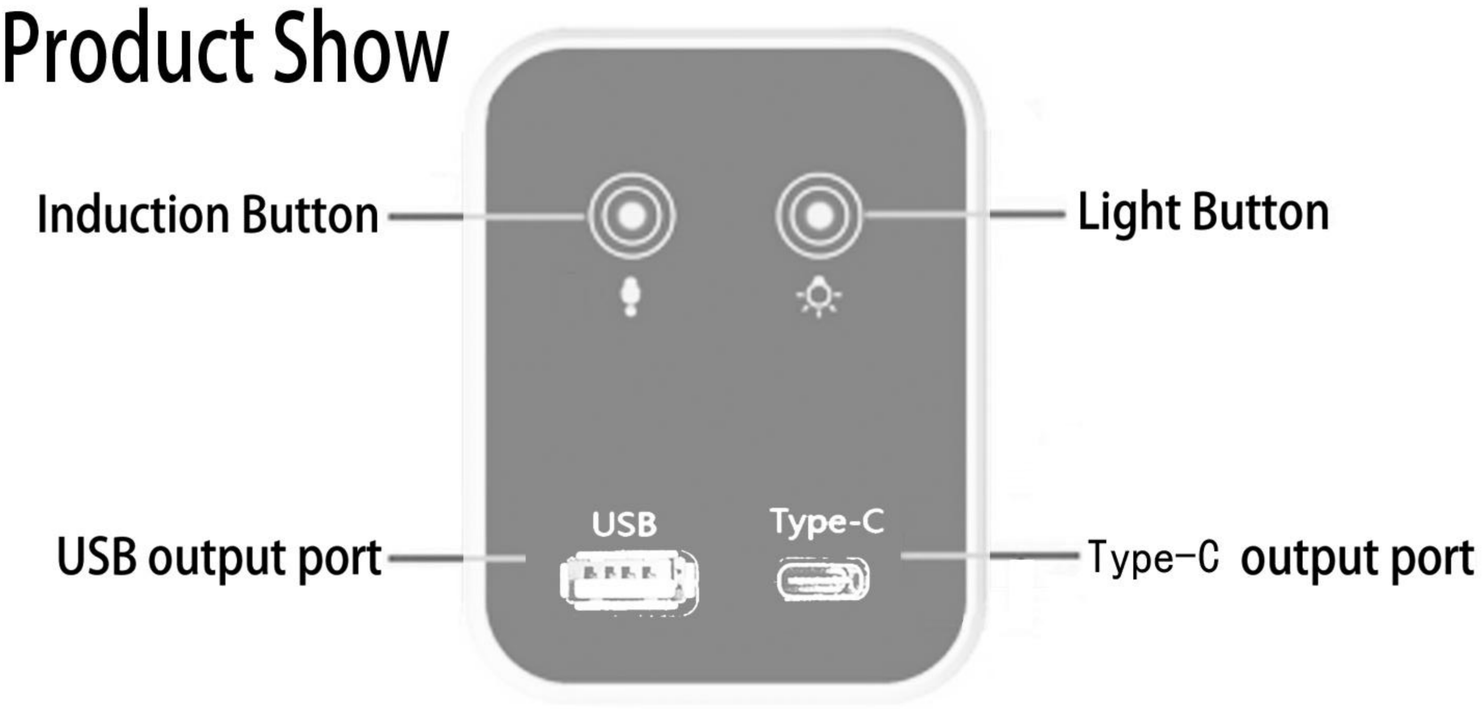

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. **B**. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A . Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B . Long touch to turn off the induction function.

C . Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.