

LED-SR4P

VELOCE LED RECESS DOWN LIGHT SERIES

LED New Construction and Remodel • Wet Location • Dimmable •



Specifications:

Description:

The slim downlight delivers a solution for fast flush mount application for both residential and commercial markets at wanted locations. In addition, it is wet located and is a cost effective solution for fire rated application. It provides a 120V alternating current source and eliminates the need for a traditional LED driver. This modular approach results in an encapsulated luminaire that unites performance, cost and safety benefits to make ceiling even flat and also can be replaced after market recess can.

Features:

Diffused polycarbonate lens controls direct glare from the LEDs
Aluminum construction
Super thin
No junction box needed
IC-Rated (Suitable for direct contact with insulation)

Performance:

Input Power	10W
Input Voltage	120V
Input Frequency	60Hz
Lumens	580
CCT	3000K
CRI	90+
LPW	58
Life Hour	35,000 hrs
Warranty	3 years Limited
Listing	cETLus Classified for Wet Locations ENERGY STAR qualified

Catalog Number:

Base	Finish	Color Temp.	CRI	Voltage
LED -SR4P/WT	White	3000K	90+	120V
LED -SR4P/BZ	Bronze	3000K	90+	120V
LED -SR4P/BN	Brushed Nickel	3000K	90+	120V

Dimming Notes:

Low Voltage (ELV-Reverse Phase) controls. LED rated dimmer controls may offer favorable dimming perform.

Amax Lighting, Inc.


10268 Santa Fe Springs Road,
Santa Fe Springs, CA 90670
www.amaxlighting.com

Toll Free: (888) 945-5221
Tel: (562) 945-5221
Fax: (562) 464-1664

Image:



Included Mounting Option:

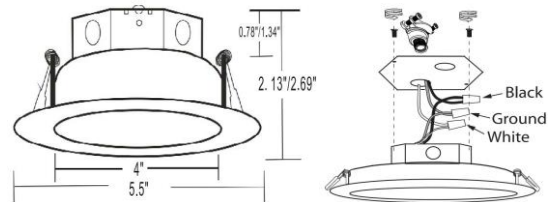

ELECTRICAL DATA:

Input Voltage	120V
Input Frequency	60Hz
Power Factor	≥0.90
Temperature	-25°C to 40°C
Dimming	Yes
Dimming Model	Leviton# 6672, Leviton# 6633