

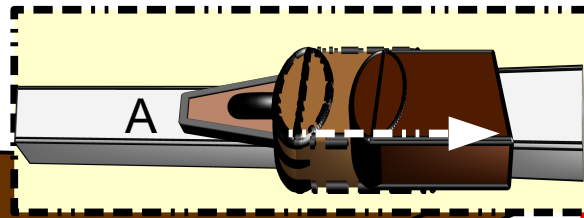
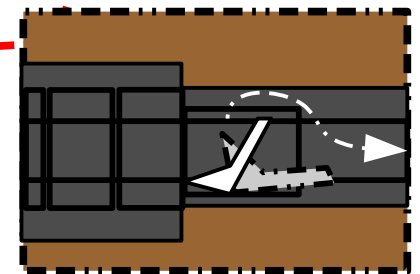


REMOVING DRAWERS

STEP 1: DETERMINE WHICH OF THE TWO BASIC TYPES OF SLIDE, GLIDE/STOP SYSTEMS ARE USED TO MOUNT DRAWER INSIDE OF CASE HOLE. BOTTOM MOUNT OR SIDE "FULL EXTENSION GLIDES".

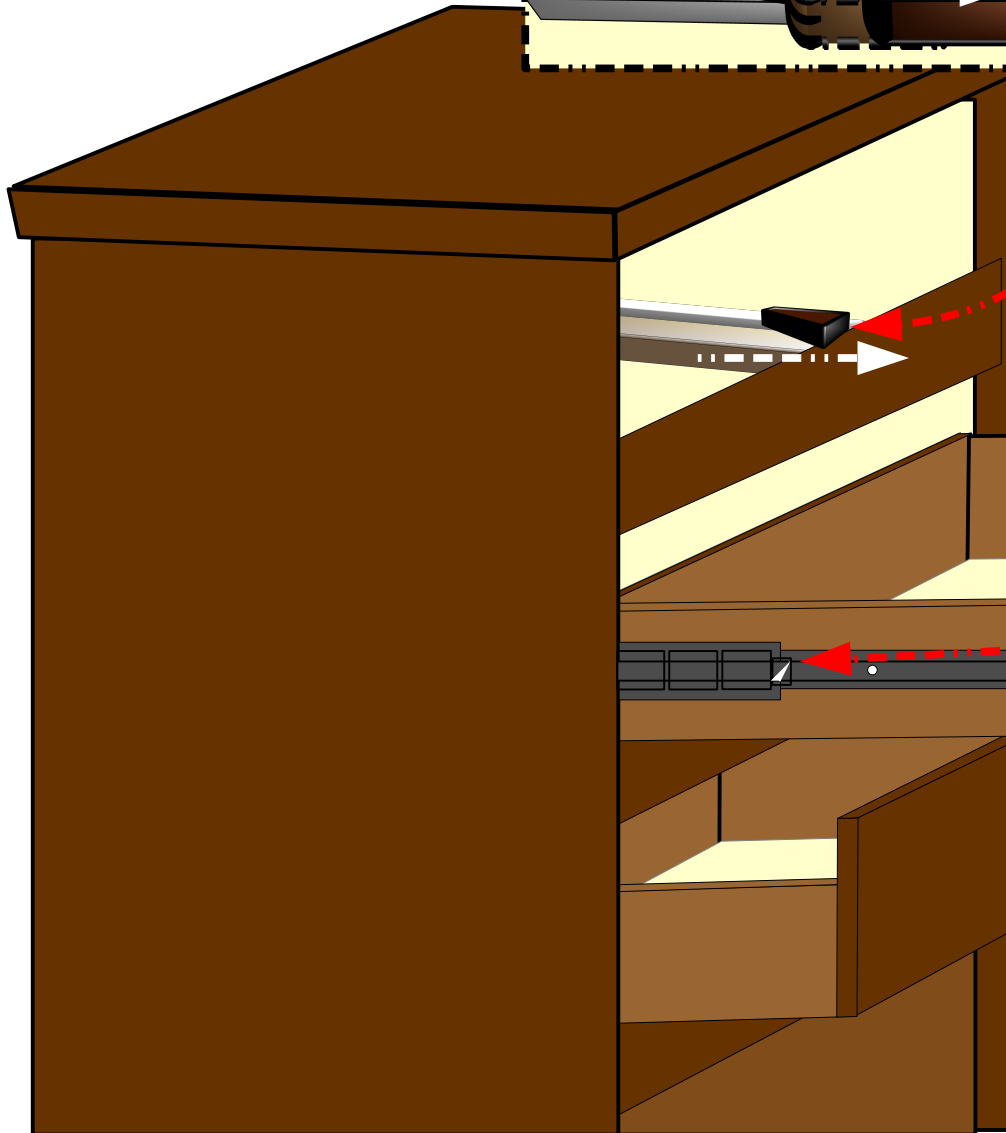

BOTTOM MOUNT: TO REMOVE A DRAWER UTILIZING THE BOTTOM MOUNT GLIDE SYSTEM, PULL THE DRAWER OUT UNTIL RESISTANCE CAUSES THE DRAWER TO STOP. THIS IS WHERE THE GLIDE WHEEL AND STOPPER SQUEEZE THE TRACK HEAD. ONCE DRAWER IS PULLED ALL THE WAY FORWARD UNTIL IT STOPS, PLACE A HAND AGAINST THE CABINET AND EXERT EVEN MORE FORCE VERY QUICKLY. THE DRAWER WILL THEN PULL FREE.

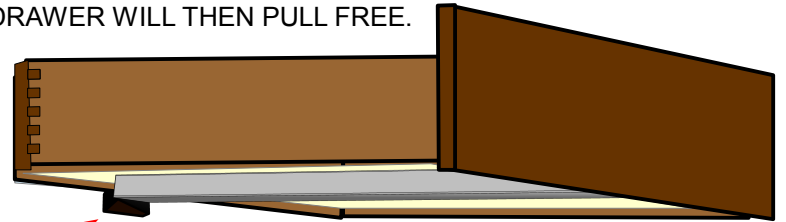

FULL EXTENSION GLIDES: PULL THE DRAWER ALL THE WAY FORWARD UNTIL THE LOCKS ENGAGE. FIND THE LOCKING TABS ON EACH SIDE. ONE WILL SQUEEZE DOWNWARD AND THE OTHER WILL SQUEEZE UPWARD. ACTIVATE THE TAB LEVERS BY PINCHING THEN PULL THE DRAWER THE FREE OF THE CABINET. YOU MUST CONTINUE TO PINCH THE TABS UNTIL THE DRAWER IS FREE OF THE CABINET.