


Installation Instruction

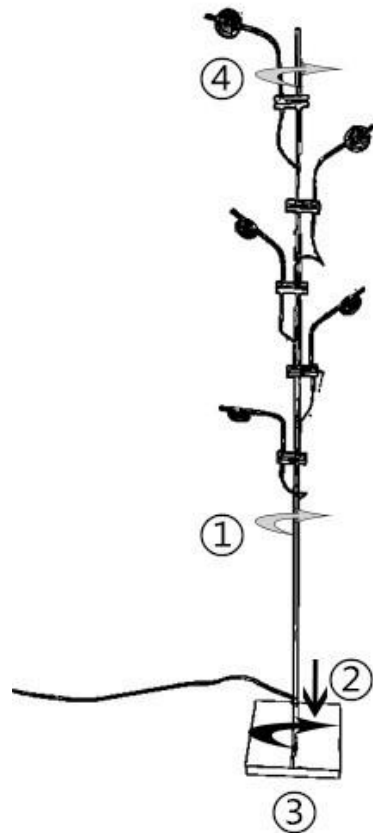

1. Rotate and tighten the upper half of the light bar with the longest section of iron pipe. Pass the thread through the longest iron pipe.

2. First pass the wire of the lamp body through the chassis, and then rotate the lamp body first, and fix the lamp body to the screws of the chassis (if you connect the connector to the rotating lamp body first, the wires may be entangled). After fixing the lamp body, connect the wires passing through the lamp body to the wires on the chassis.

3. Arrange the lines of the chassis and paste the sponge cushion.

4. Rotate the shortest section of iron pipe to the top section of the lamp body.

PS: To replace the color film, you need to rotate the lamp head, put on the color film, and then re-rotate and tighten.