



DTV Prompt® | K-557-K

Three-port digital thermostatic valve

Features

- Digitally controlled thermostatic mixing valve
- Antiscald protection
- Three independently controllable 1/2" (13 mm) outlets with copper tube connections
- Up to 13 gpm (49.2 lpm) flow rate at 45 psi (3.1 bar) with maximum flow of 8 gpm (30.3 lpm) from one outlet
- 1/2" (13 mm) inlets with copper tube connections
- High-temperature limit setting for additional protection



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 00:18 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1
ASSE 1016/ASME A112.1016/CSA B125.16
UL Listed

Material

- Reinforced engineering-grade thermoplastic body
-

Required Electrical Service

One circuit required.

Thermostatic Valve: 120 V, 15 A, 60 Hz

Electrical Component Ratings


Thermostatic Valve: 120 V, 0.31 A, 60 Hz

Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty



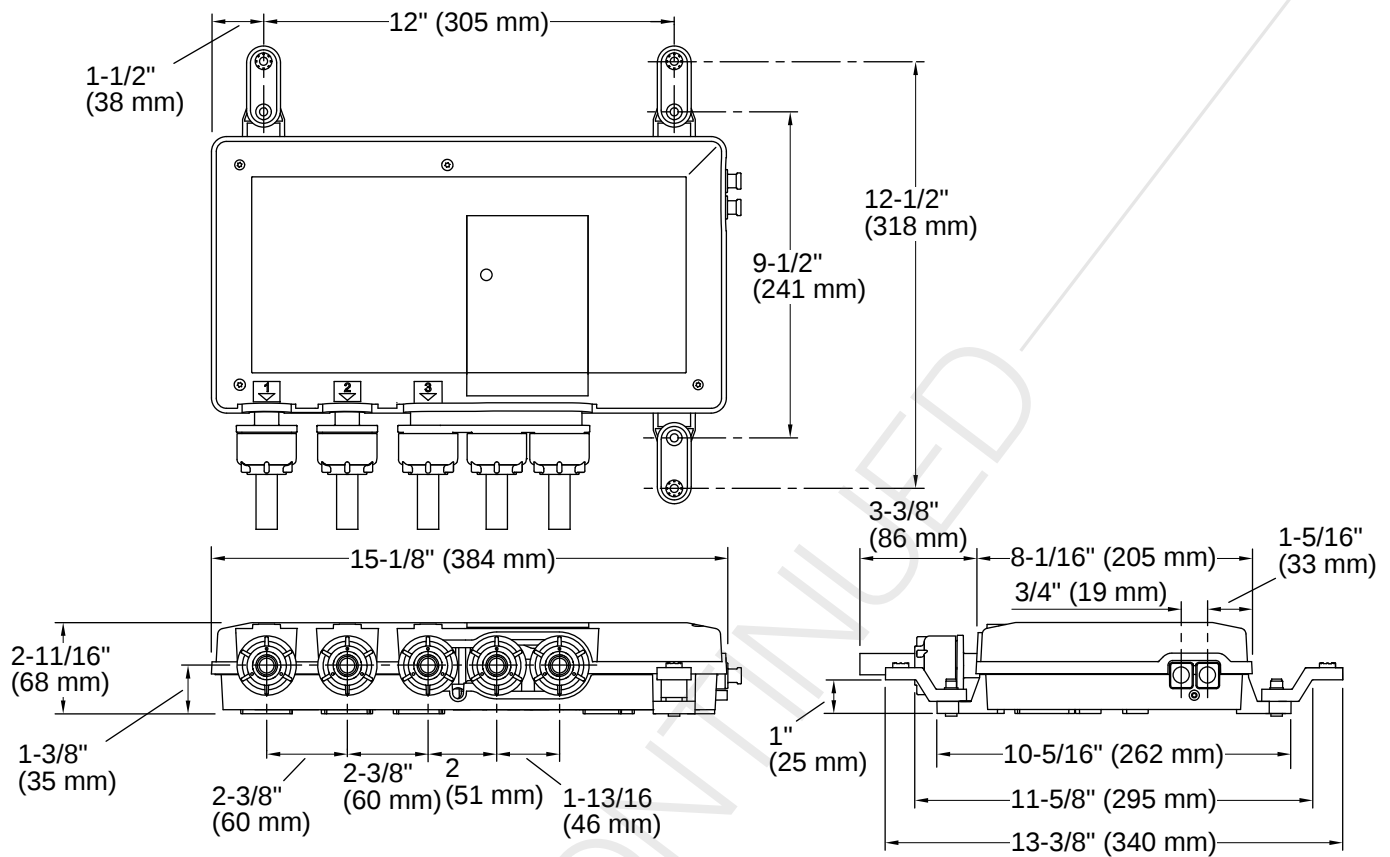

Installation

- Mounts within standard 2" x 4" (38 x 102 mm) walls
- Prewired with three-prong plug for connection to 110 V AC receptacle

Installation Notes

Install this product according to the installation instructions.

If used for bath-shower system, the bath spout must be connected to the #1 outlet port and restricted to 10 gal/min (37.9 l/min) maximum.

Provide access for servicing valve.

Use 1/2" supply lines.

Do not install this valve in walls exposed to subfreezing temperatures.

Avoid mounting the valve in a wall adjacent to a frequently occupied room, such as a bedroom or living room.

Pressure regulators are strongly recommended in applications where large pressure swings are anticipated or pressure differences between the supplies exist, such as commercial installations with separate hot and cold supply systems.

Water hammer arrestors and shut-offs are required in both the hot and cold supplies.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
 For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
 7-30-2026 00:18 - US-CA