


20 Minutes Installation



- 1 Cross all hose through the sink hole

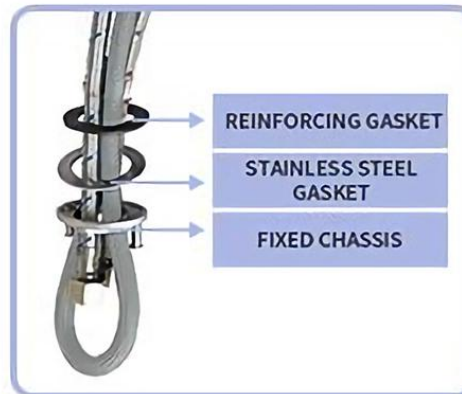

- 2 Put rubber gaskets, steel gaskets and chassis in sequence through the hole



- 3 Tighten all screws to fix the faucet wobble



- 4 Snap the nylon pull down hose into the quick-connector



- 5 Install the gravity ball near the end of the pull out hose



- 6 Tighten hot & cold water supply hose upon the angle valve and tighten two hoses counterclock-wise for checking leaks