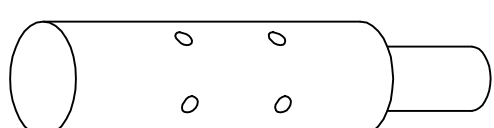
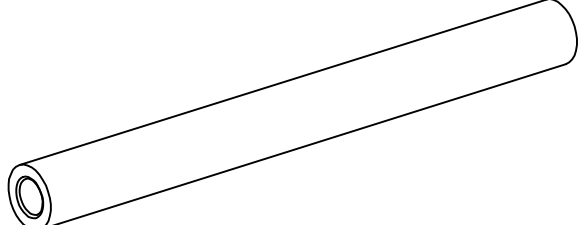
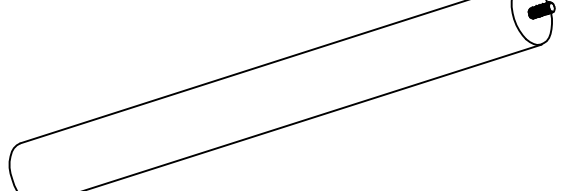
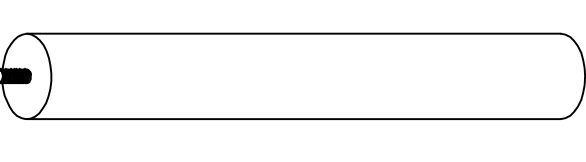


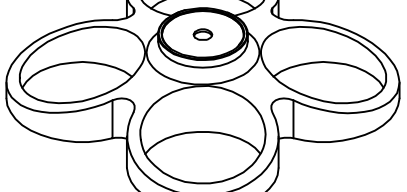




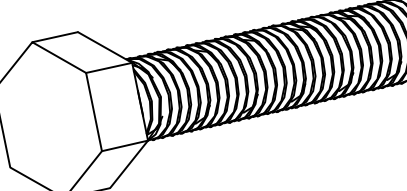
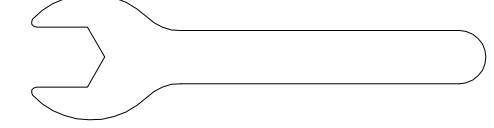




# CARE AND MAINTENANCE

Never use abrasive or acid-based cleaners on the rack.  
Clean racks and rods with a solution of mild detergent and water. Use a soft cloth or sponge to wipe parts. Rinse and dry thoroughly. Keep surfaces dry and clean for a longer lasting finish.

## NOTICE

- Please read and understand these instructions before attempting to assemble, operate or install the product.
- One or two adults required for a assembly.
  - Do not allow children to climb or play around the racks.
  - Each hook hold up to 22 lbs.when items are evenly distributed.
  - Assemble on a soft surface such as carpeting to avoid scratching the finish.
  - Metal material, be careful when assembling.

Part	Description	Picture	Quantlty
A	Rotating Head		1
B	Upper Pole		1
C	Middle Pole		1
D	Lower Pole		1
E	Basement		1
F	Hooks		5
G	Umbrella Holder		1
H	Water Tray		1
I	Plastic Connector		1
J	Hook Fix Screws		10
K	Gasket		1
L	Basement Fix Screw		1
M	Basement Fix Screw Spanner		1

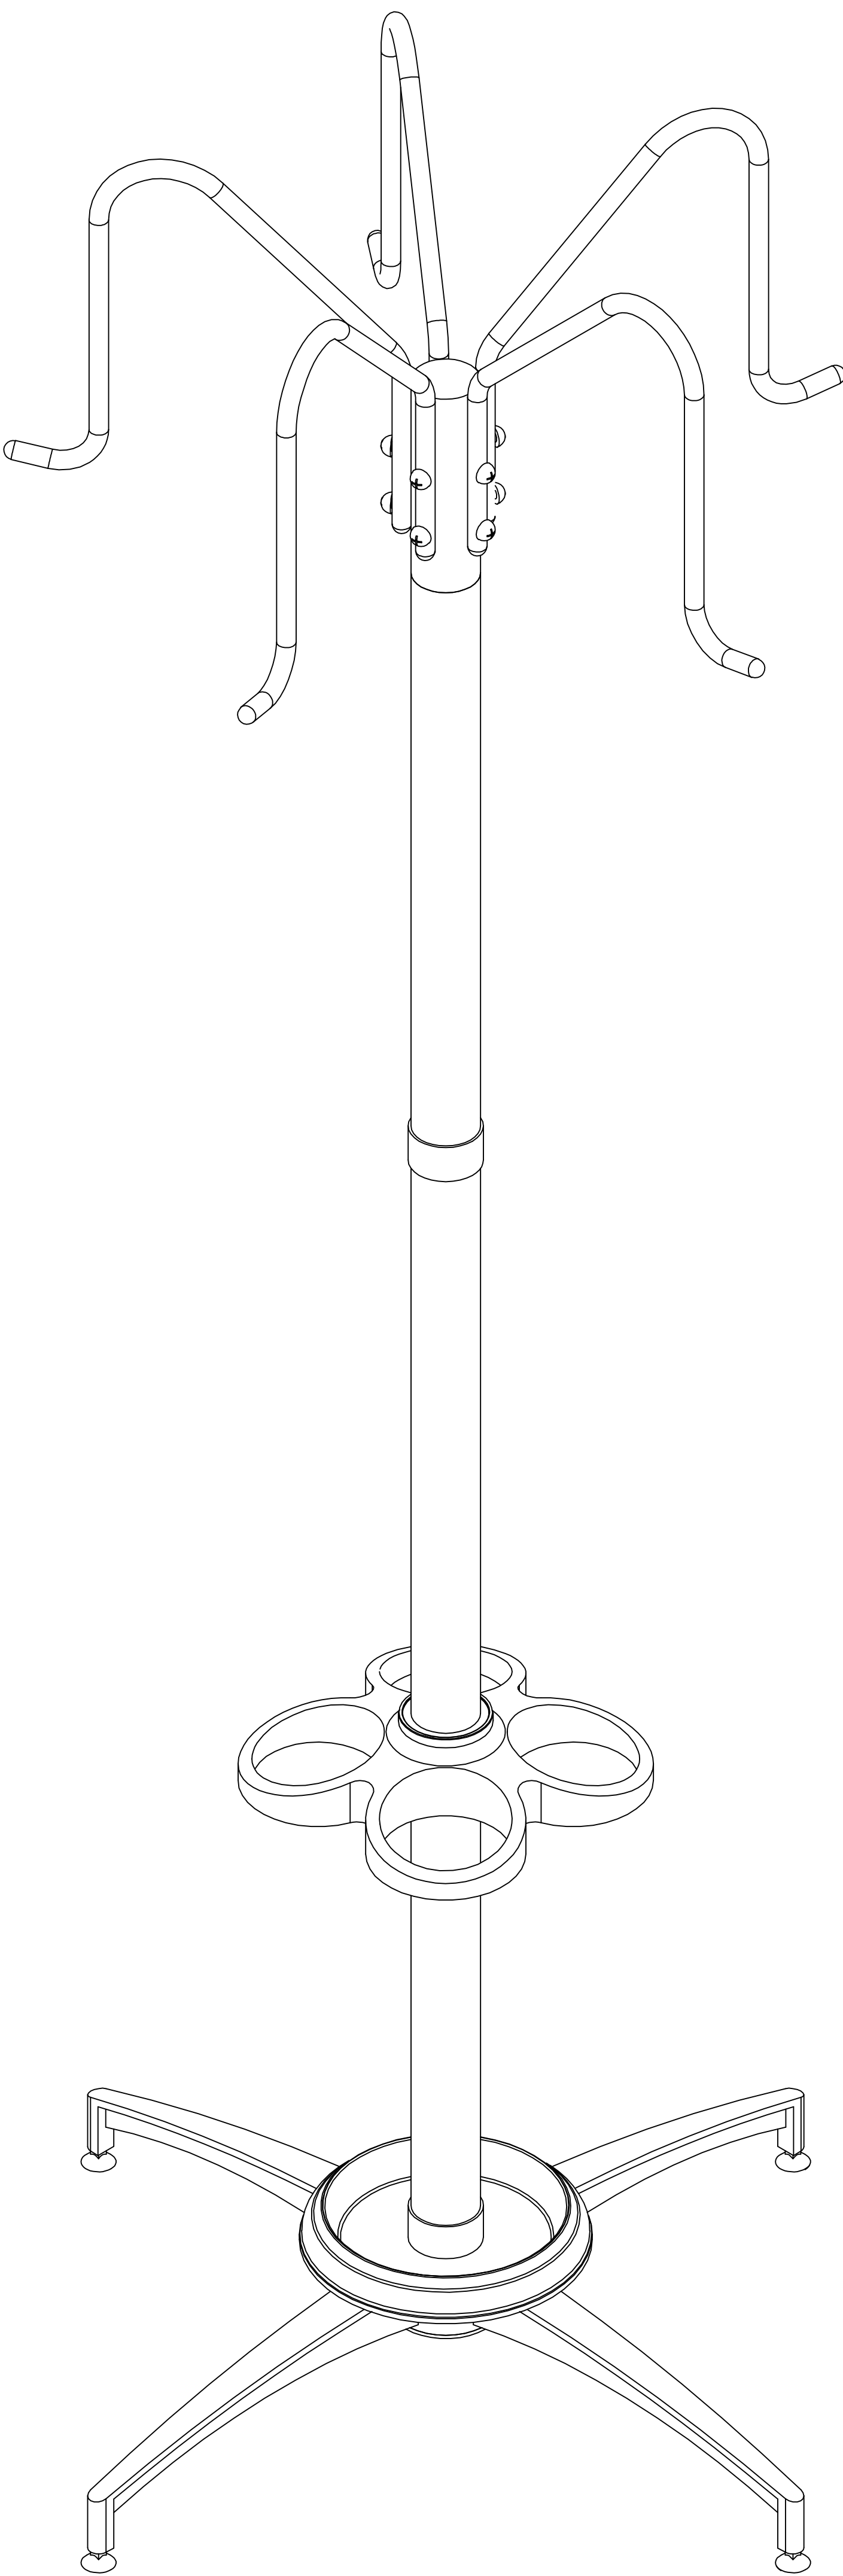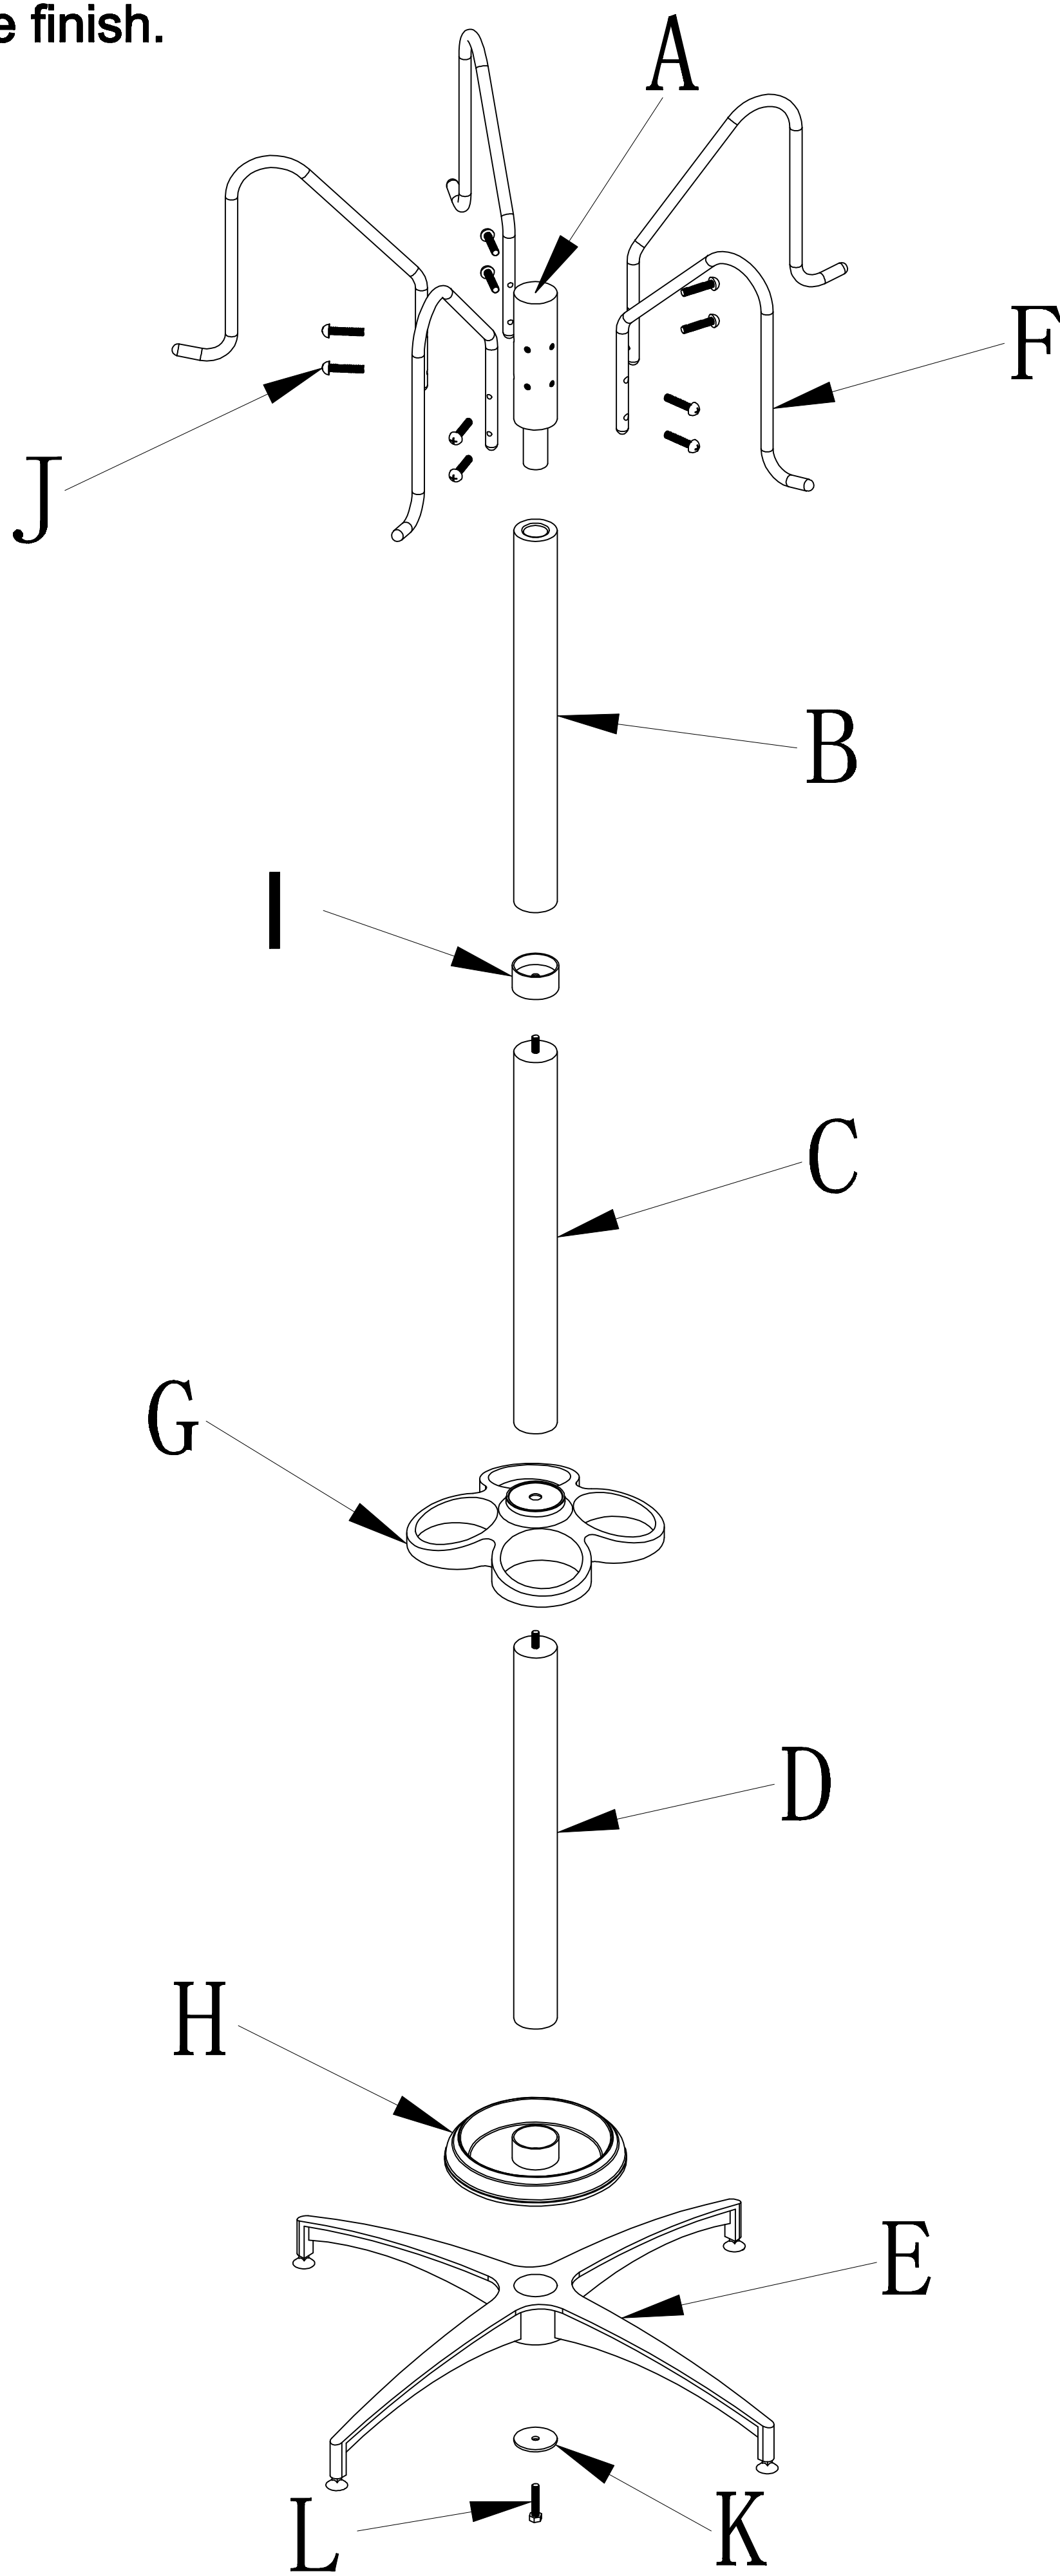


20 in W x 20 in D x 72.83 in H  
(51 cm W x 51cm D x 185 cm H)

## PREPARATION

1. Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hareware contents.If any part is missing or damaged, do not attempt to assemble the product.
2. Estimated Assembly Time: Approximately 8-20 minutes.
3. Helpful Tools: All useful tools are included in hardware, screwdriver is not provide.


# Assembly Instructions

1

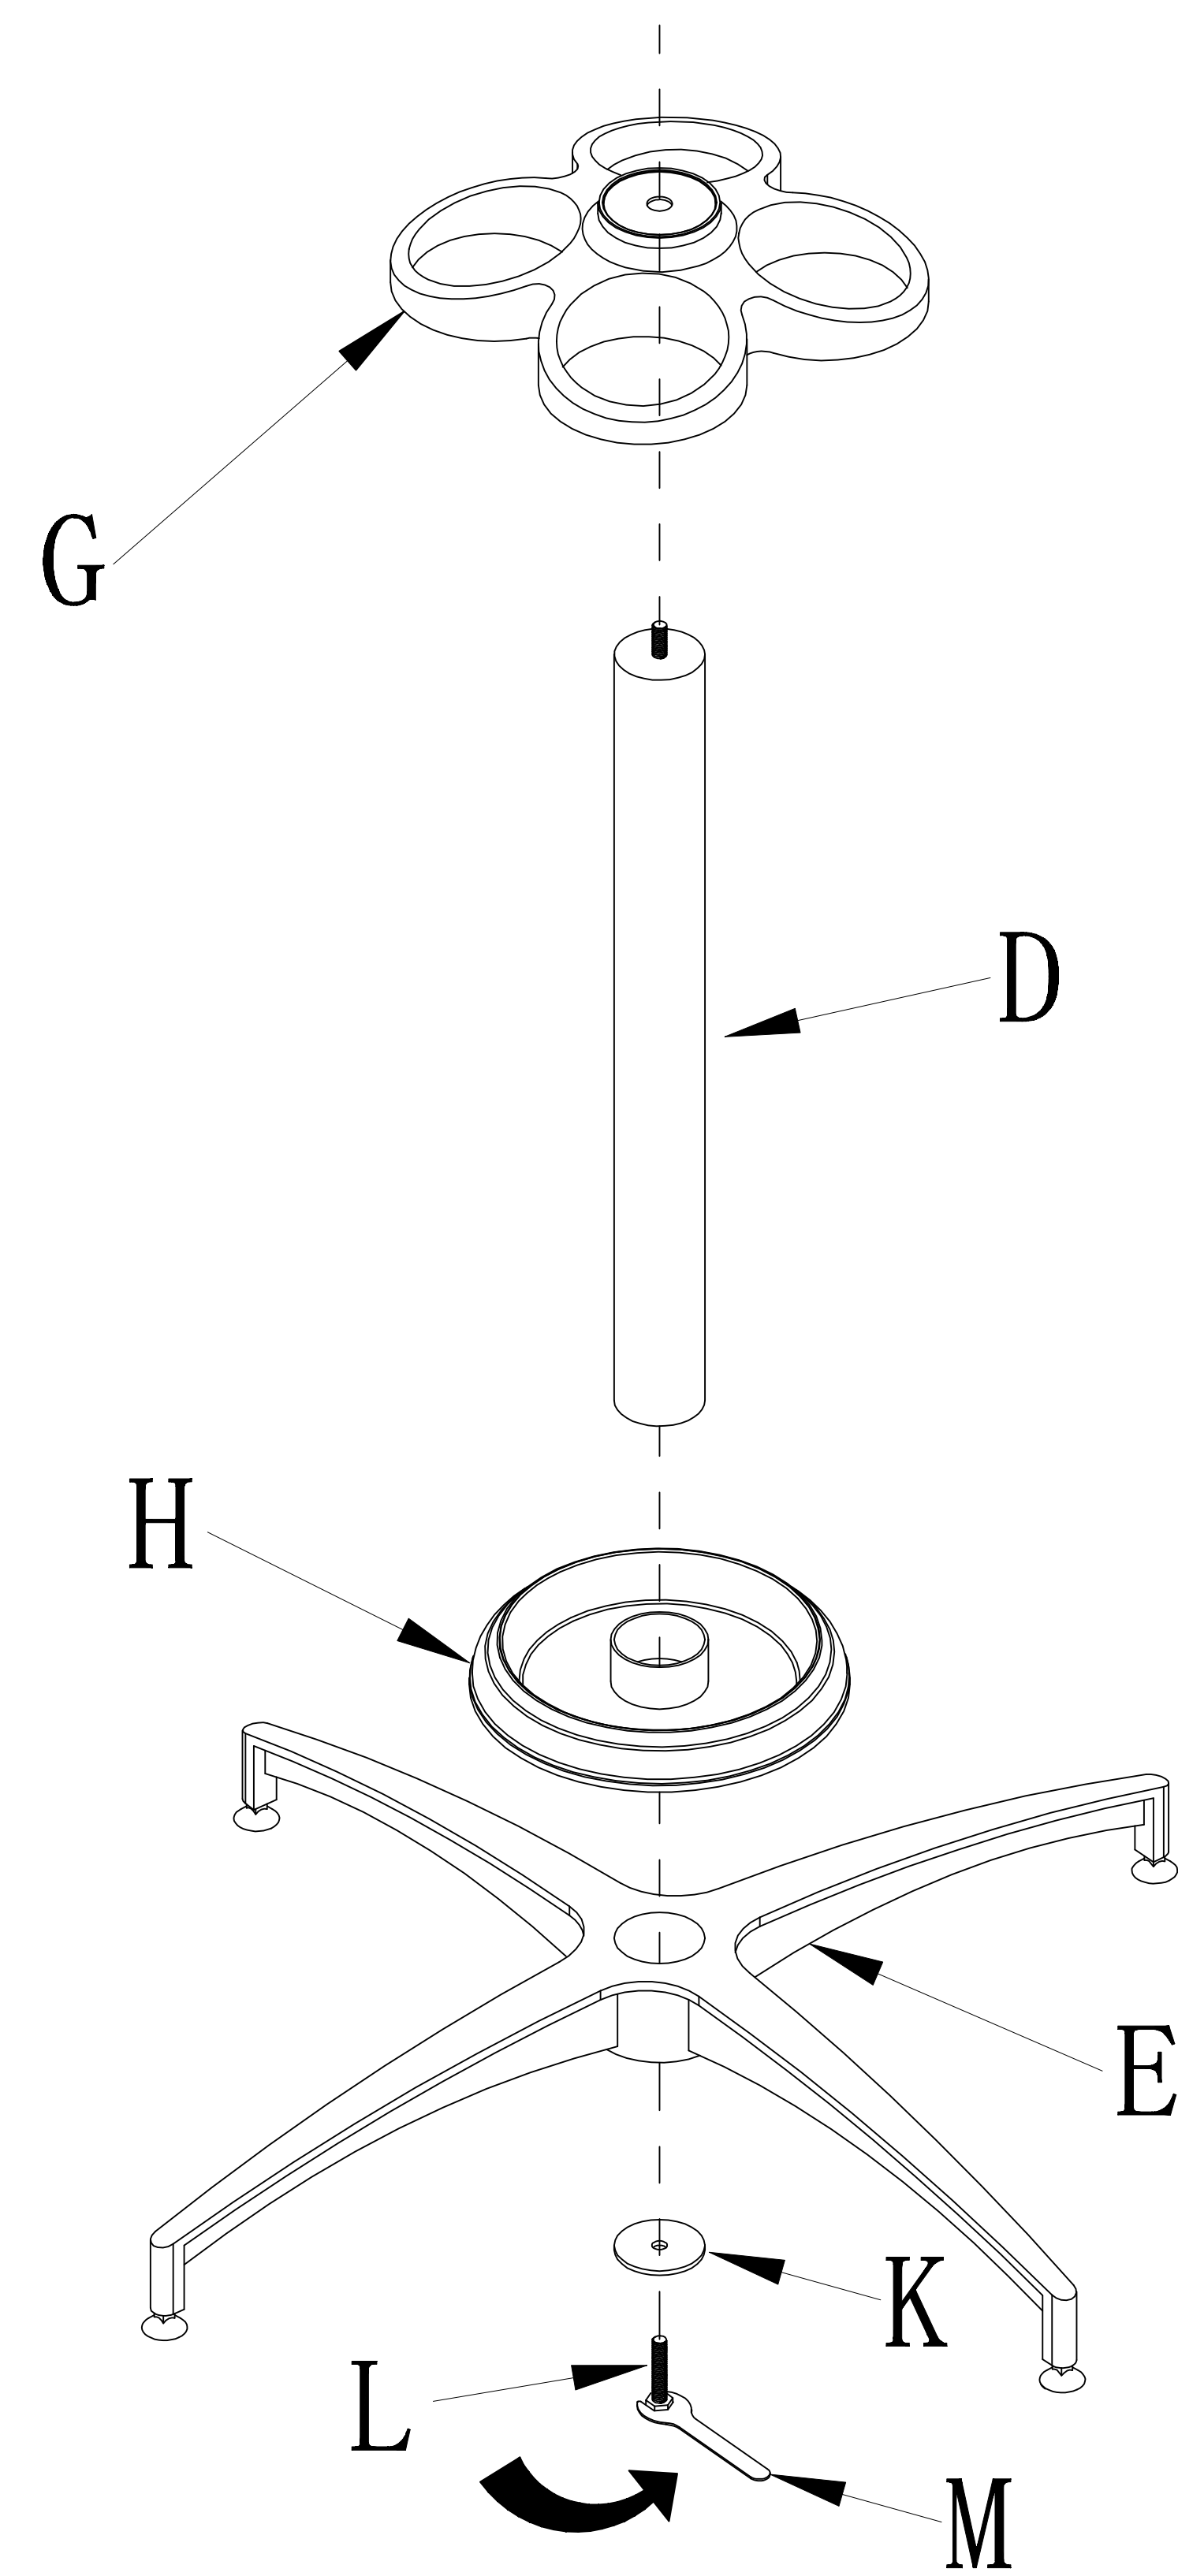


Align the mounting hole, fix basement, water tray and lower pole together by basement fix screw and gasket. Put umbrella holder on lower pole.

2

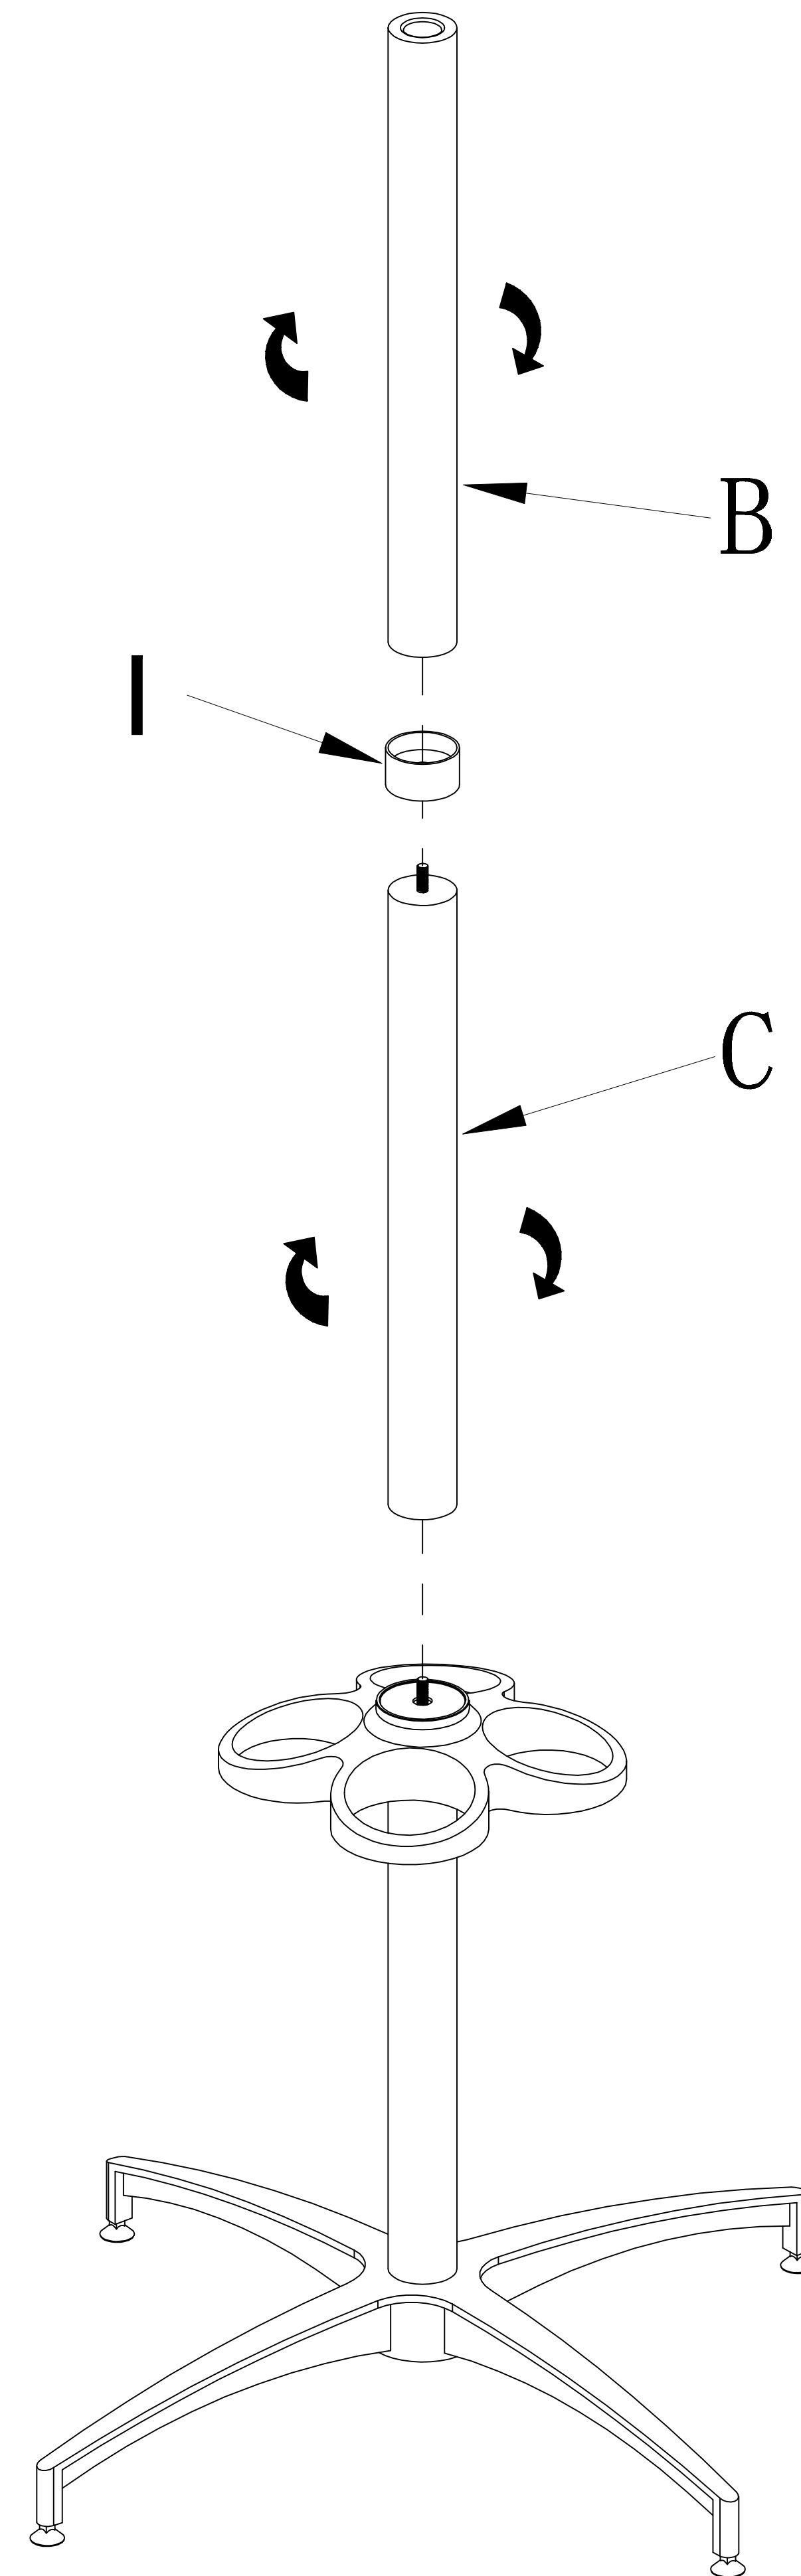


Screw middle pole on, put plastic connector on middle pole and screw the upper pole on it.

3

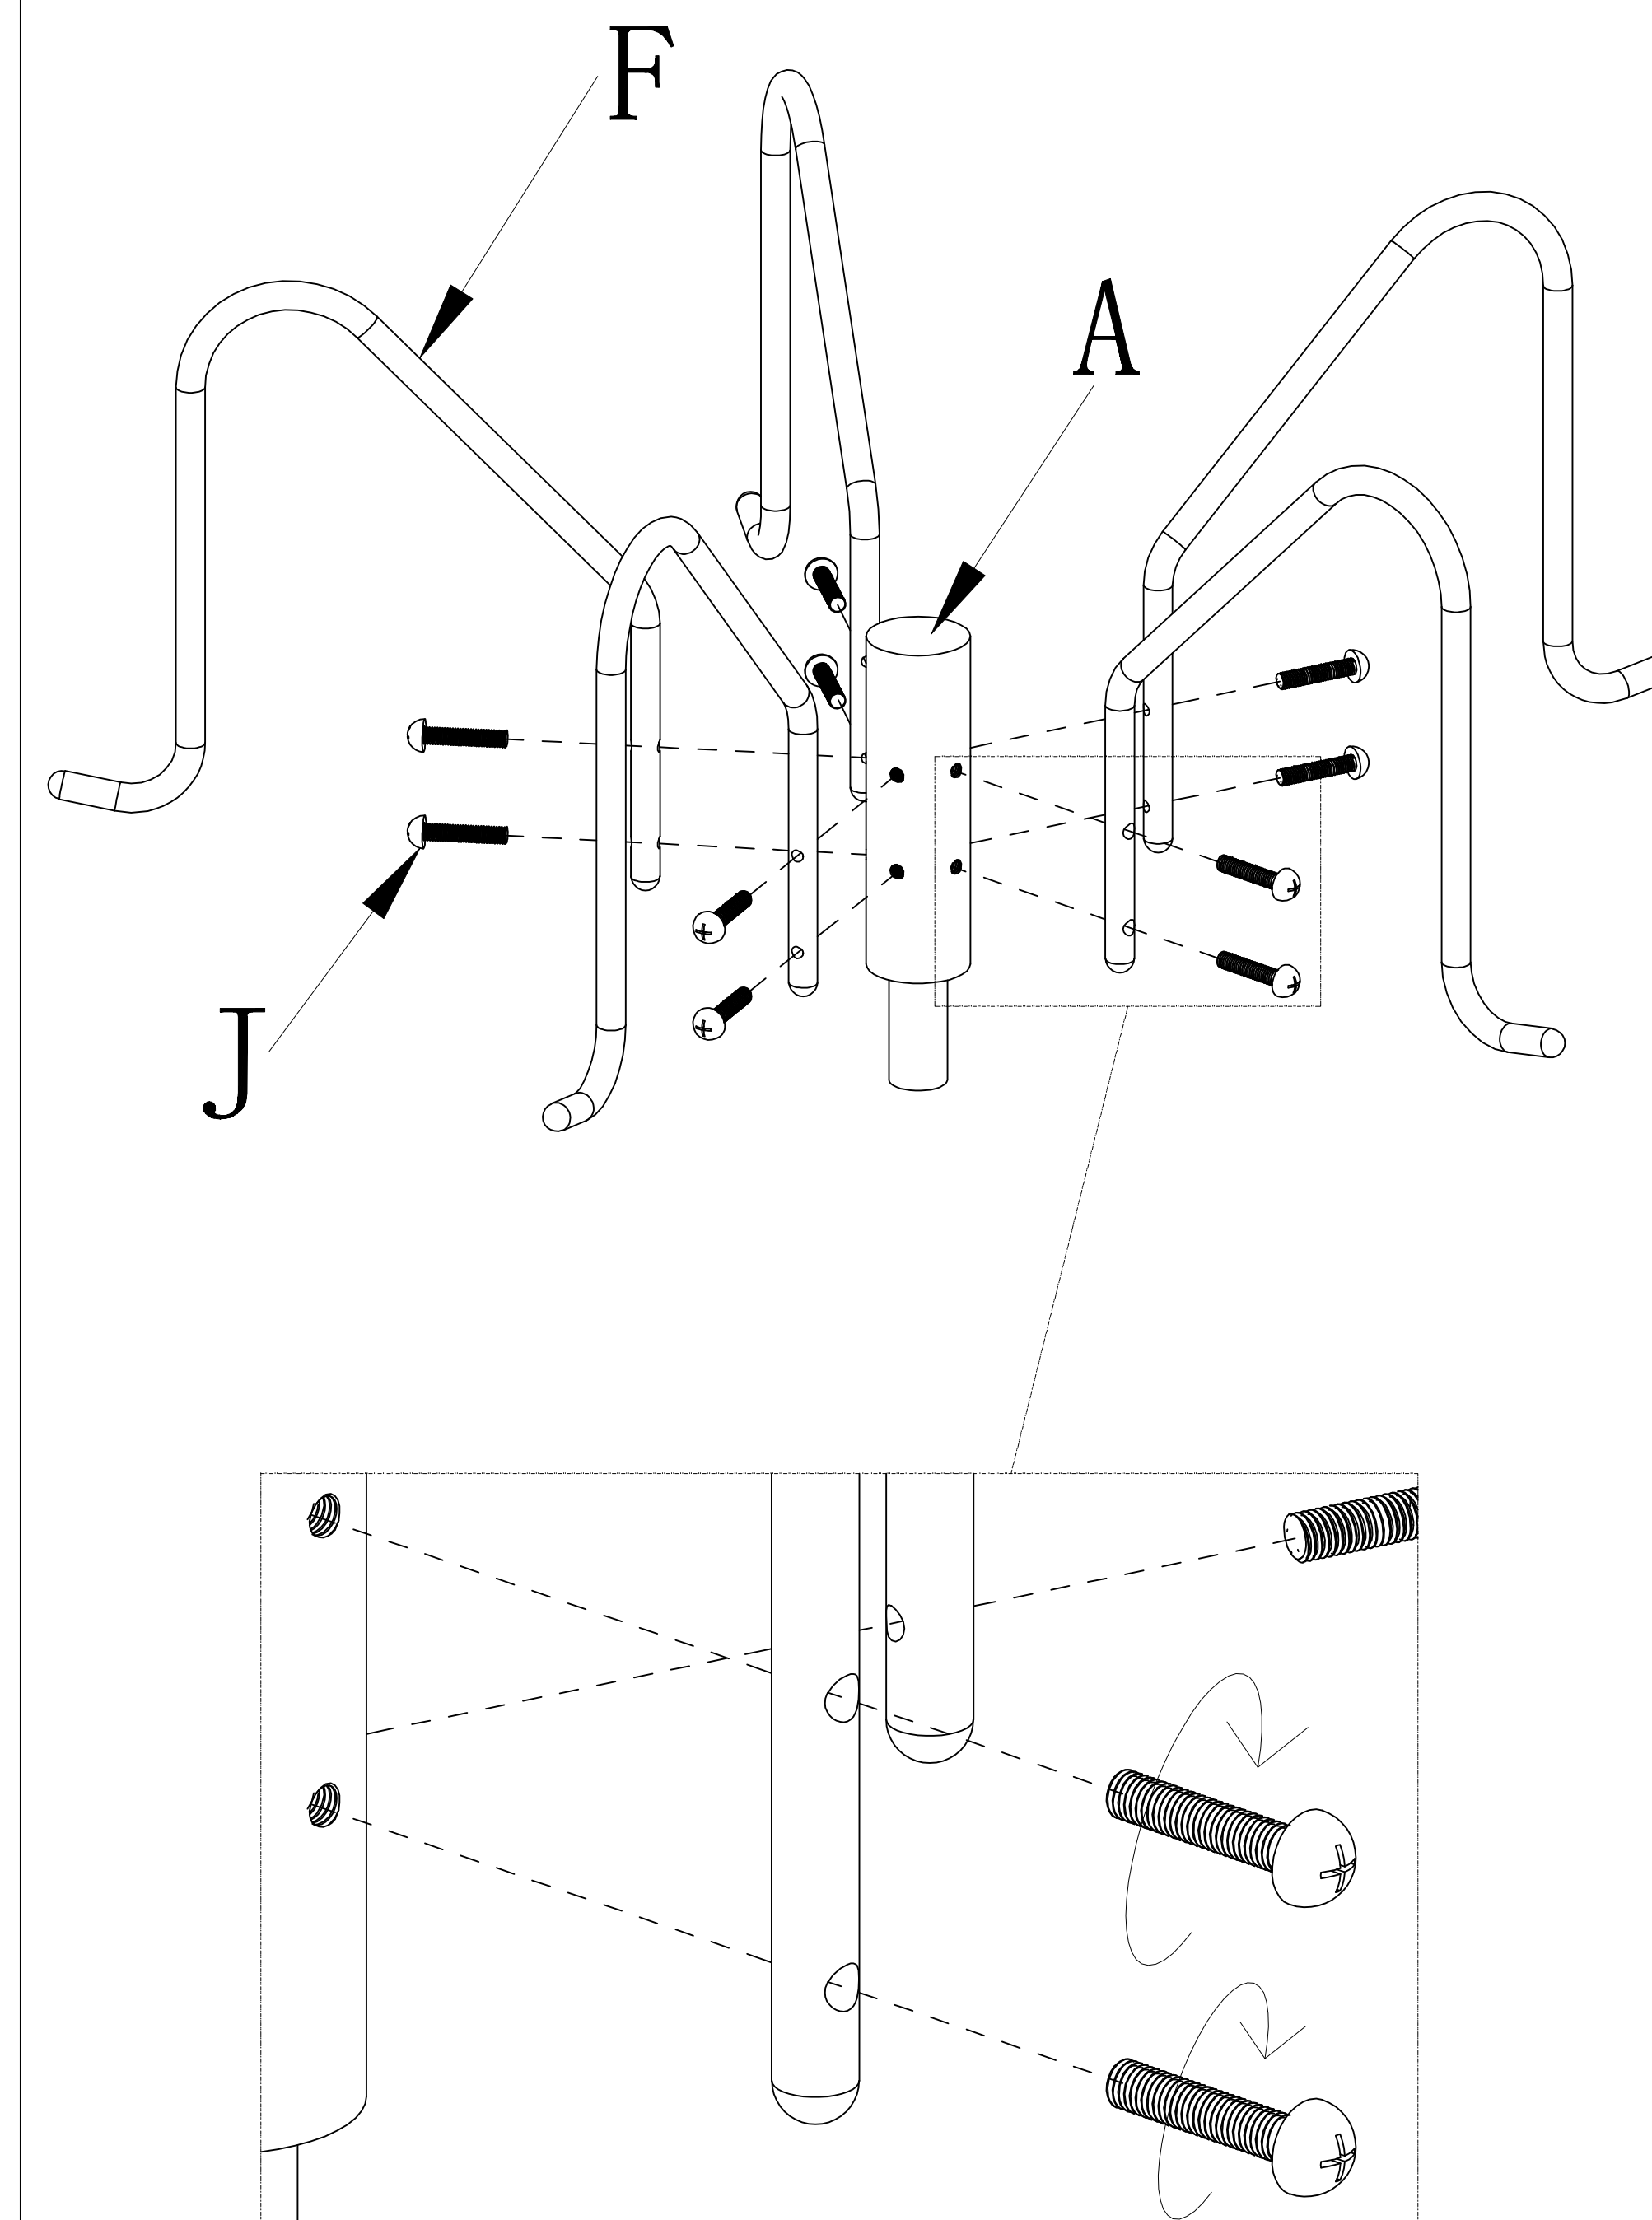

Align the holes, fix hooks on rotary head by screws, please use your own cross screwdriver.

4

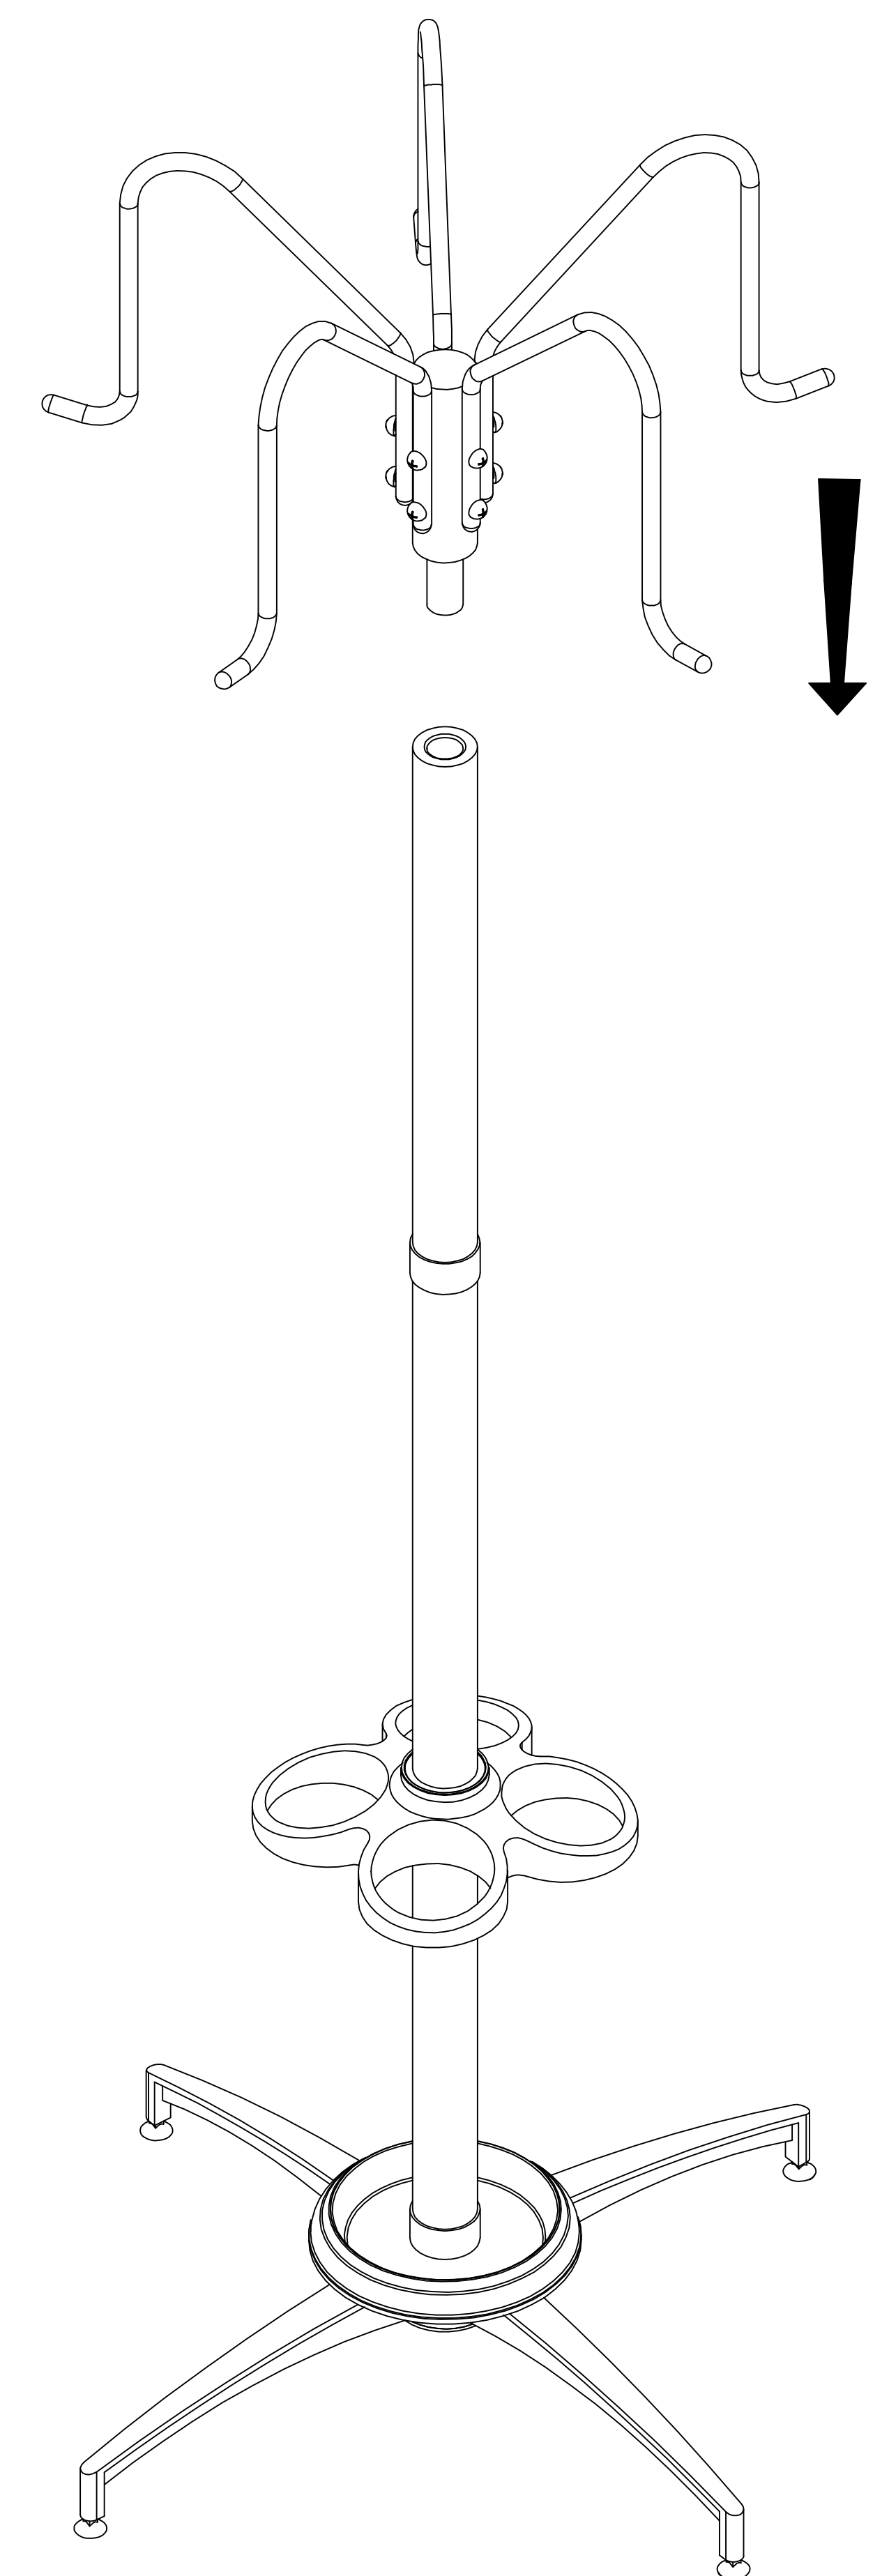

Put the rotary head on upper pole, seize up the head. Check all parts and make sure they are fasten installed.