



# PART LIST:


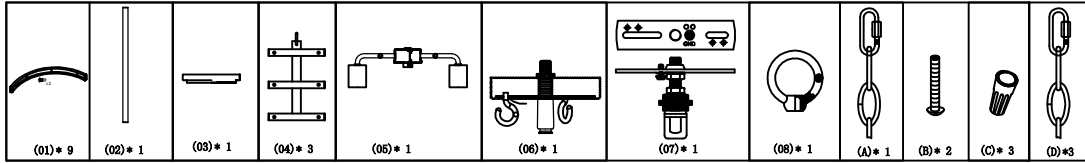


## YOU WILL NEED:




Part	Description	Quantity	Part	Description	Quantity
01	Wood grain pipe	9	07	hanging panel	2
02	sponder	1	08	hand ring	1
03	ceiling plate	1	A	sponder	1
04	Iron rack	3	B	Outlet Box Screw	2
05	Lamp body	1	C	Wire Nut	3
06	Land	1	D	suspender	3

U3

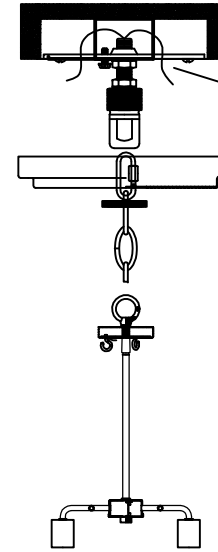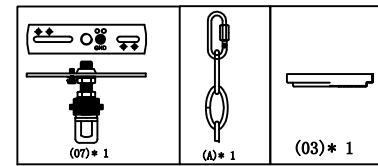


Fix the hanging plate under the ceiling with two junction box screws, and lead the lamp body power cord into the junction box




U4



Connect the lamp body wire and the wire in the junction box through the wiring cap in accordance with the method shown.


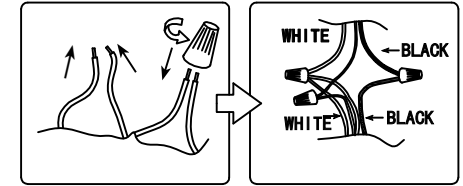


01

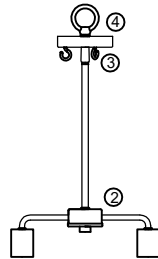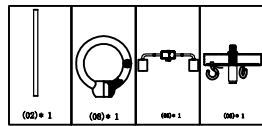

- ① Turn off the power;
- ② Screw the boom into the middle of the lamp body
- ③ Connect the connecting disc and the boom through the thread connection, can not be loosened
- ④ Screw the lifting ring into the middle external thread of the connecting disc until it is tight and cannot be loosened


02

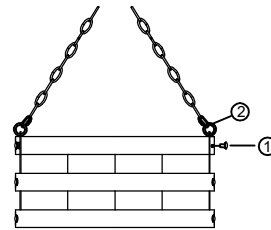


- ① Fix the wood grain pipe to the iron frame with the installation grain shown;
- ② Fix the 3PCS chain on the round iron ring on the iron plate rack.

05

- ① Fix one end of the sling with the amount of 3PCS on the hanging frame of the connecting
- ② screw the thread ring on the lamp body component [05] upward to fix the lamp body

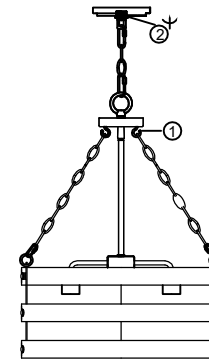

06

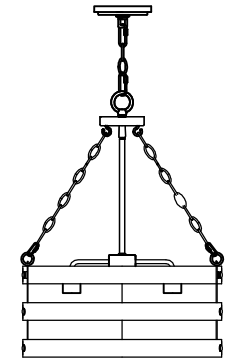

Screw the bulb into the lamp holder as shown