


Product Installation Instructions

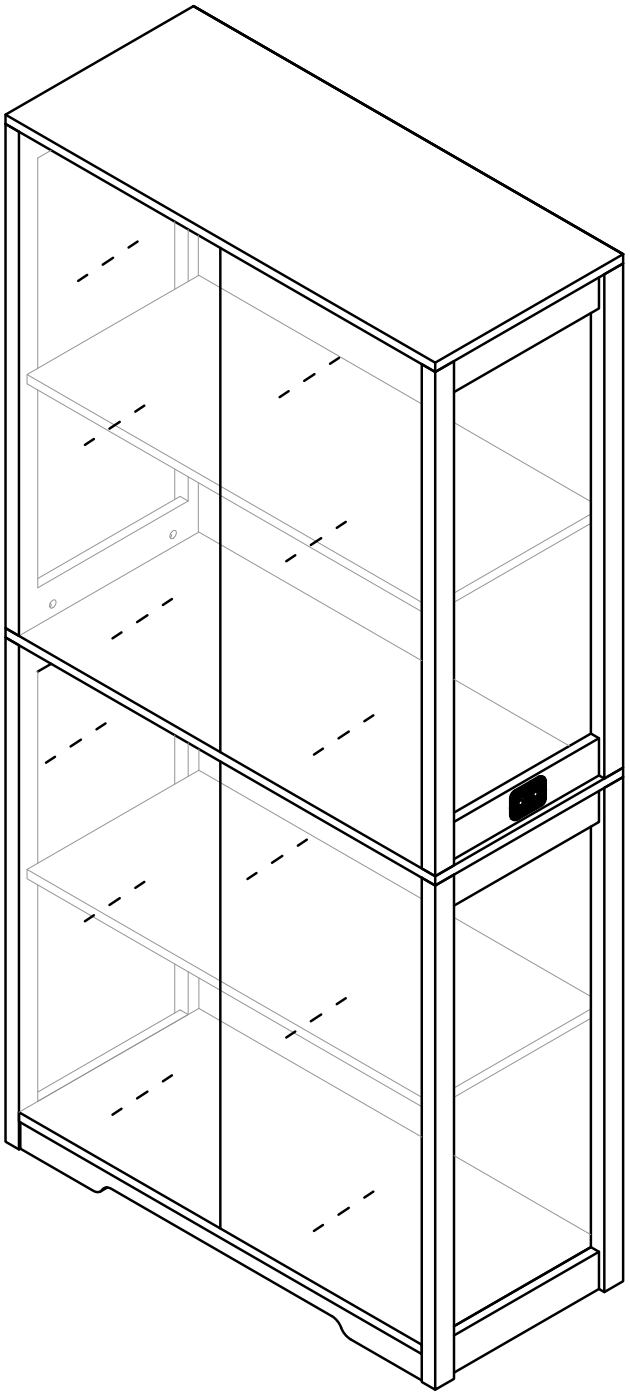





Ax1




Bx1

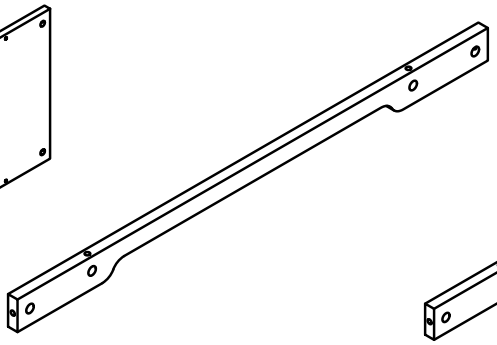


Cx1

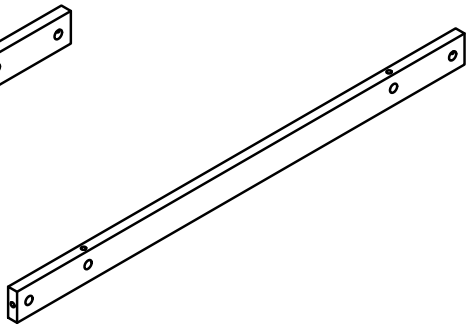


Dx1




Ex2




Fx1

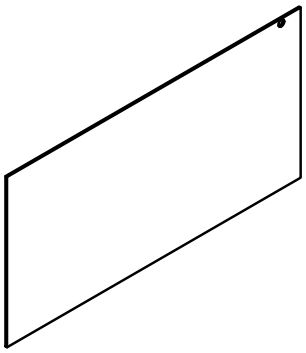


Gx1

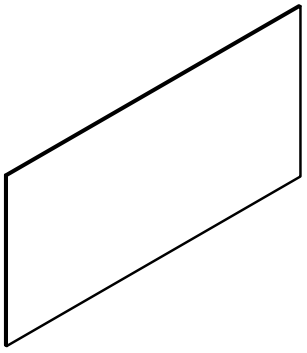


Hx1

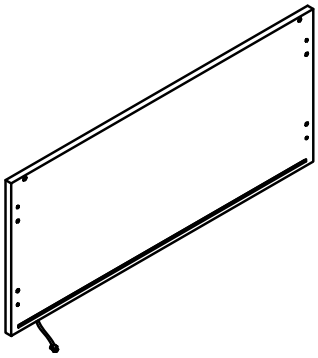


Ix1




Jx1




Kx1

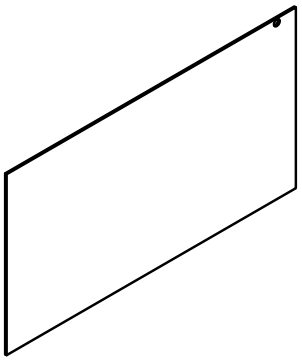


Lx1

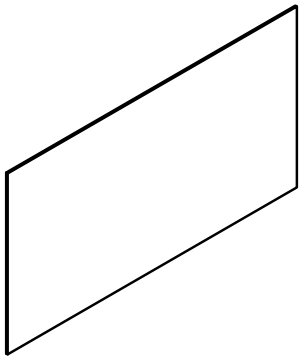


Mx1

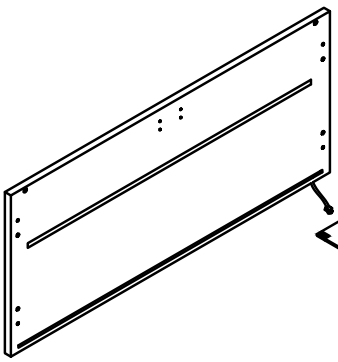

Nx1










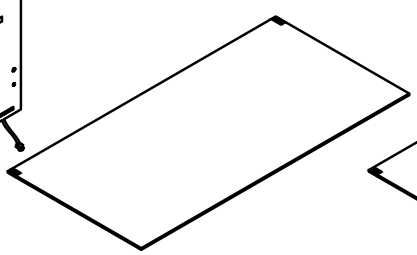


Ox2

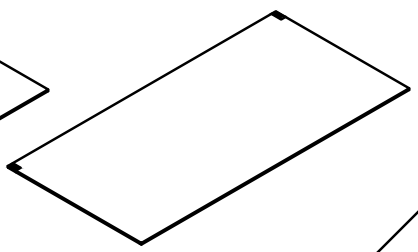


Px2


Accessories list

①		Two in one screw (6x28mm)	32pcs +4pcs
②		Two in one nut (10x12mm)	32pcs +4pcs
③		Wood chipping (6x30mm)	12pcs +4pcs
④		Non-slip pads	6pcs +2pcs
⑤		Rebound device & Screw (3x16mm)	8pcs +2pcs 2pcs
		Iron sheet	4pcs
⑥		Double end connecting line	2pcs
⑦		Wire clamp	2pcs +2pcs
⑧		Fixing clip & screw (3x16mm)	8pcs +4pcs
⑨		Foot nail	4pcs +2pcs
⑩		Hinge	8pcs
		AC/DC Adapter(12V⎓3.0A)	1pcs

⑪ Anti Fall Hardware

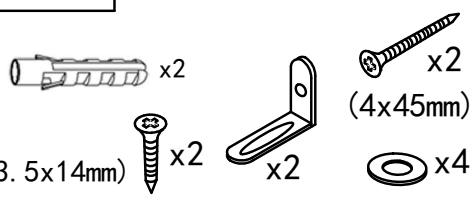







Double-head screwdriver, use as required




2

Product structure decomposition

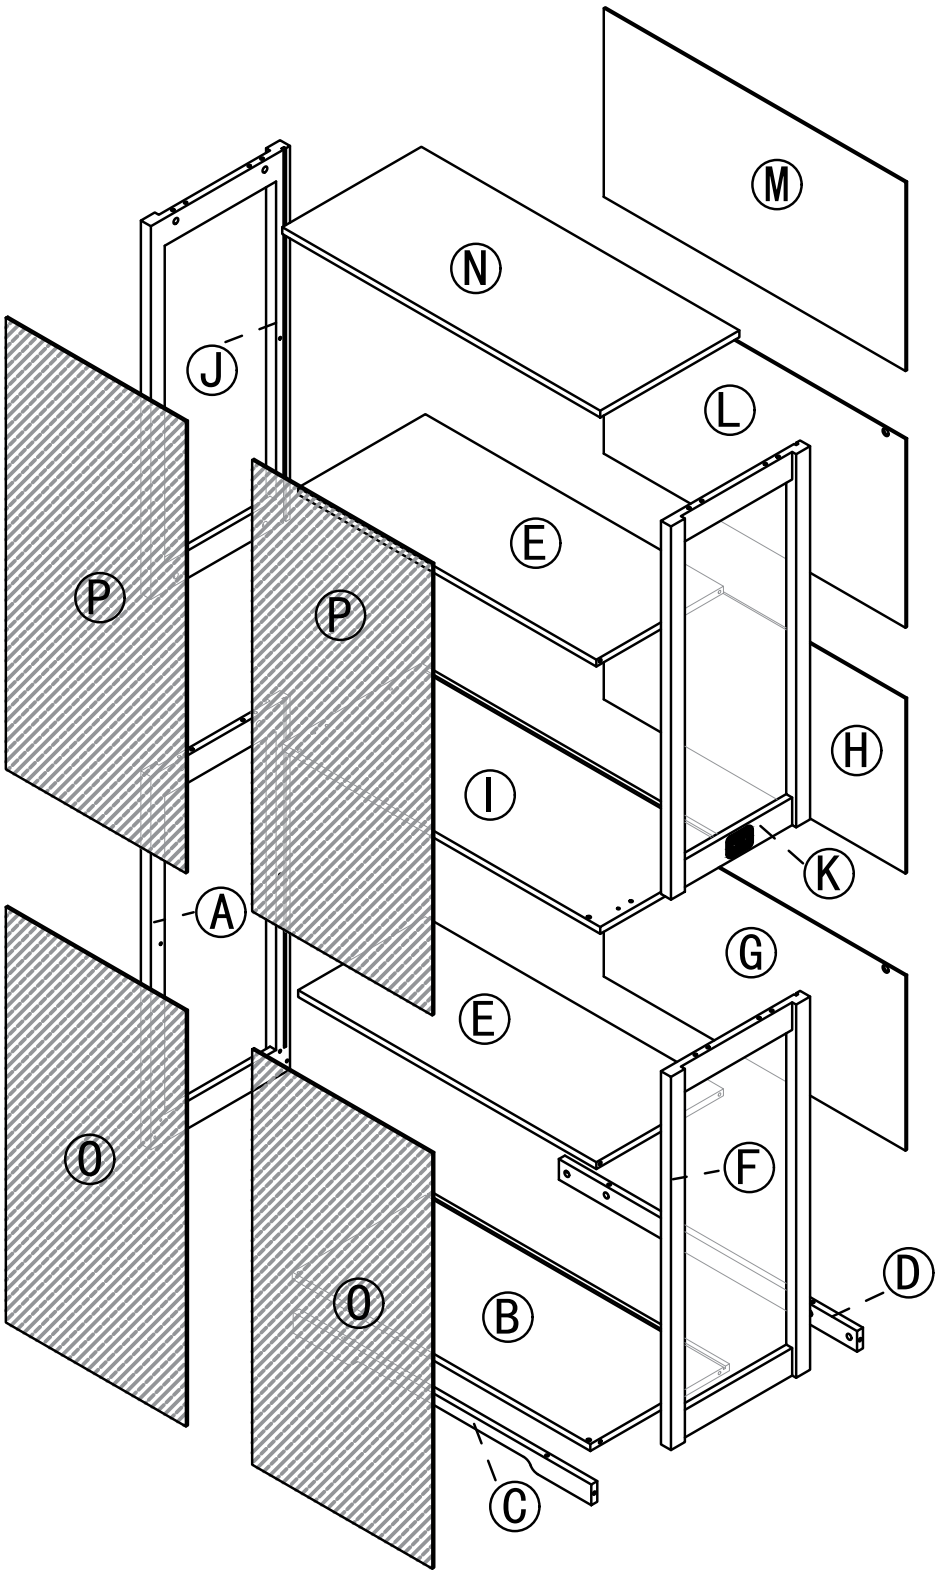


①		32pcs	④		6pcs	⑦		2pcs
②		32pcs	⑤	 2pcs	 8pcs	⑧		8pcs
③		12pcs	⑥		2pcs	⑨		4pcs

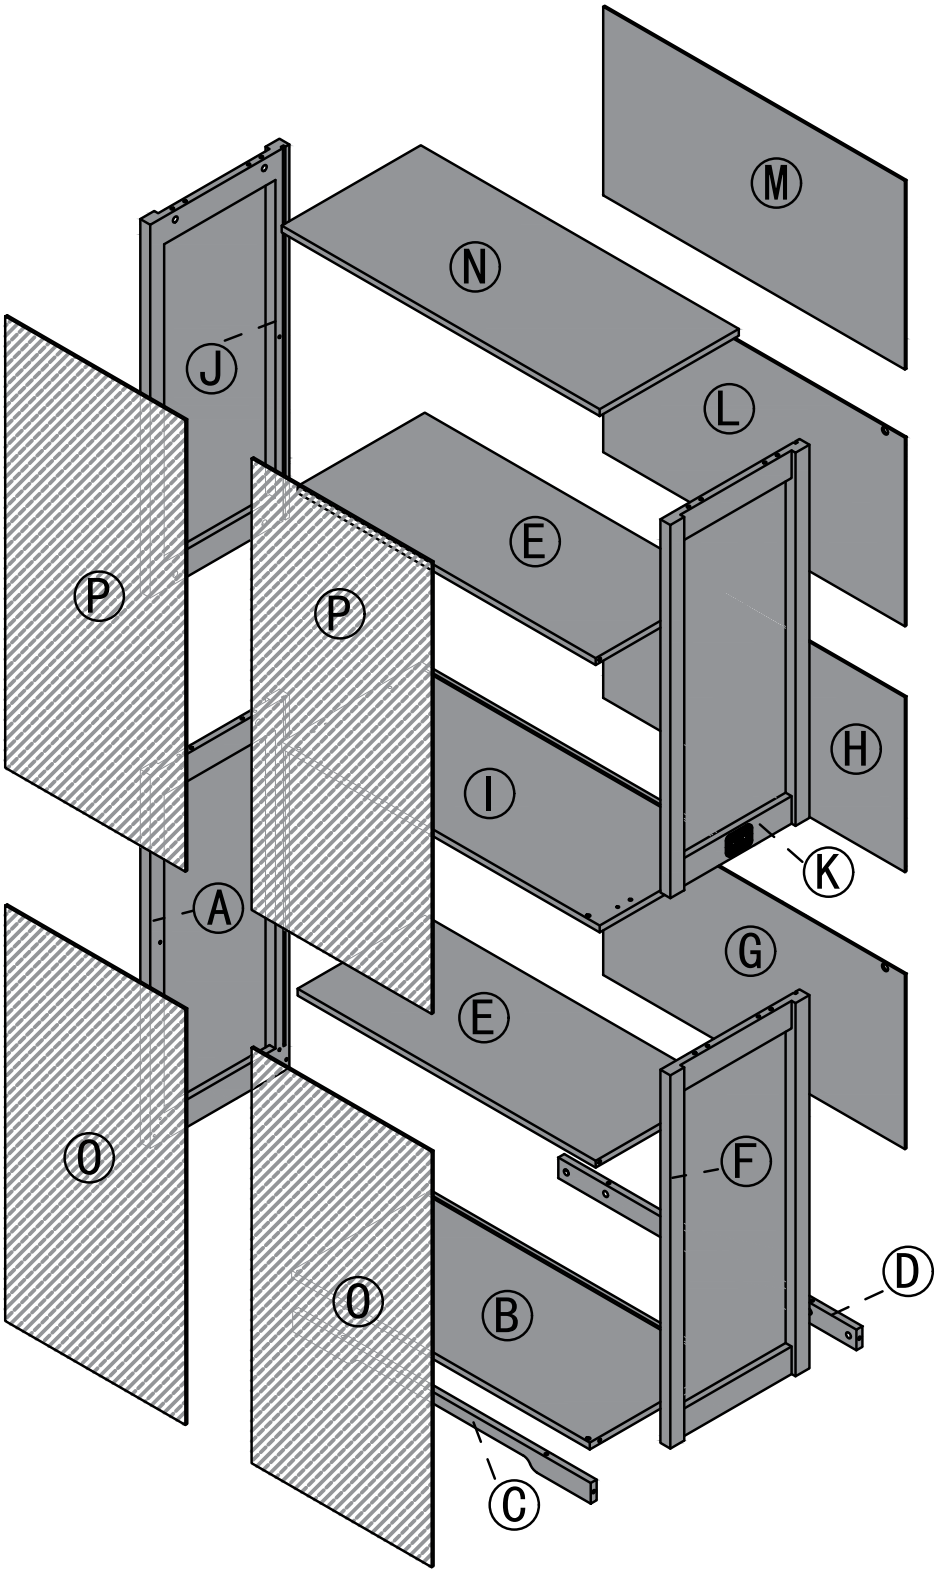


Use parts ① and ②


Step1

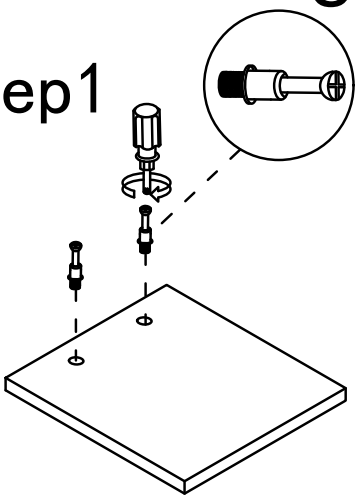


Step2

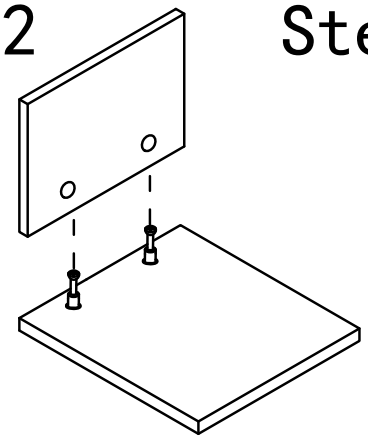


Step3

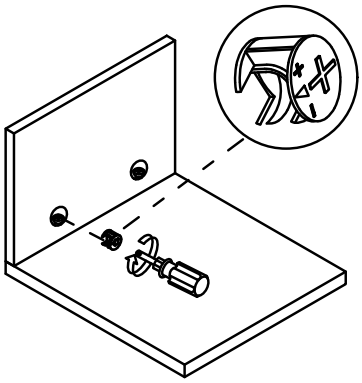

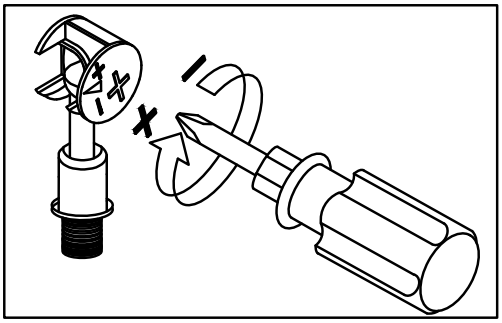



Use a screwdriver to lock in the direction of the "+" sign

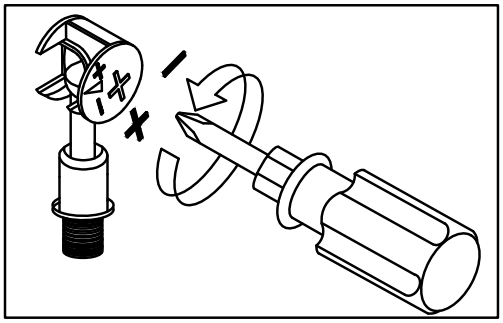


Disassemble along the direction of "-" sign

Step 1



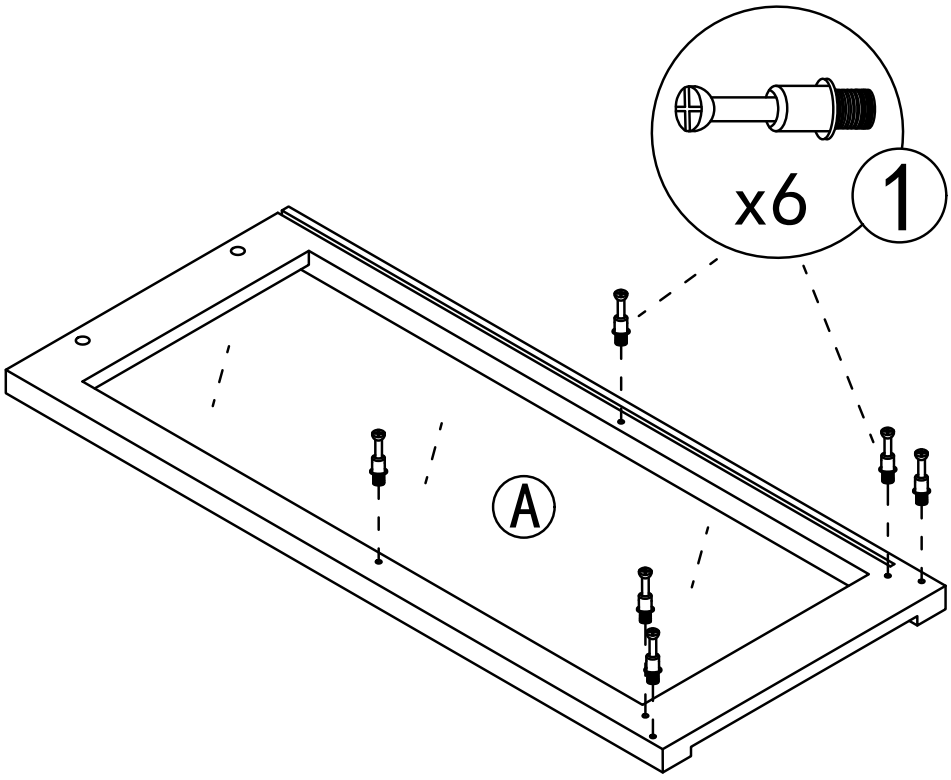


Step 2

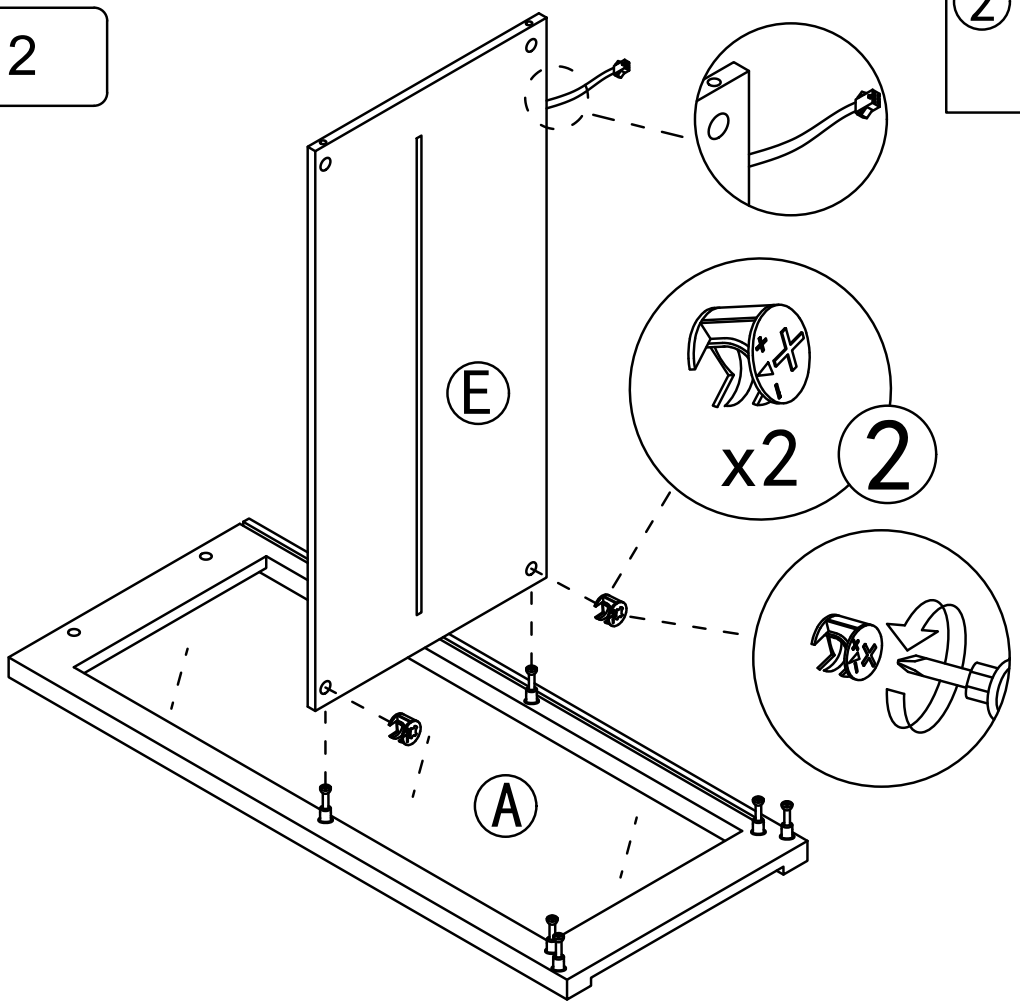


2 x2

Step 3

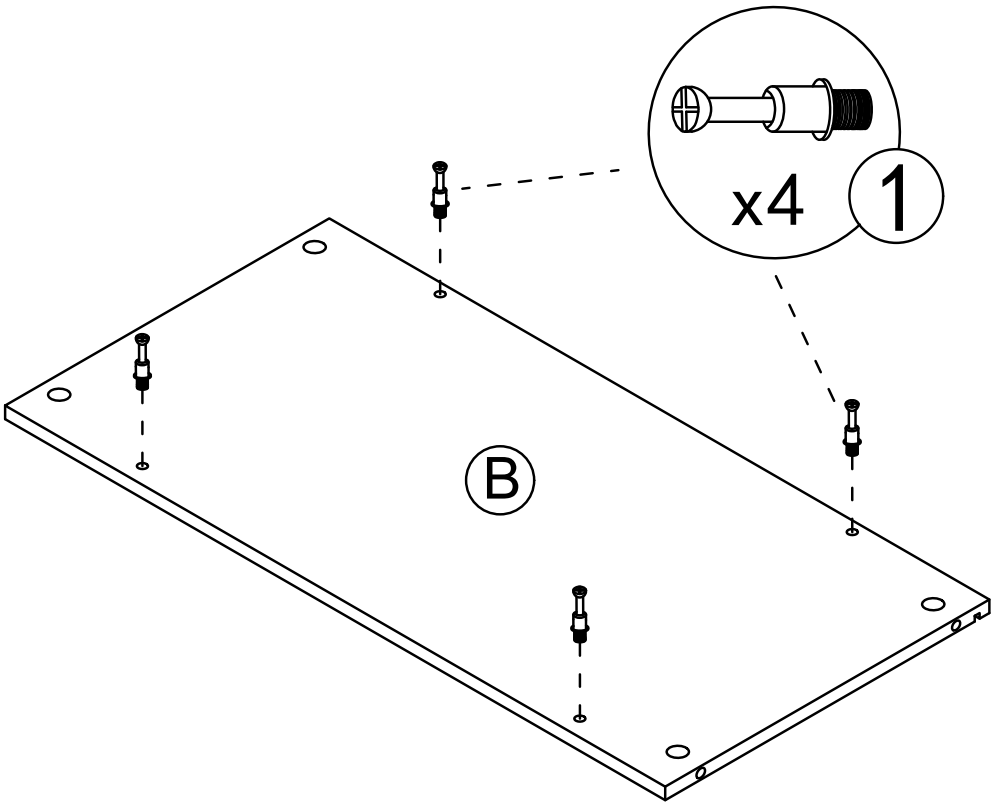


1 x4


Step 4

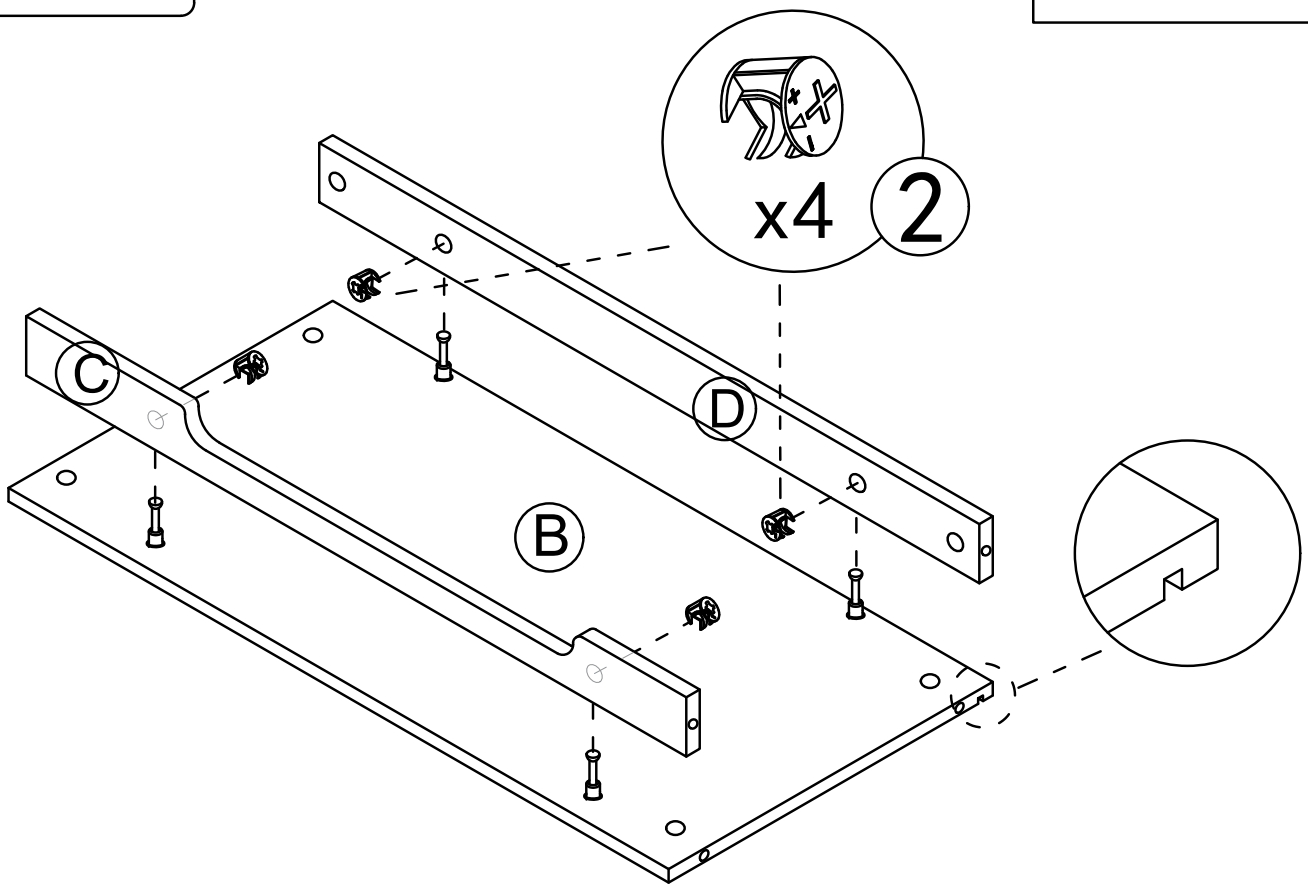


Step 5

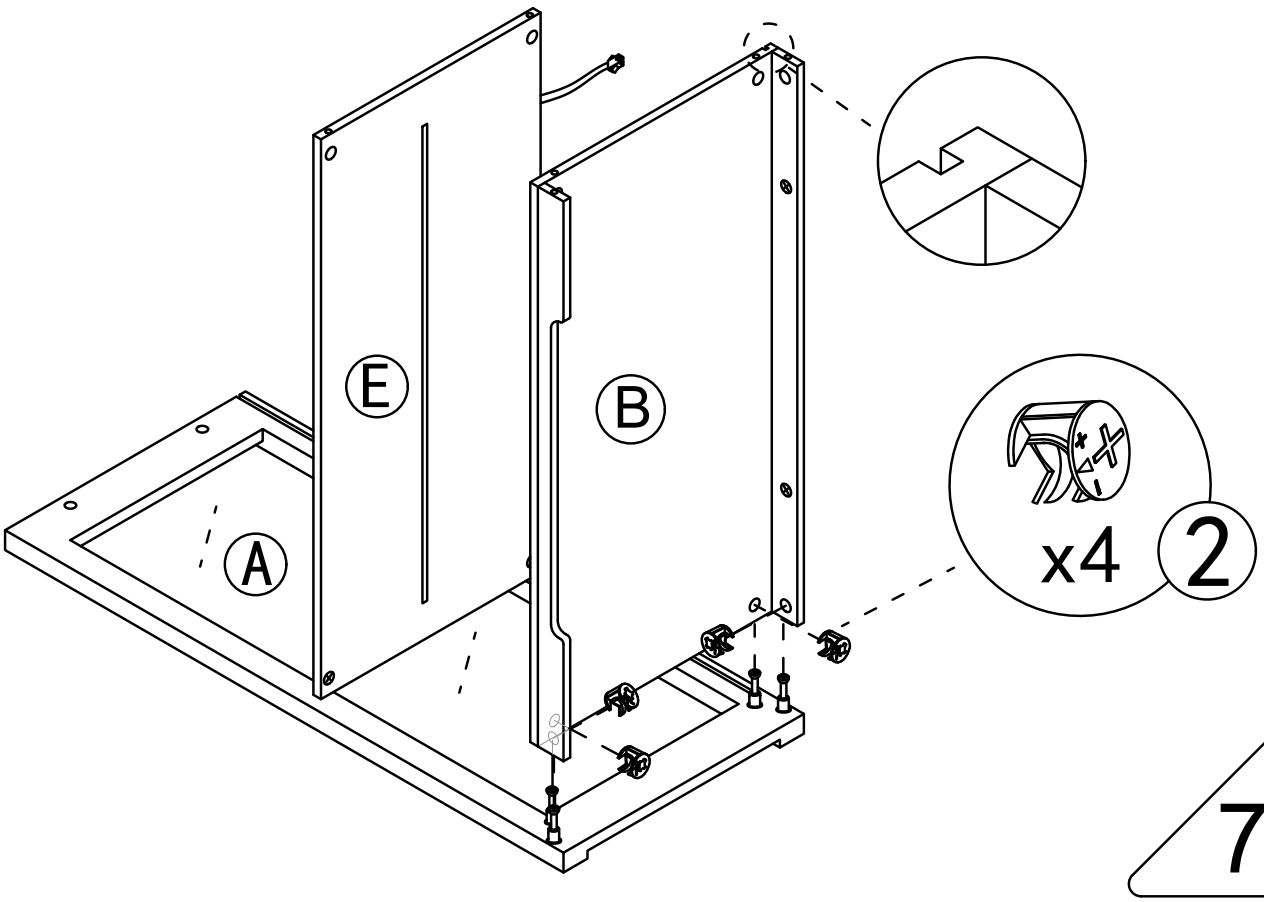



Step 6

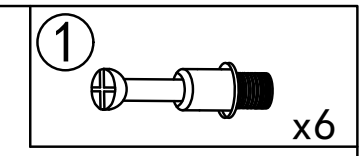

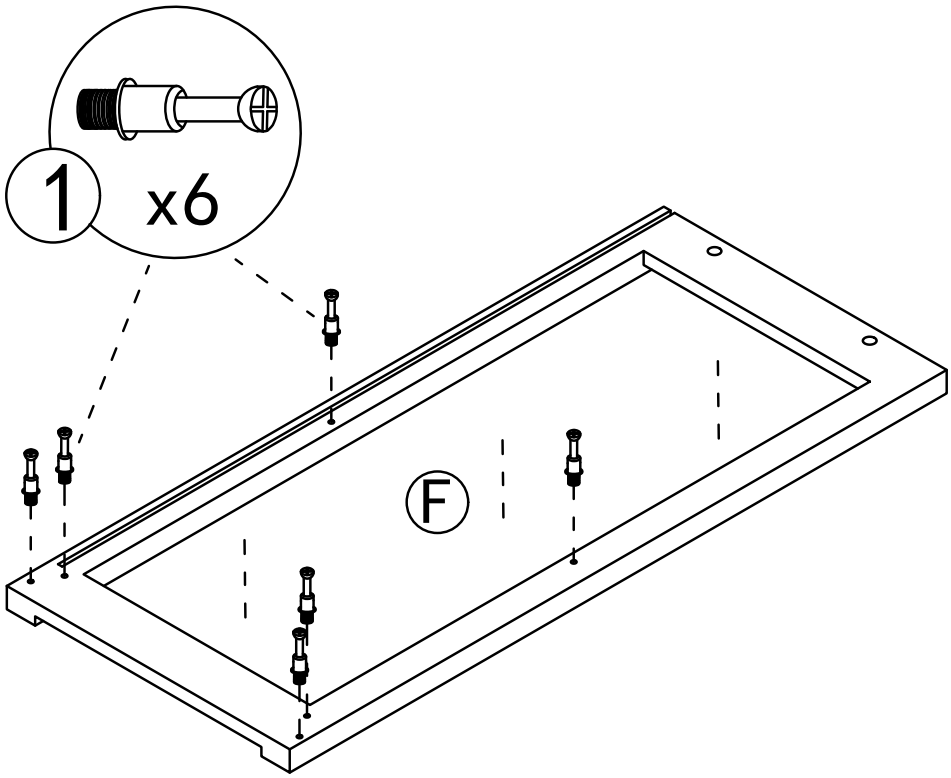

Step 7

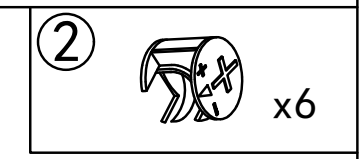


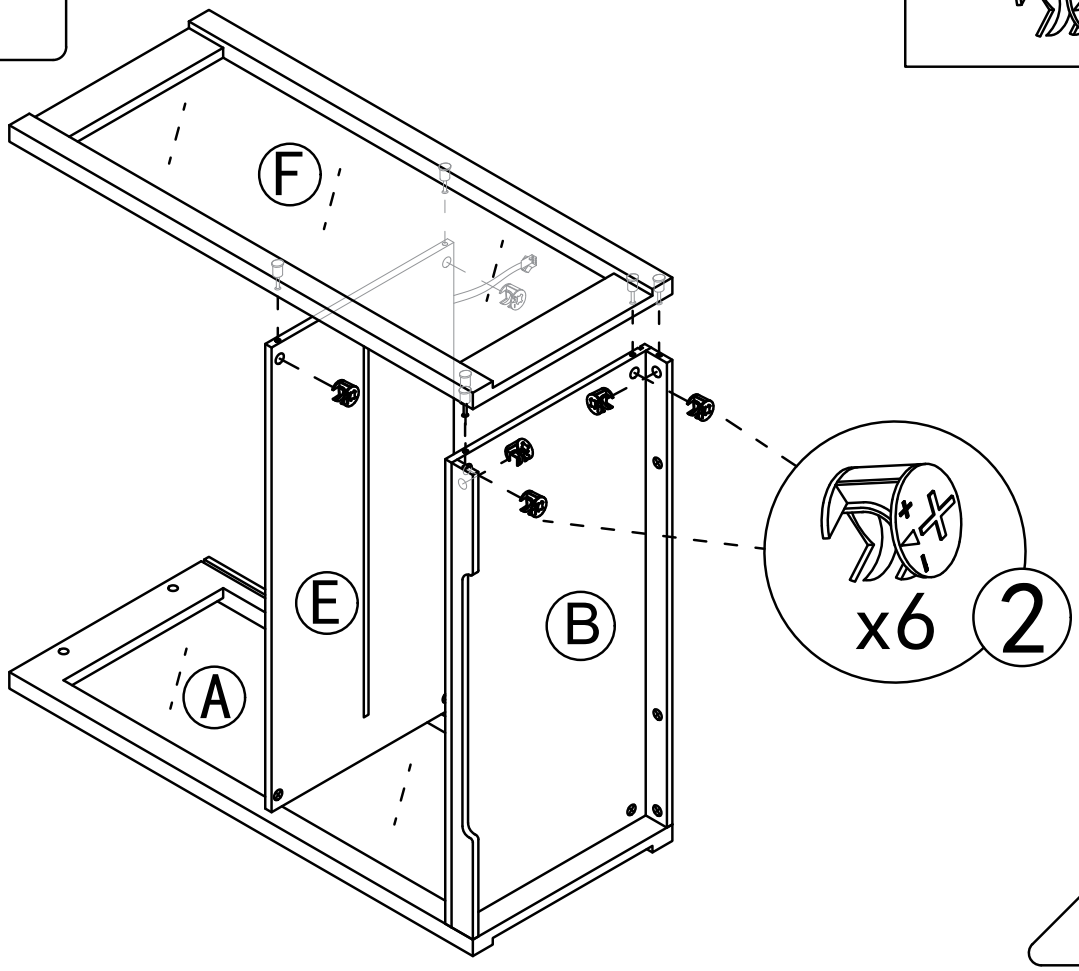


Step 8

4 x6


Tear off release paper and stick the black foot pad on the board

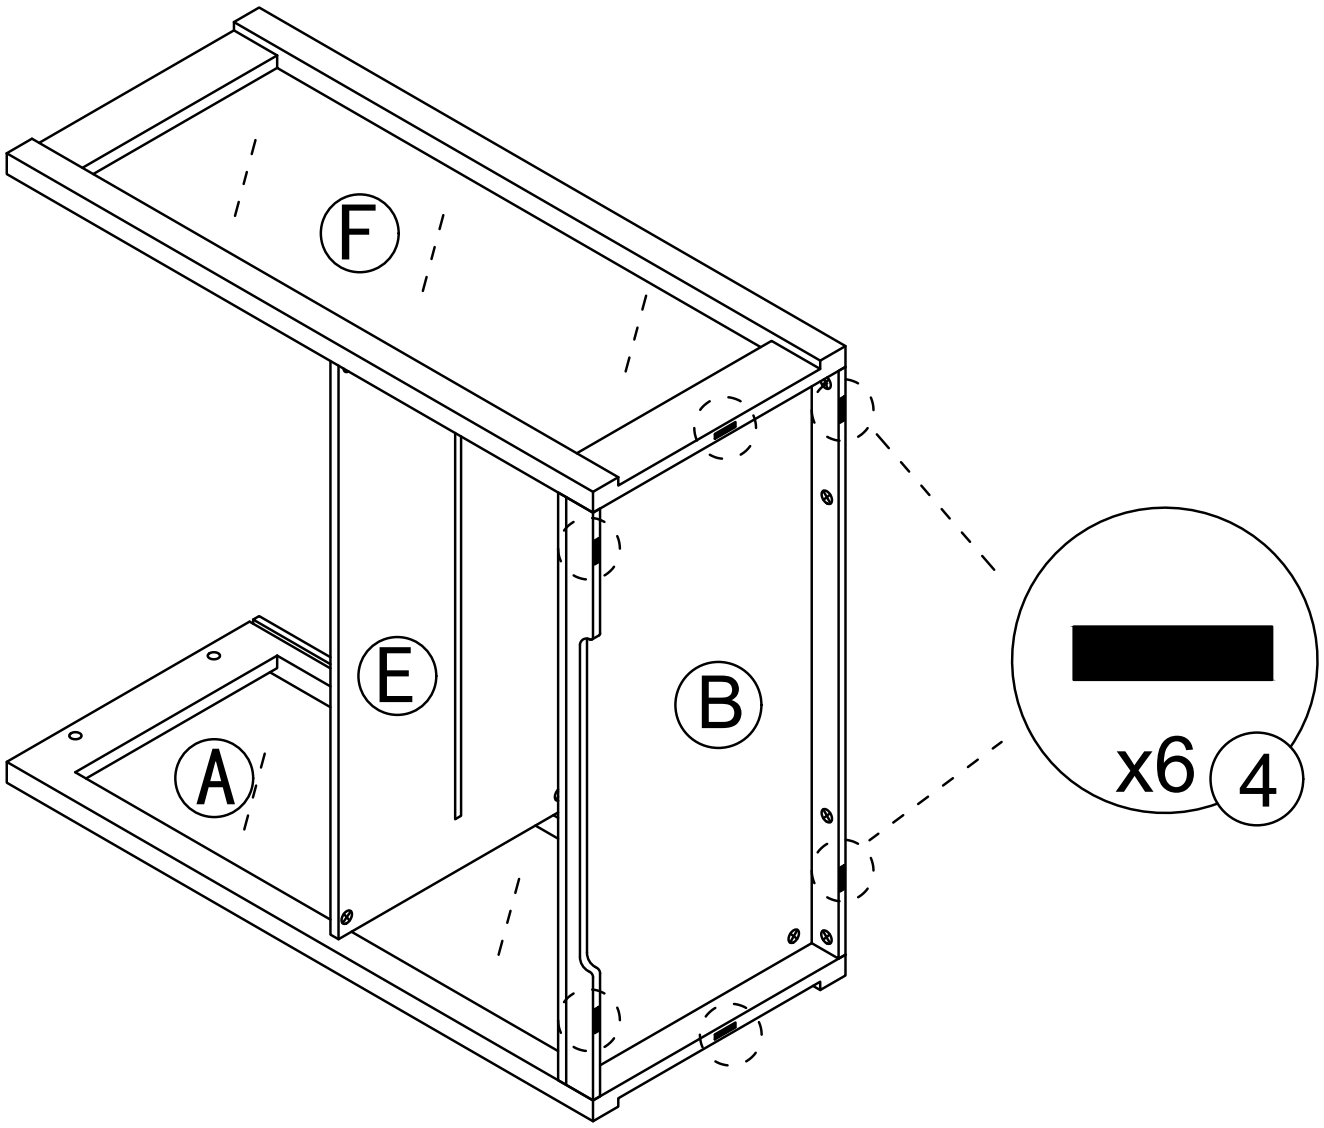


Step 9

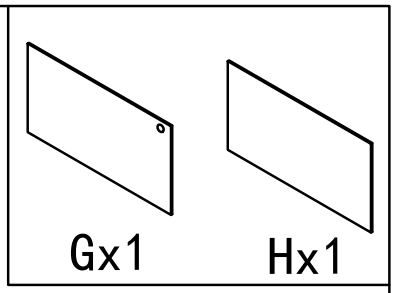


Insert the backplane into the slot

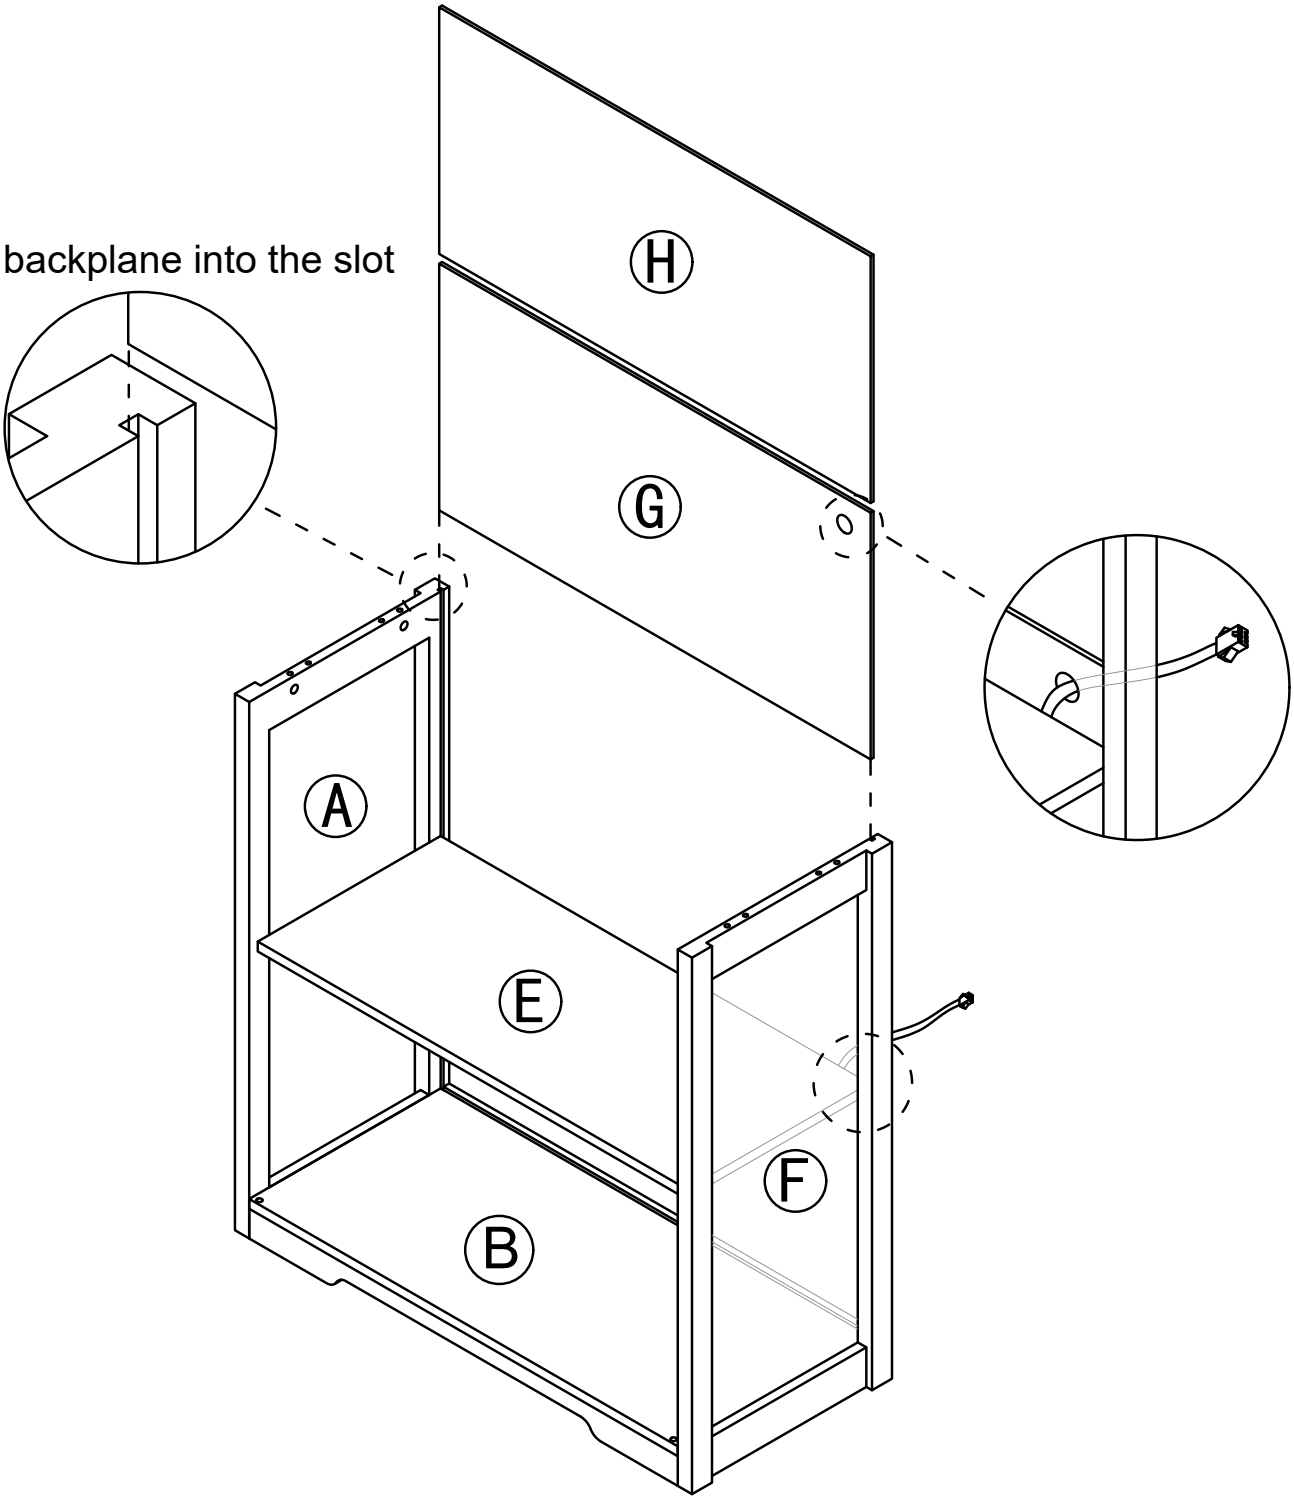


Step 10

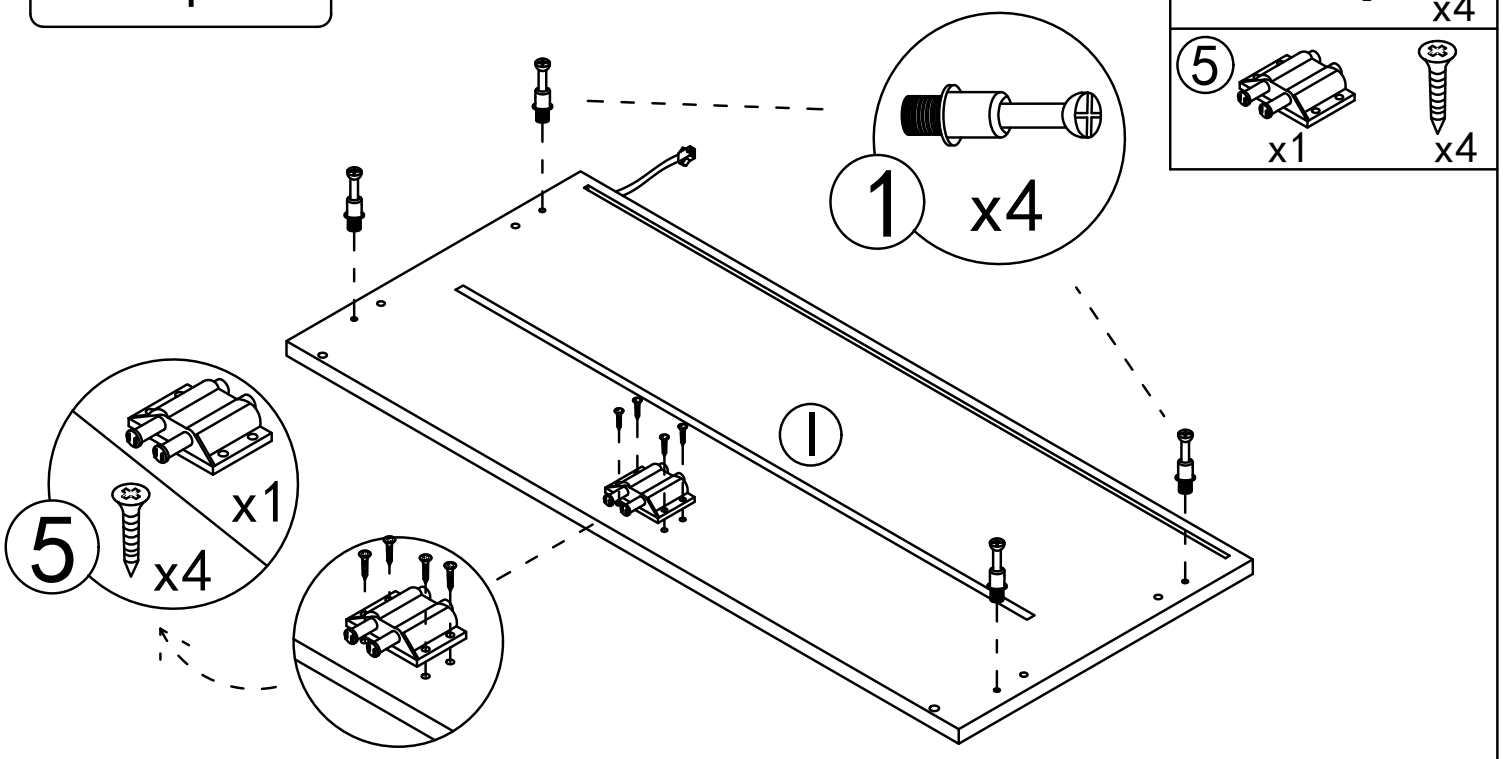


Step 11

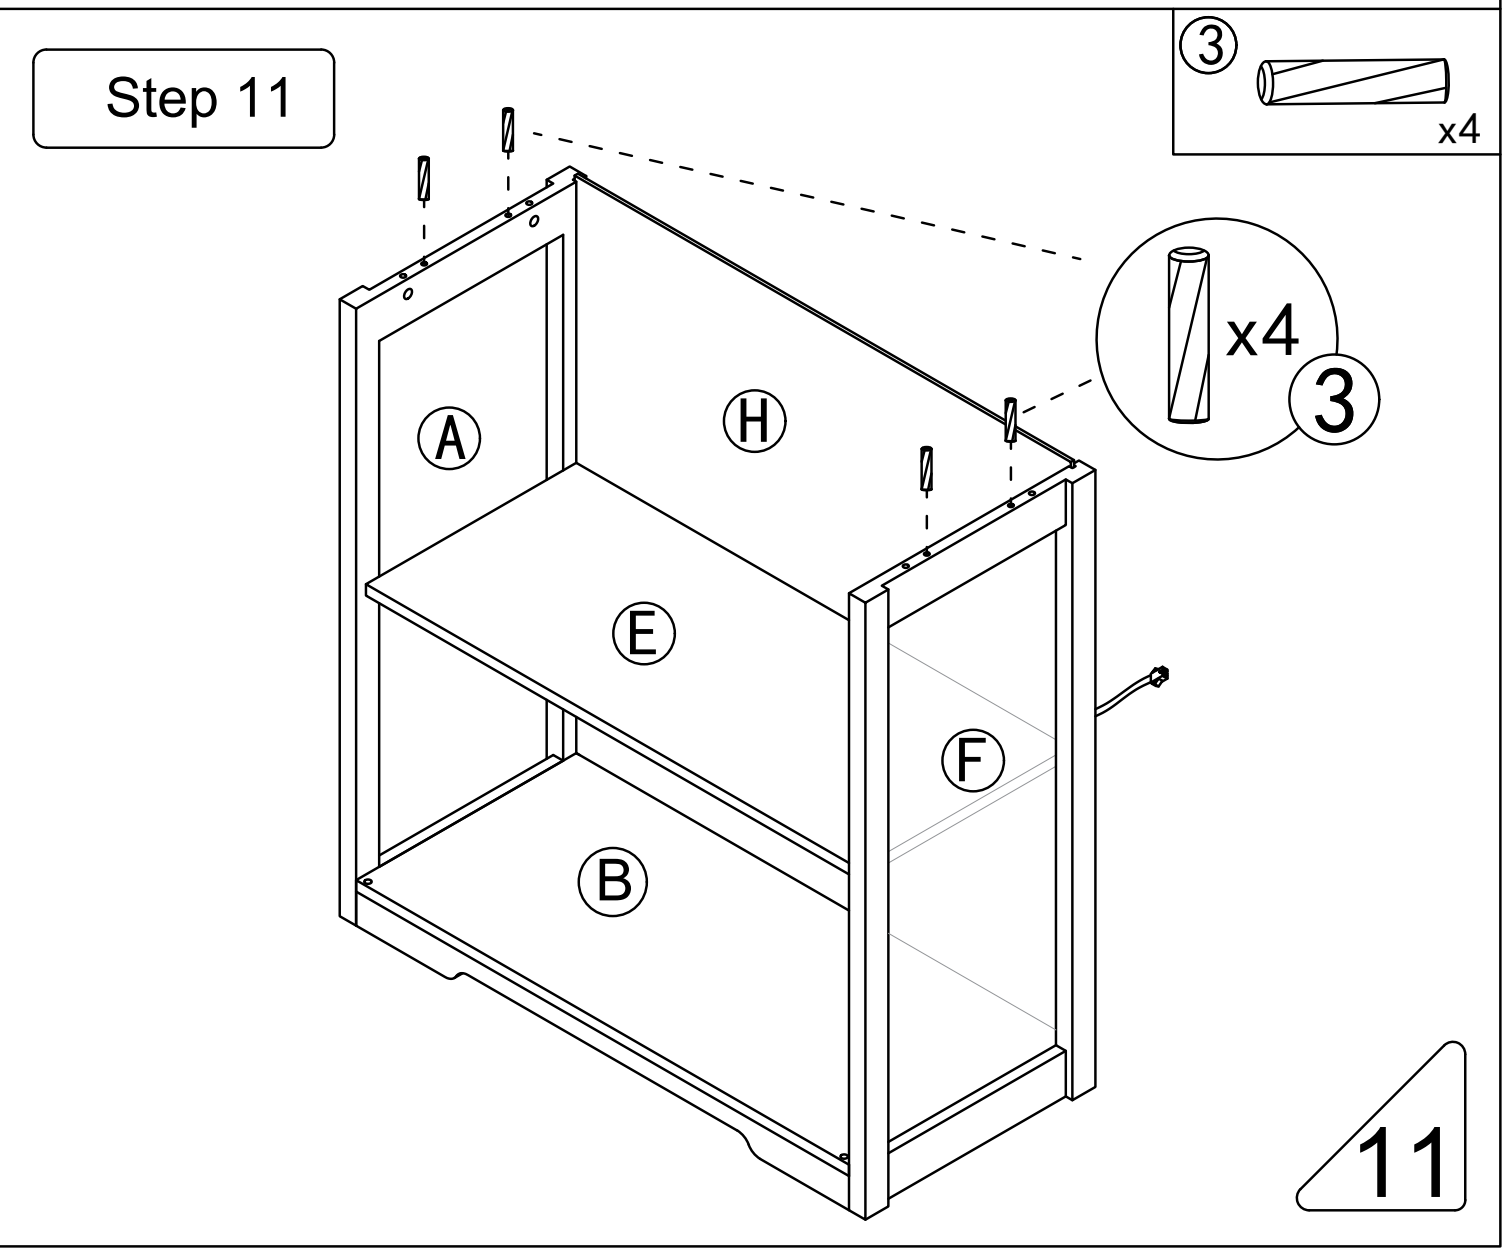


Step 12

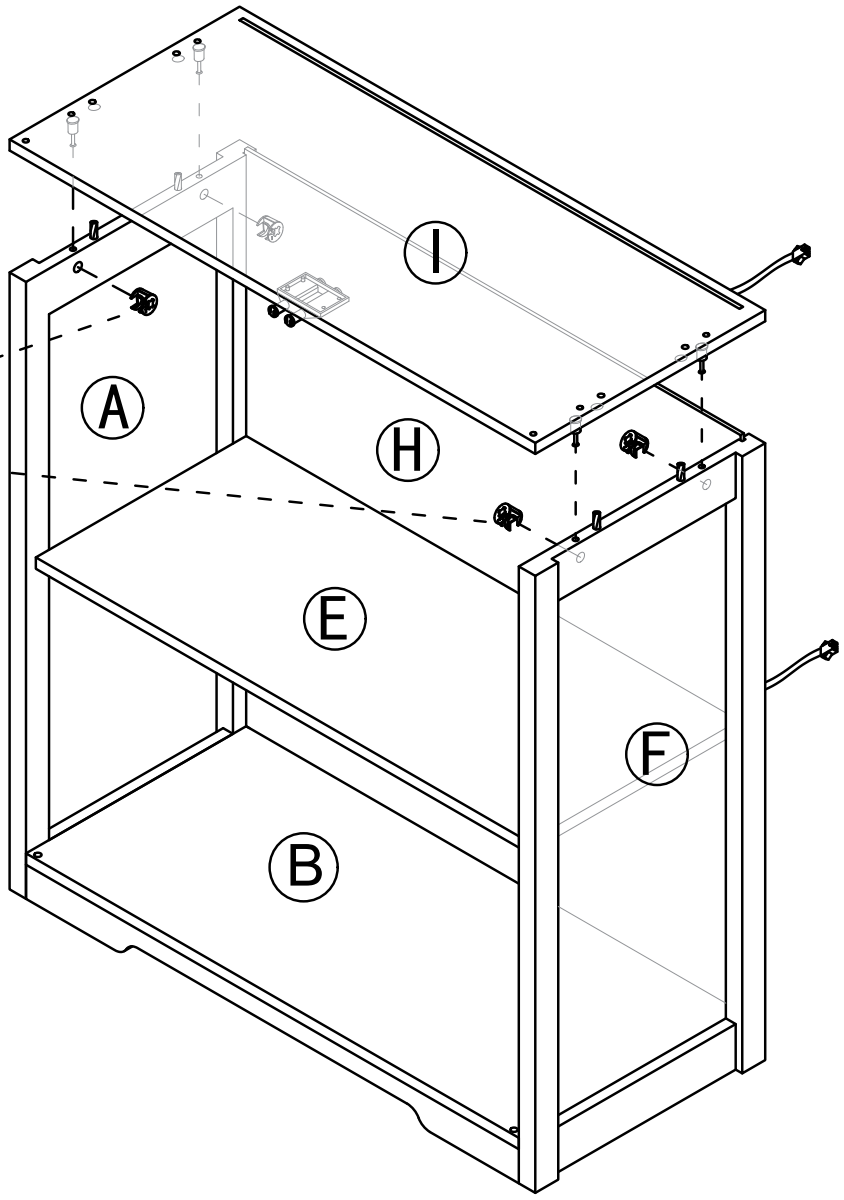





2  x4


Step 13



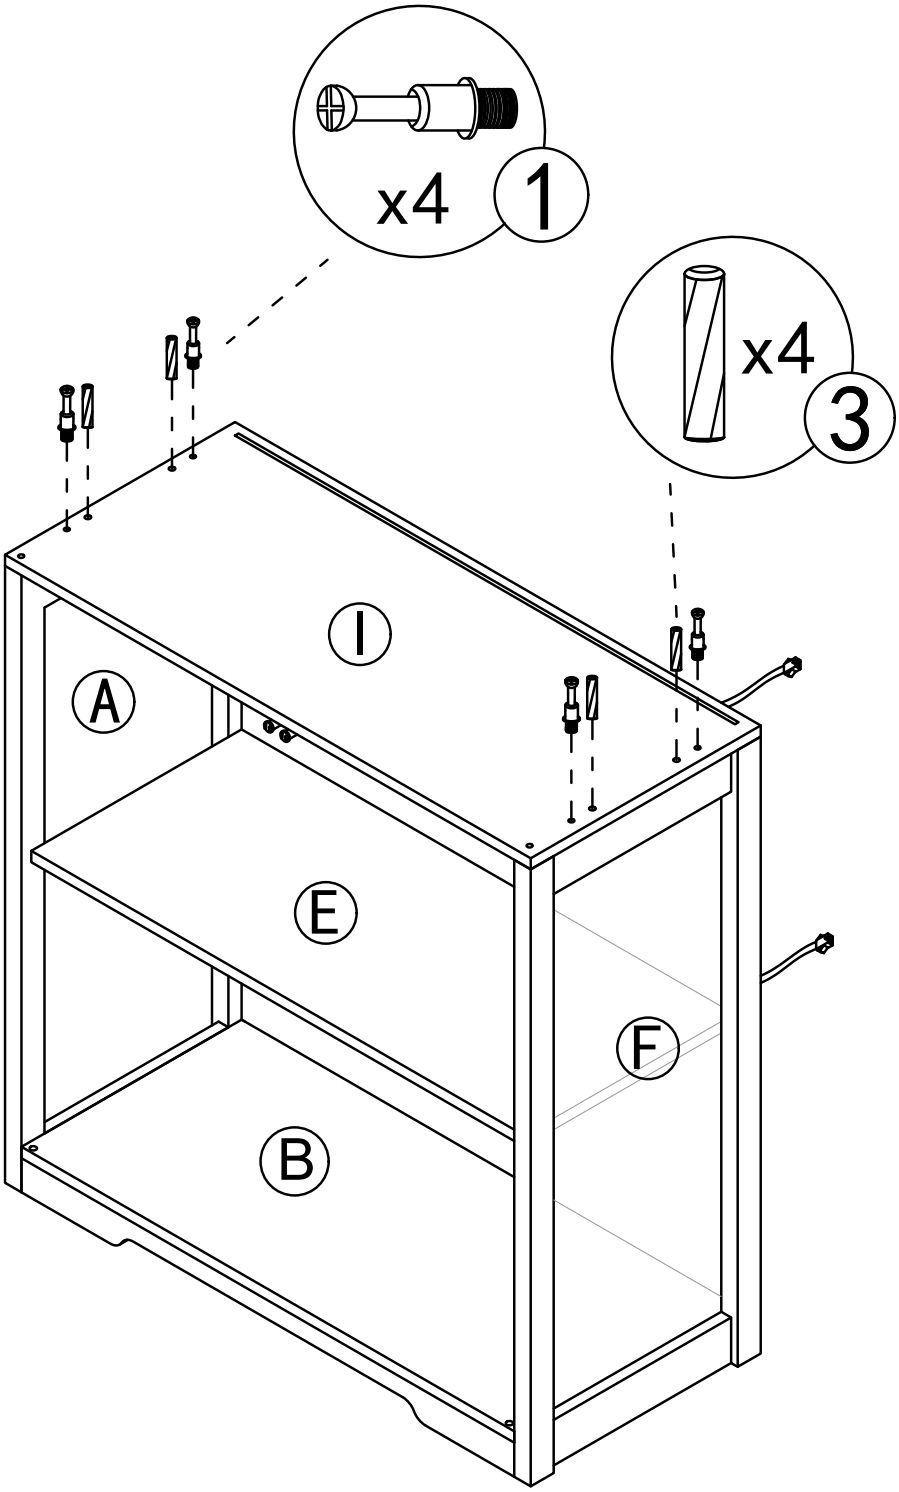



Step 14



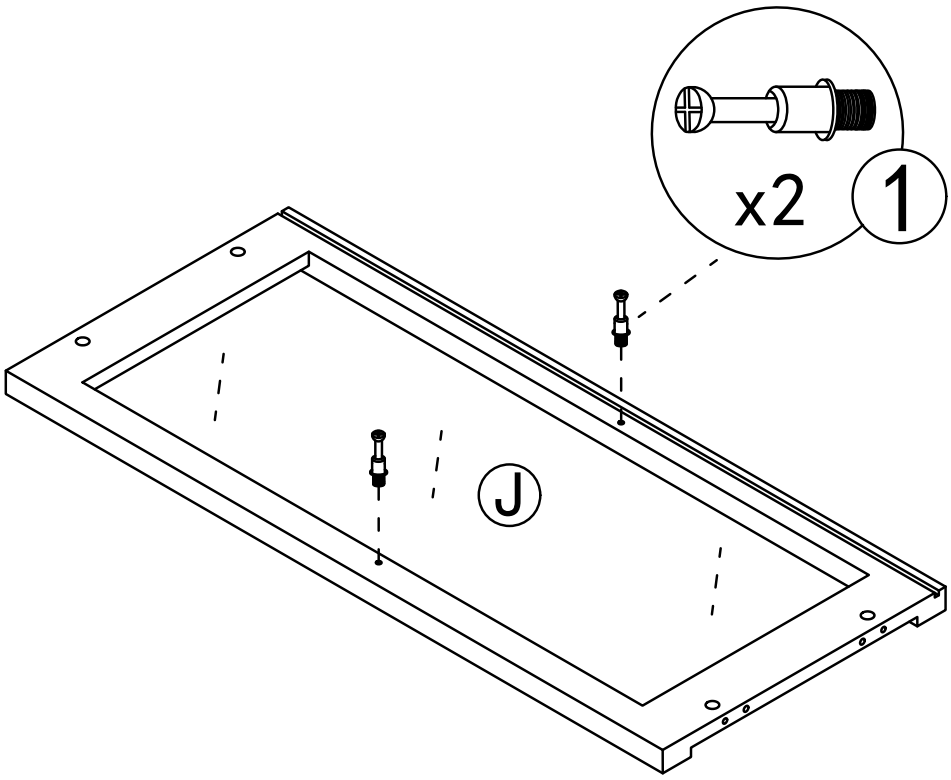



Step 15



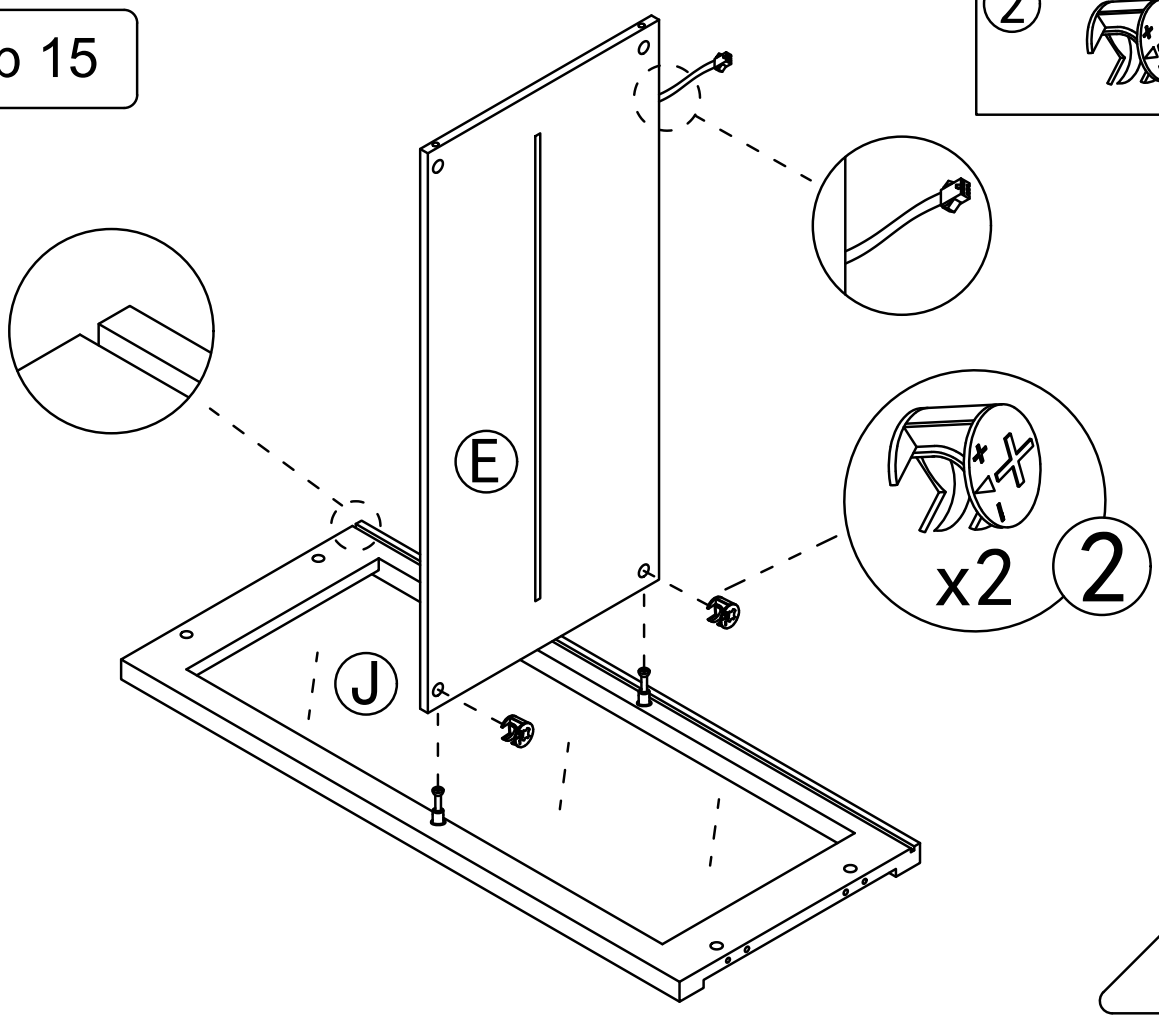



Step 16



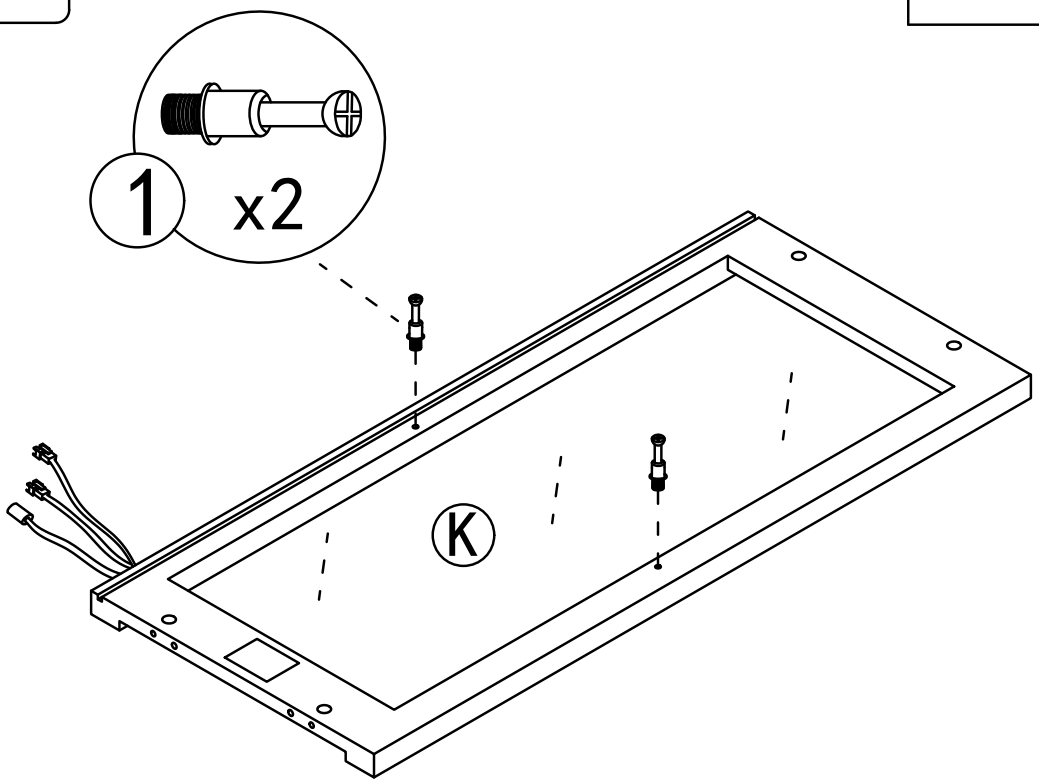



Step 17



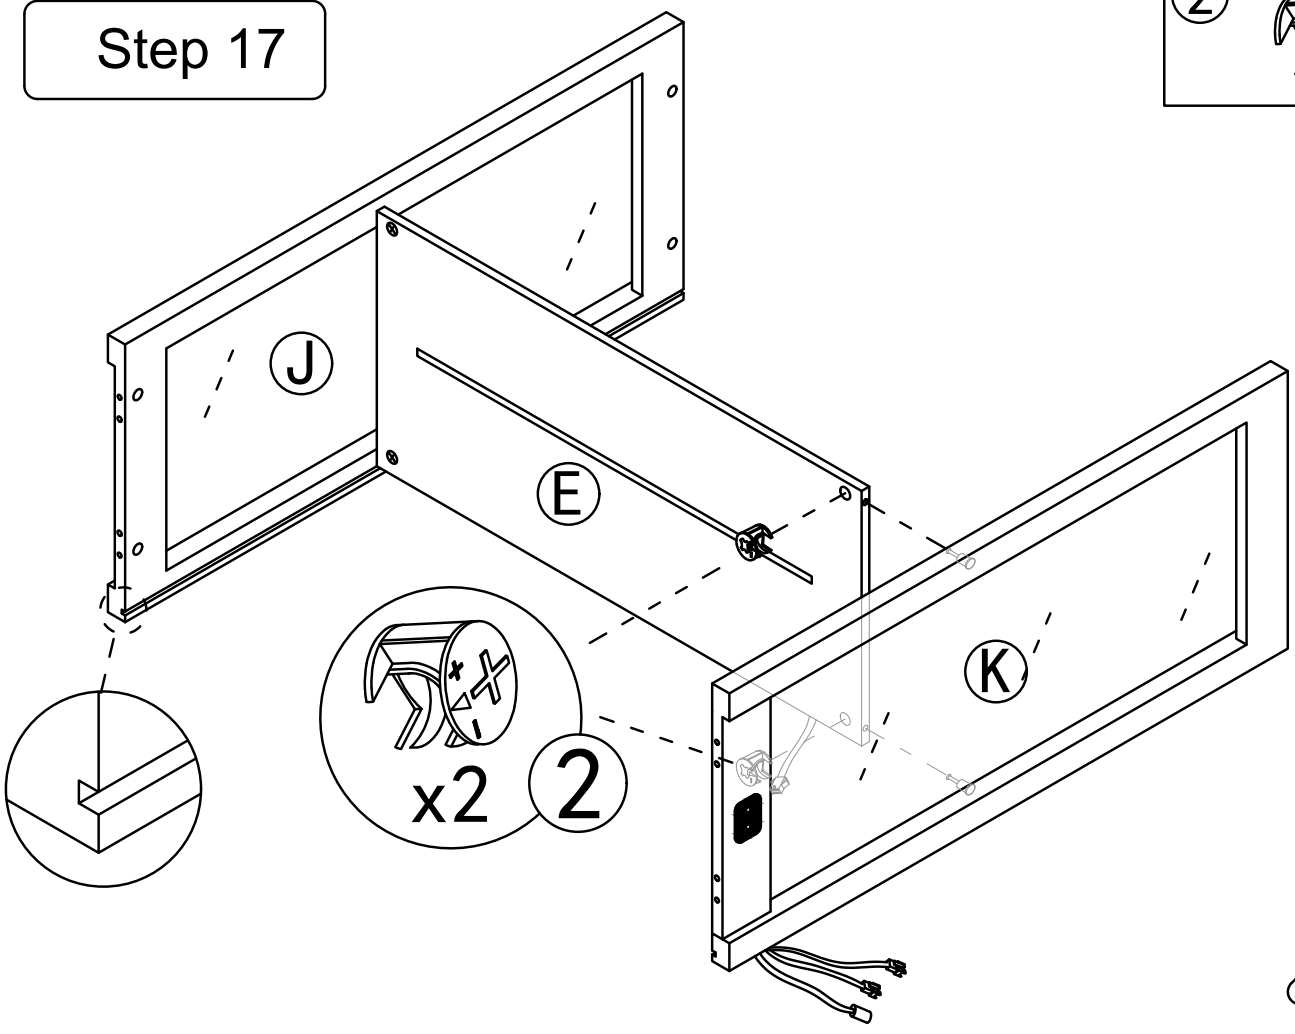


Step 18

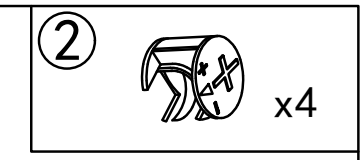


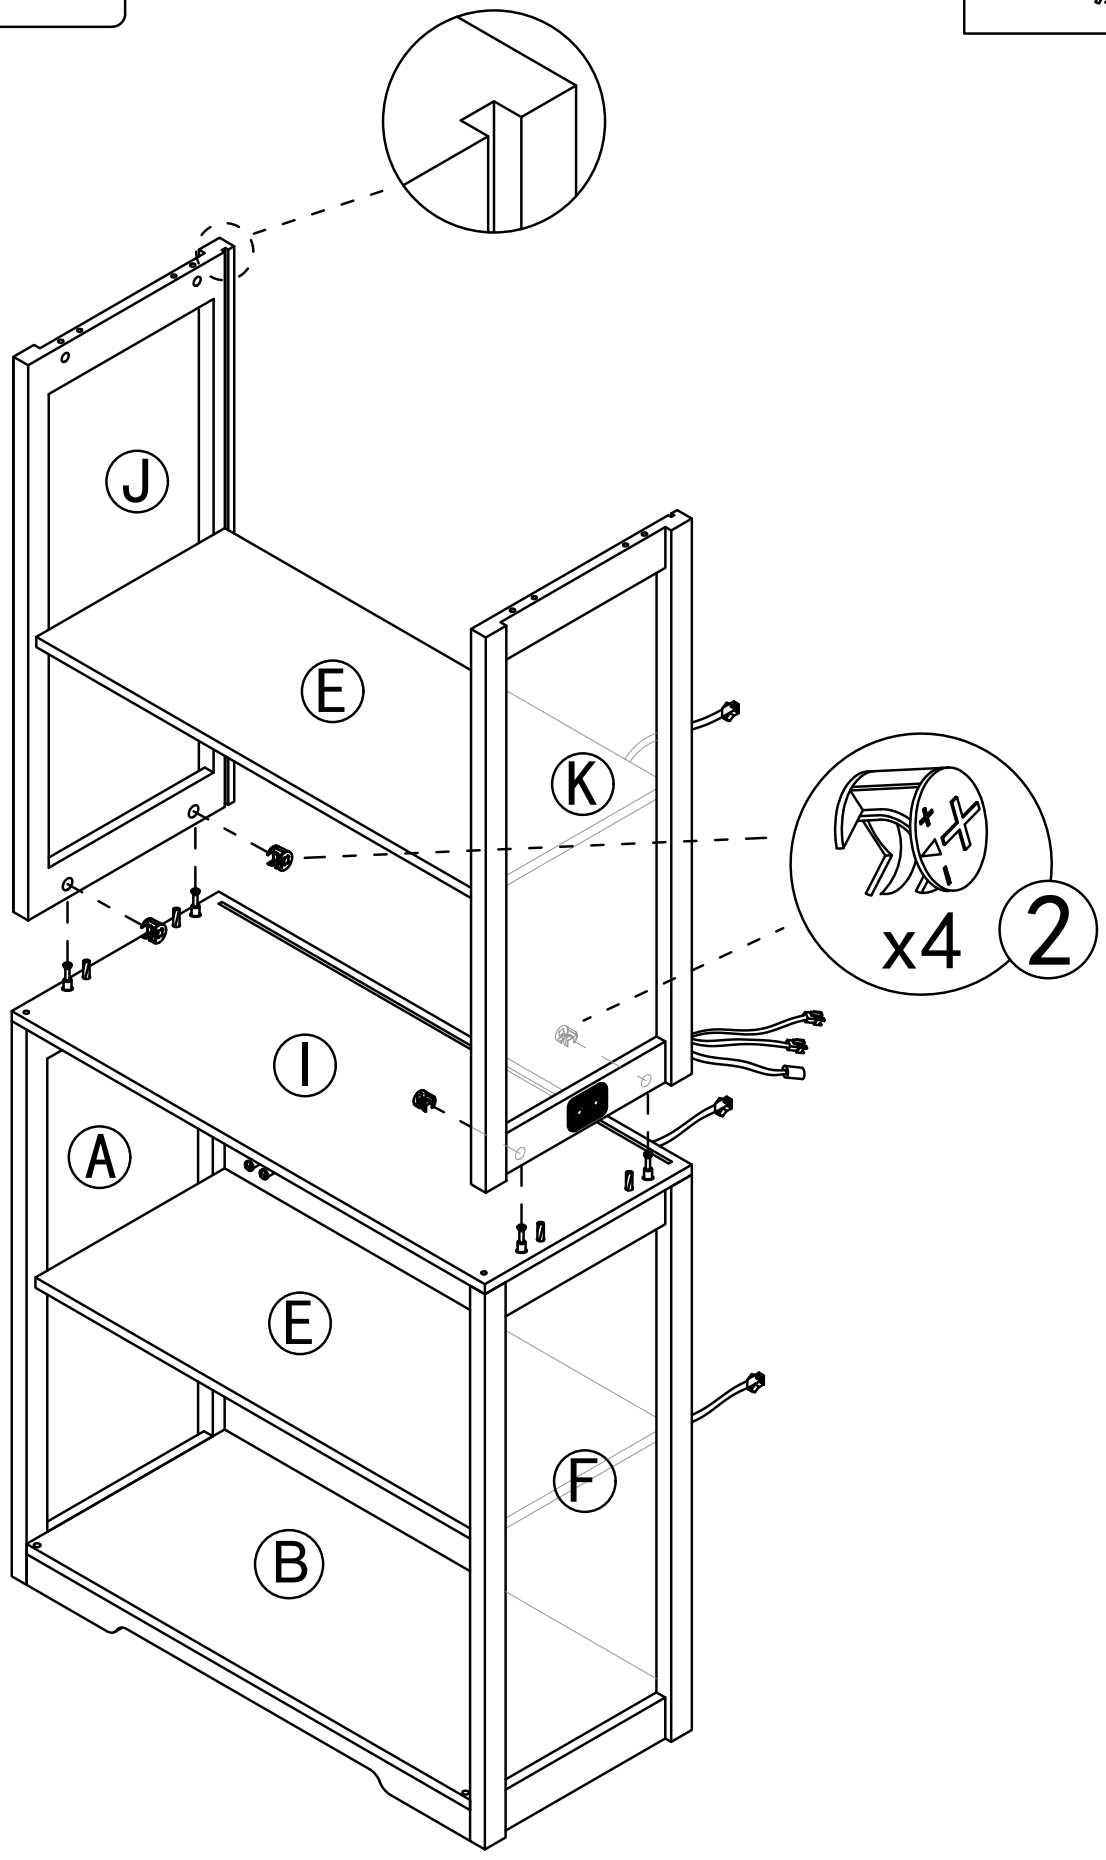


Step 19

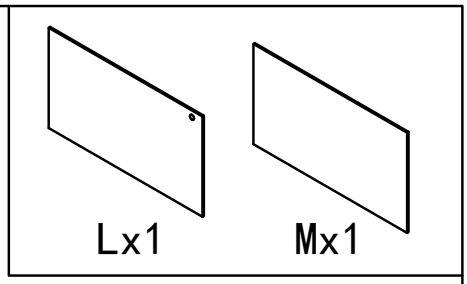


Insert the backplane into the slot

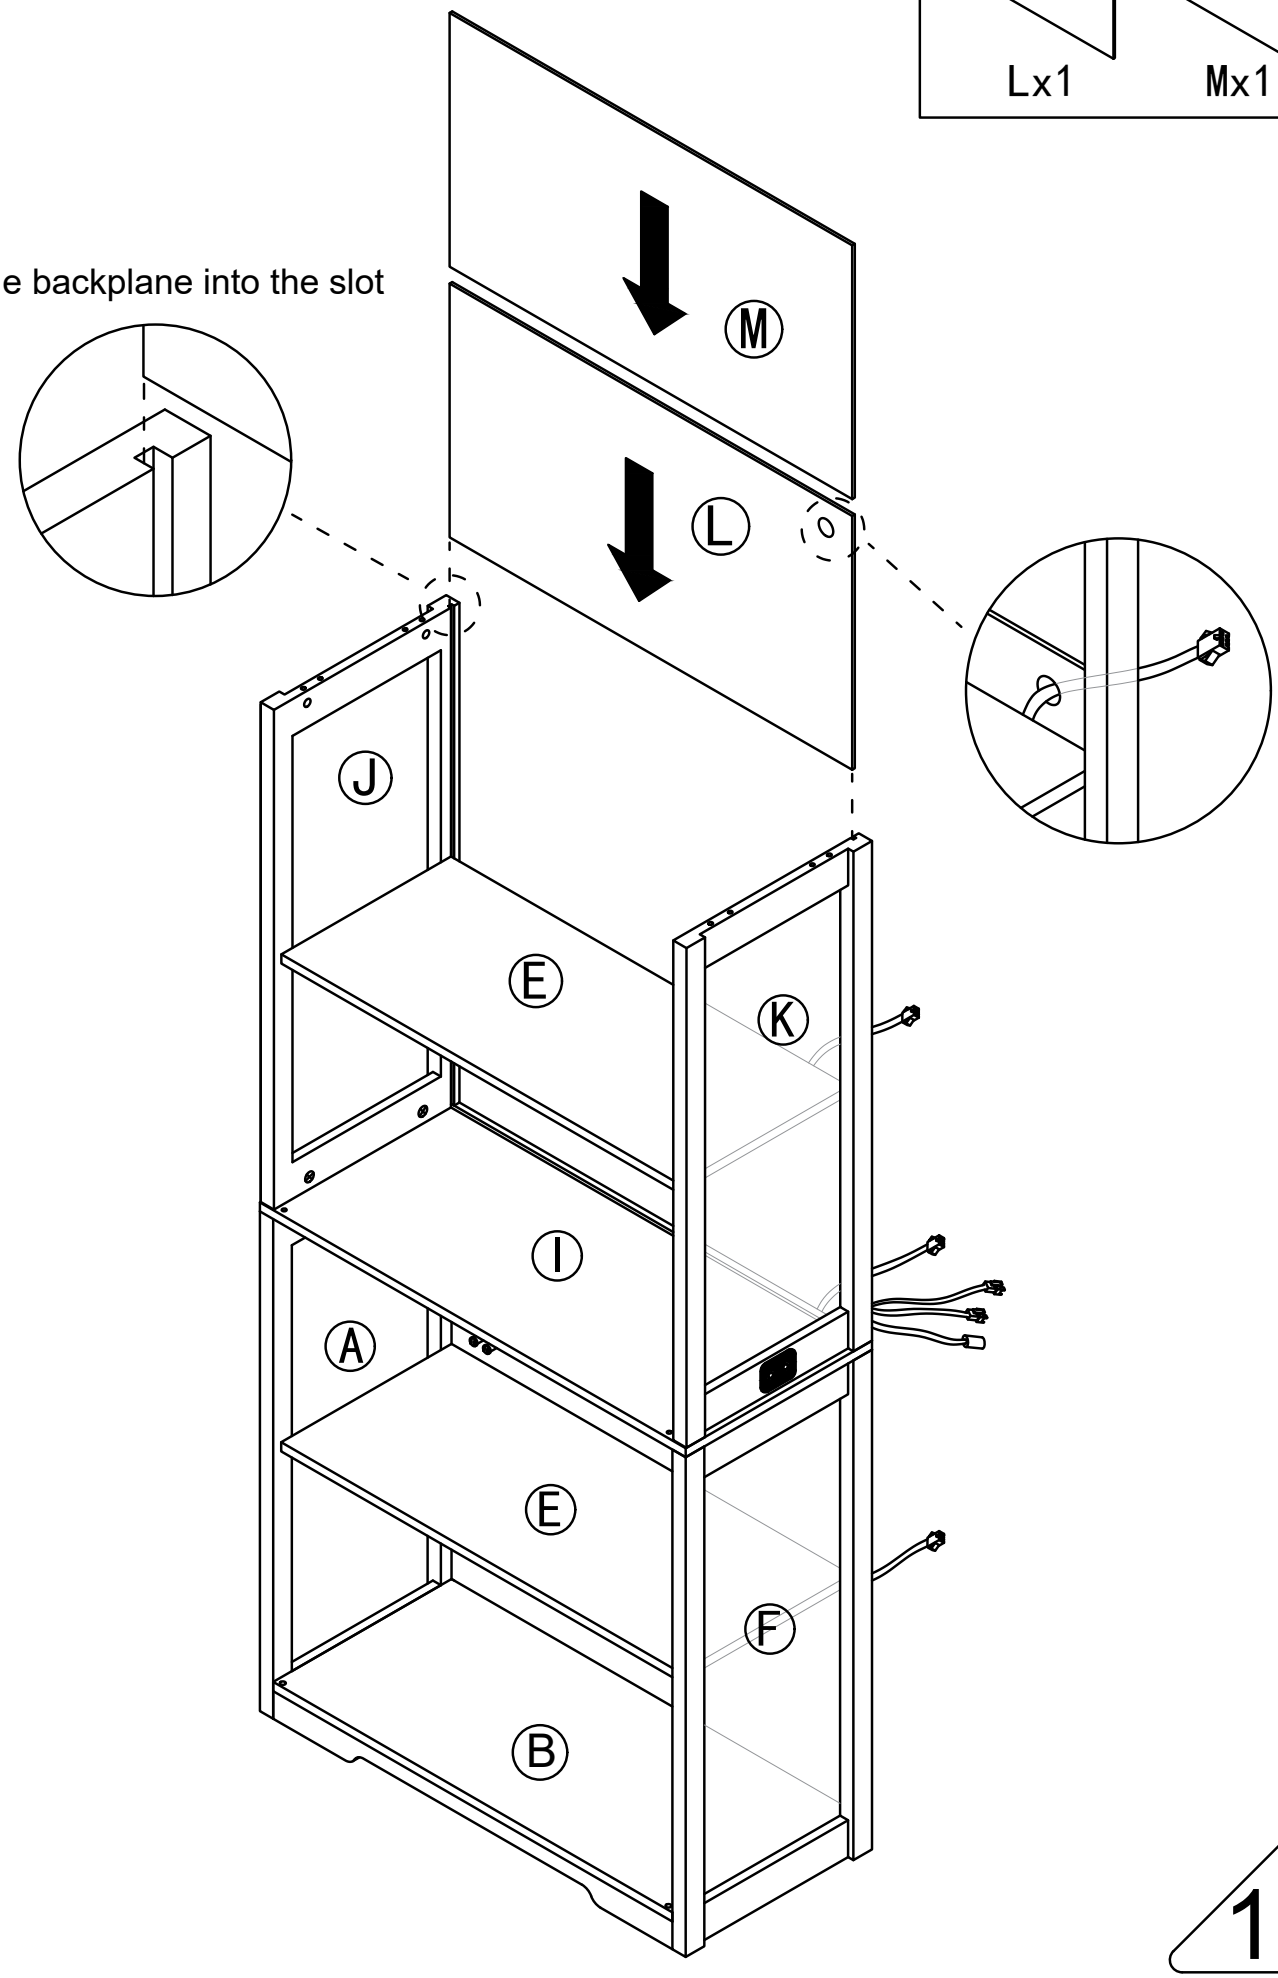



Step 20

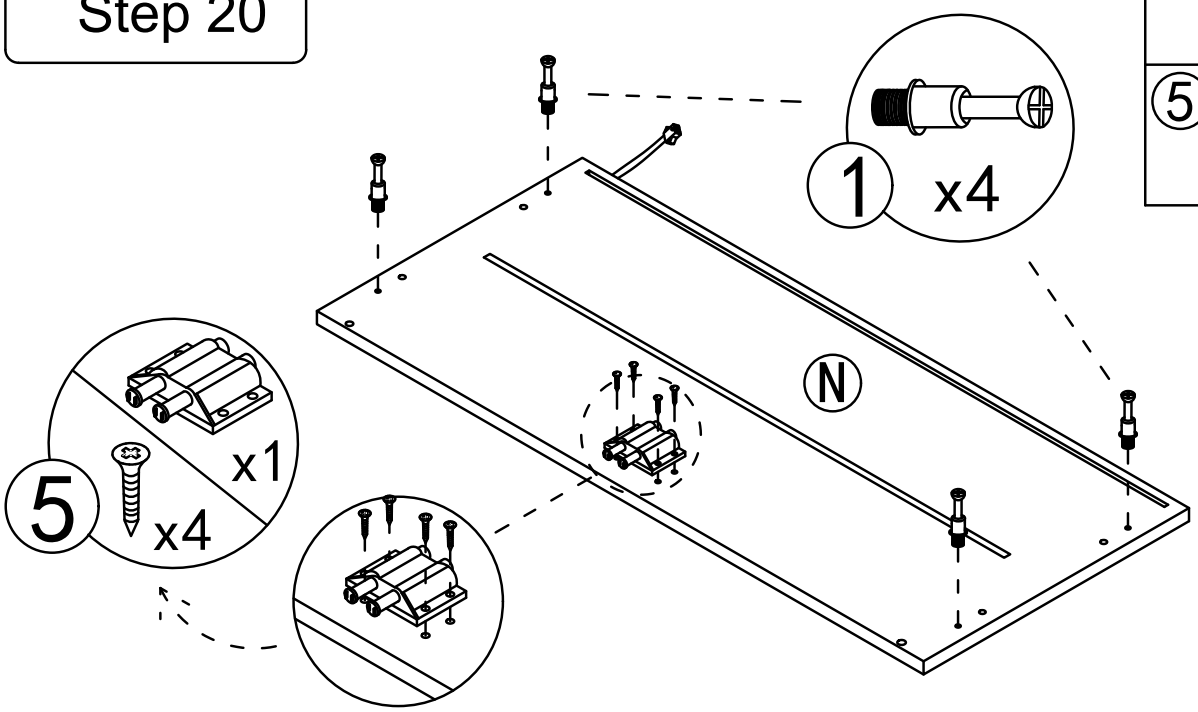




Step 21

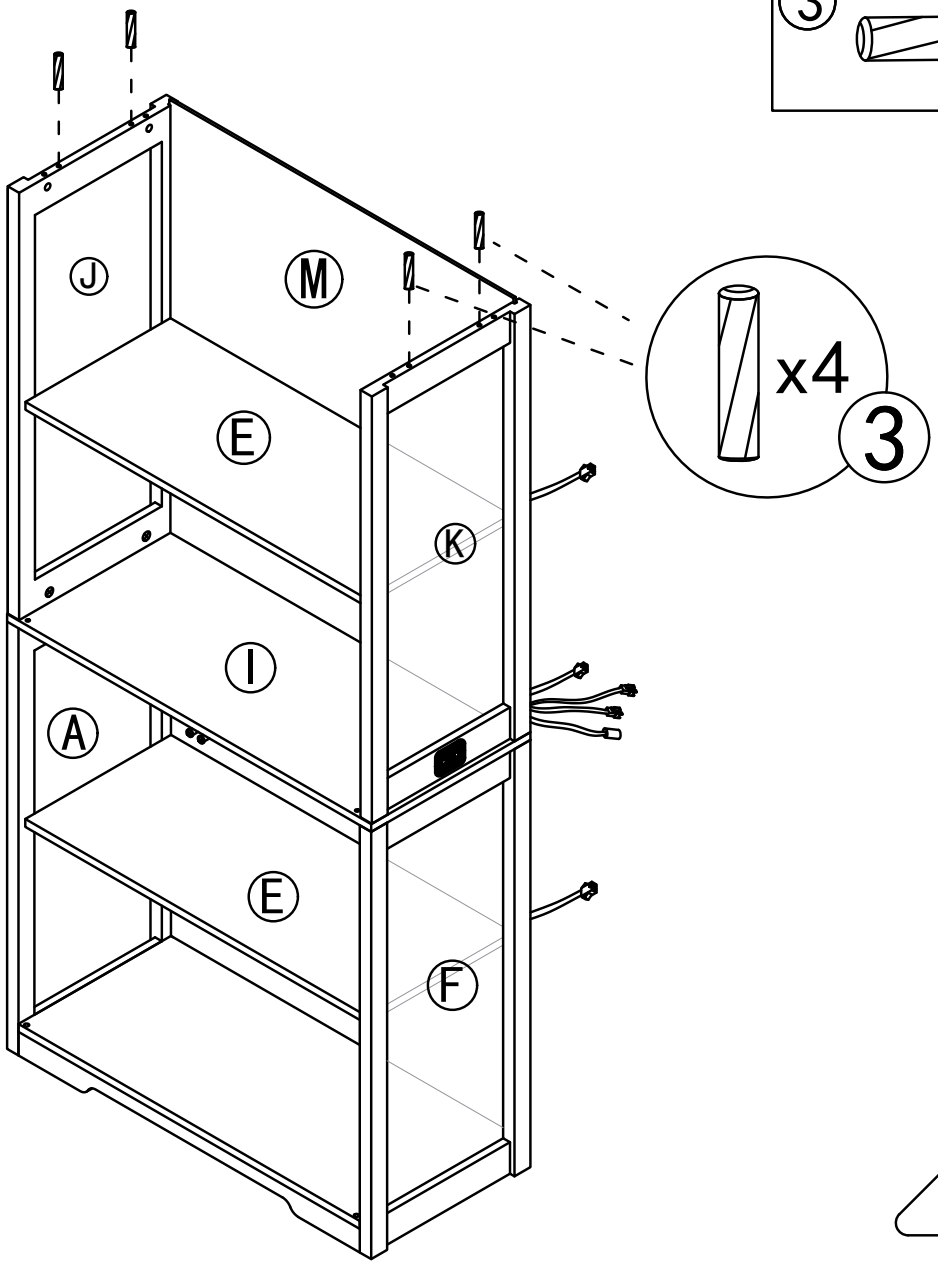





Step 22

② x4

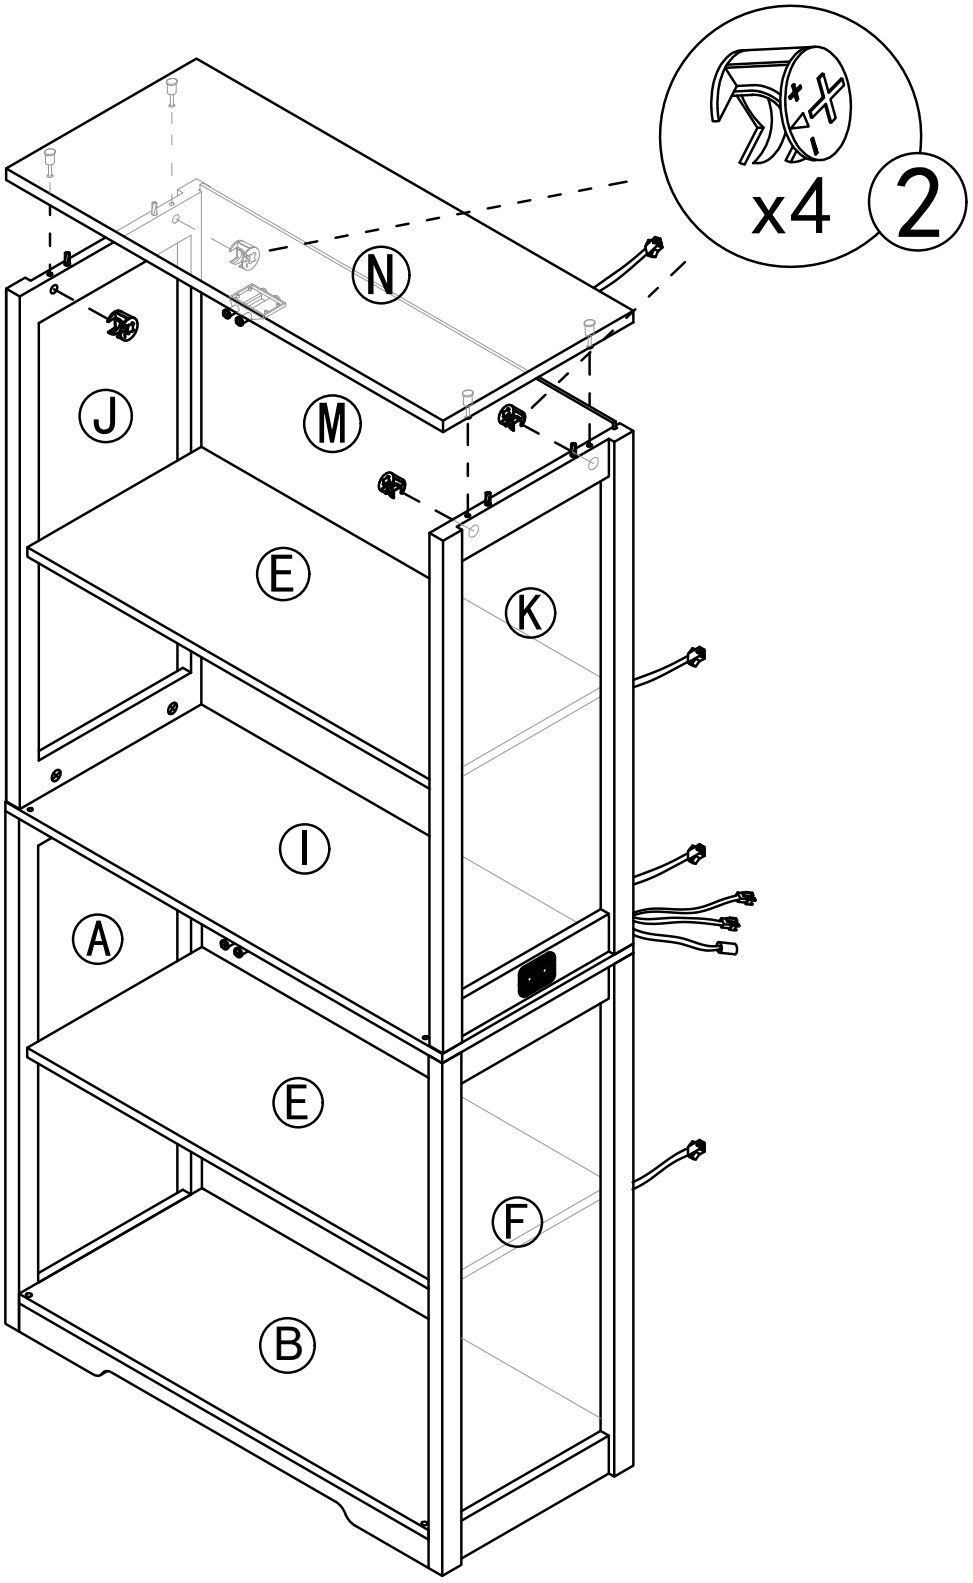


Step 23

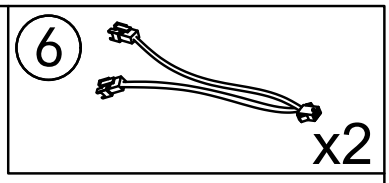


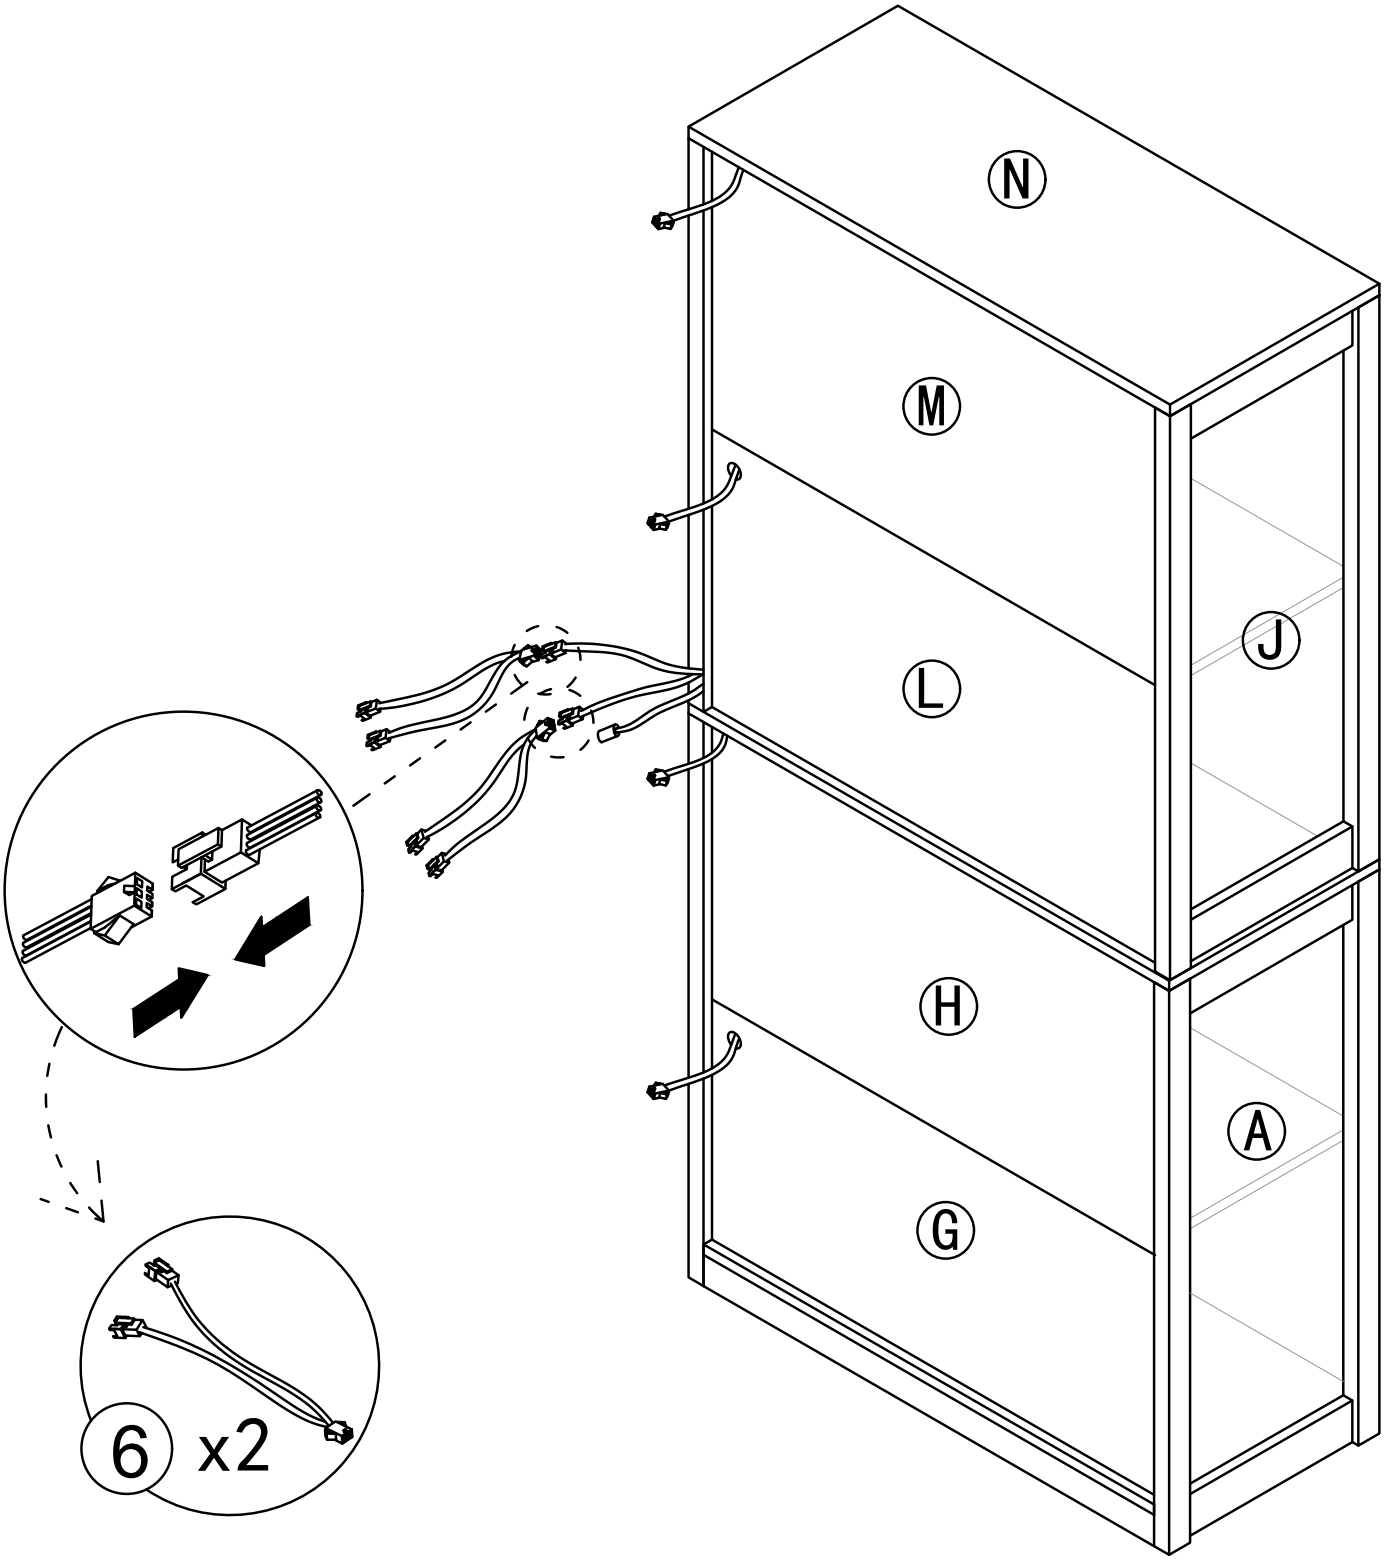


Step 24

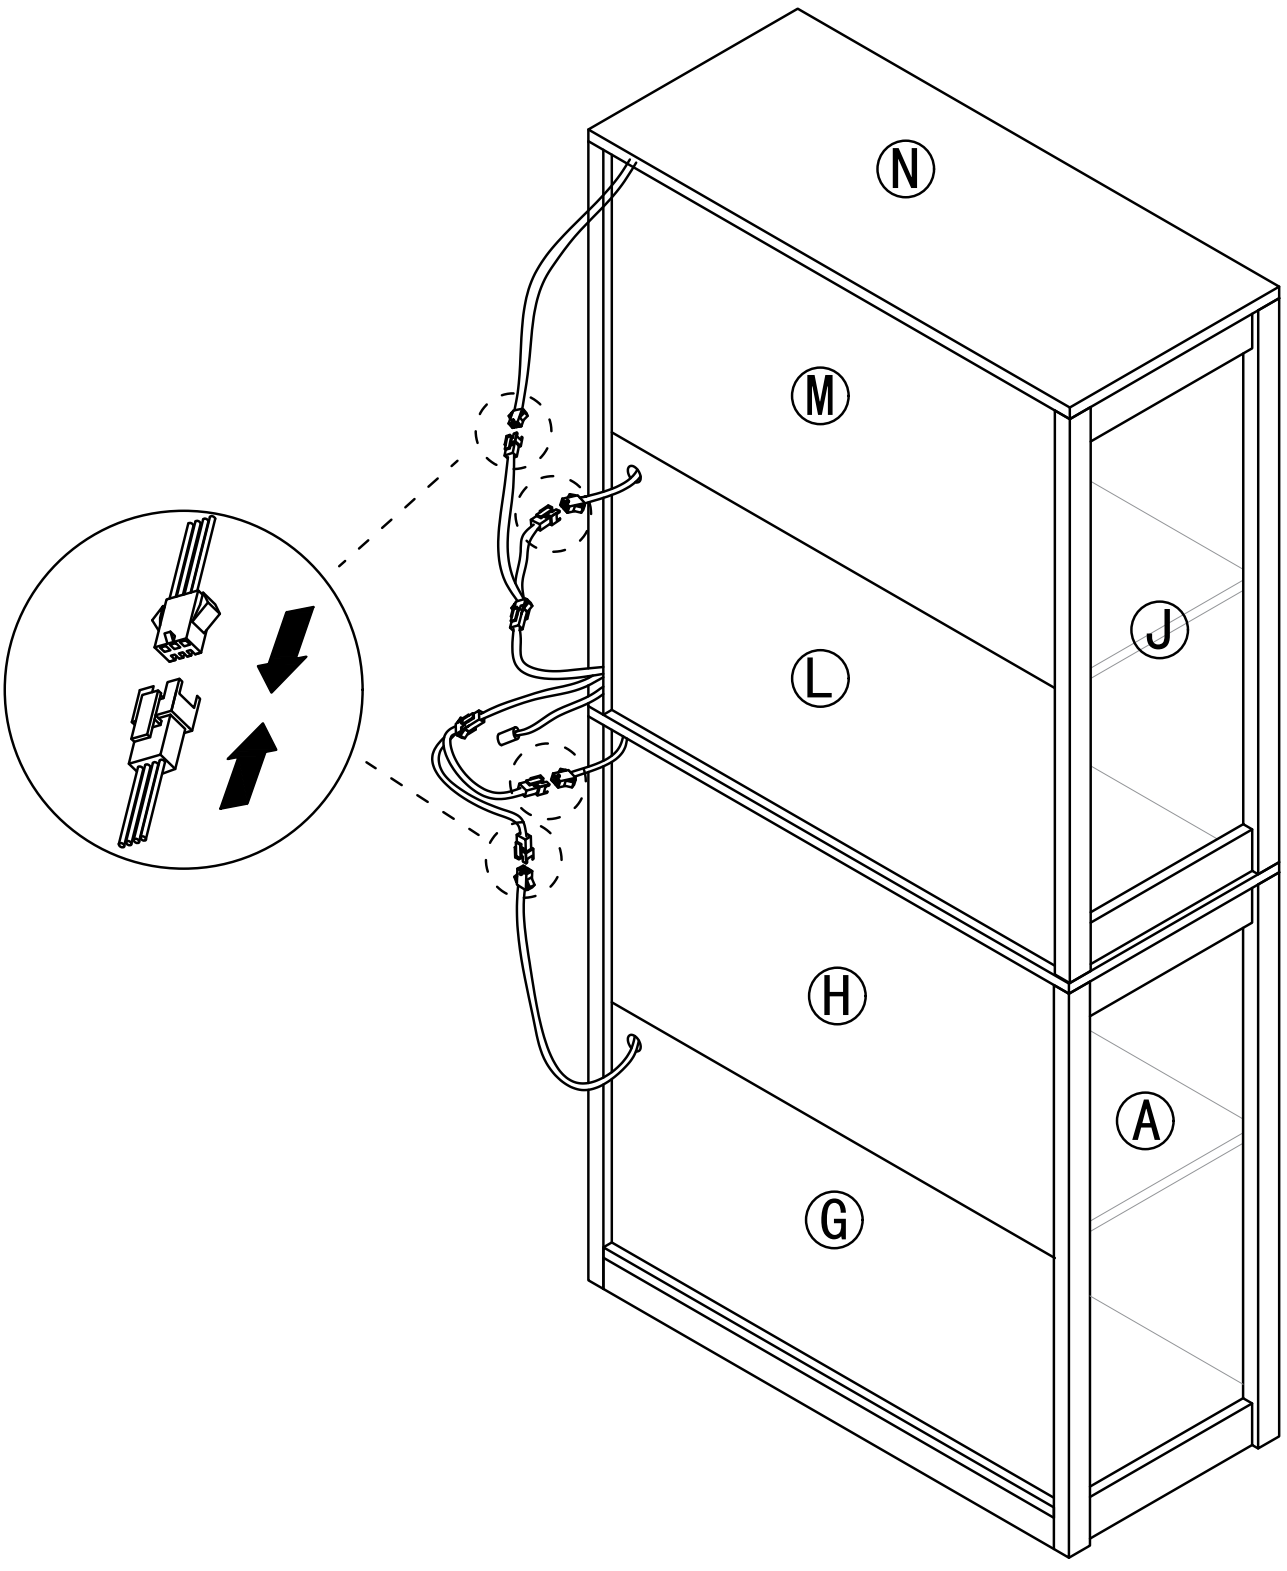



Step 25

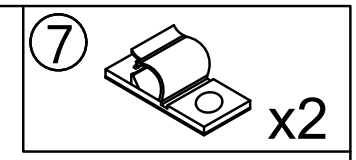

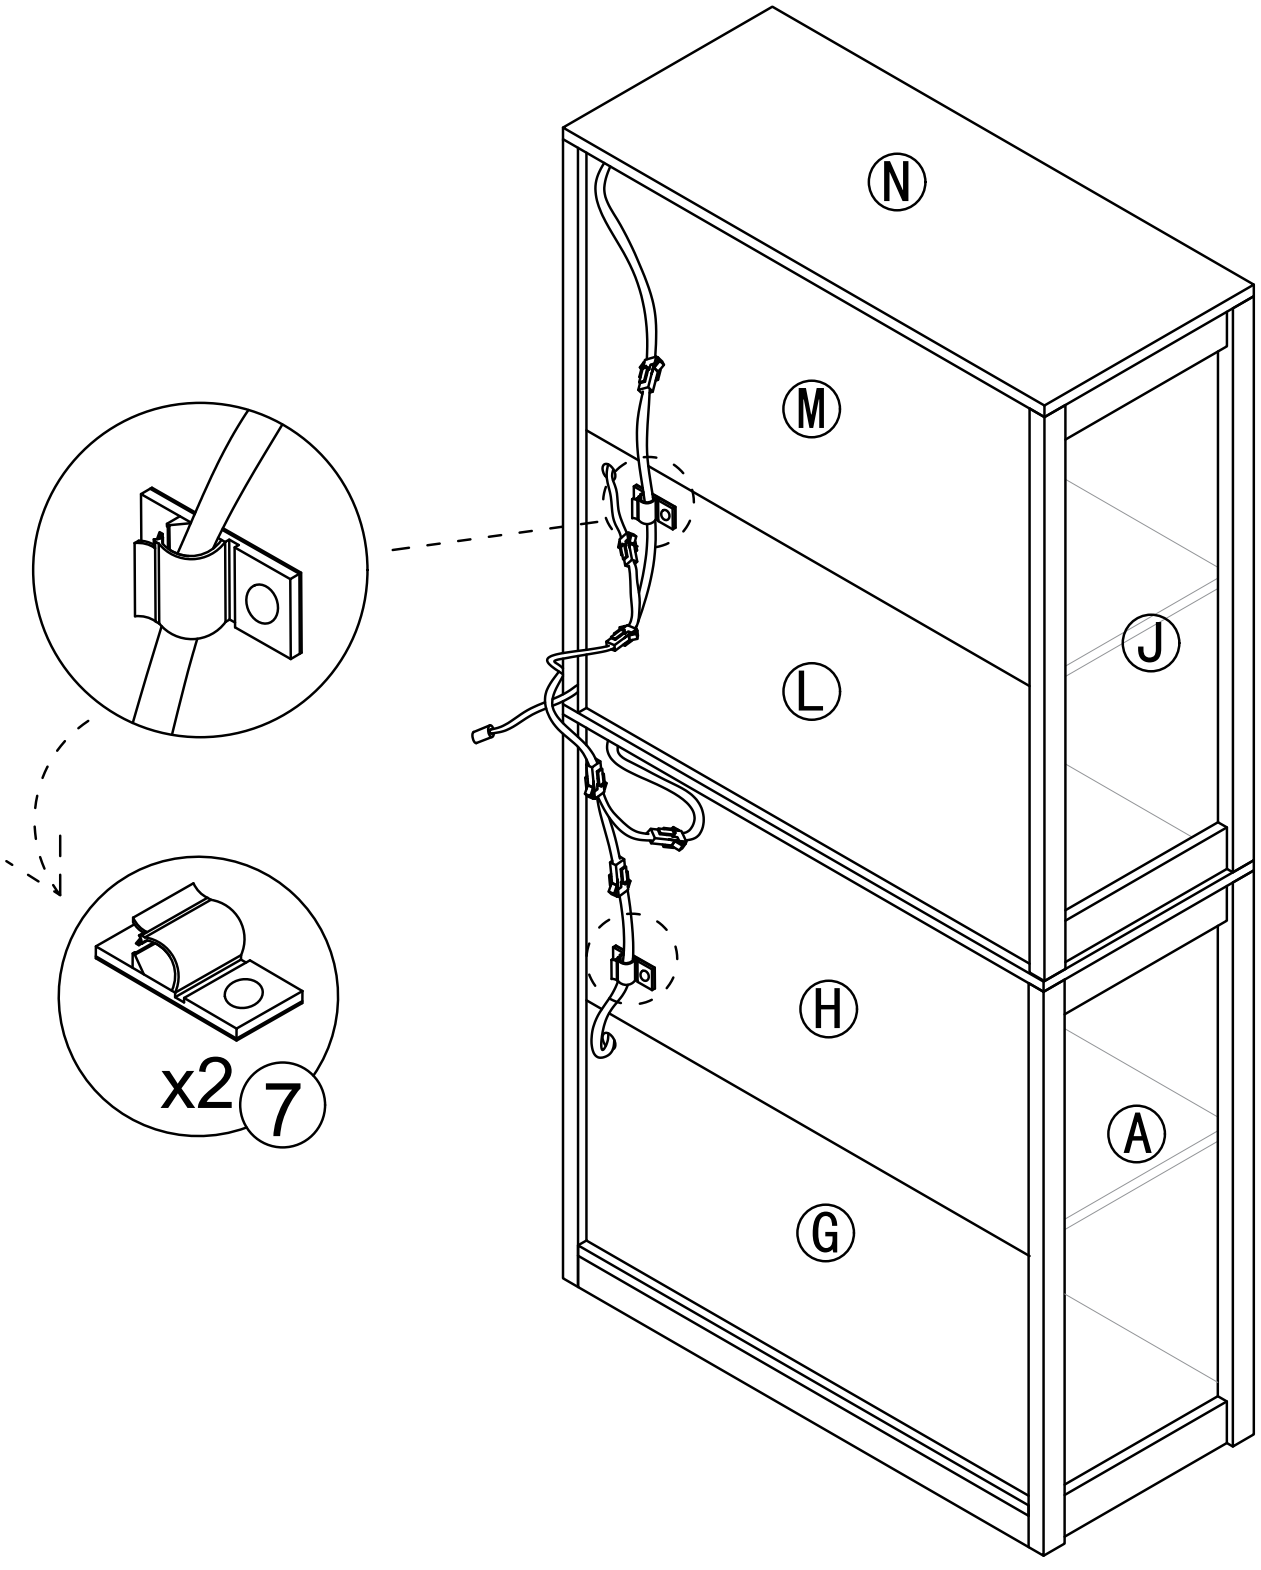

Step 26

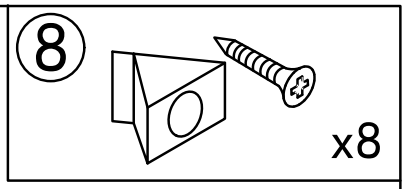




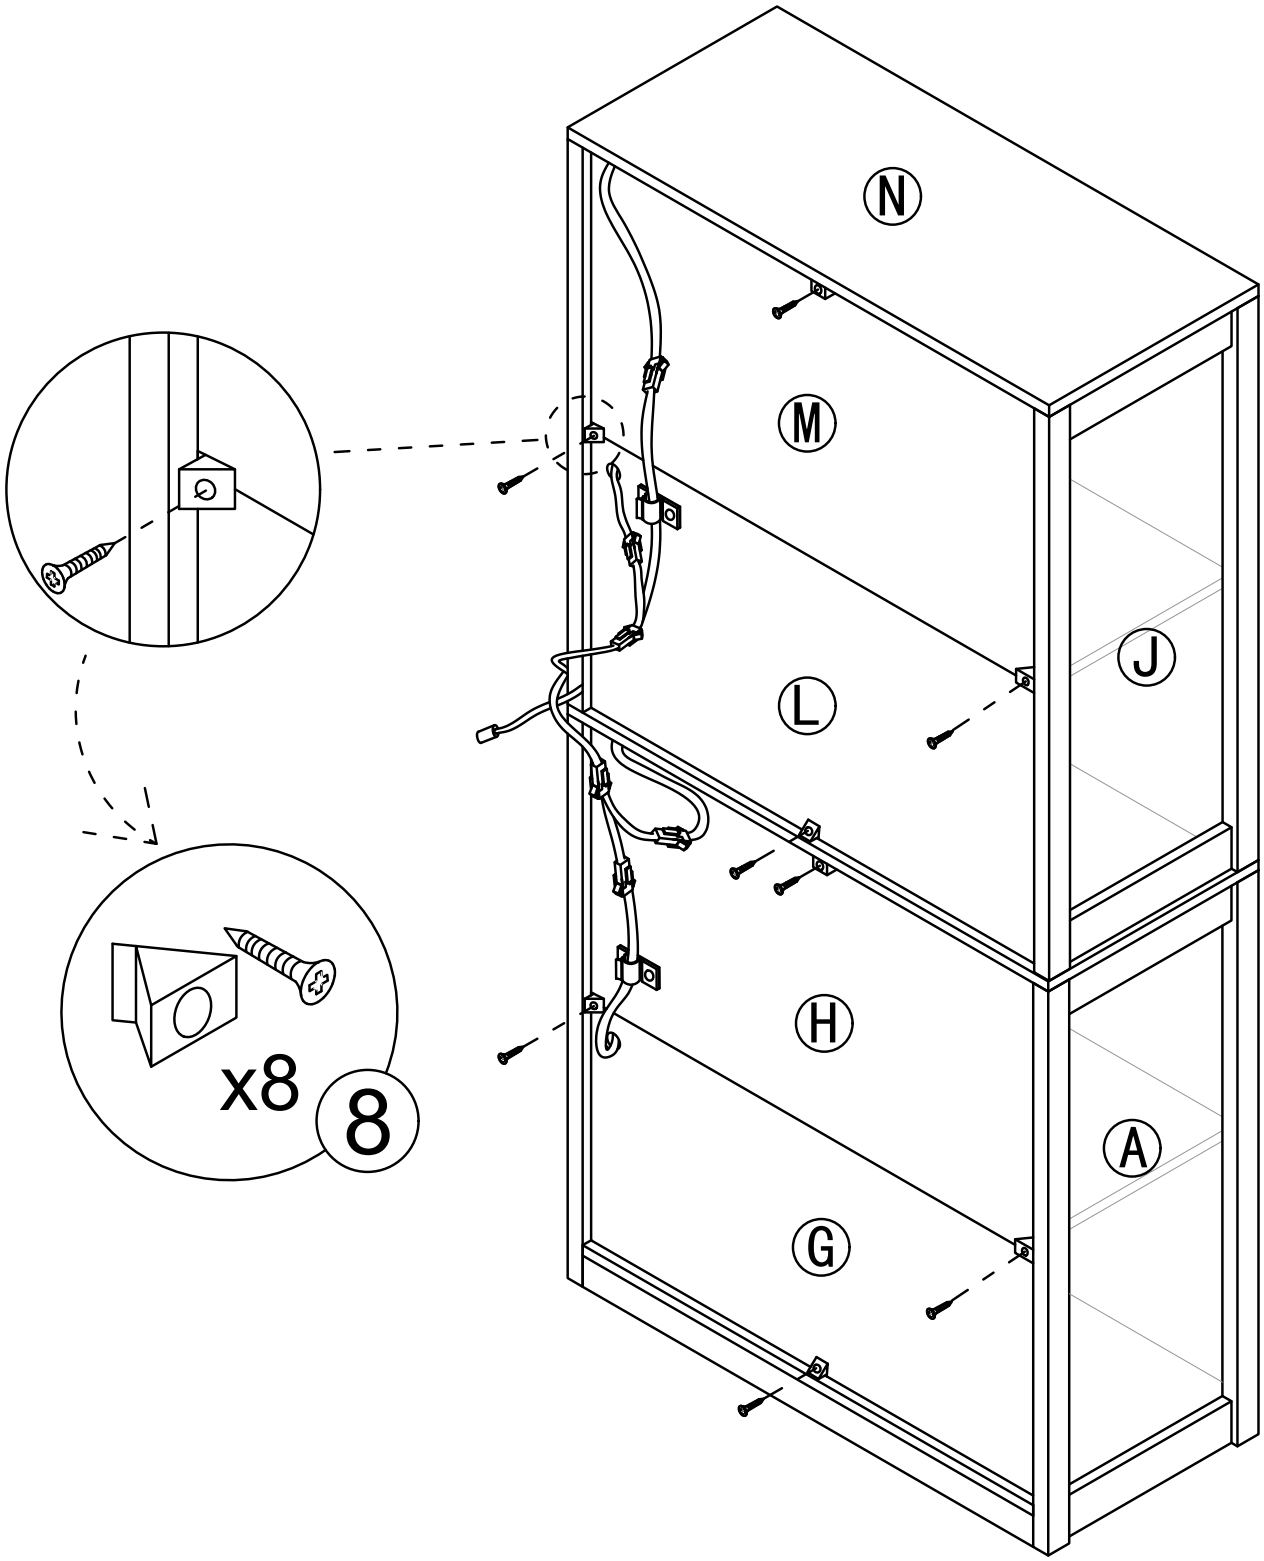


Step 27

9 x4


Use a hammer to drive the nail into the gap of the wooden board and fix the back board

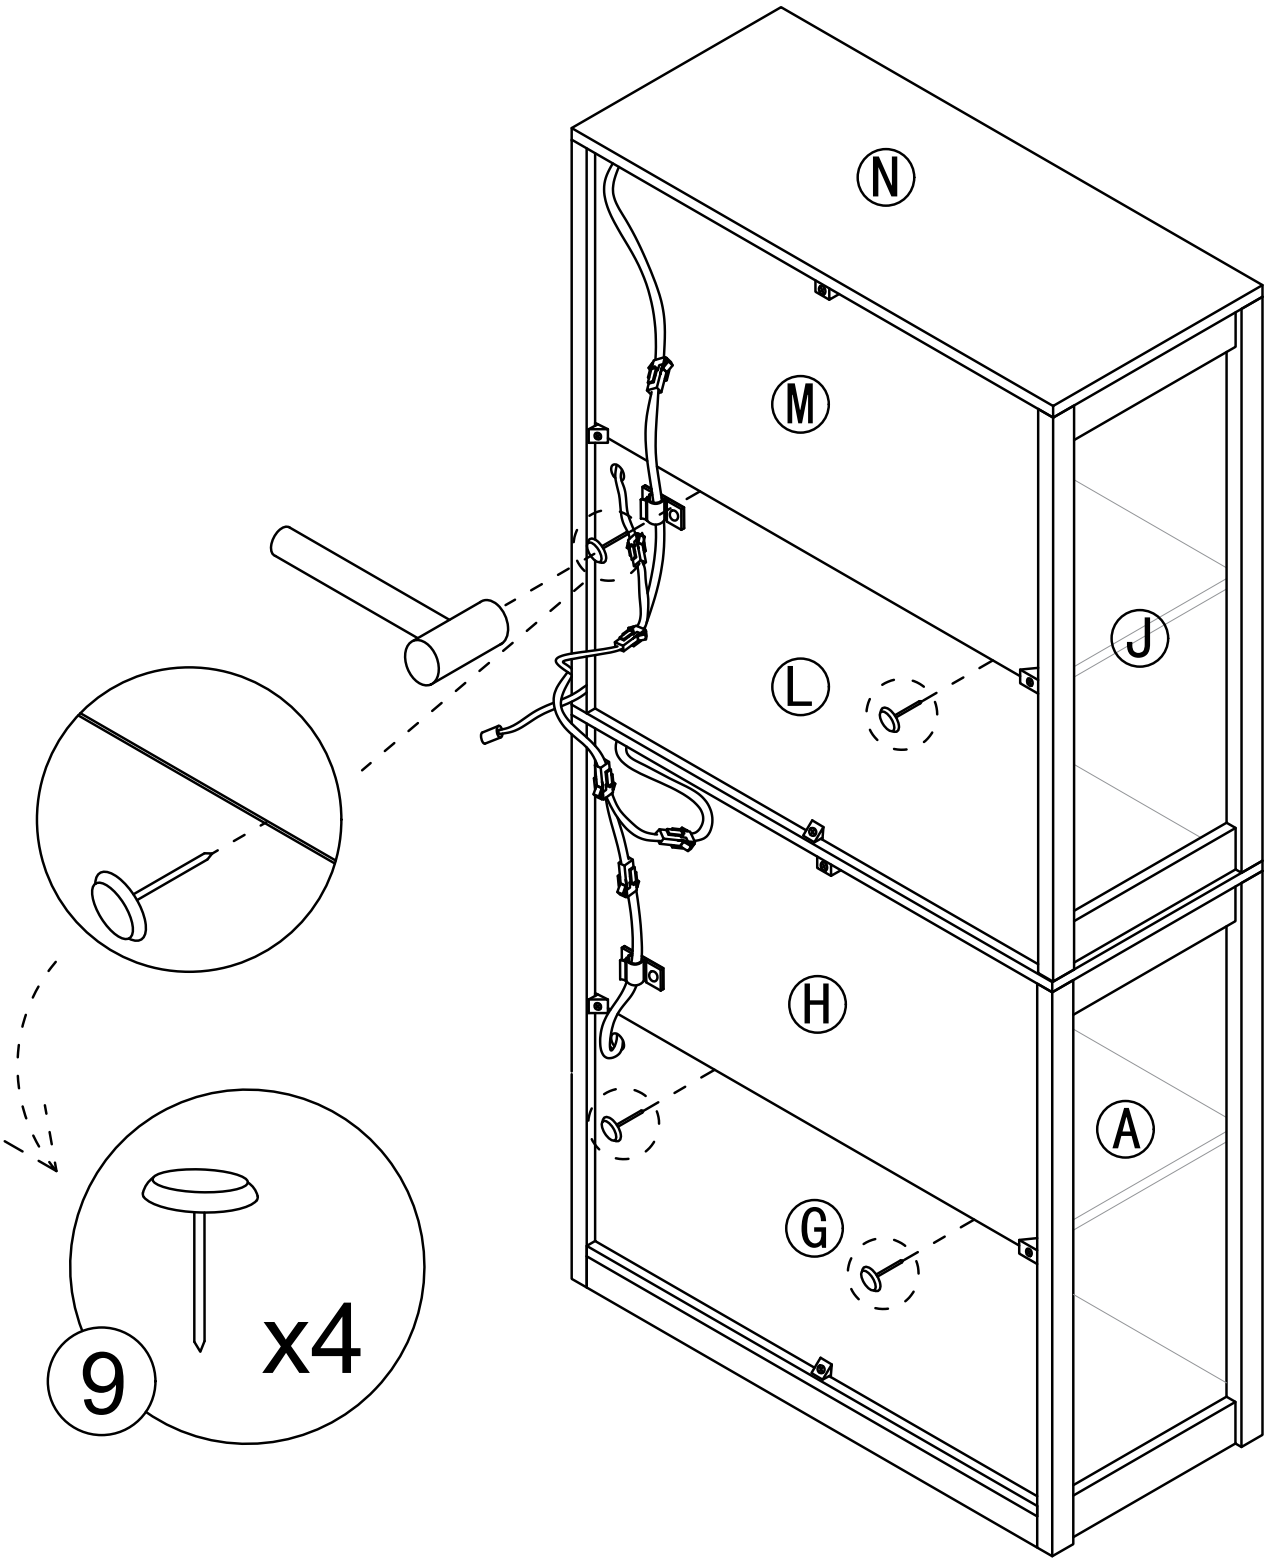


5		4pcs	10		8pcs			1pcs


11  x2

 x2  x2

 x2  x4

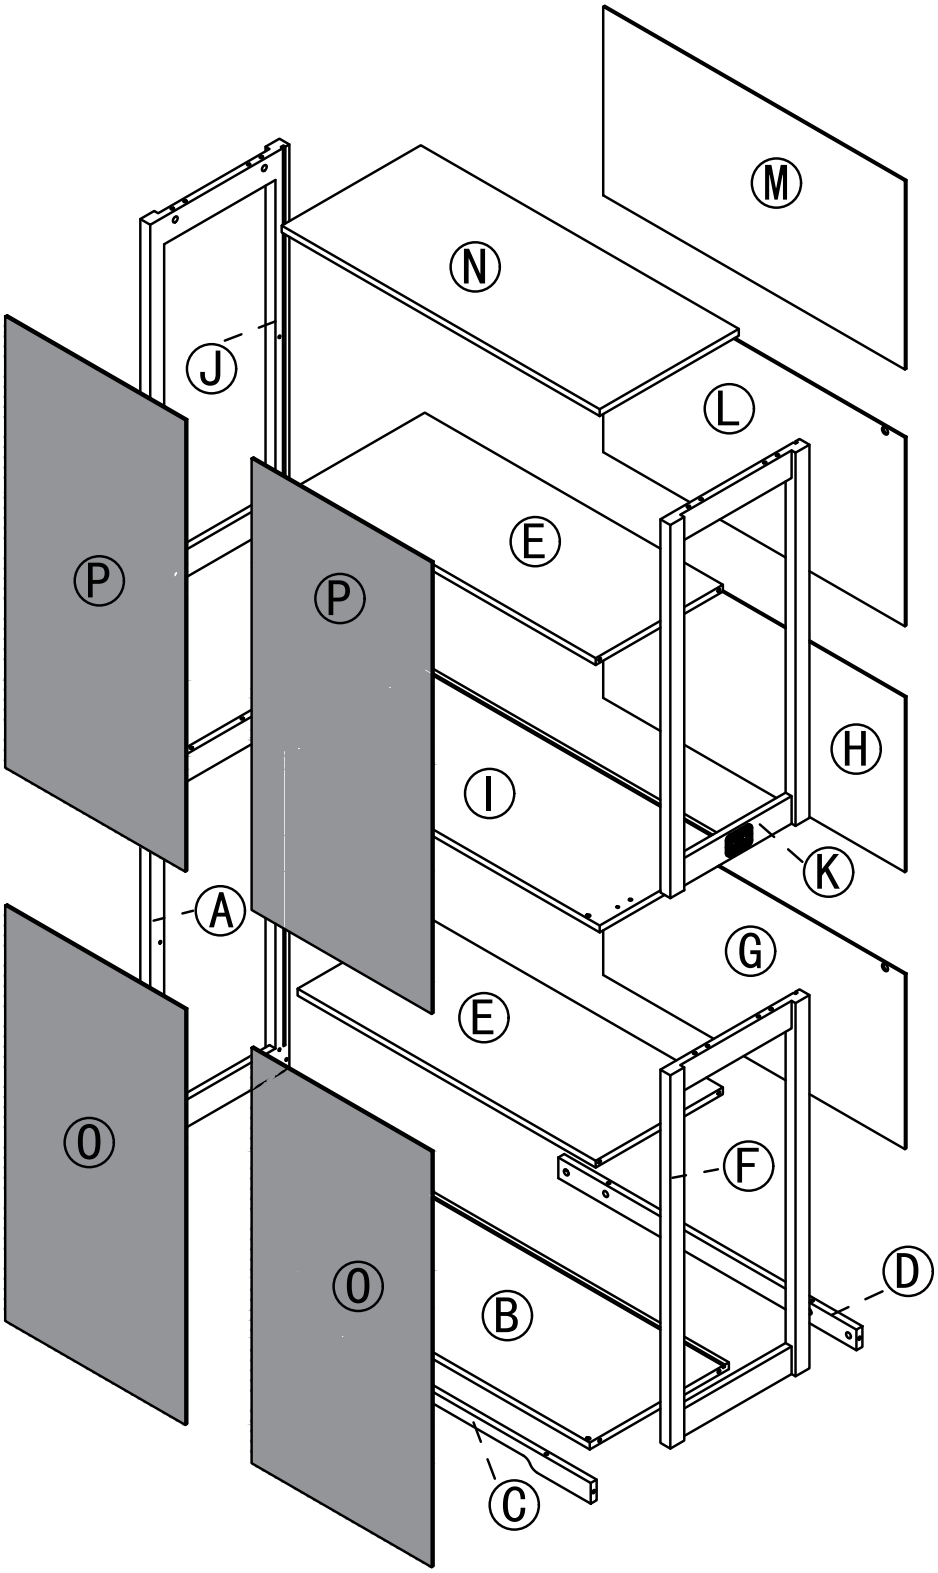

Step 28

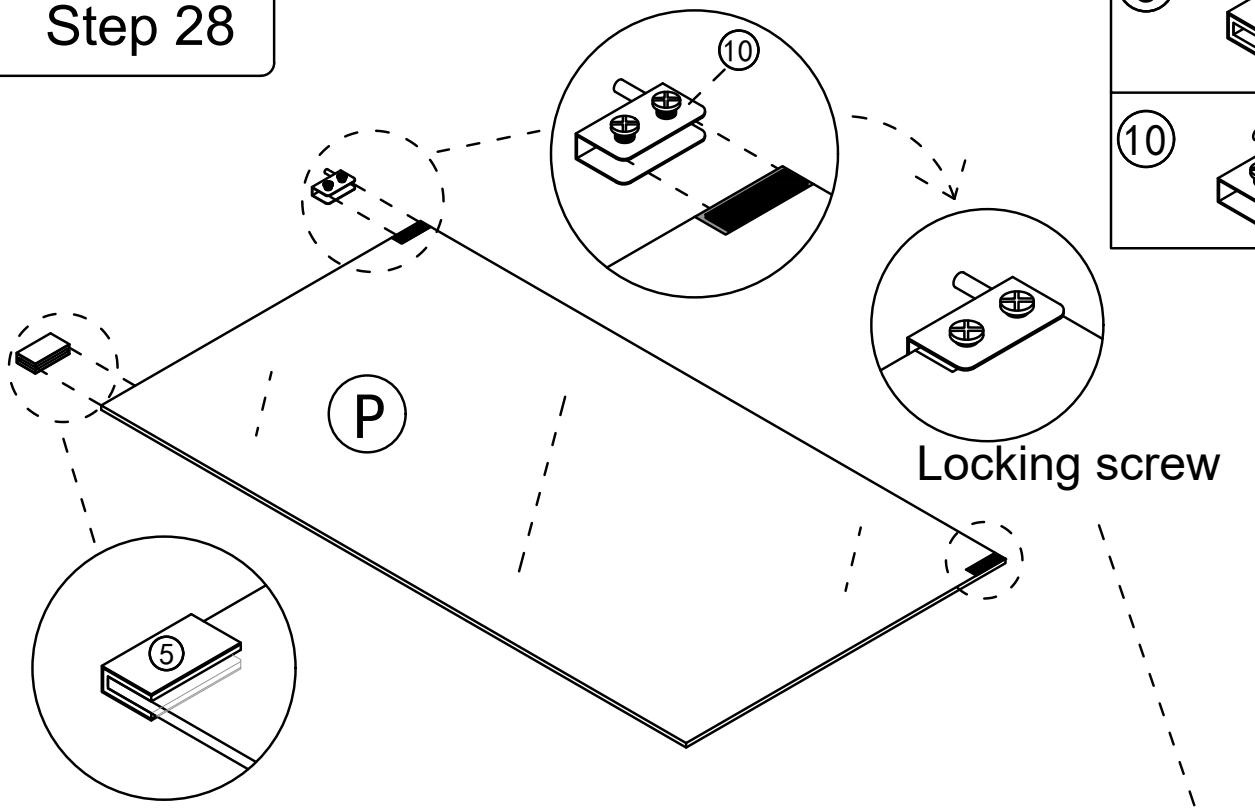


5 x1

10 x1

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction


Step 29

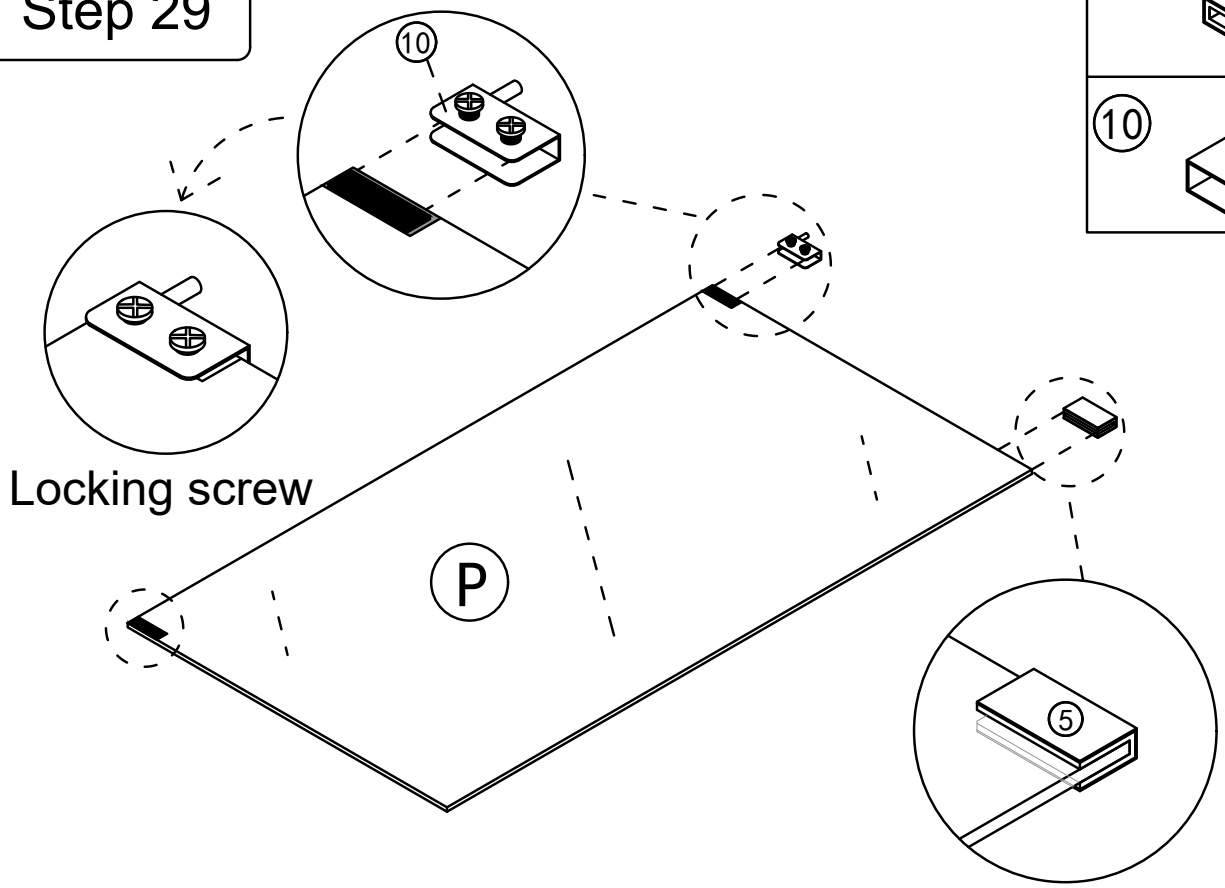


5 x1

10 x1

Step 30




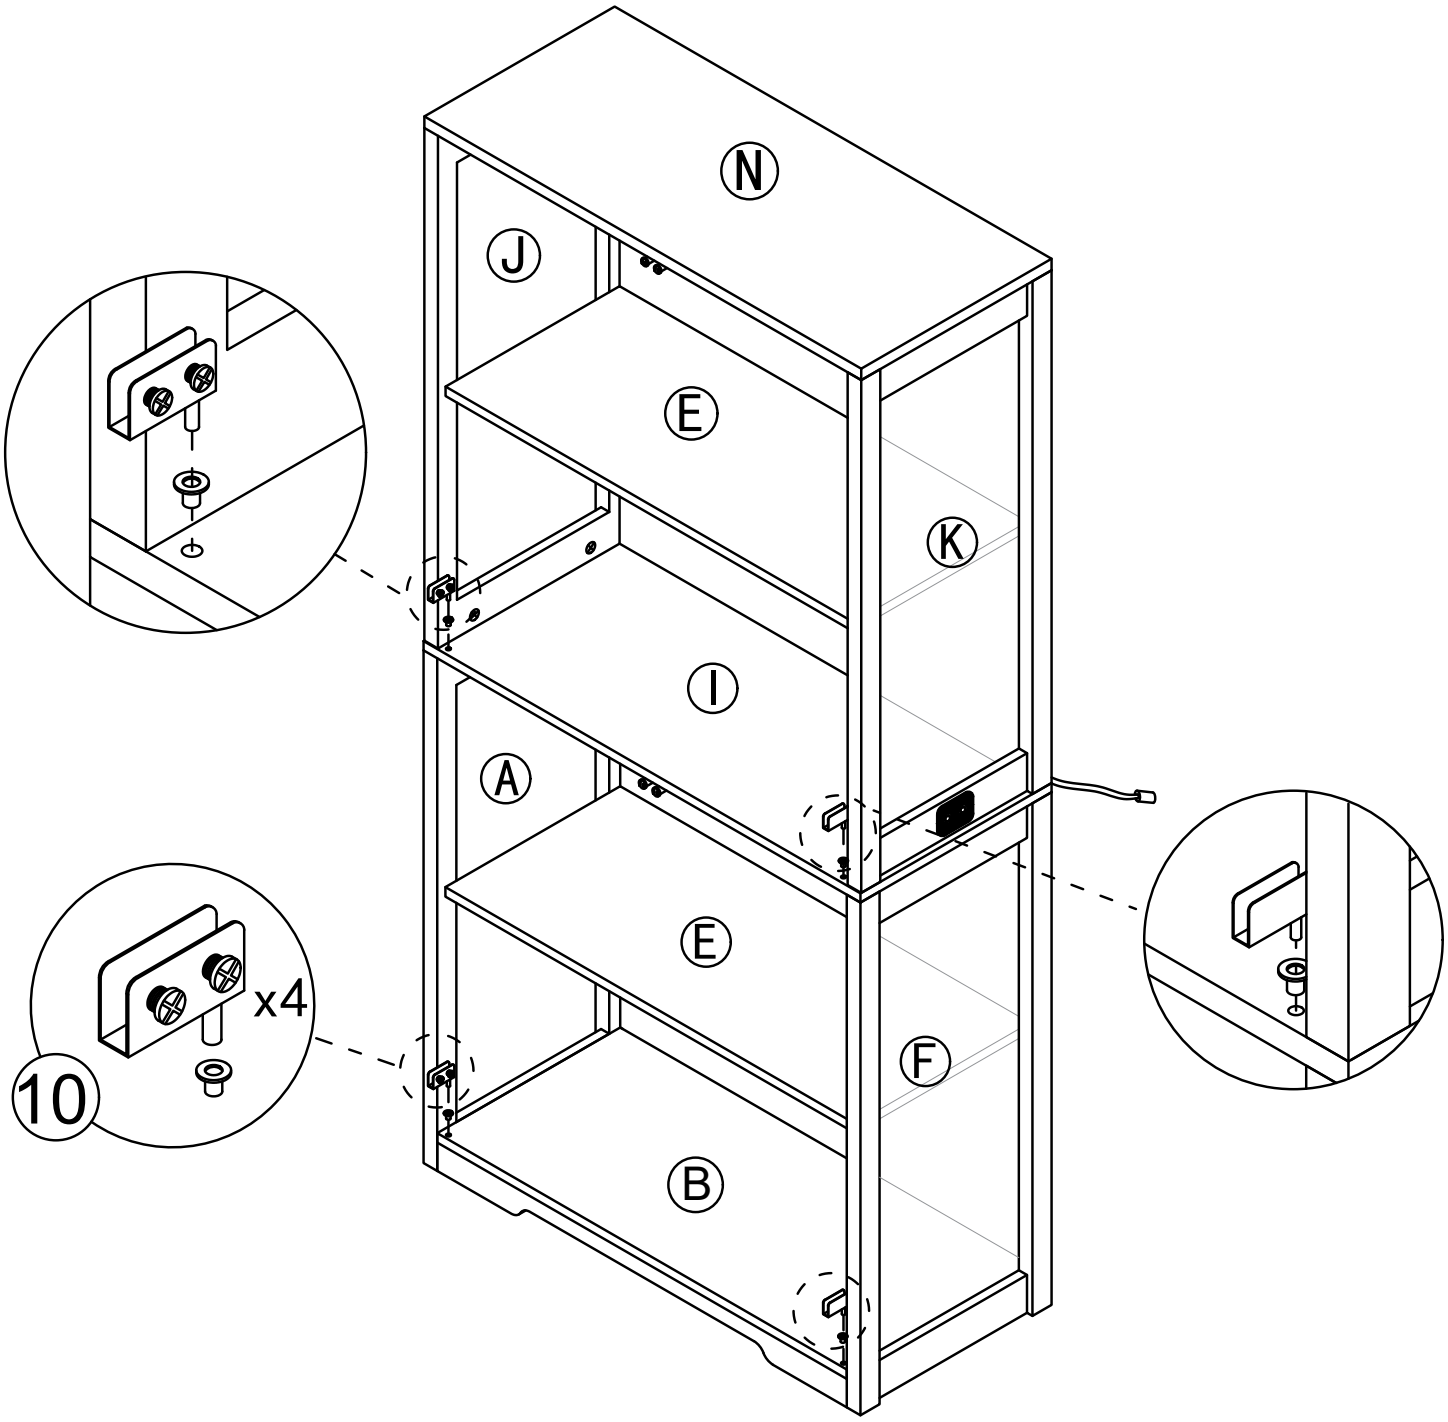

Step 31


10 x2


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.



first

Pay attention to the direction of the door hinge during installation




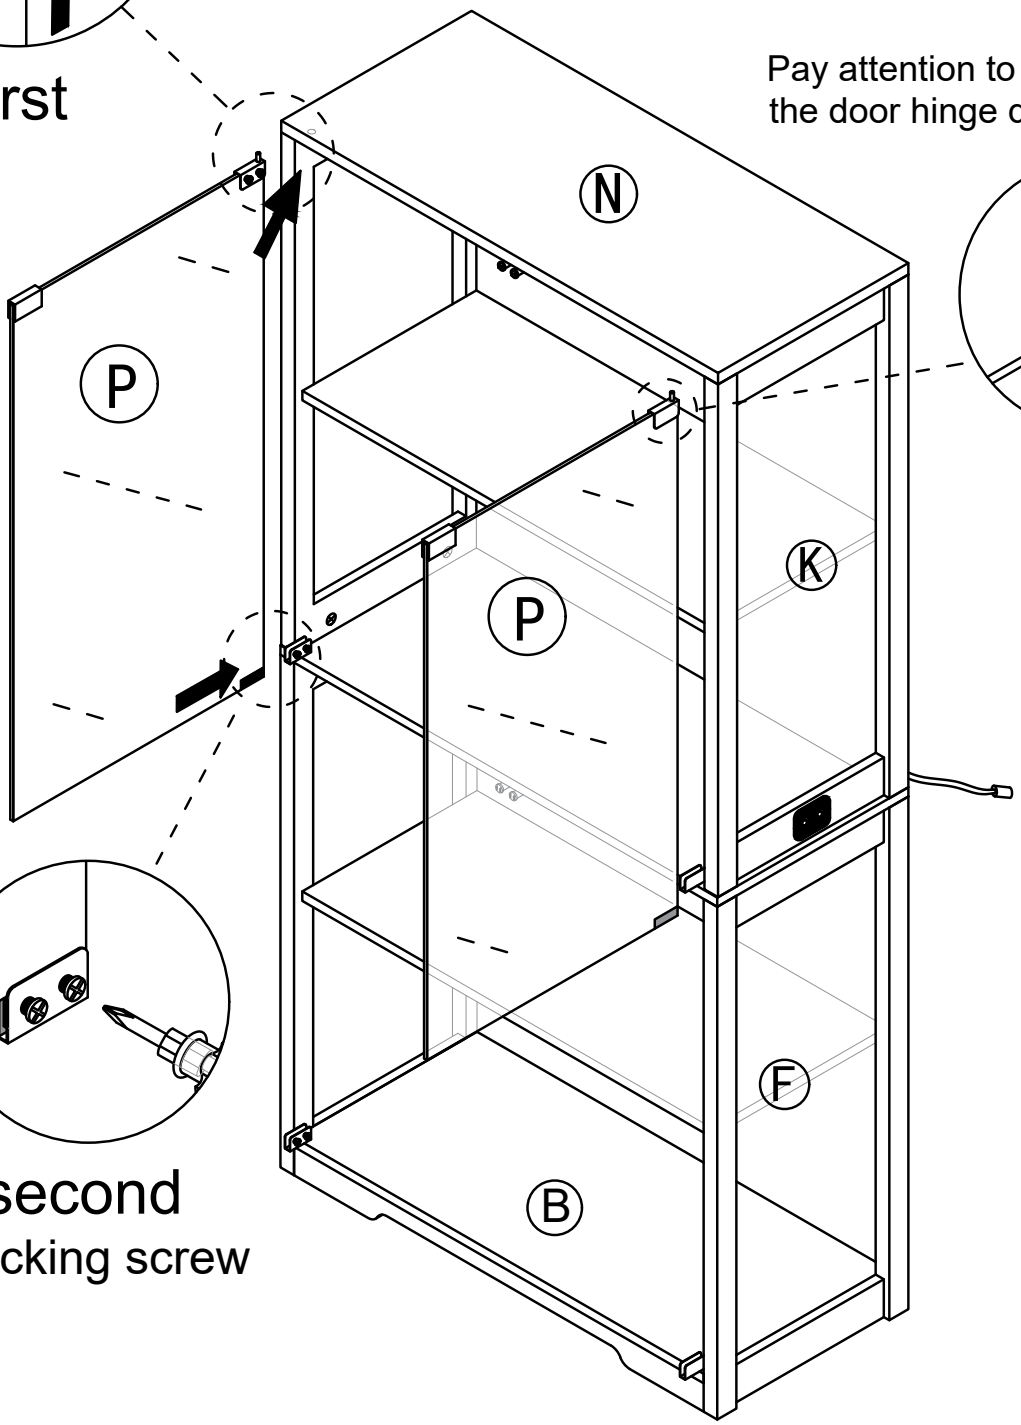

second

Locking screw


Step 32

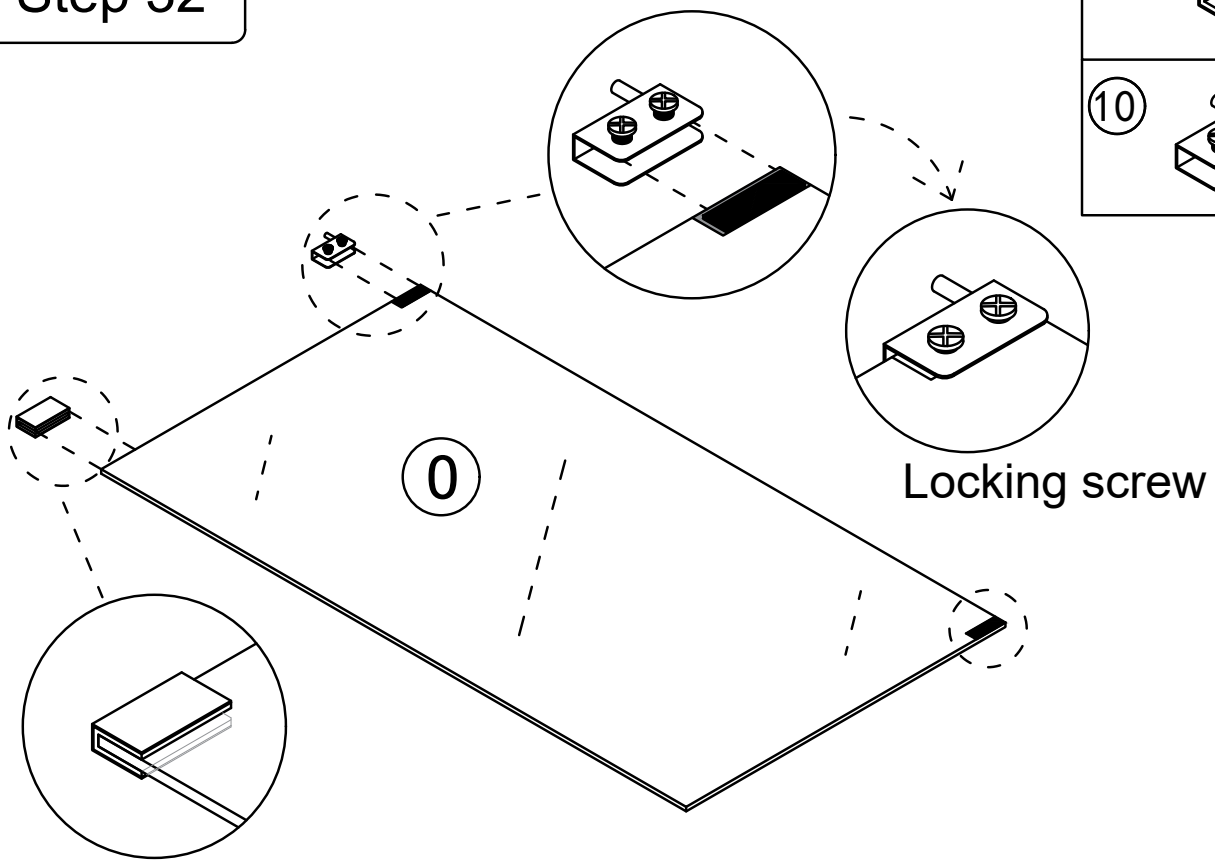

5 x1

10 x1

Step 33

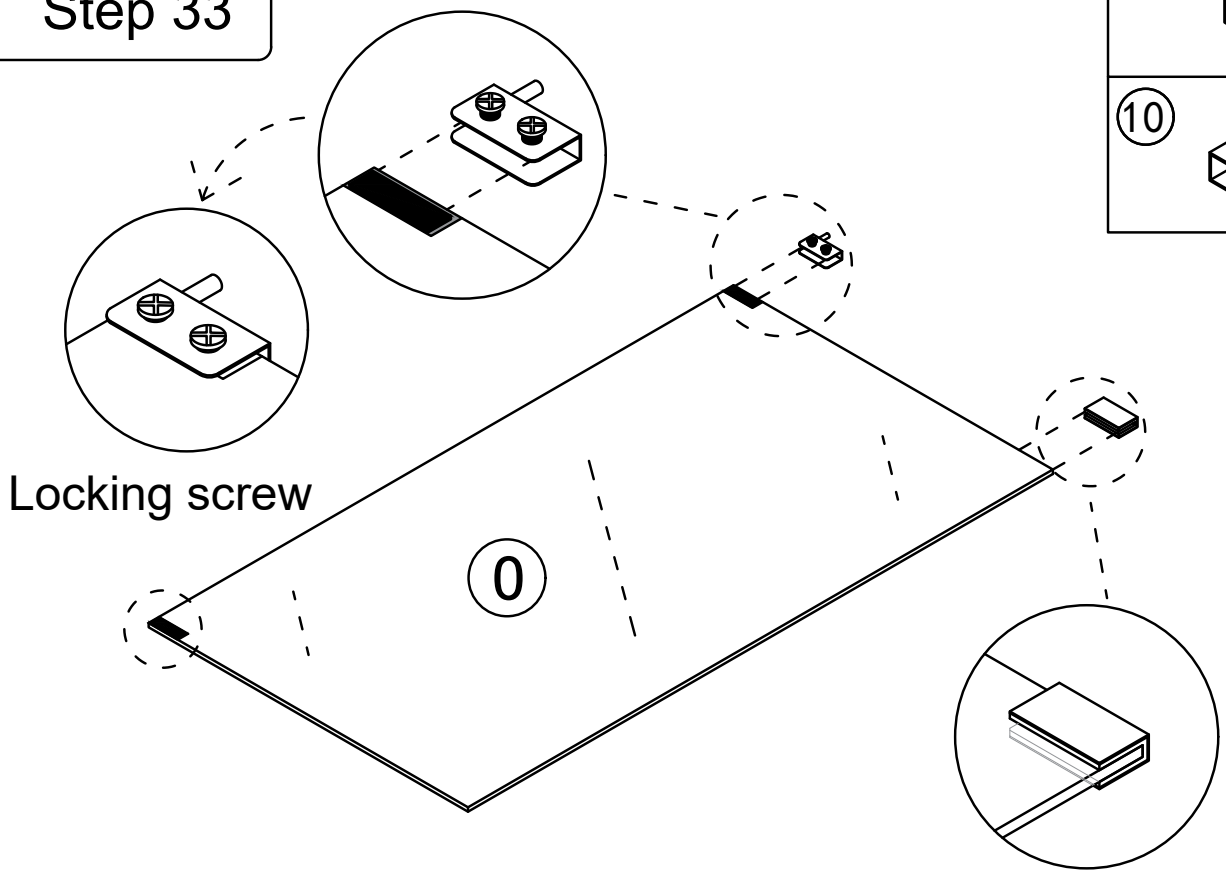


5 x1


10 x1

Step 34


The rebound device automatically opens and closes by pressing

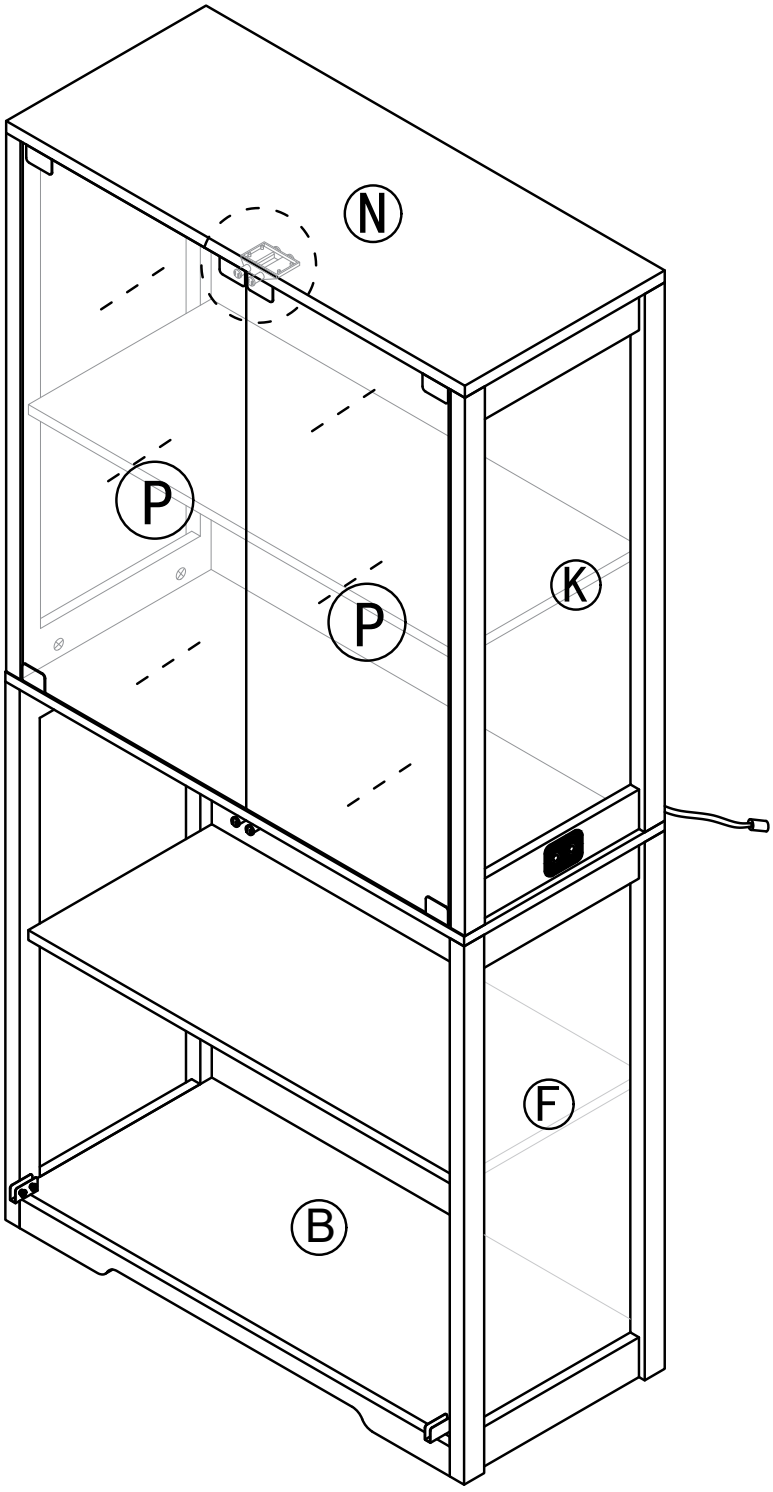

Open the glass door

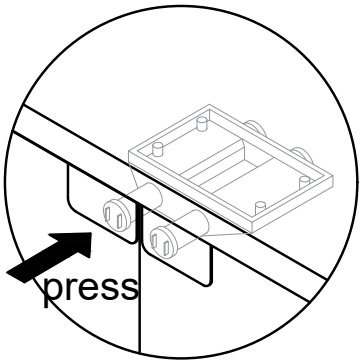


Close the glass door

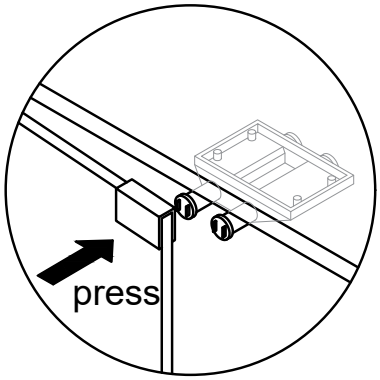



Step 35


10 x2

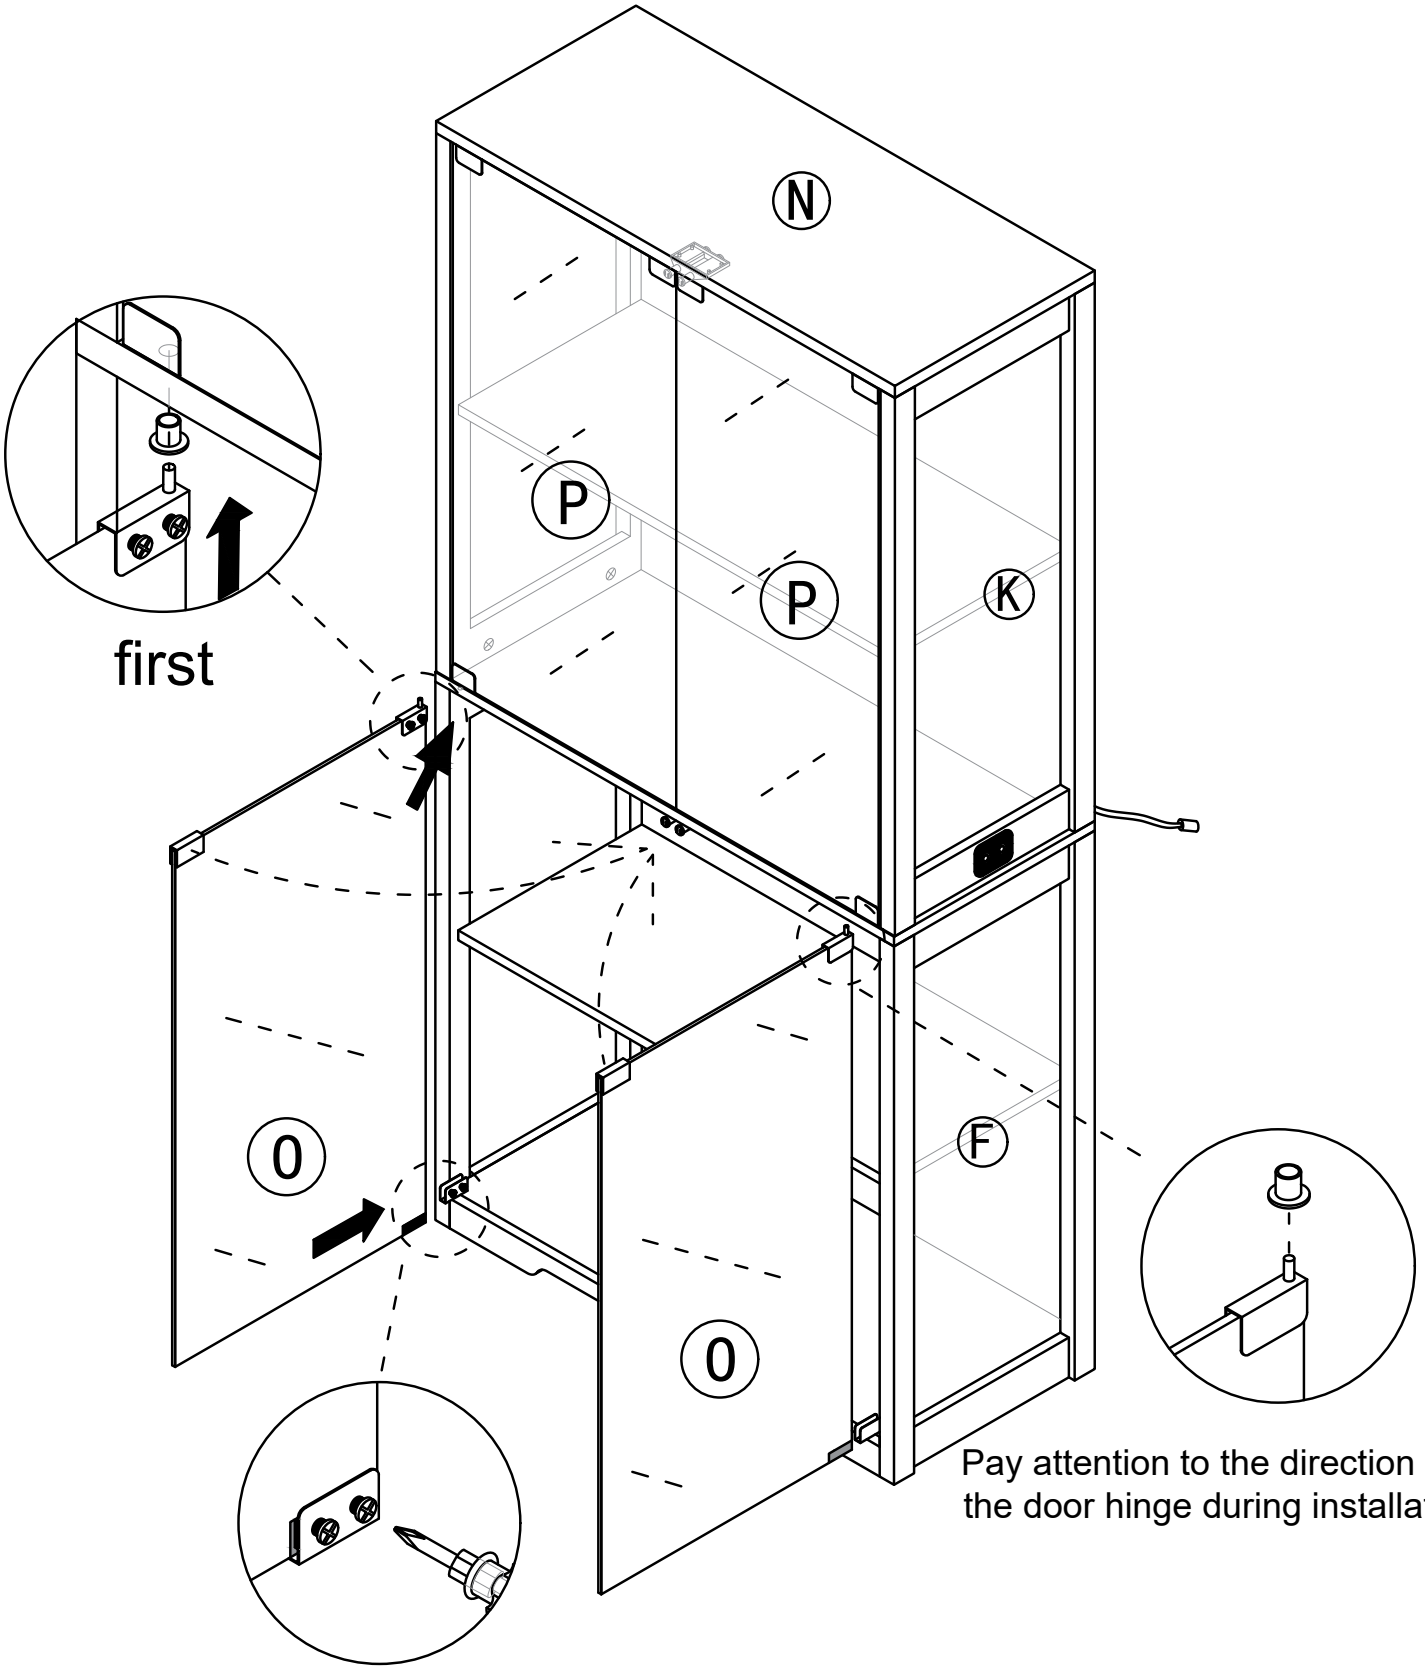
N
P
P
K
O
O
F
first
second
Locking screw
Pay attention to the direction of
the door hinge during installation


Step 36

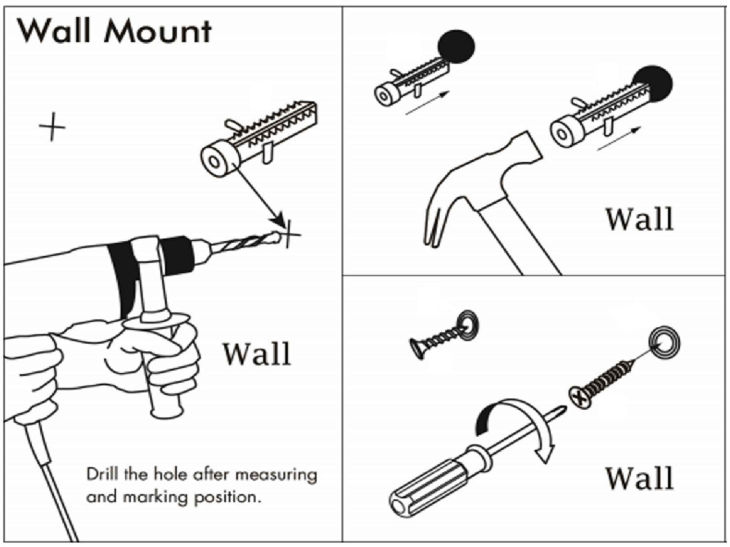


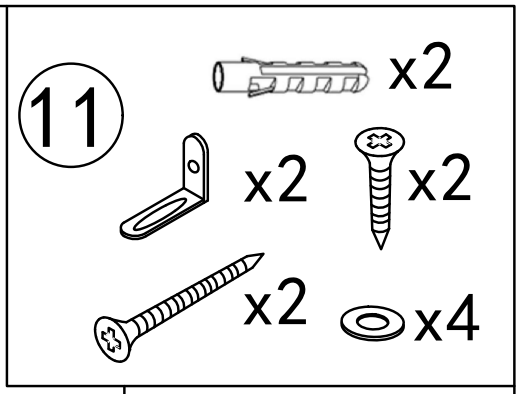


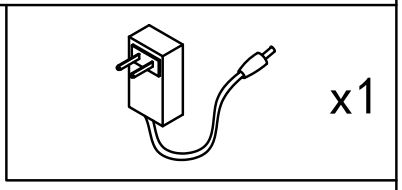


Install as required





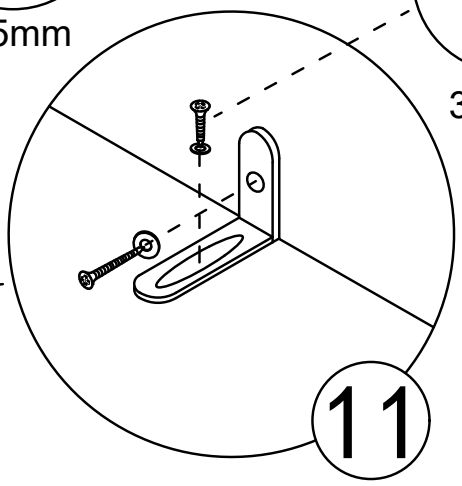

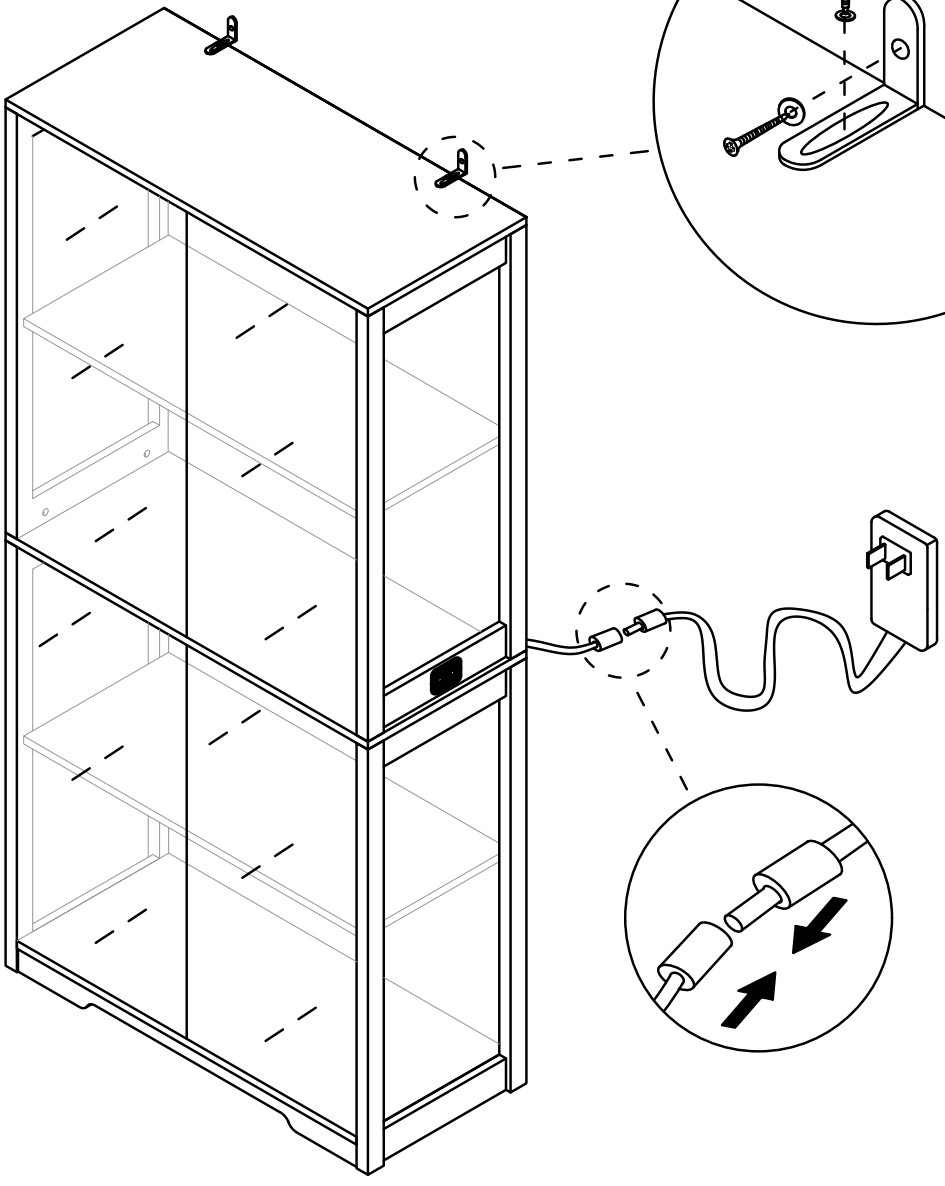


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

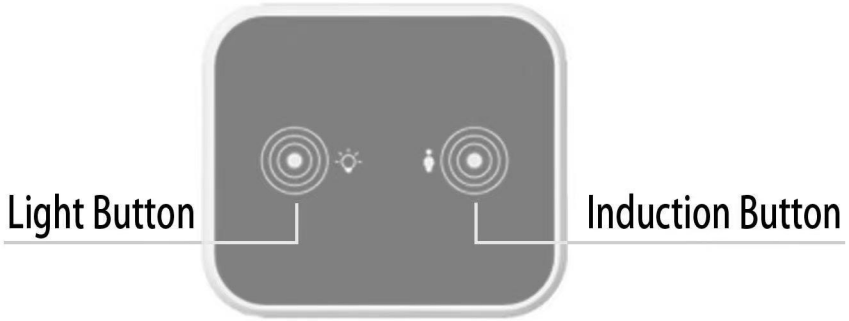

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. **B**. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.