
Chandelier Installation Instructions

WARNING (To reduce the risk of fire, electric shock or personal injury):

1. Installation by a licensed electrician is recommended.
2. Please read the instructions carefully and keep them in case of emergency.
3. Do not perform any work without disconnecting the power supply before beginning work. A). Turn on the main fuse or circuit breaker box in your home. Place the main power switch in the "OFF" position. B). Place the wall switch in the "OFF" position.
4. The mounting surface should be clean, dry, flat, strong enough, and larger than the mounting plate cover on all four sides. Any gaps between the mounting surface and the mounting plate cover exceeding 0.5 cm (3/16 in.) should be corrected as required.
5. Make sure the ceiling or wall can support the weight of the fixture.
6. Ensure that the voltage used is 85-265V.
7. Keep the lamp away from acidic and alkaline objects to prevent damage to the surface of the lamp.
8. The safety instructions in this manual do not cover all possible situations. Common sense and caution must be exercised when using any electrical product.
9. Do not touch the lamp or frame while the fixture is in operation.
10. Due to different versions, there will be European or American mounting plate, please refer to the version received. Pictures are for installation reference only.


Image for finished product:



Installation Procedures:

Open the package and take out all the parts or accessories, then place them on a clean flat place. Assemble the light fixture as below procedure:


1. Before any installation, it is recommended that the chandelier be power tested to ensure that it will light up properly before proceeding to the next step.
2. Drill holes in the ceiling with an impact drill, the holes should not be wider than the anchors provided. Drive the anchors into the ceiling with hammer, then secure the mounting plate to the anchor with the nuts.
3. Connect wires from lamp to the ceiling, wiring instructions as below:

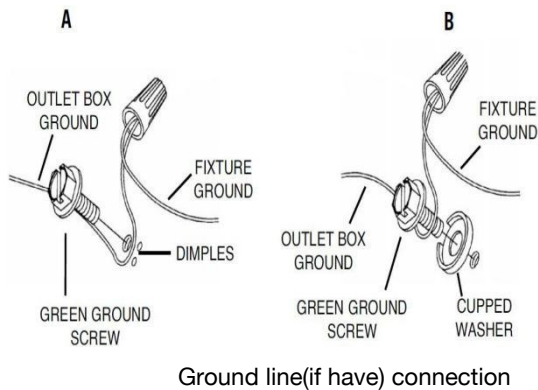

Ground line(if have) connection

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



Neutral and live line connection

4. Secure the mounting plate cover with screws to cover the driver and wires.
5. Fix the main wire from the lamp holder with screws.
6. There are 3 sizes of crystals, please insert them in the order shown in the picture, if the crystal can not be fixed, please contact us immediately. We will replace the crystal for free.
7. 31.49" need 17-light
8. Screw on the E12 bulb (bulb not included).
9. Check that everything is installed correctly, then you can turn on the light.
4. 10. Please feel free to contact us if you have any problem during the installation!

