

OUTDOOR CEILING ASSEMBLY/INSTALLATION INSTRUCTIONS

Item: BLK OUTDOOR CEILING

Item: ORB OUTDOOR CEILING

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Min 75°C supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

TOOLS REQUIRED

Phillips screwdriver.


ASSEMBLY AND INSTALLATION

Turn off the power at fuse or circuit breaker.

1. Attach the two screws to the JUNCTION BOX.
2. Attach the MOUNTING BAR to the JUNCTION BOX using JUNCTION BOX SCREWS.
3. Pull out the supply wires and the SUPPLY GROUND WIRE from the OUTLET BOX. Make wire connections using the wire nuts:
 - A - Connect the black wire from Fixture to the black supply wire.
 - B - Connect the white wire from Fixture to the white supply wire.
 - C - Attach the fixture ground wire to the CROSS BAR with the green GROUND SCREW. Then connect it to the SUPPLY GROUND WIRE with a WIRE CONNECTOR.Carefully tuck the wires back into the JUNCTION BOX.
4. Attach the PAN to the MOUNTING BAR by inserting two SCREWS and rotating the PAN until it locks in place. Then tighten the screws securely.
5. Install BULB (not included). See relamping label at socket area or packaging for maximum allowed wattage.
6. Attach the GLASS SHADE onto FIXTURE using MOUNTING SCREWS.

Turn on the power at fuse or circuit breaker.

ASSEMBLY AND INSTALLATION (CONT.)

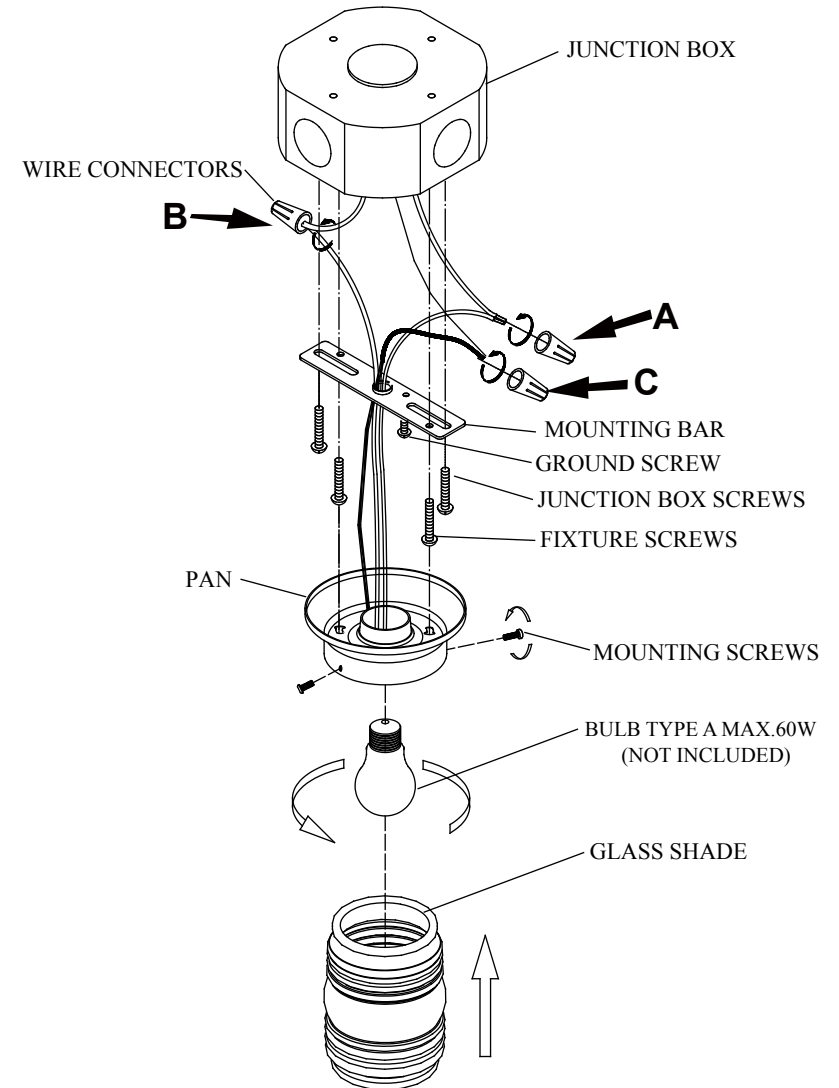

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**