

Step 4: Wrap the ground wire from the outlet box around the Ground Screw (BB) on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.

Step 5: Connect the wires from the fixture to the house supply wires, neutral (white) to neutral wire, and hot (black) to hot wire.

Step 6: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

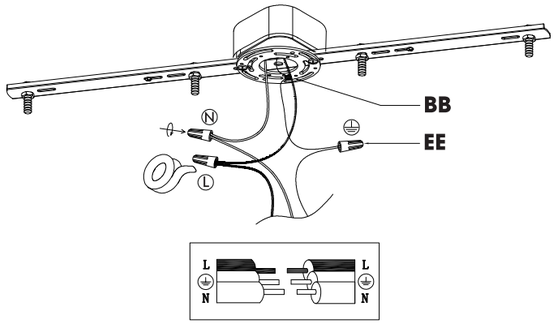

Step 7:Pass Canopy (A) through Mounting Bracket (AA) and secure it with Cap Nut (CC).

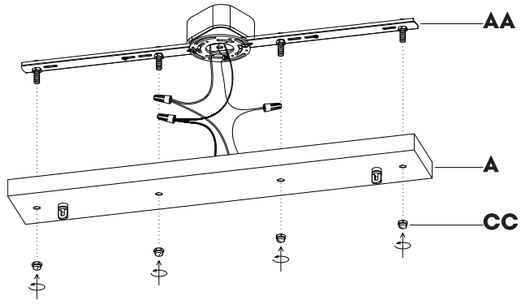


04 INSTALLING THE CRYSTALS AND BULBS

4. Install the Bulbs

Step 1: Hang the crystal (NN) onto the Lamp Body (C) and Two-tier Lamp Holder (D).

Step 2: Install the E12 Bulbs (not included).

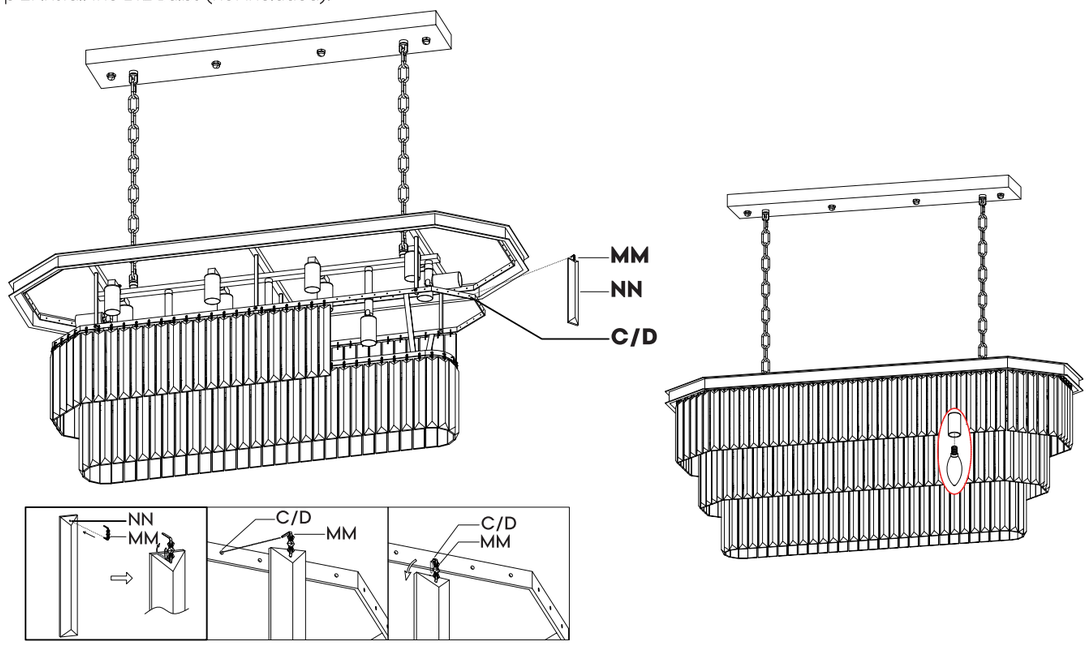


NOTE:




This lamp uses E12 bulbs base and can only be used in conjunction with LED bulbs up to 40W.

Fully dimmable when used with dimmable bulbs and compatible dimming switches (not included).


CHANDELIER	Model No.: LH-2017BL-3913

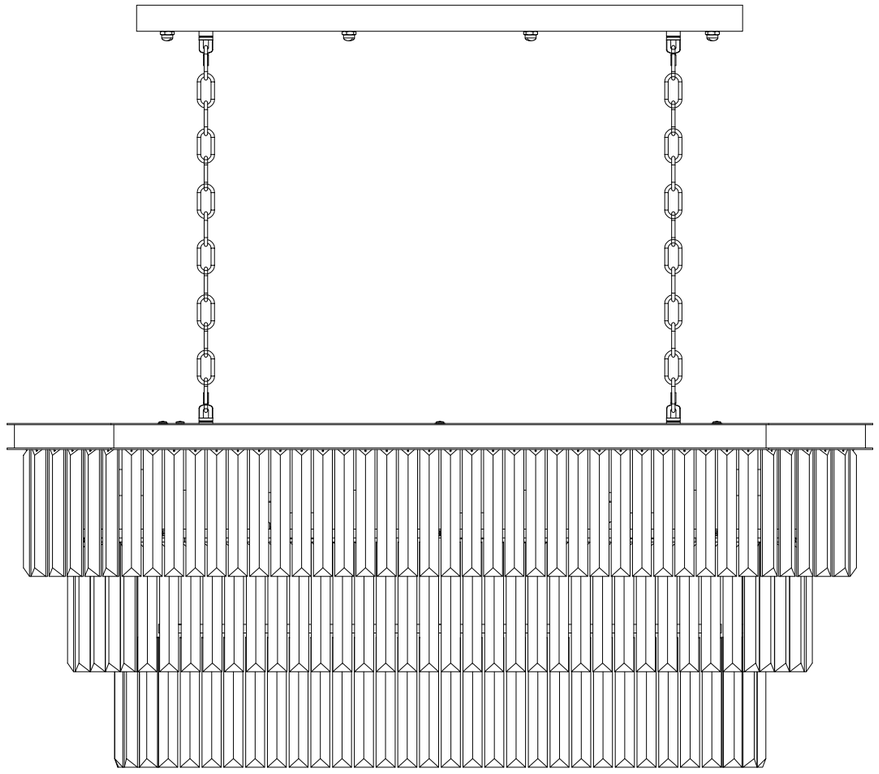

INSTALLATION MANUAL

TOOLS REQUIRED			
			
Ladder	Pliers	Wire Strippers	Screwdrivers


01 PACKING LIST




A Canopy x1



B Chain x2

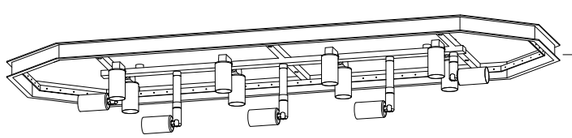

C Lamp Body x1

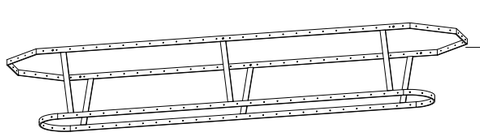

D Two-tier Lamp Holder x1

02 INSTALLATION KIT

AA 1X  Mounting Bracket	**BB** 1X  Ground Screw	**CC** 4X  Cap Nut
DD 2X  Outlet Box Screw	**EE** 3X  Wire Nut	**FF** 2X  Washer
GG 2X  Plastic Anchor	**HH** 2X  Wood Screw	**II** 2X  Canopy Loop
JJ 6X  M5 Screw	**KK** 6X  M3 Screw	**LL** 6X Square Bar
MM 232X  Butterfly Clip	**NN** 232X  Crystal	**OO** 1X  Gloves


NOTE:

BB has already been pre-installed with AA. AA and CC has already been pre-installed with Canopy (A).

03 MOUNTING AND WIRE

1. Install the Mounting Bracket


Loosen the Cap Nut (CC) from the Canopy (A) and remove the Mounting Bracket (AA).

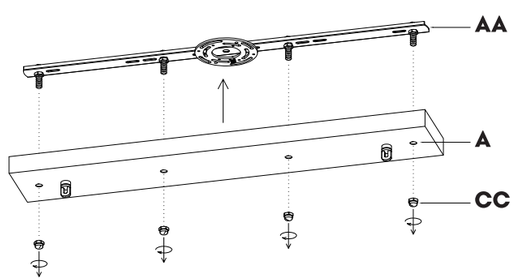

Step 3: Pass the power cord of Lamp Body (C) through Canopy Loop (II), Chain (B), and Canopy (A).

Step 4: Rotate and install Canopy Loop(II) onto Lamp Body (C).


Step 5: Unscrew the Quick Link at both ends of Chain (B) and fasten them onto Canopy Loop (II) and Canopy (A) respectively.

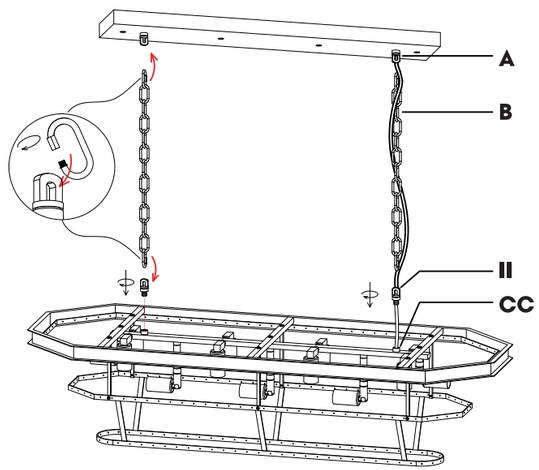

2. Install the Lamp Body

Step 1: Insert M5 Screw (JJ) through Lamp Body (C) and secure it at the top of Square Bar (LL).

Step 2: Insert M3 Screw (KK) through Two-tier Lamp Holder (D) and lock it onto the Square Bar (LL).

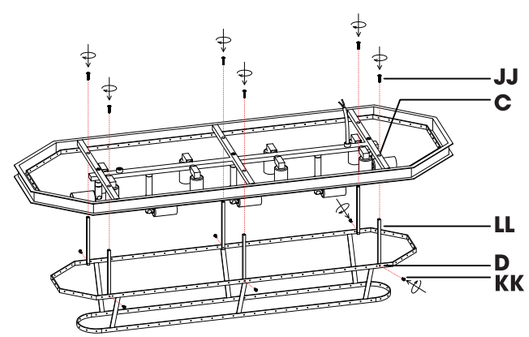

3. Connect the Wires

Step 1: Locate the hole position and insert the Plastic Anchor (GG) into the ceiling.

Step 2: Pass the Outlet Box Screw (DD) through the Mounting Bracket (AA) and lock it into the threads of the ceiling box.

Step 3: Insert the Wood Screw (HH) through the Washer (FF) and the Mounting Bracket (AA), then tighten the Plastic Anchor (GG).

