

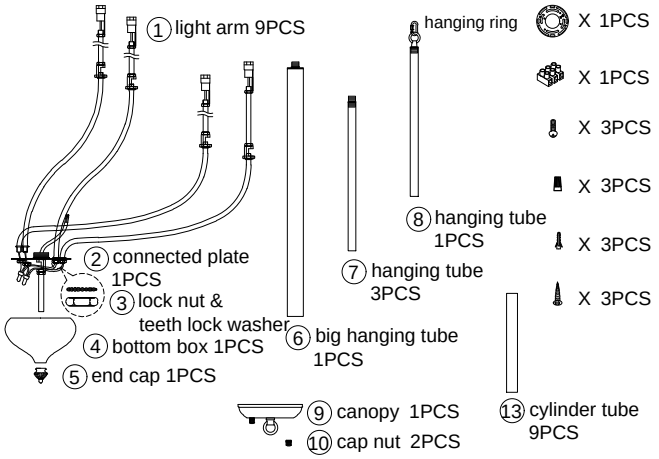


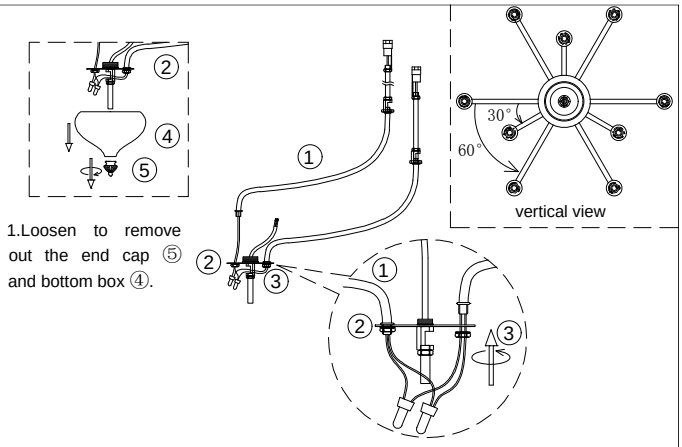


1.Loosen to remove out the end cap ⑤ and bottom box ④.


2.Fasten the light arm ① by rotate lock nut & teeth lock washer ③, adjust the light arms to suitable position like picture shown.

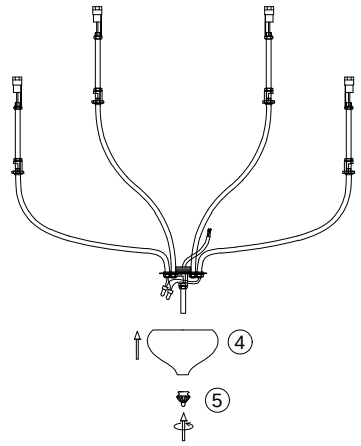


3.Put the wires in the bottom box ④, close it to the fixture with end cap ⑤.

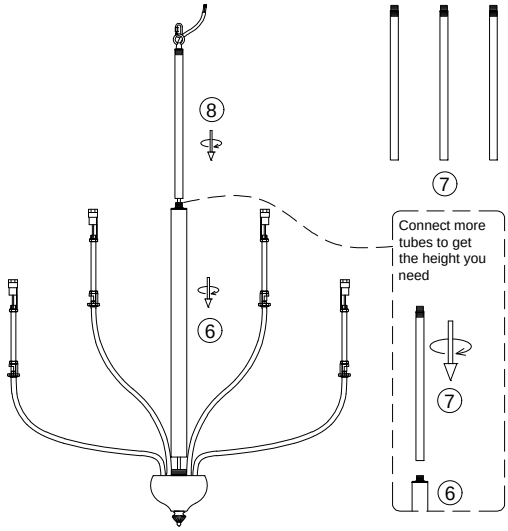

4.Let the wire go through the big hanging tube ⑥ and hanging tube ⑧, rotate to install the tubes to the fixture.(can connect more tubes to get suitable hight you need)

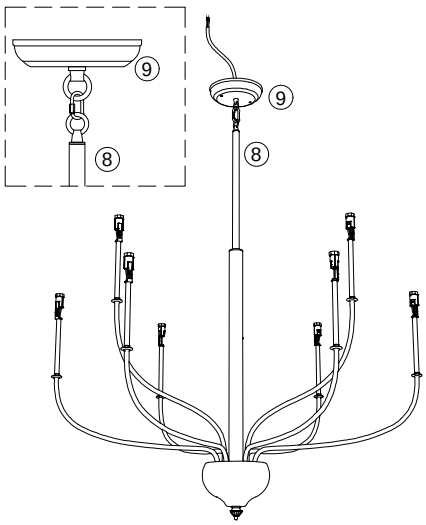

5.Let the wire go through the canopy ⑨, hang the fixture to the canopy ⑨.

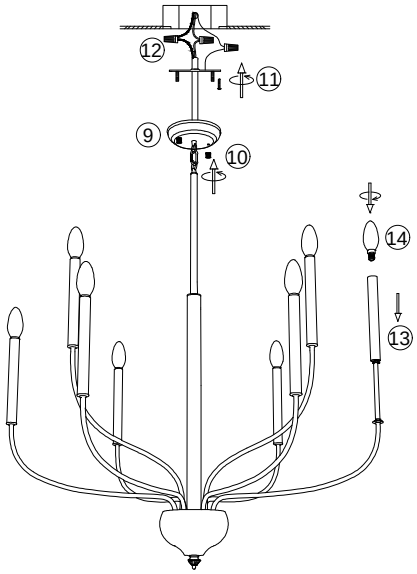

6.Install the bracket to the ceiling junction box with screw ⑪.
7.Connect the wire to your home line with cap connector ⑫.
8.Install the fixture to the bracket with cap nut ⑩.
9.Put the cylinder tube ⑬ on top of bulb holder and install the bulb ⑭.

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !