


Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit. Breaker panel before beginning installation.

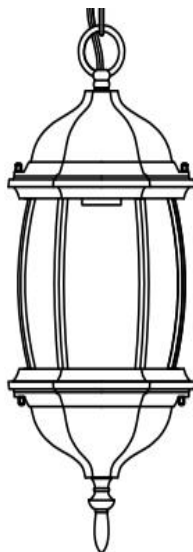

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the surface of the fixture. To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture. Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:10 minutes


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	lamp body		1	5	1/8" IPS HEX NUT		2
B	Light bulb		1	6	SCREW COLLAR		1
C	Nut		2	13	WIRE CONNECT		3
D	lamp cover		1	15	CANOPY		1
2	MOUNTING BRACKET		1	16	THREADED RING		1
3	MOUNTING SCREW		2	17	CHAIN		1
4	NIPPLE		1				

Installation



Step 1:

Unpack all parts from cartons carefully.
Thread light bulb(B) into lamp body (A) ,
connect lamp body (A) with light cover(D)
and secure it into place using the nuts(C)
provided.

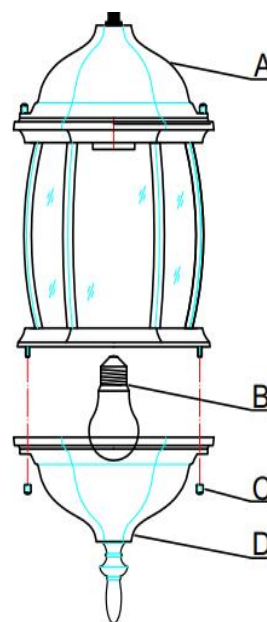


**PLEASE USE TYPE"A"BULB MAX 100W OR CFL
BULB MAX 23-WATT OR LED BULB MAX
12WATT**

THERE ARE 1 PC LED BULB IN THE BOX

Step 2 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to: Black	Connect,Neutral,White Outlet Supply Wire to: Black White White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor

*Note: When parallel wire(SPTI&SPTII)is used. The
neutral wire is square shaped and ridged and the hot
wire will be round in shape and smooth. (Like the



Grounding Instructions:

- For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- For installation in Canada: If fixture is supplied with ground wire, wrap ground wire

Step 3:

1. Take the parts out of the mounting package and thread both 1/8" IPS HEX NUTS (5) several turns onto each end of the NIPPLE (4). Screw the end of the NIPPLE (4) several turns into the threaded hole of the MOUNTING BRACKET (2) but do not tighten the 1/8" IPS HEX NUTS (5). Pull the SUPPLY WIRES (9 & 11) and the SUPPLY GROUND WIRE (8) out from the OUTLET BOX (1) and attach the MOUNTING BRACKET (2) assembly to the OUTLET BOX (1) using the slotted holes of the MOUNTING BRACKET (2) and the MOUNTING SCREWS (3) provided.
2. Thread the SCREW COLLAR LOOP (6) onto the bottom end of the NIPPLE (4). Place the CANOPY (15) over the OUTLET BOX (1) and adjust the SCREW COLLAR LOOP (6) and NIPPLE (4) until the midpoint of the outside threads on the SCREW COLLAR LOOP (6) is centered (aligned) with the surface of the CANOPY (15). Remove the CANOPY (15) and tighten both 1/8" IPS HEX NUTS (5) down on the MOUNTING BRACKET (2) and the SCREW COLLAR LOOP (6). Pull the arms of the lamp out so they are evenly spaced.
3. Open up the end links of the CHAIN (17) and attach one end of the CHAIN (17) onto the FIXTURE LOOP (18). Slide the THREADED RING (16) and the CANOPY (15) onto the CHAIN (17) (in that order) and attach the other end of the CHAIN (17) to the SCREW COLLAR LOOP (6). Close the ends of the chain links.
4. Unravel the fixture lead wires and FIXTURE GROUND WIRE (7) and thread them through every other link of the CHAIN (17) starting with the chain link attached to the FIXTURE LOOP (18). Feed the fixture lead wires and FIXTURE GROUND WIRE (7) through the SCREW COLLAR LOOP (6) and NIPPLE (4) assembly. Pull the fixture lead wire and the FIXTURE GROUND WIRE (7) upward to remove any excess slack.
5. Attach the power supply wires to the fixture lead wires by connecting the BLACK (HOT) SUPPLY WIRE (9) to the SMOOTH FIXTURE LEAD WIRE (10) and the WHITE (NEUTRAL) SUPPLY WIRE (11) to the RIBBED FIXTURE LEAD WIRE (12). Loop the FIXTURE GROUND WIRE (7) around the GROUND SCREW (14) of the MOUNTING BRACKET (2). (Note: Be sure to provide an extra 3' length of the GROUND SCREW (14) Connect the remaining FIXTURE GROUND WIRE (7) to the SUPPLY GROUND WIRE (8) using a WIRE CONNECTOR (13). Place wiring and connections inside the OUTLET BOX (1).
6. Slide the CANOPY (15) and the THREADED RING (16) up the CHAIN (17). Place the CANOPY (15) over the OUTLET BOX (1) and secure it in place by screwing the THREADED RING (16) onto the SCREW COLLAR LOOP (6).

Step 4:

Consult a qualified electrician to ensure correct branch circuit conductor.
ENJOY YOUR LAMP

