












Installation


To avoid scratches and swallowing parts, please do not install by children!

Hardware List		Hardware List	
	Seat		Backrest
	Armrest		Sofa cover
	Seat cushion		Back cushion
	Armrest cushion		Pillow
	Legs		Buckle
	8x20mm screw		


1 Remove the backrest first, and then rotate the armrest to 45° before removing it.



2

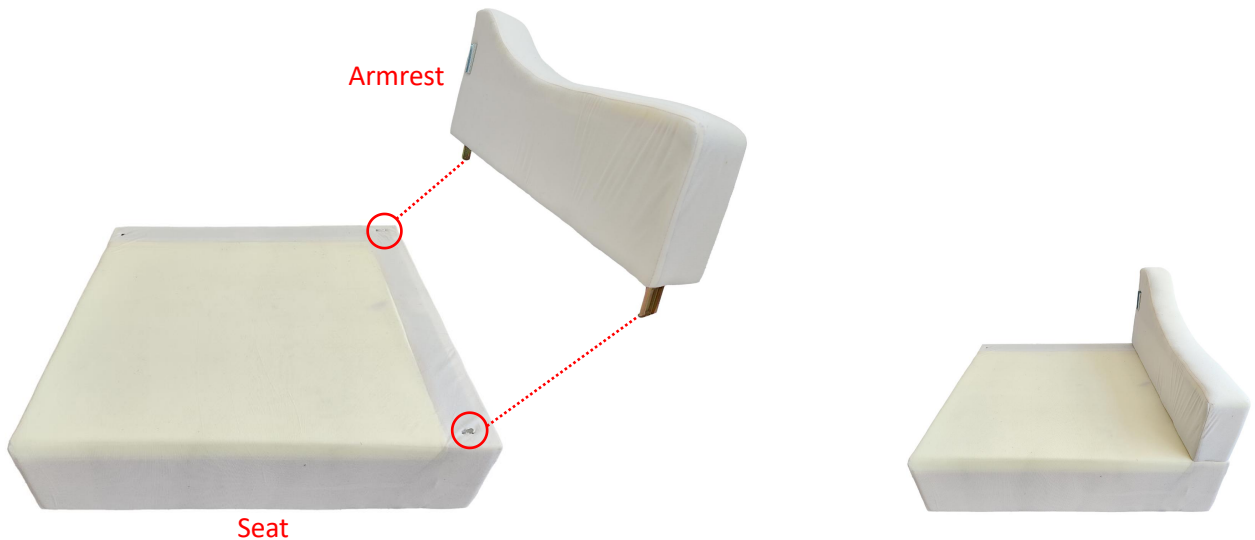

3

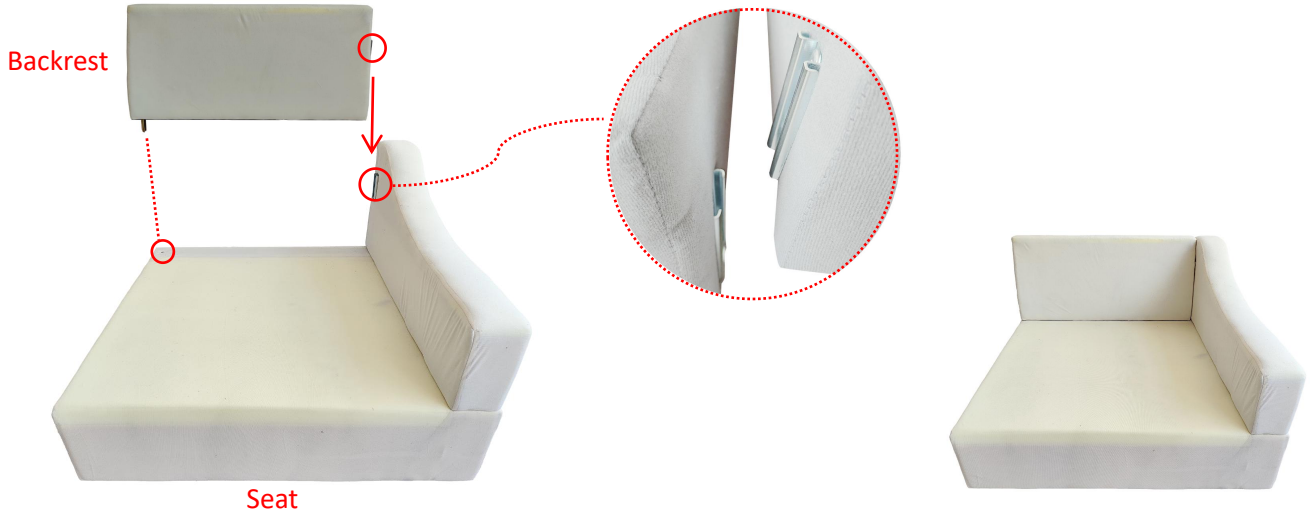


4


Put on the sofa cover. Be careful to loosen all the zippers first. The mesh goes on the bottom of the couch. Suggestion: you'd better not remove the protective strip before finish putting the cover on.



5

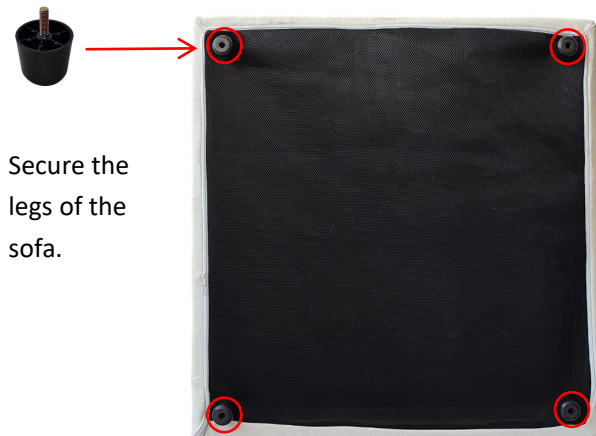

6 Note that the direction of cushion placement is distinguished by the direction of Velcro, please follow the picture demonstration operation.

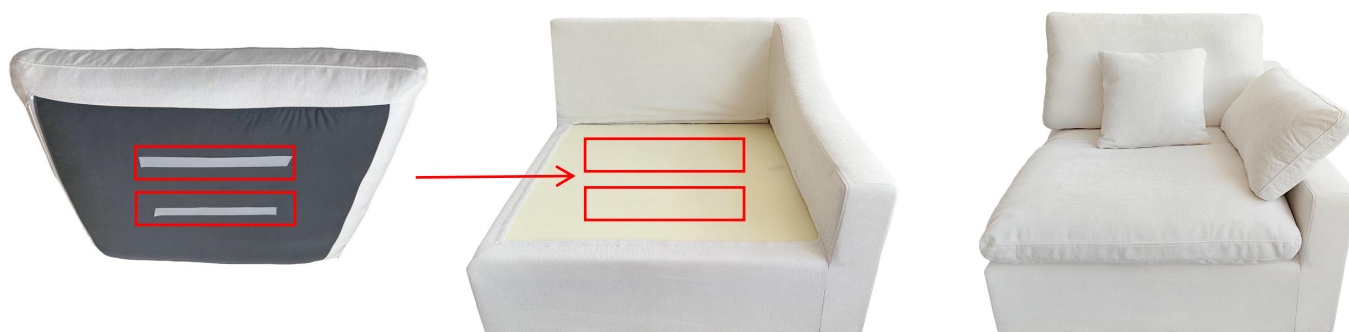

7 Apply the connection buckles to connect the seats together (or not, it's totally up to users).

