
Wood Top Kitchen Cart (Black Finish)

IMPORTANT NOTE

Carefully remove all the parts from the carton and put them individually on a soft cloth to prevent scratches or other damages occuring to the wood parts.

We have taken great care in the design of this product and request that you carefully and strictly follow our assembly instructions to ensure a completed product as it was designed.



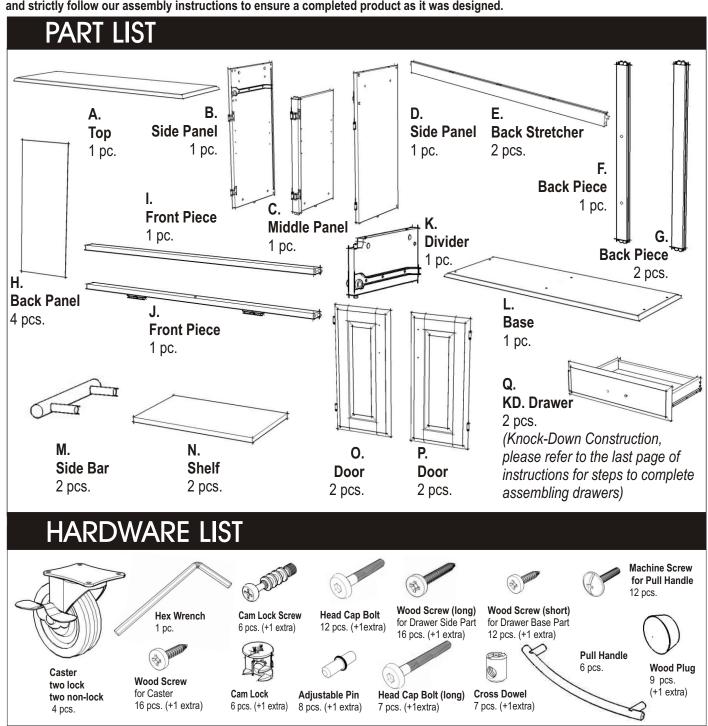

Tools Required For Assembly: Phillips screwdriver

Assembly Instructions 2/5 **Wood Screw IMPORTANT** Do not tighten up all the screws until each part is properly assembled. You should keep Hex Wrench in a safe place as you may need to tighten up the Head Cap Bolts in the future. STEP 1 **Wood Screw** Attach the two locking Casters to the front of the Base (L). Attach the two non-locking casters to the back of the Base (L). (See figure 1) (Figure 1) (Note: The 'Arrow' sticker Locking Caster indicates the front of the base.) **Upper Position** Head Cap Bolt H A Lower Position

STEP 2

Attach Back Stretcher (E) to Side Panel (B) at the lower position with Head Cap Bolt.

Attach Back Pieces (F) and (G) to the Back Stretcher (E), then slide Back Panels (H) in place.


Attach Back Stretcher (E) to the unit at upper position.

Tighten the Head Cap Bolt.


Tighten Head Cap Bolt by Hex Wrench.

Attach Front Pieces (I) and (J) to the unit with Head Cap Bolts.


Instructions 3/5

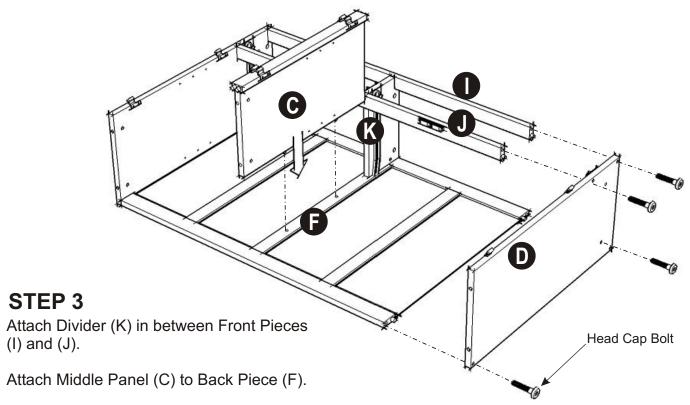

Attach Side Panel (D) to the unit with Head Cap Bolts.

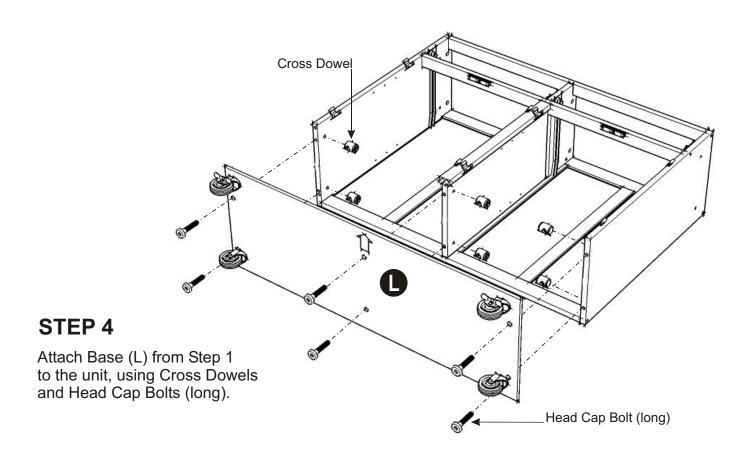

Assembly Instructions 4/5

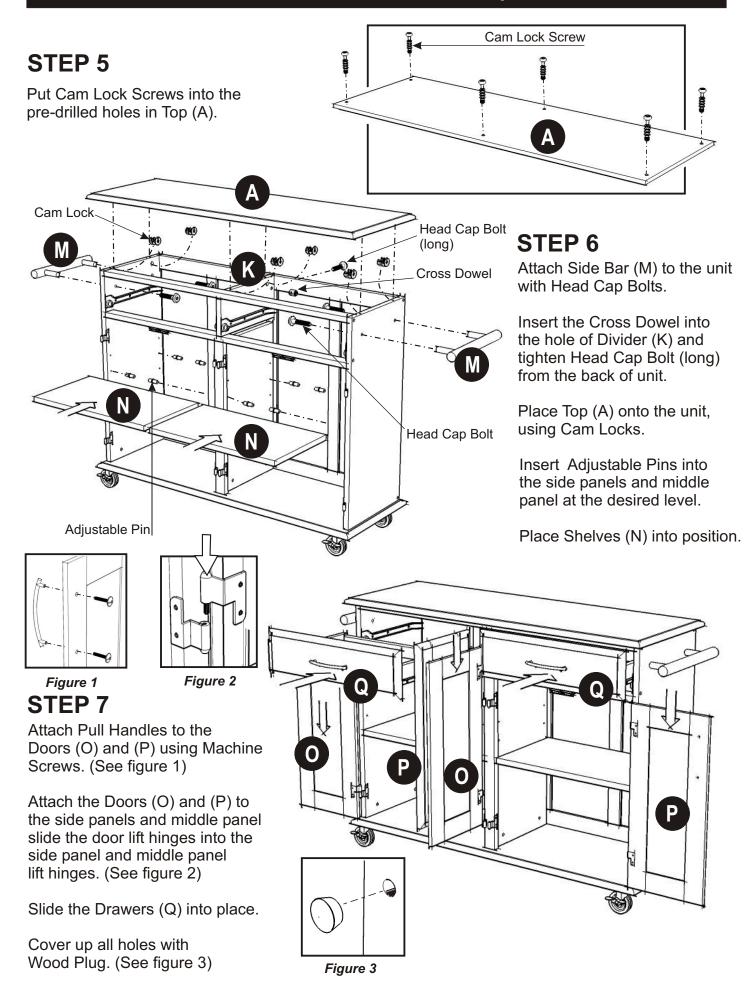

Assembly Instructions 5/5

