



Assembly Instructions

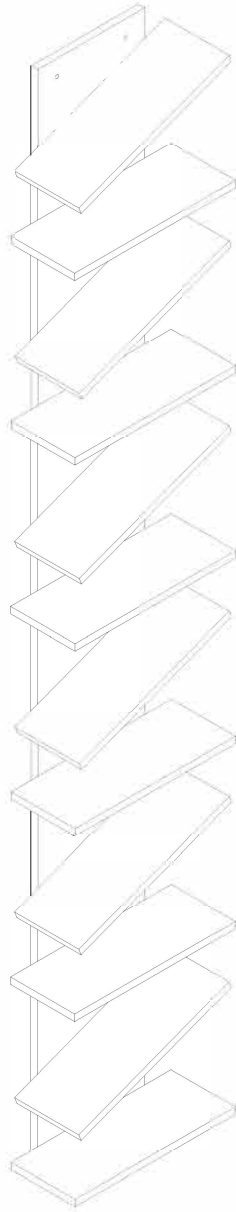

**DESIGN
TRANSFORMS
LIFE**

Product Attributes

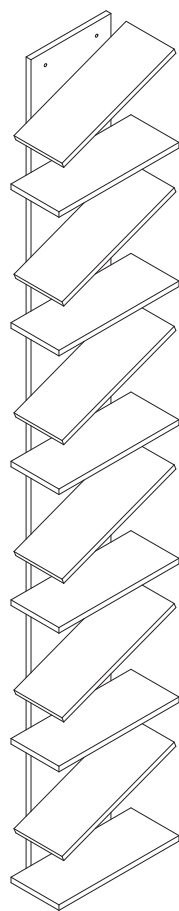

Material

Particle Board	Plywood	Rubberwood
☐	☒	☐

Specification

12 Tiers
☒


Color

☒ Walnut	☐ Black	☐ White	☐ Natural
--	--------------------------------	--------------------------------	----------------------------------

Installation Tip


1. Drywall or Plaster Walls

Use Screw D(M3.5x40) with the included Wall Anchors A (M6x30) for a secure hold.

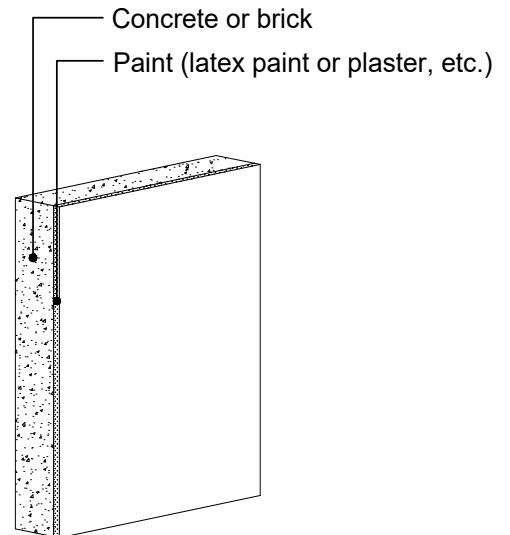


2. Solid Wood Surfaces


Use Screw C (M3.5x25) directly.
No wall anchors needed.

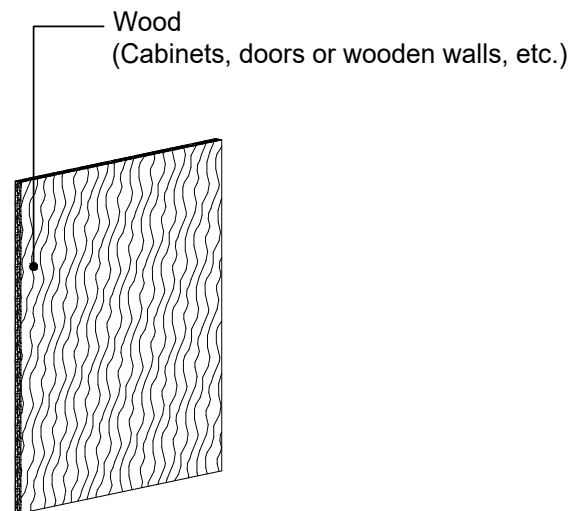




3. Wood or Metal Stud Walls

Use Screw D(M3.5x40) directly into the stud. No wall anchors needed.




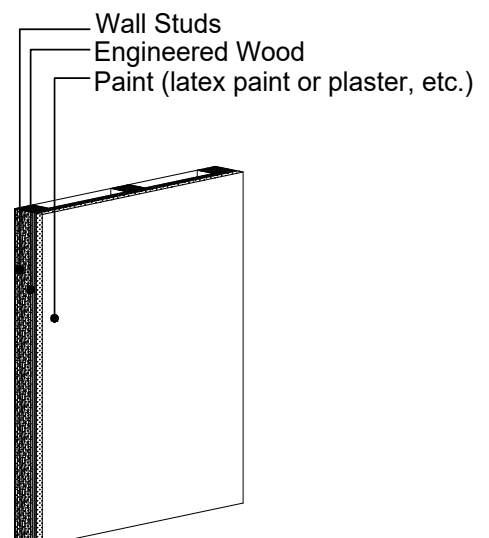


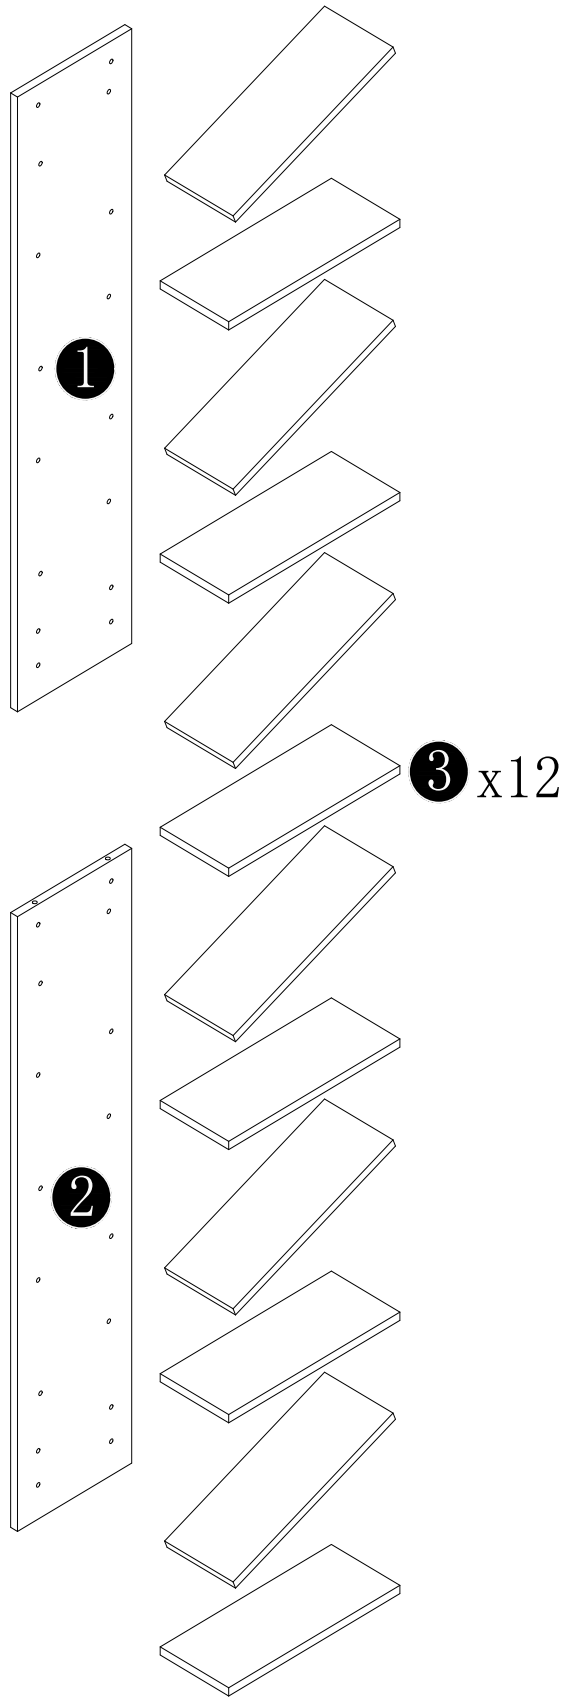



Parts & Hardware List

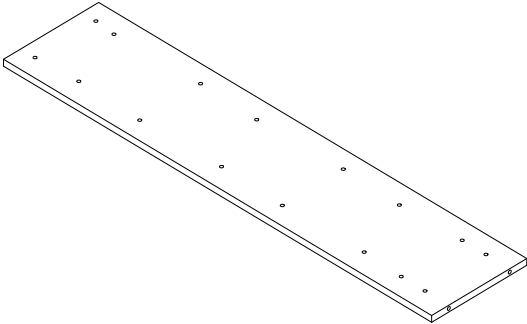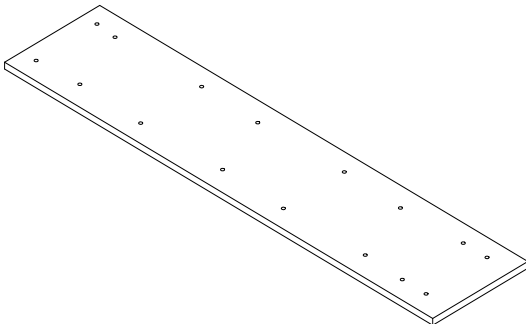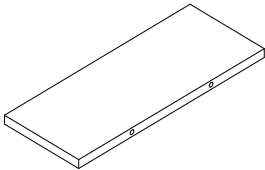 1 1pc	 2 1pc
 3 12pcs	

Parts & Hardware List


 M6X30MM A 8pcs	 M7X50MM B 24pcs	 M3. 5X25MM C 8pcs	 M3. 5X40MM D 8pcs	   E 8pcs
 F 1pc	 G 6+2pcs	 M6X30MM H 2pcs		

1

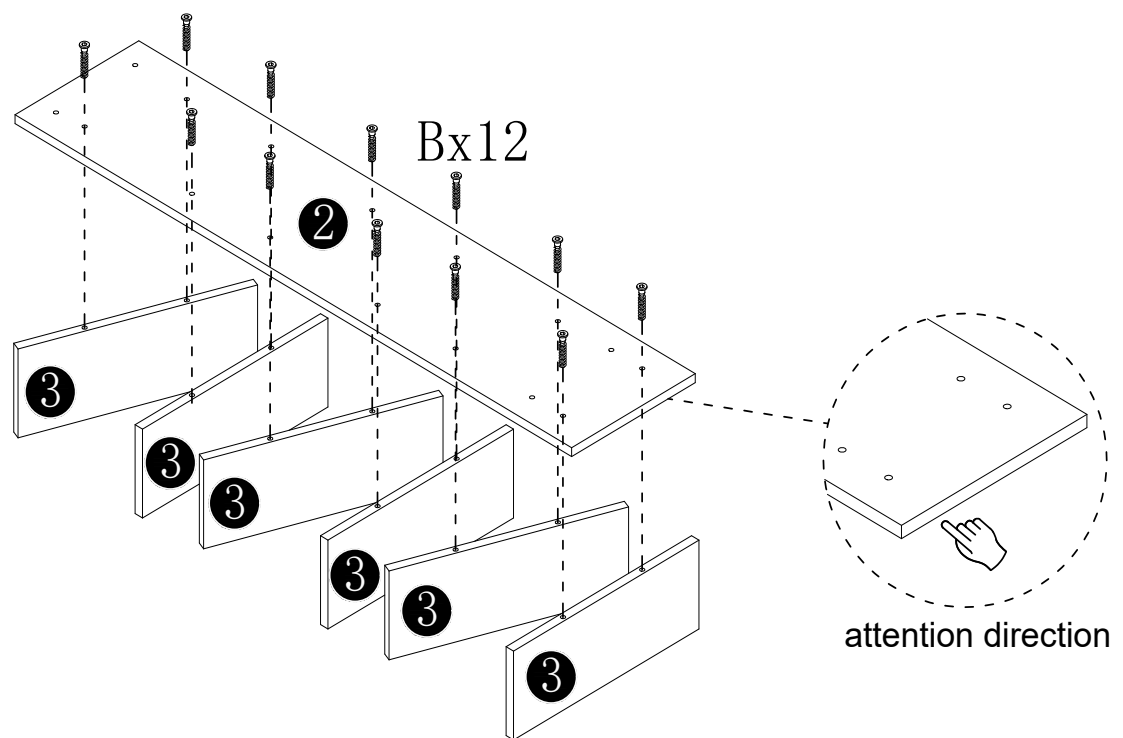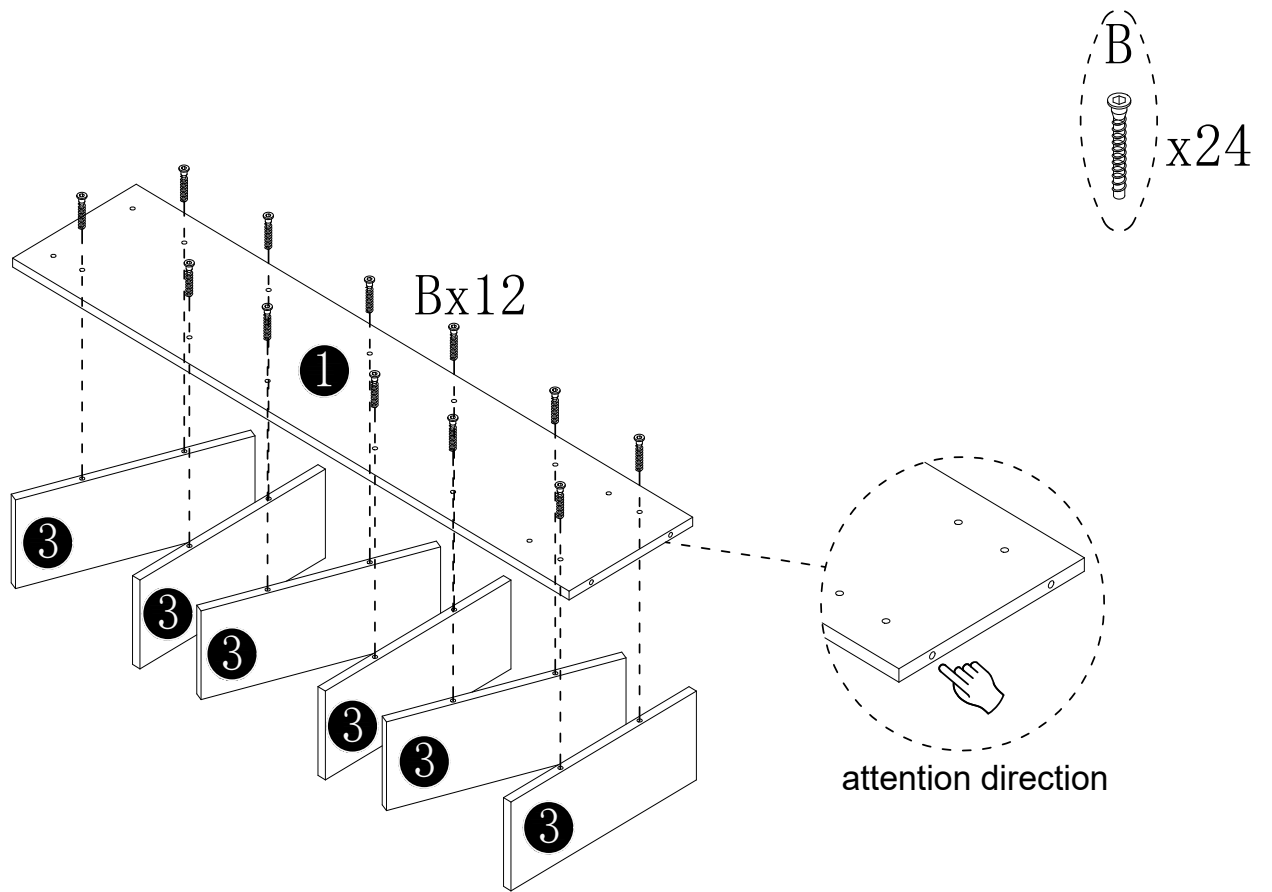


2

1.Drywall or Plaster Walls

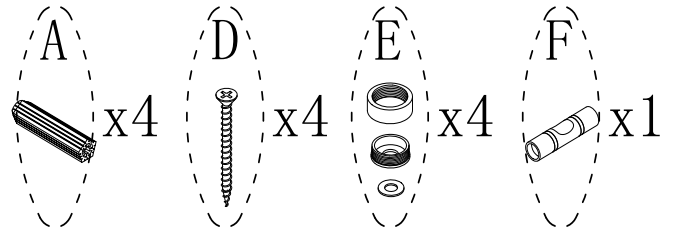


Installation steps for drywall or gypsum wall

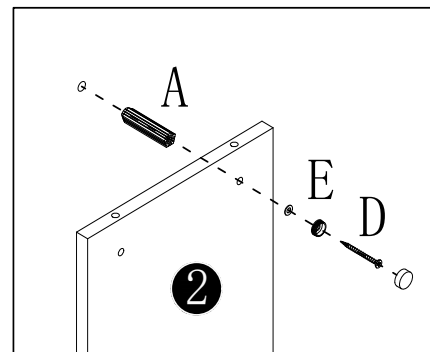


step1


Measure the horizontal height using component F

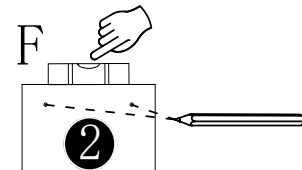


step2




step3



step4

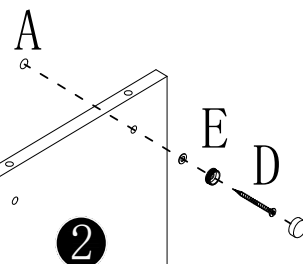


The F component serves as an auxiliary function and should be removed after use.


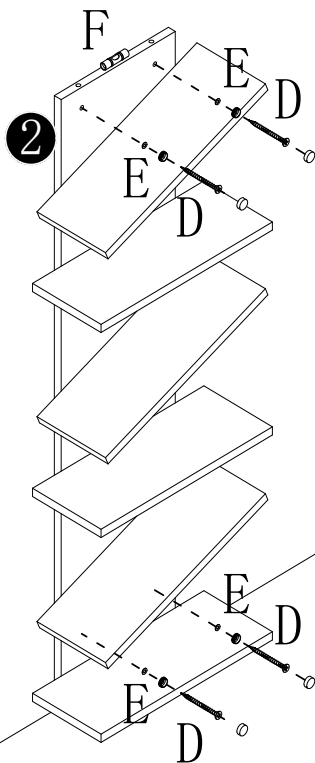


3


H
x2

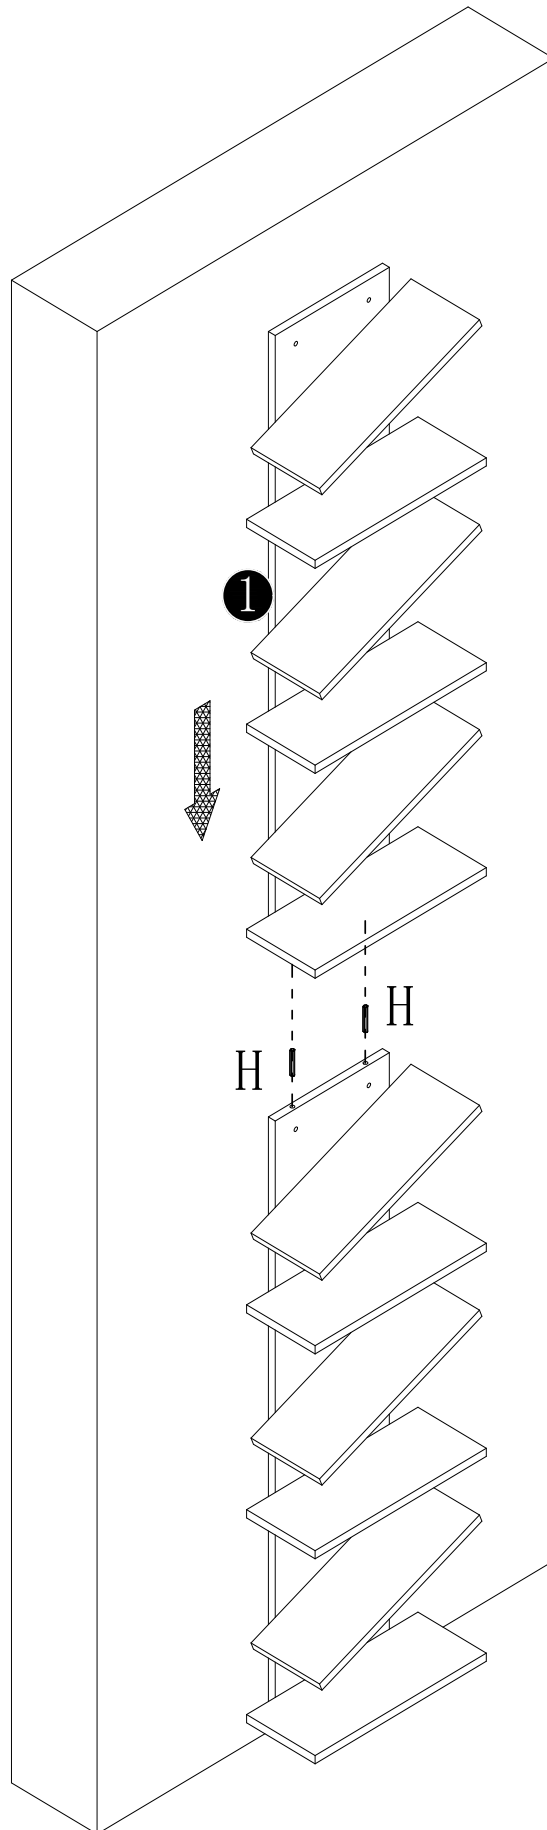

4

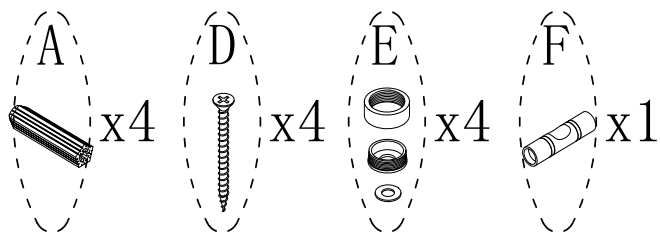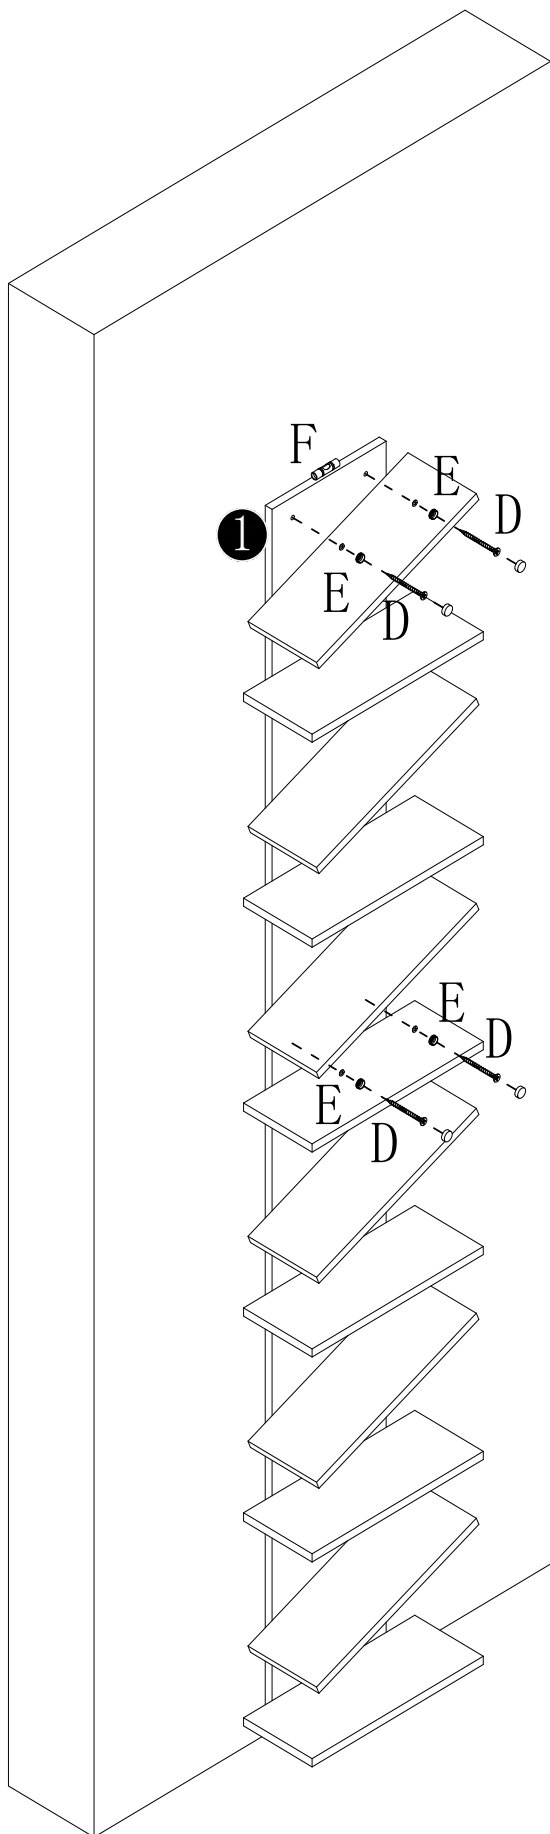


Installation method of drywall or gypsum wall

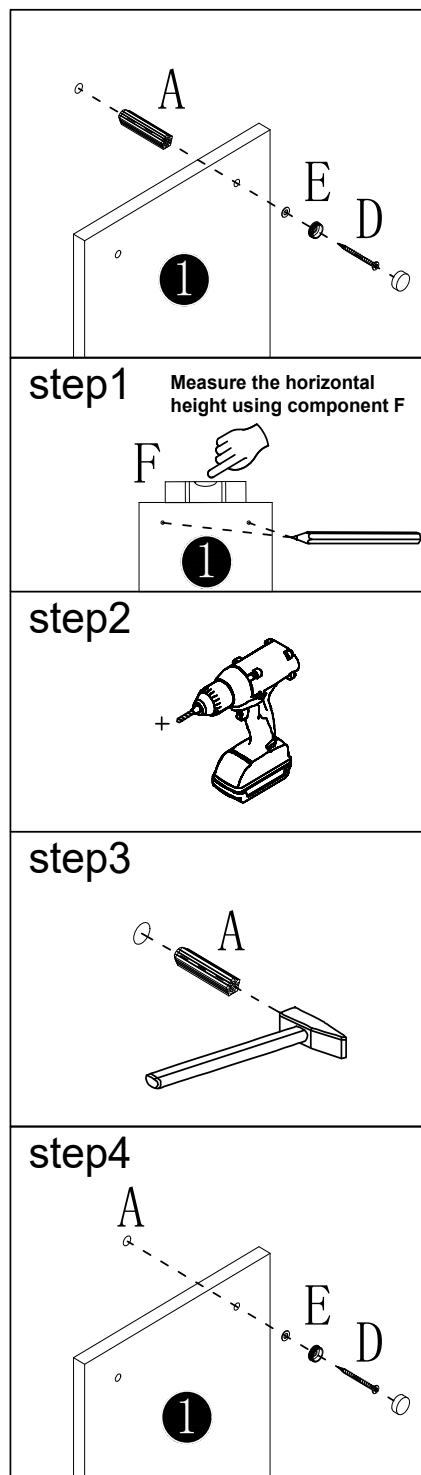


5


2.Solid Wood Surfaces

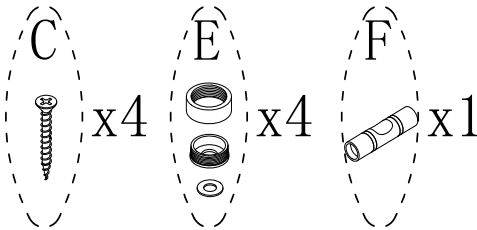

Installation steps for solid wood surface

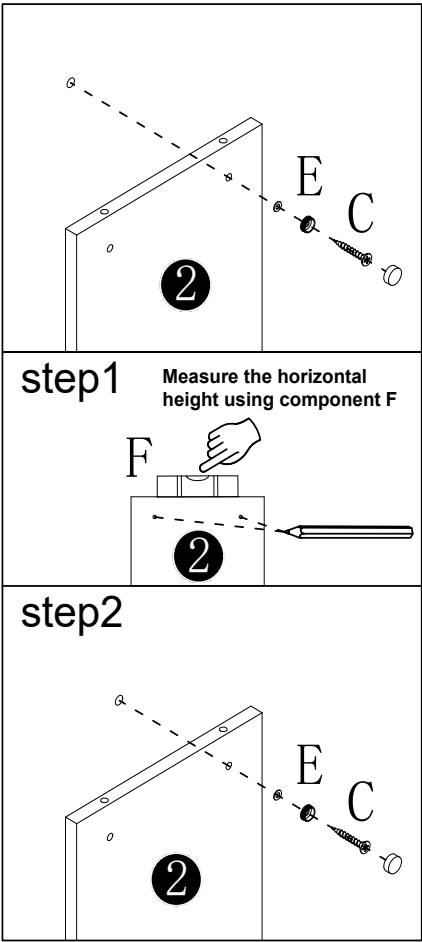


The F component serves as an auxiliary function and should be removed after use.


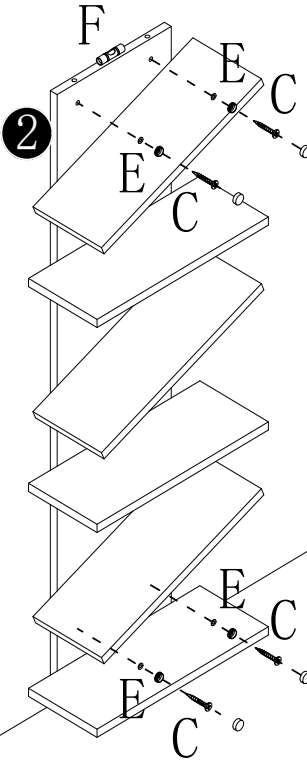


6


H
x2

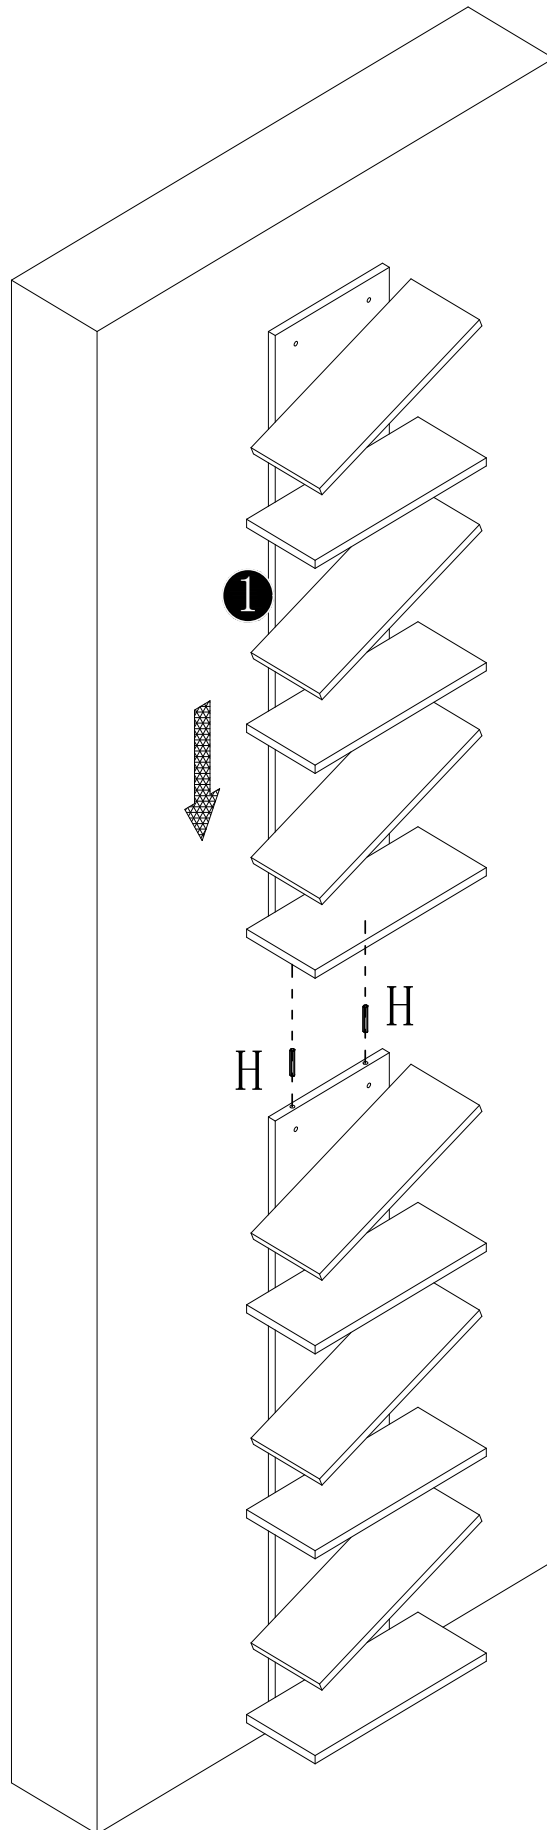


7

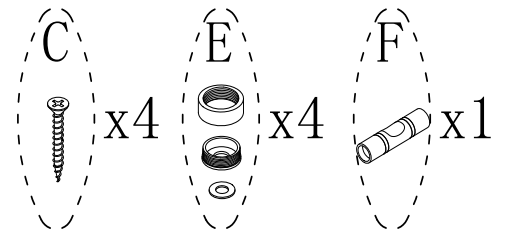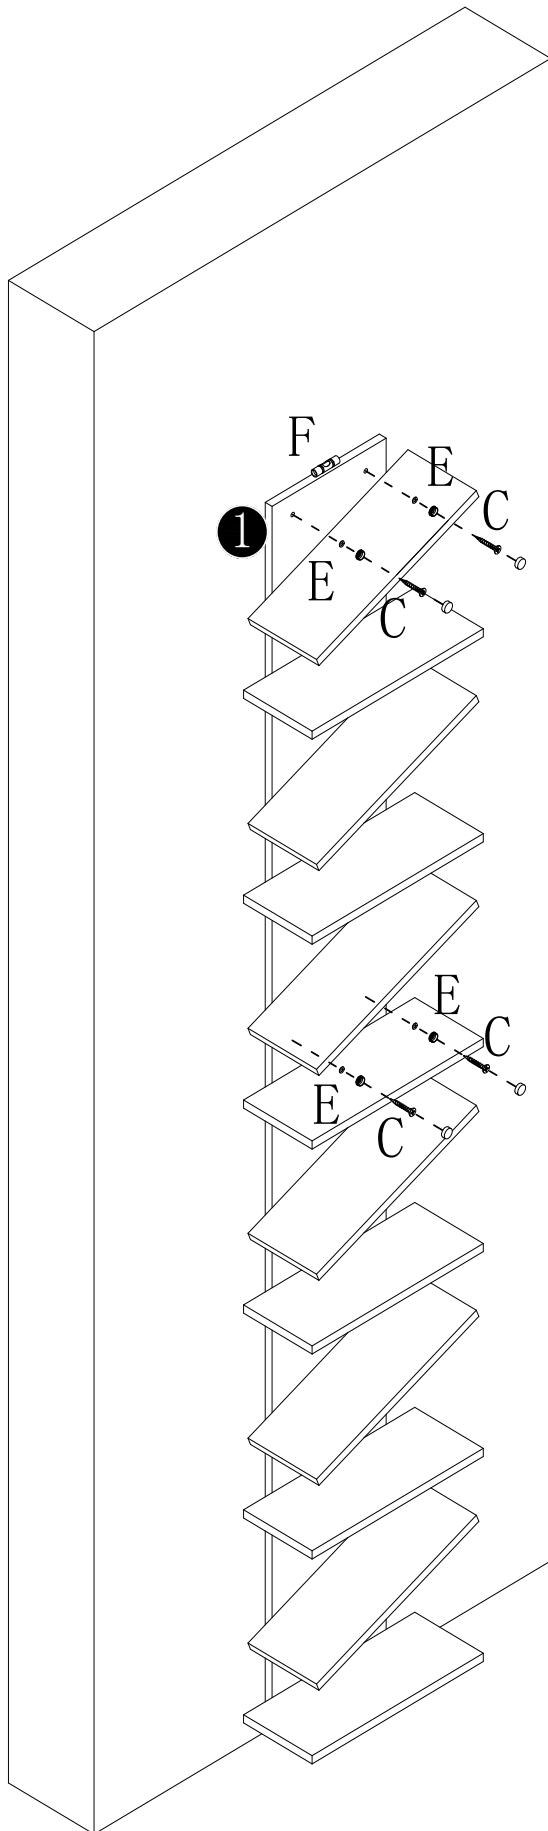


Installation steps for solid wood surface

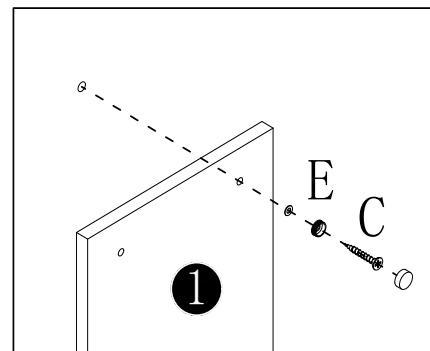


step1 Measure the horizontal height using component F




step2

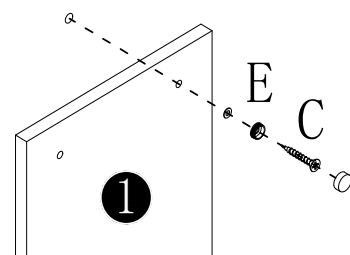


3. Wood or Metal Stud Walls

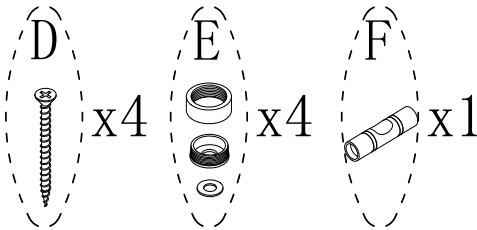

Installation steps for wooden or metal column walls

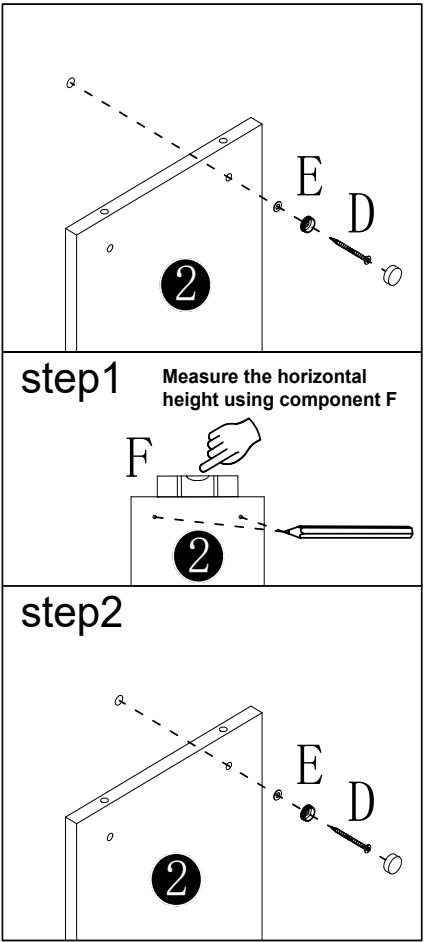




The F component serves as an auxiliary function and should be removed after use.

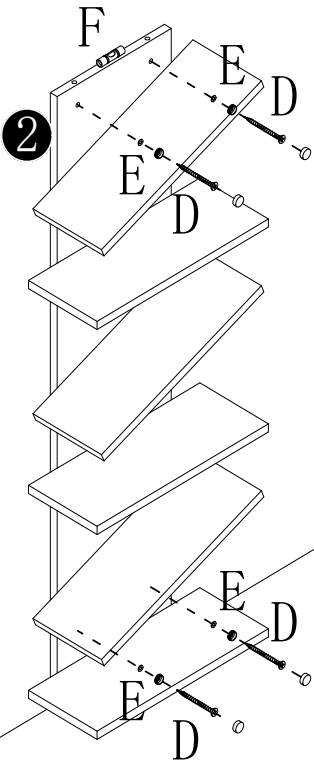


9



H
x2

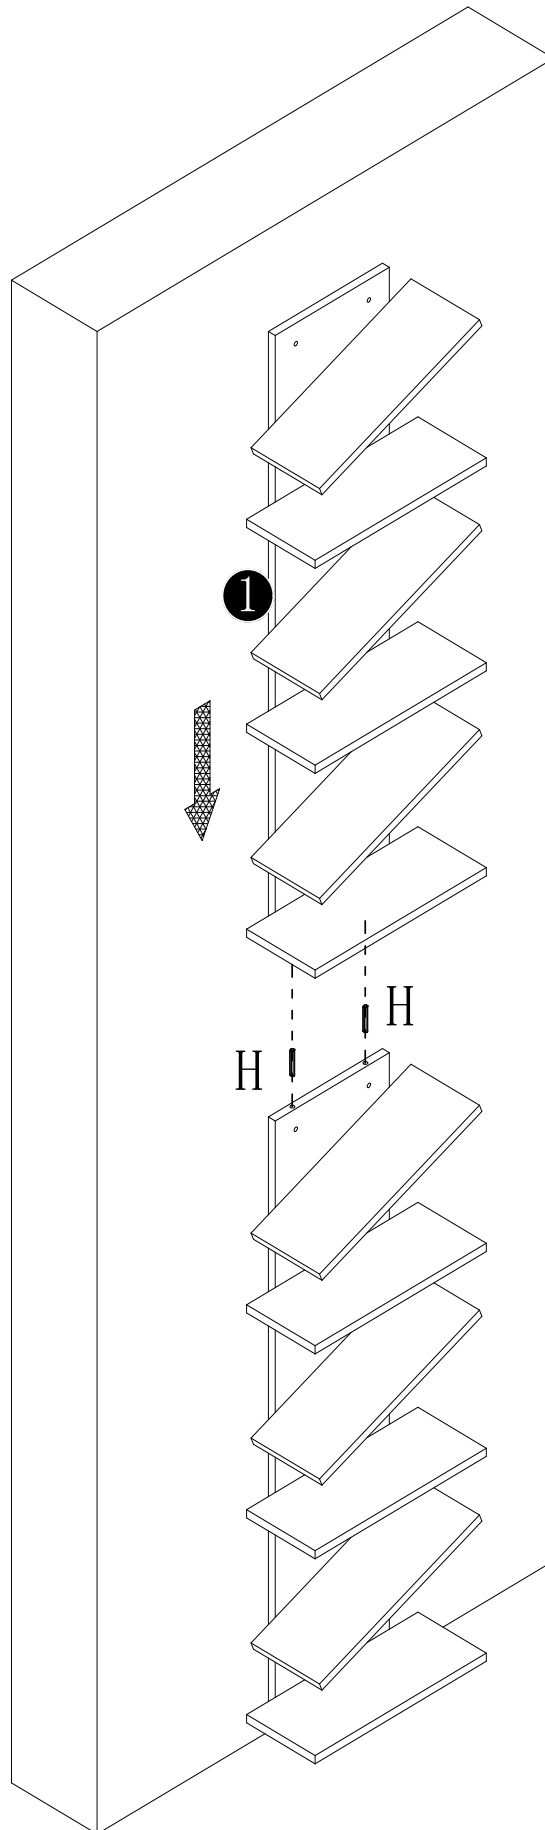

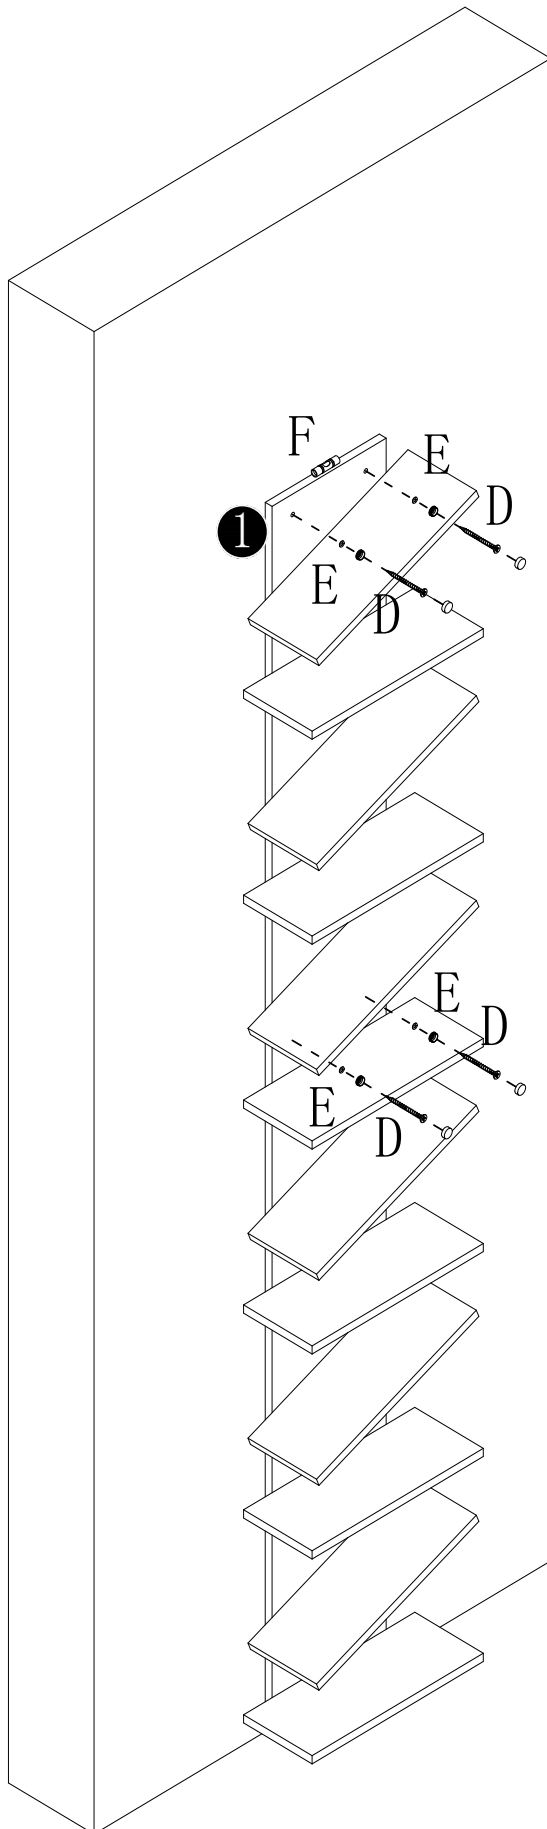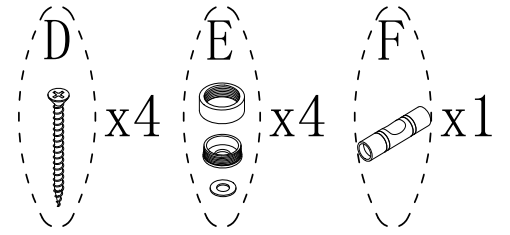


Installation steps for wooden or metal column walls

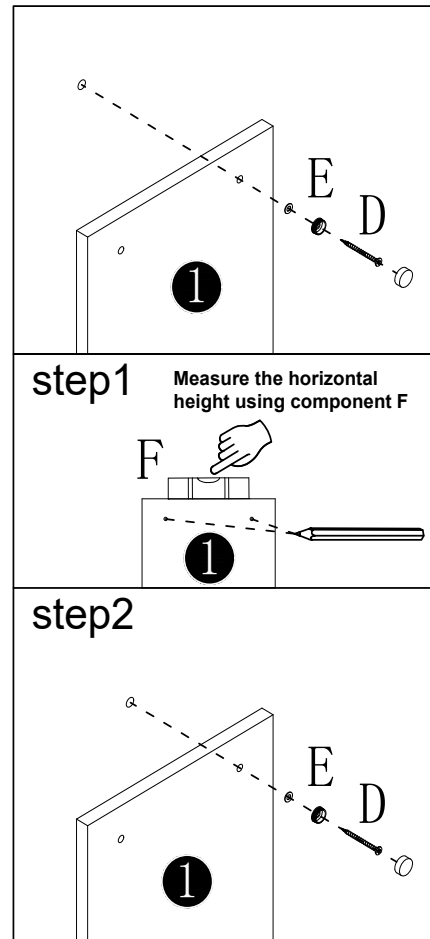

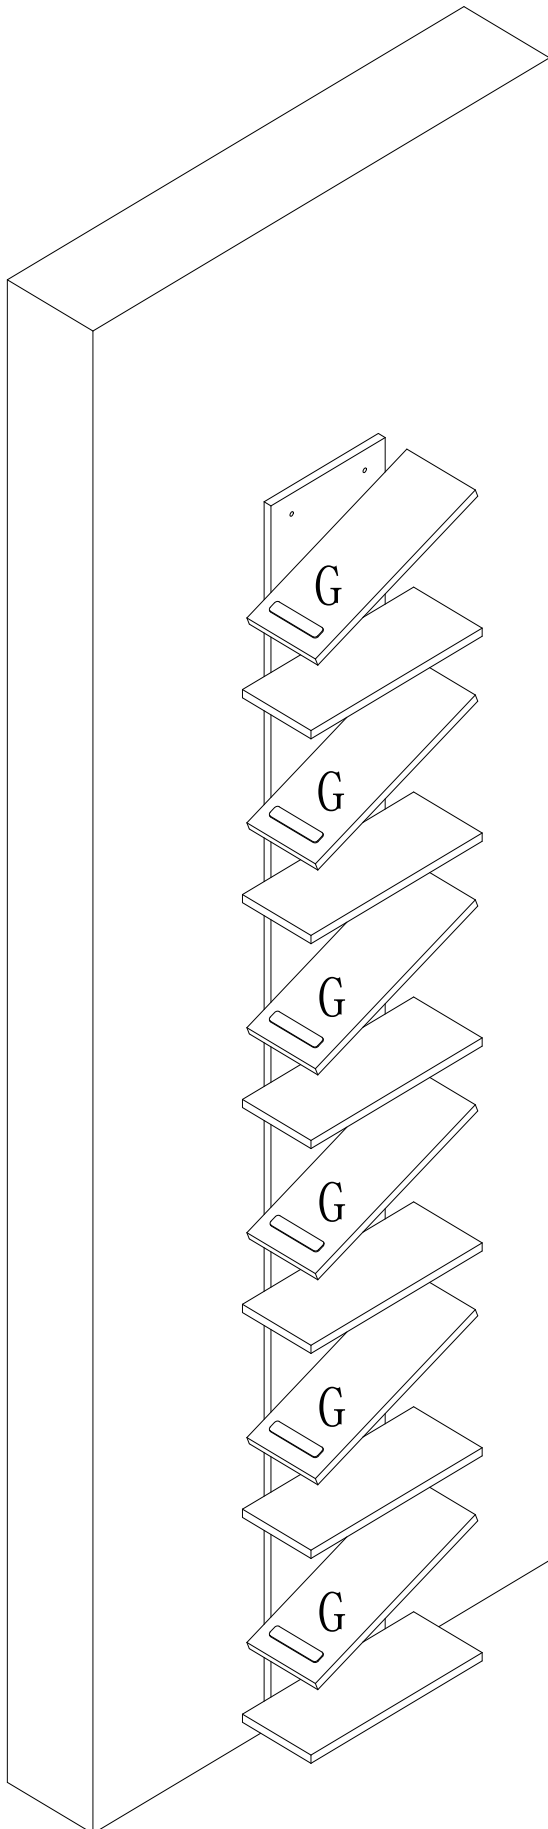

Installation steps for anti slip stickers

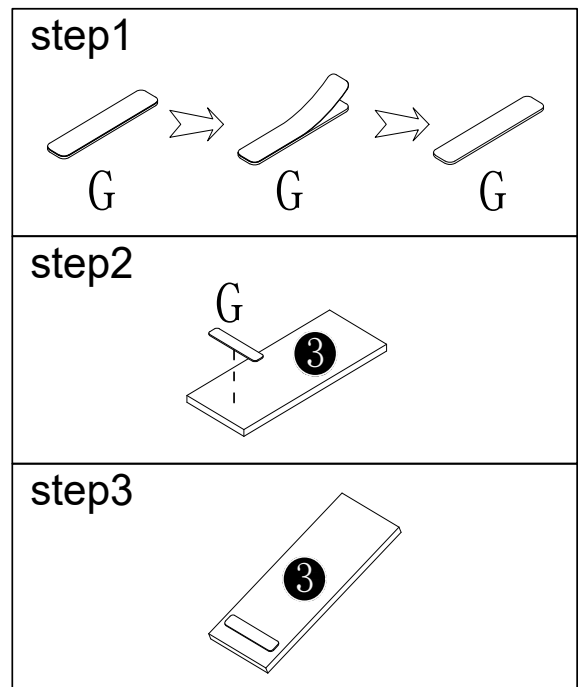

The anti slip sticker of component G is installed on the inclined plate