

RECESSED


4", 5-6" DOWNLIGHT RETROFIT

5 CCT SELECT


SMOOTH, BAFFLED



4"

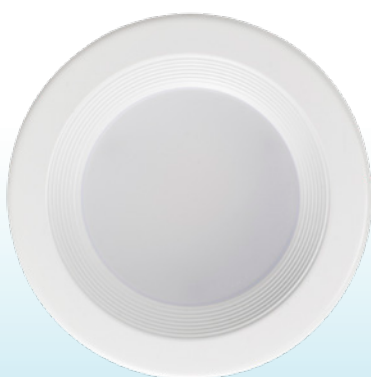

BAFFLED

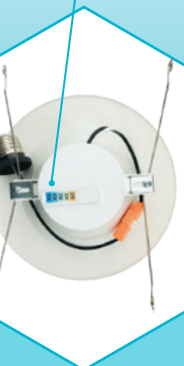

SMOOTH

5 COLOR
OPTIONS
1 FIXTURE

5-6"



SPECIFICATIONS

ELECTRICAL


	MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	FREQUENCY	LUMEN EFFICACY	WATT REPLACEMENT	LIFETIME
4"	BAFFLED LR23790	LED/DL4/5CCT/FL/B/RD	10	120V	YES	60Hz	75	60	50,000
	SMOOTH LR23791	LED/DL4/5CCT/FL/RD	10	120V	YES	60Hz	75	60	50,000
5-6"	BAFFLED LR23795	LED/DL5-6/5CCT/FL/B/RD	14	120V	YES	60Hz	79	90	50,000
	SMOOTH LR23796	LED/DL5-6/5CCT/FL/RD	14	120V	YES	60Hz	79	90	50,000

PHOTOMETRIC


MODEL	COLOR (CCT)	TEMP	LUMEN	CRI	DAMP LOCATION	BASE	COST/YR	ETL LISTED	ENERGY STAR	TITLE 24
LR23790	2700K/3000K/3500K/4000K/5000K	CCT SELECT	750	90	YES	E26 ADAPTER	\$1.20	YES	YES	YES
LR23791	2700K/3000K/3500K/4000K/5000K	CCT SELECT	750	90	YES	E26 ADAPTER	\$1.20	YES	YES	YES
LR23795	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90	YES	E26 ADAPTER	\$1.69	YES	YES	YES
LR23796	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90	YES	E26 ADAPTER	\$1.69	YES	YES	YES

GENERAL

DIMENSIONS

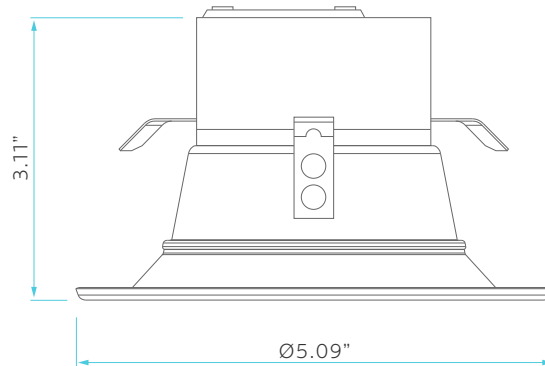

4"

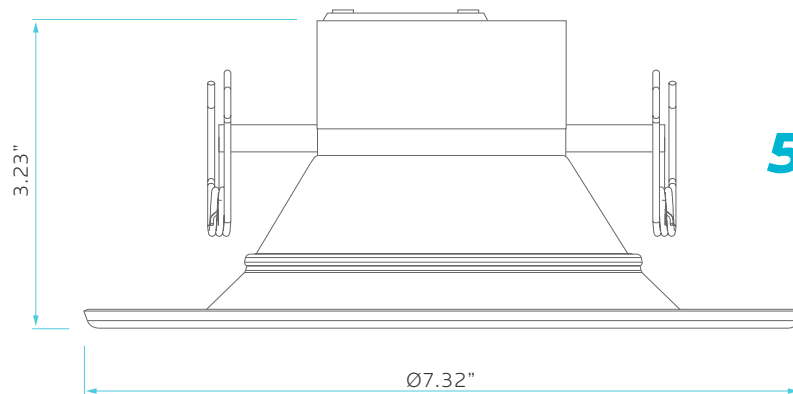

5-6"