



KITCHEN FAUCET

- Stiletto Collection
- **Single-Handle Kitchen Faucet with Pull-Down Spray**
- **Single or Three-Hole Installation**

STANDARD SPECIFICATIONS

- Zinc body & brass spout & zinc handle
- 25mm Ceramic Cartridge
- 1/2"-14 NPSM male inlet connections
- Quick connecting spray head hose
- Neoperl aerator
- 2-function spray head
- Flow Rate: 1.8gpm @ 60psi

FINISHES INCLUDE

- Chrome (UF15000)
- PVD Brushed Nickel (UF15003)
- Oil Rubbed Bronze (UF15005)
- Matte Black (UF15007)

WARRANTY

- Limited lifetime warranty on workmanship and materials to the original purchaser

COMPLIES WITH

- NSF 61-9
- ASME A112.18.1
- CSA B125.1
- IAPMO/UPC/cUPC
- AB1953
- ADA



NSF/ANSI 61



C



COMPLIES WITH LEAD-FREE REQUIREMENTS

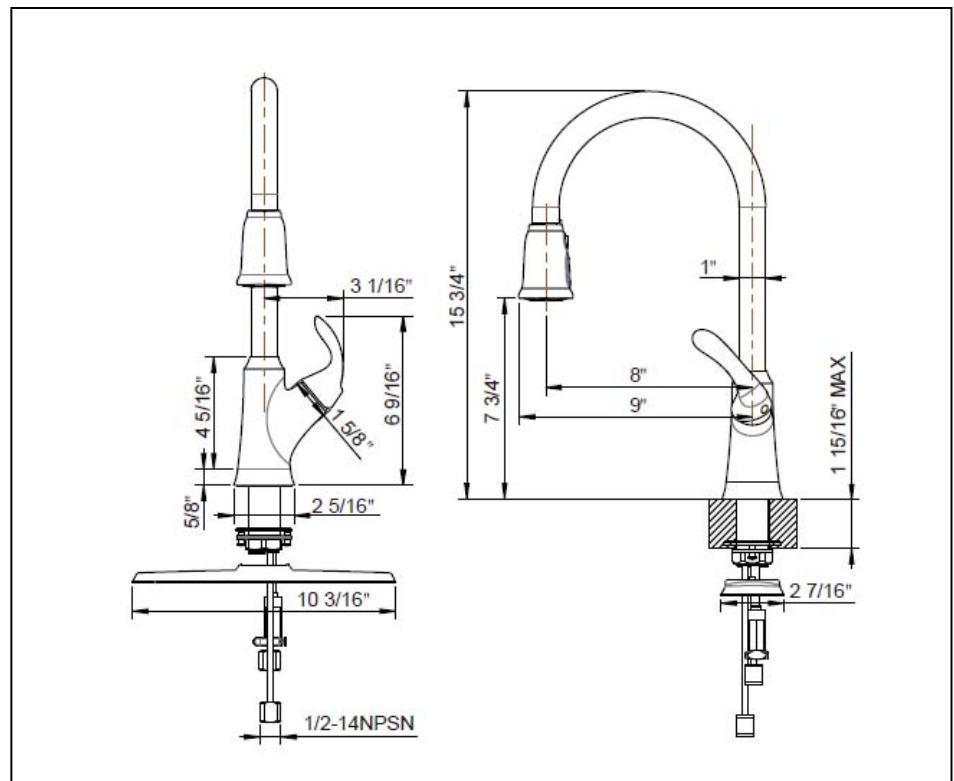

tel. 888-OK-ULTRA (658-5872) • fax. 949-252-9989 • <http://www.ultrafaucets.com>

This specification is provided for reference only. Ultra Faucets reserves the right to modify specifications and materials without notice or obligation.