

SPECIFICATIONS:

DESCRIPTION

2-4 light vanity luminaires featuring handcrafted glass.
Multilight version of 1 sconce.

LAMPING

Standard: 40W Low-pressure G9 Halogen 120V lamp, included.

Suitable for use in an open fixture. Dimmable with standard incandescent dimmer.

LED: 5W LED Replaceable source 120V, dimmable, included.

DIFFUSER

Shade shall be handcrafted glass of various decors.

5.5" Dia. x 2.5" H, spaced 7.875" apart on center.

CONSTRUCTION

Fixture utilizes metal arm assembly and stamped steel body, with plated finish.

Decorative finials can be removed for downlighting applications. Decorative outlet box cover optional when not required.

METAL FINISH

Fixture shall be finished in Bronze, Chrome or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.


LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



SHOWN IN WHITE STARPOINT WITH SQUARE CANOPY

DICRO SWIRL




BLUE MATTE




MARBLE



BI-COLOR



SUNSET



WHITE STARPOINT



MANGO STARPOINT



BLUE STARPOINT



For ordering information, see next page




All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

VANITIES WALL

ORDERING:

FIXTURE	GLASS OPTIONS	METAL FINISH	METAL FINISH	OPTIONS
2 Light Vanity	White	40W G9 Hal	Bronze	Square
3 Light Vanity	Marble	5W LED 120V,	Chrome	Canopy
4 Light Vanity	Sunset	dimmable	Satin Nickel	
	Blue Matte			
	Bi-color			
	White Starpoint			
	Blue Starpoint			
	Mango Starpoint			
	Dicro Swirl			

3-Light Vanity w/ Dicro Swirl Glass, Satin Nickel Finish

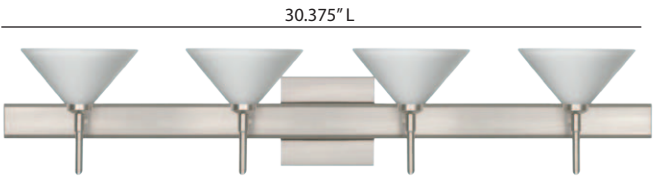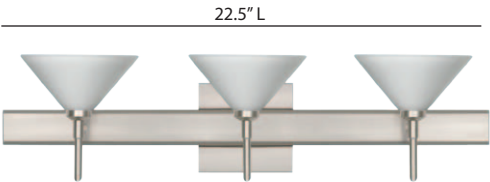

LED SCNCES:

- Total power of only 5 watts
- Dimmable with a standard dimmer
- Rated life: 25,000 hours
- 450 lumens
- CCT: 3000° Kelvin
- CRI: 80+

Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

Project Information: