


# Installation

To avoid scratches and swallowing parts, please do not install by children!

| Hardware List                                                                      |                                          | Hardware List |  |
|------------------------------------------------------------------------------------|------------------------------------------|---------------|--|
|   | Seat                                     | 1             |  |
|   | Seat cushion                             | 1             |  |
|   | Back cushion                             | 1             |  |
|   | Base cloth                               | 1             |  |
|   | Legs                                     | 4             |  |
|  | Connecting buckle x1<br>8x20mm screws x2 |               |  |
|                                                                                    |                                          |               |  |
|  | Backrest                                 | 1             |  |
|  | Sofa cover                               | 1             |  |
|  | Pillow                                   | 1             |  |
|  | Inserted rod                             | 2             |  |
|  | Cover plate                              | 1             |  |
|                                                                                    |                                          |               |  |

**1** Cover the hole with a cover plate.

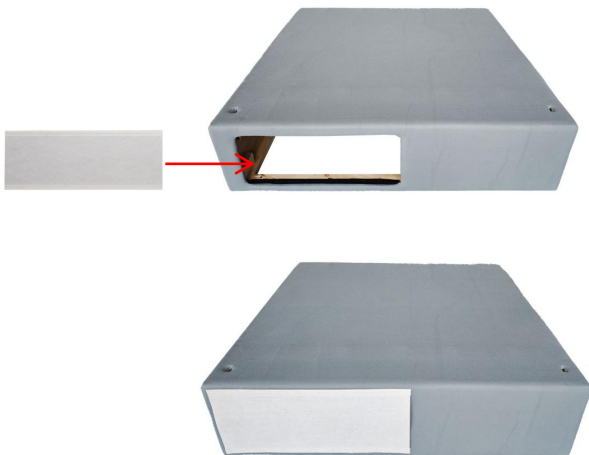


**2** Seal the bottom with the base cloth. And then screw the sofa Legs into the reserving holes on the seat.



**3** As shown in the figure: Insert the rod into the corresponding positions of the backrest and armrest.



4

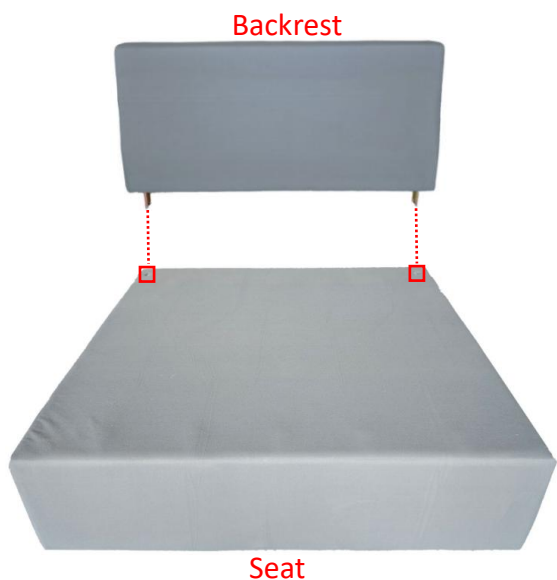


Make sure the flat side is level with the side edge of the seat frame, and the curved side faces inward.



5

Put on the sofa cover.


Suggestion: you'd better not remove the protective strip before finish putting the cover on.

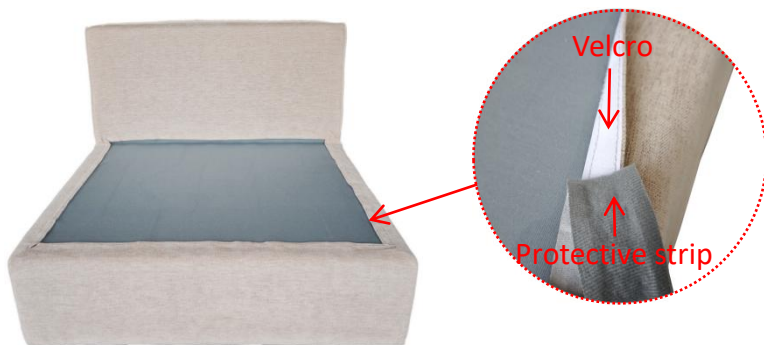

6

Place the seat cushion and back cushion.

The seat cushion can be attached using Velcro.

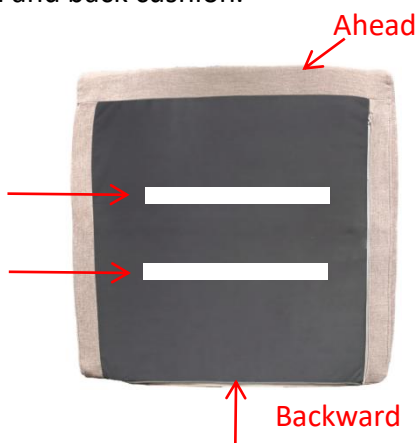

Note: The side of the grey magic cloth that is flush with the edge of the seat cushion should be facing backward.