




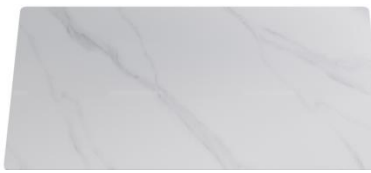


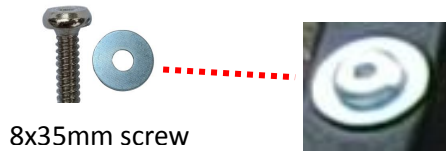
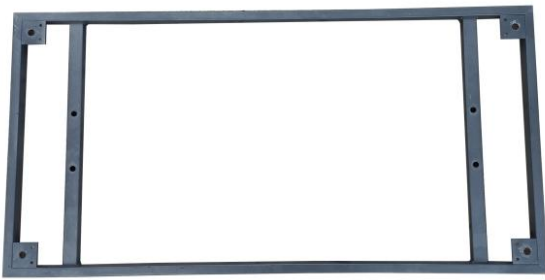


Installation

Hardware List		Hardware List	
 Table top	1	 Table leg	1
 Support frame	1	 8x16mm screw	4
 8x35mm screw	4	 Washer	8
 spare 4x15mm Self-tapping screws	8	 Hexagonal screw tap	1


1



Tighten the screws to fix the support frame and table leg together.



2

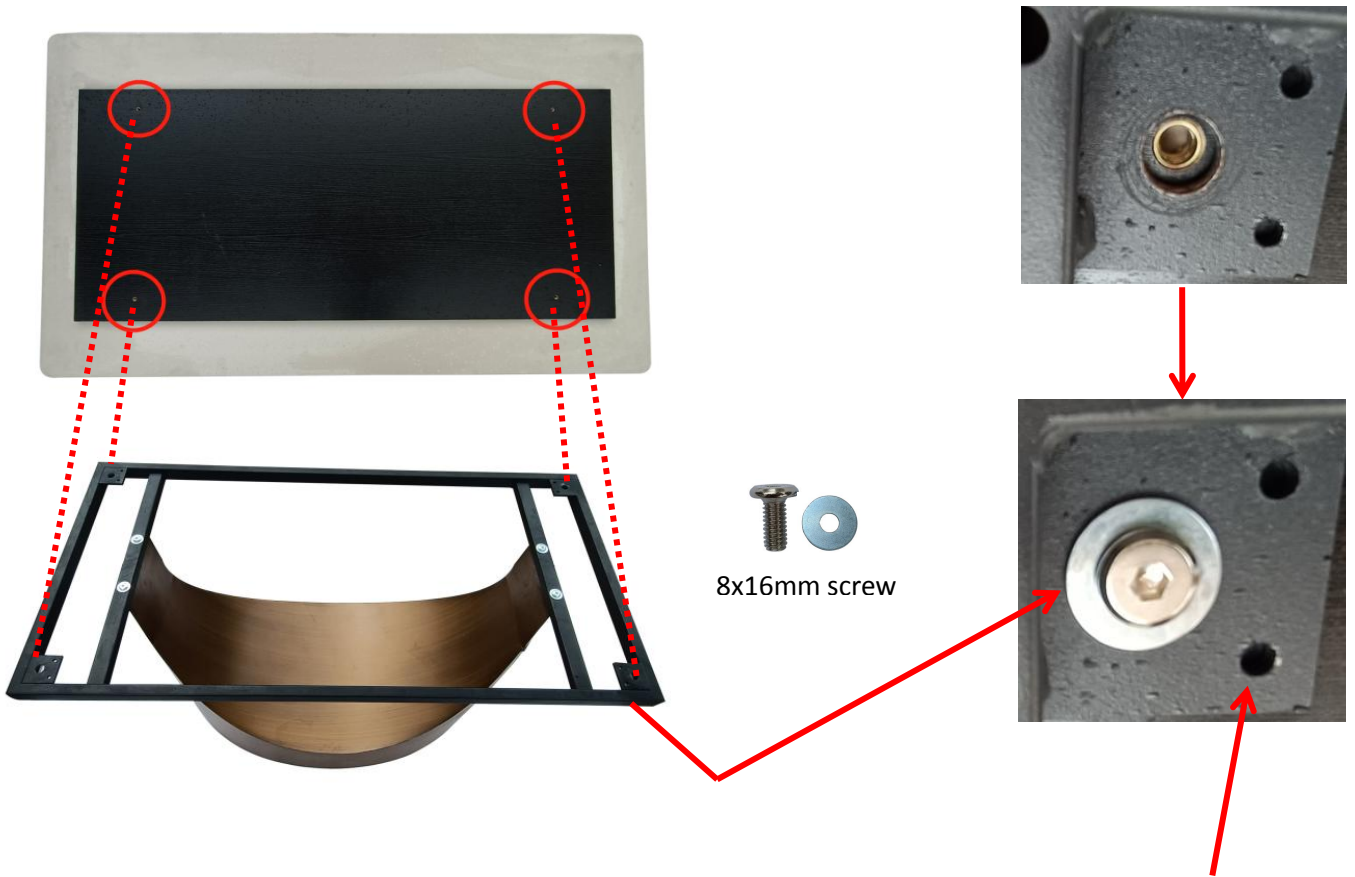







Put the table top on the table leg, make sure the reserved screw holes of the table top and the frame are corresponding, tighten 8x16mm screws to finish the installation.

This is a spare screw hole. When the 8x16mm screw fails to be screwed in, the hole can be fixed with a 4x15mm self-tapping screw. Either way will do.



Installation

Hardware List		Hardware List	
 Seat	1	 Support leg	1
 8x20mm screw	2	 8x16mm screw	2
 Washers	4	 Hexagonal screw tap	1

1



Note: The wider side (13") of the support foot corresponds to the front edge of the seat and is fixed with 8x16mm screws. The narrow side (12.2") corresponds to the back edge of the seat and is fixed with 8x20mm screws.

