



**Tercet®**  
Bath with Integral Apron  
**K-1161-LA**

- Acrylic
- Molded lumbar supports and armrests.
- Integral apron with removable access panel.
- Tile-in flange.
- 60" (1524 mm) x 60" (1524 mm) x 21" (533 mm)



**Codes/Standards**

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

**KOHLER® One-Year Limited Warranty**


See website for detailed warranty information.

**Available Color/Finishes**

*Color tiles intended for reference only.*


| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|                                                                                      |    |         |
|--------------------------------------------------------------------------------------|----|---------|
|  | 0  | White   |
|  | 96 | Biscuit |
|  | 47 | Almond  |

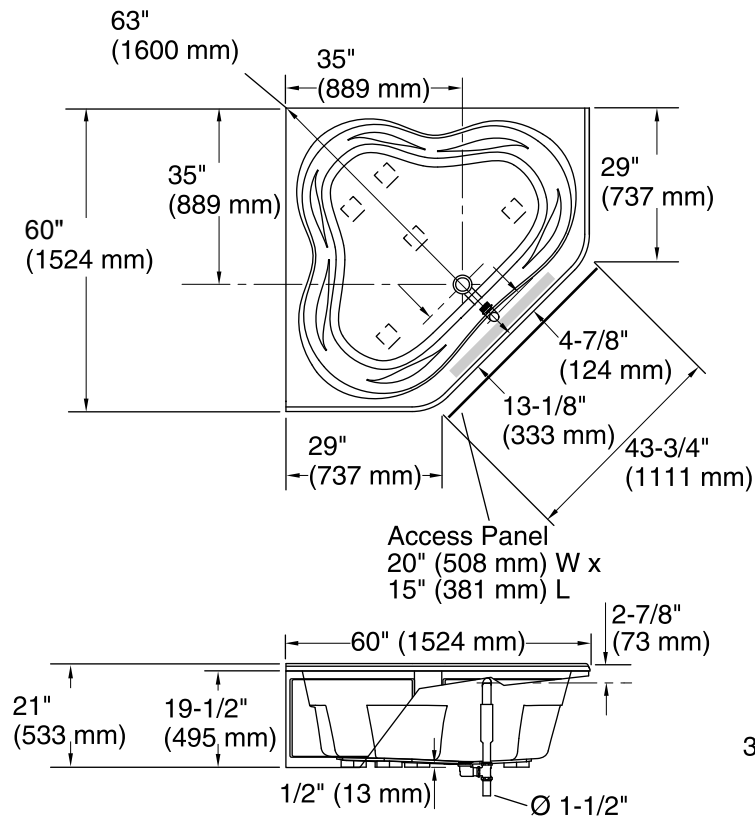


No change in measurements if connected with drain illustrated. (K-11677)


Recommended faucet area




**Tile Flange Detail**



**Drop-In Rim Detail**

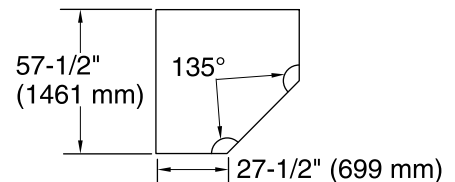

**Drop-In Rim Style Cut-Out Detail**

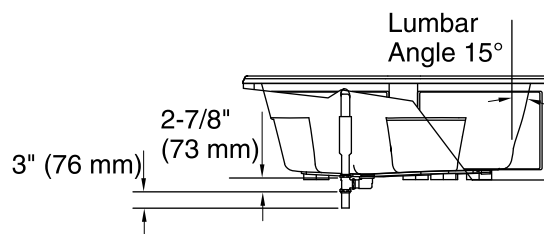

## Technical Information

All product dimensions are nominal.

|                     |                                   |
|---------------------|-----------------------------------|
| Installation:       | Corner                            |
| Drain location:     | Center                            |
| Basin area, bottom: | 52" x 38-3/4" (1321 mm x 984 mm)  |
| Basin area, top:    | 61" x 46-1/4" (1549 mm x 1175 mm) |
| Weight:             | 118 lbs (53.5 kg)                 |
| Minimum floor load: | 35 lbs/ft² (170.9 kg/m²)          |
| Water depth:        | 15" (381 mm)                      |
| Water capacity:     | 96 gal (363.4 L)                  |

## Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

Hot water supply should be 70% of capacity or greater. Installations will vary.