




SY-01

80062Product Installation Instructions

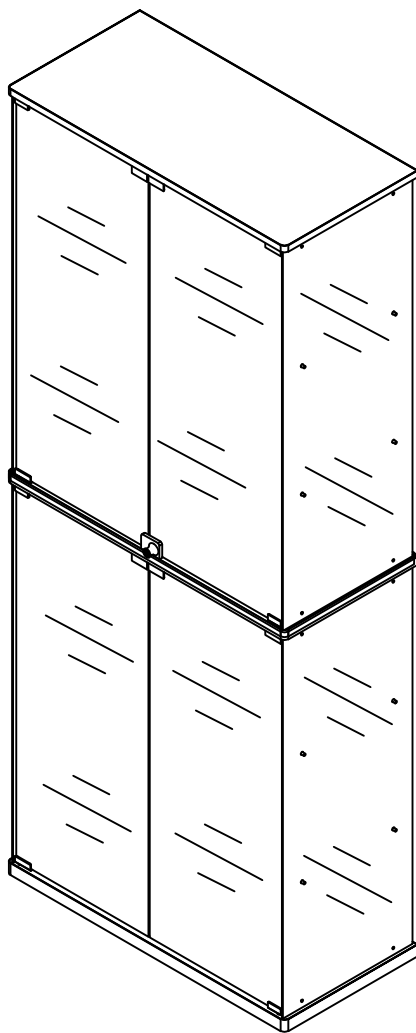





01x1




02x4

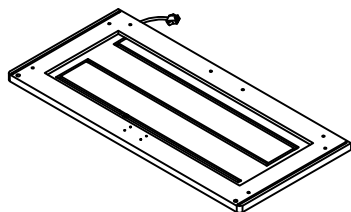


03x1




04x4




05x1




06x4




07x4

A		Non-slip pads (50x10mm)	4pcs +2pcs
B		Corner Bracket,,Screw (4x8mm)	32pcs +2pcs 32pcs +2pcs 64pcs
C		Laminate support nail (6x16mm)	16pcs +2pcs
D		Rebound device & Screw (3x16mm)	8pcs +2pcs 2pcs
		Iron sheet	4pcs
		Hinge	8pcs 4pcs 4pcs
E		Single door glass lock Key	1pcs
F		Double end connecting line	1pcs
G		LED Strip Controlle	1pcs
H		AC/DC Adapter (12V=3.0A)	1pcs
I			





1pcs



Double-head screwdriver, use as required

Product structure decomposition

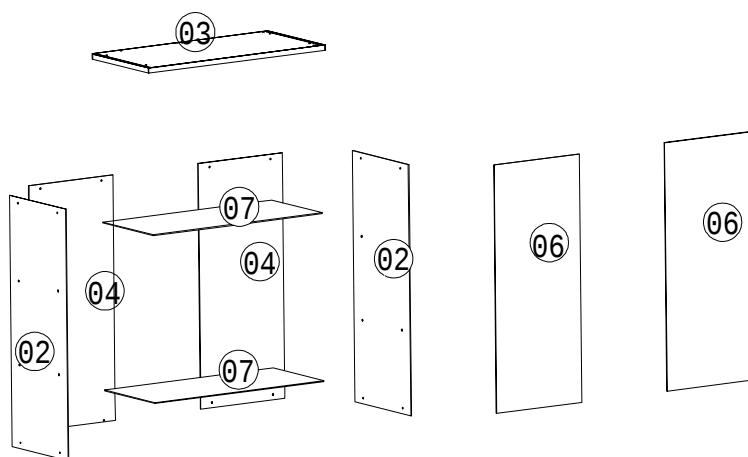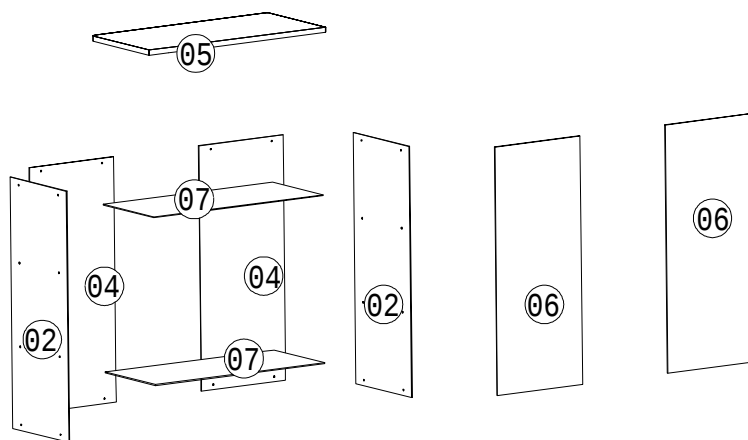


Step 1

A



x4

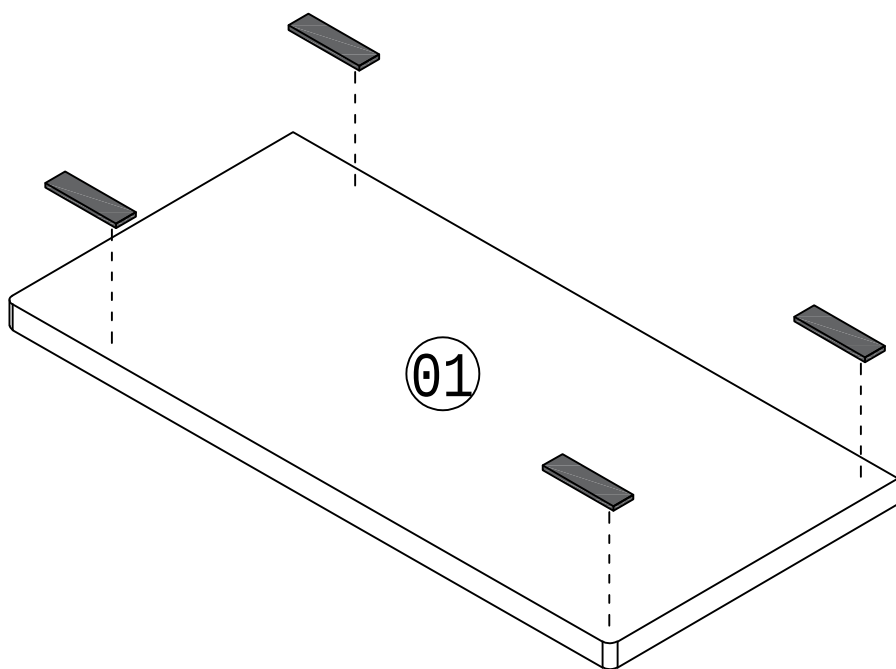

4

Step 2

(B)







x8



x8




x8

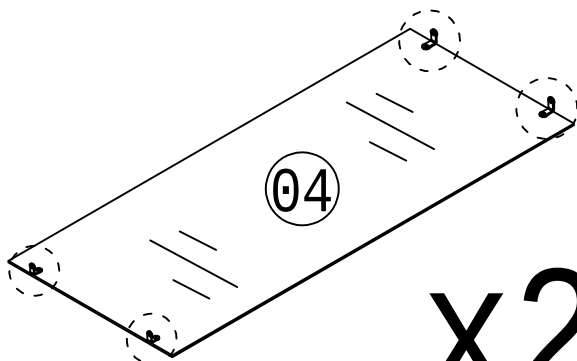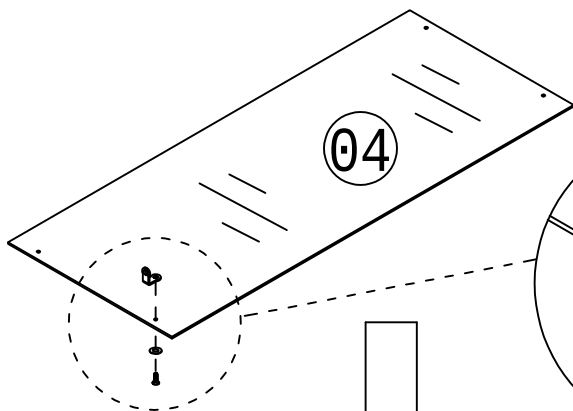

x2

Install this hole




5

Step 3

(B)



x4

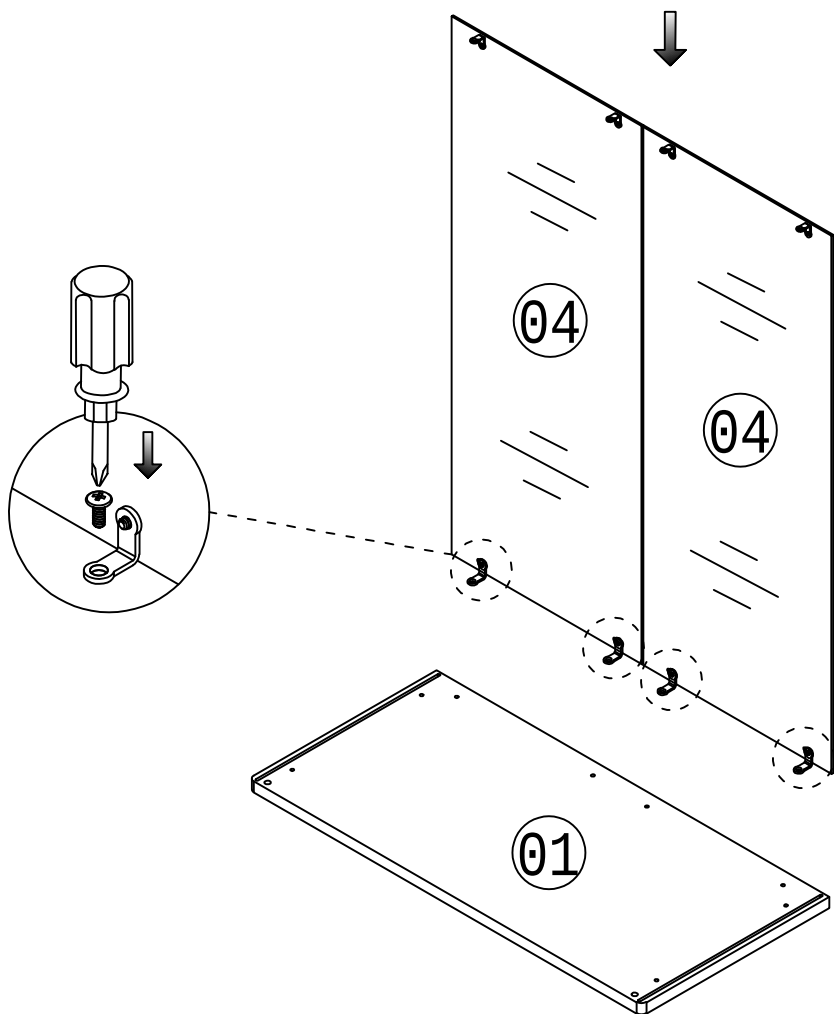

It is recommended to have two people assist with the installation.

Step 4

(B)






x8



x8



x8

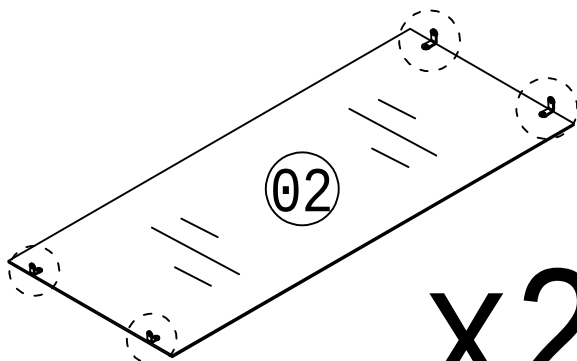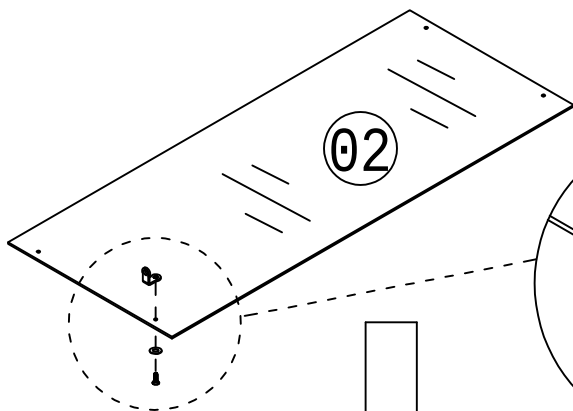

x2

Install this hole




Step 5

(B)



x4

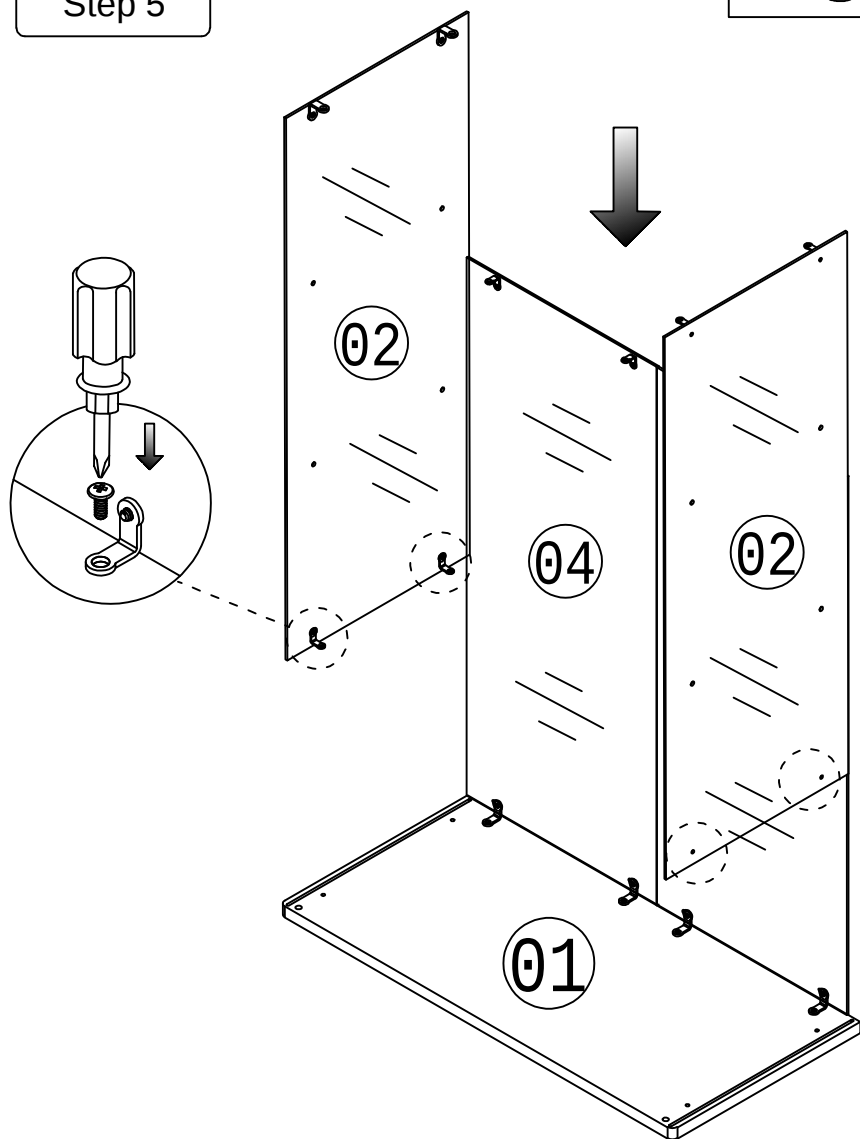

It is recommended to have two people assist with the installation.

Step 6



D



x1



x4

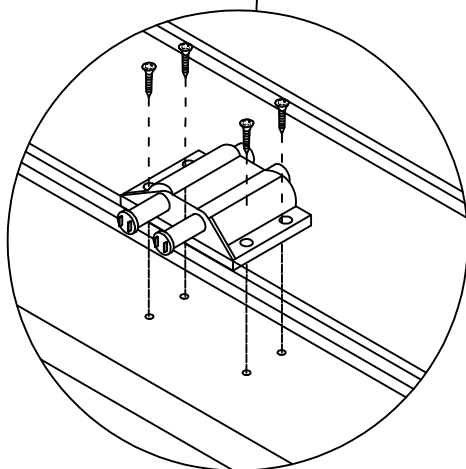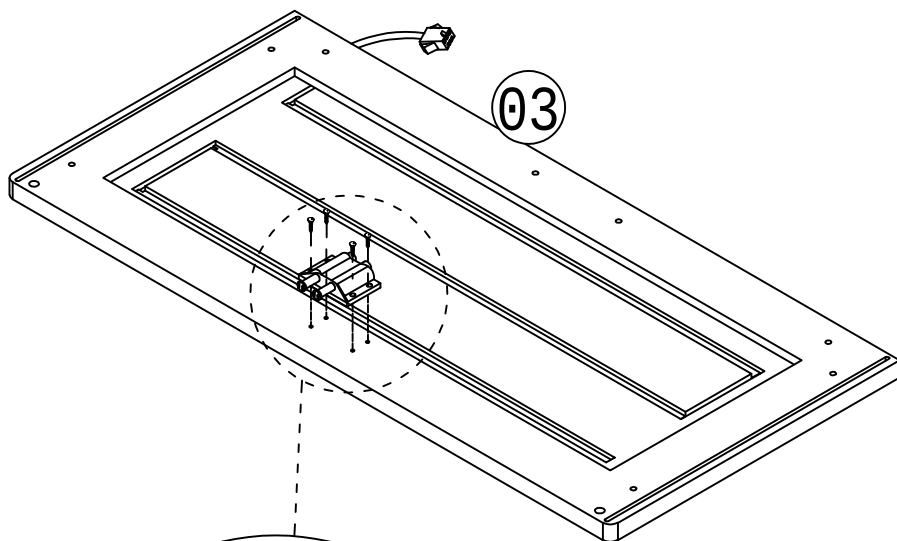


Step 7

(B)





x8

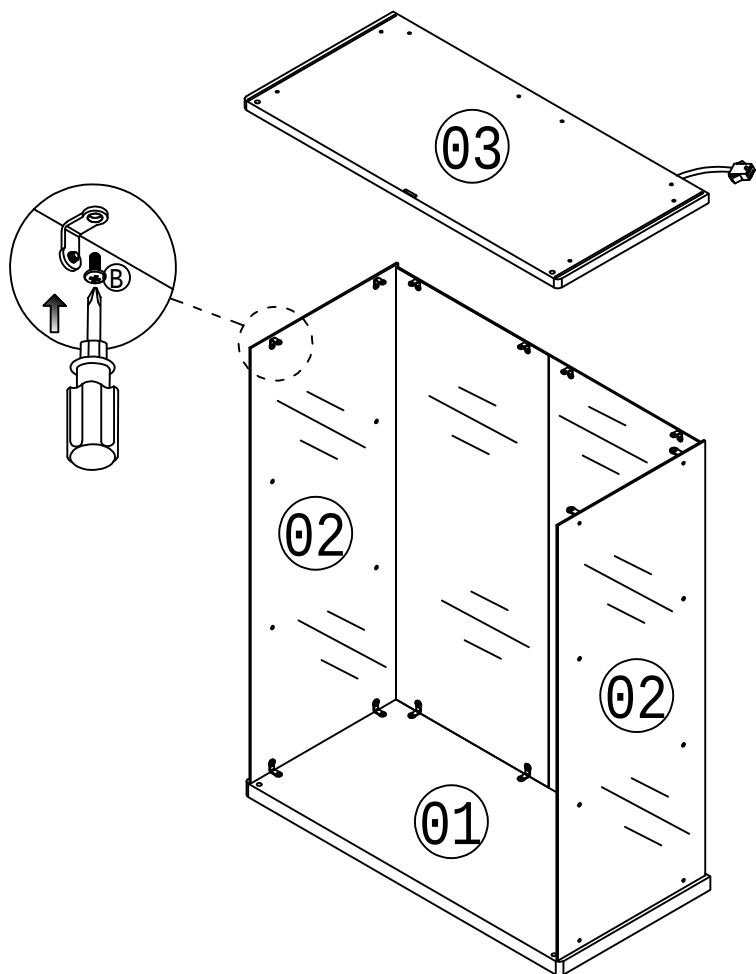

It is recommended to have two people assist with the installation.


Step 8

(B)  x8  x8  x8

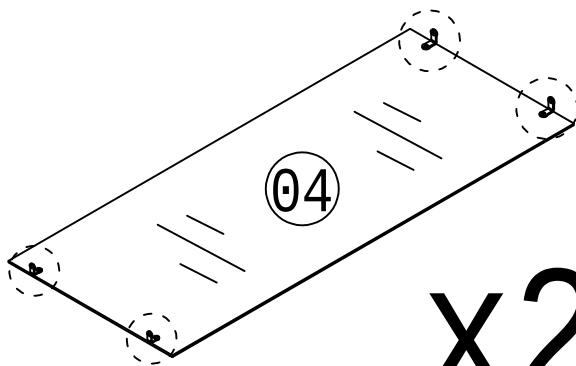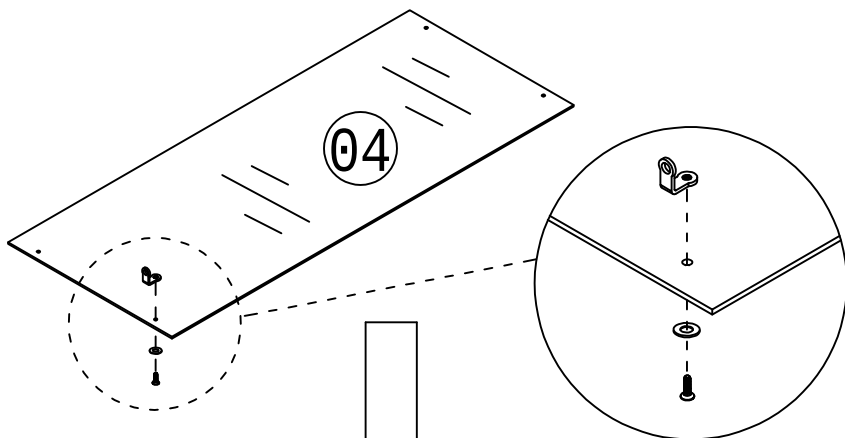

x2

Install this hole






Step 9

(B)





x4

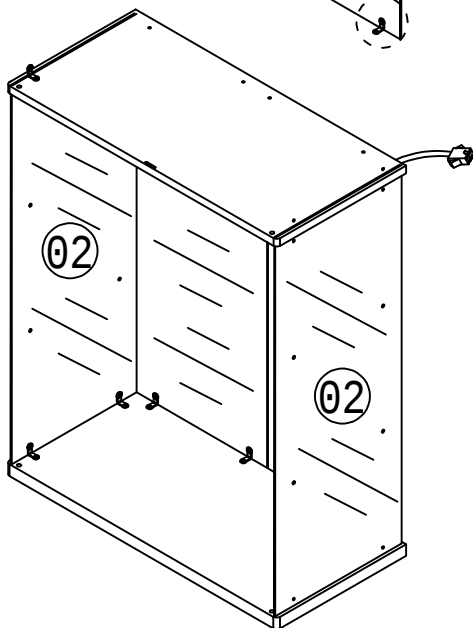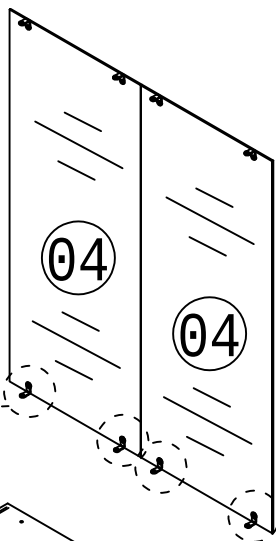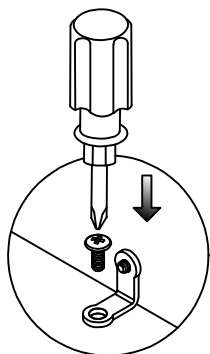

It is recommended to have two people assist with the installation.


Step 10

(B)  x8  x8  x8

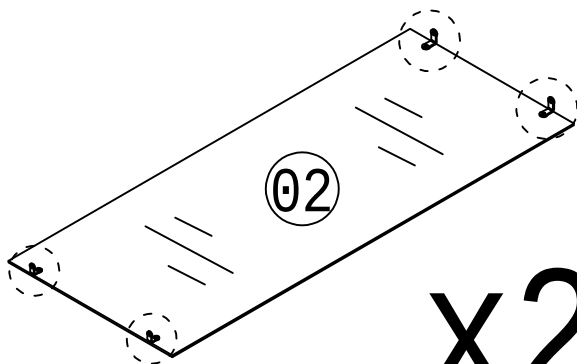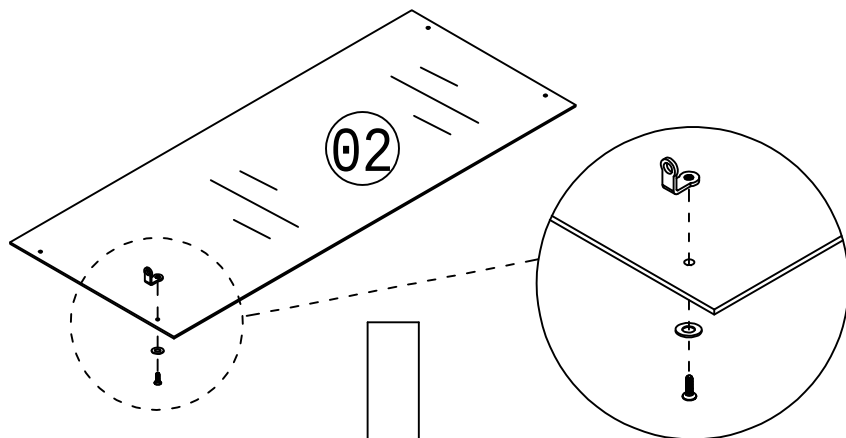

x2

Install this hole




Step 11

(B)





x4

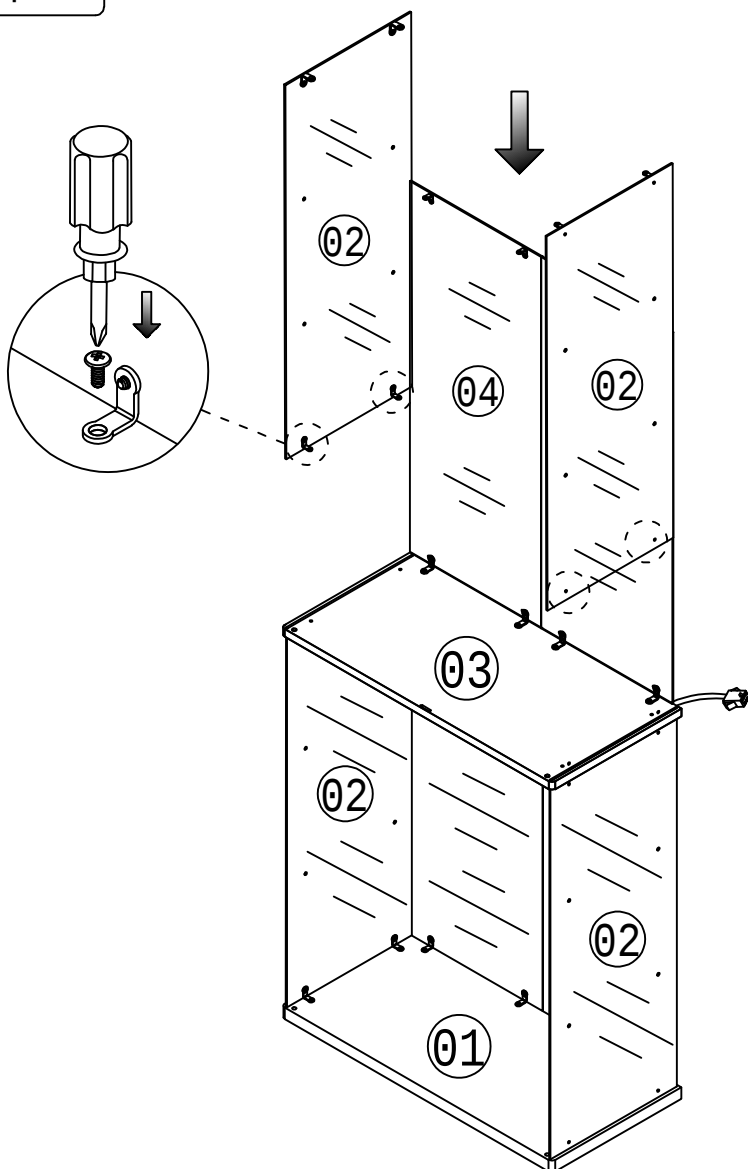

It is recommended to have two people assist with the installation.

Step 12

D

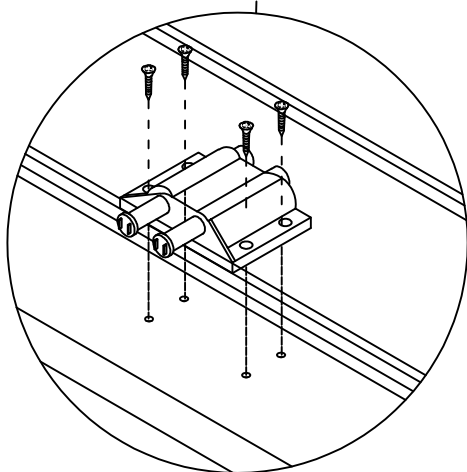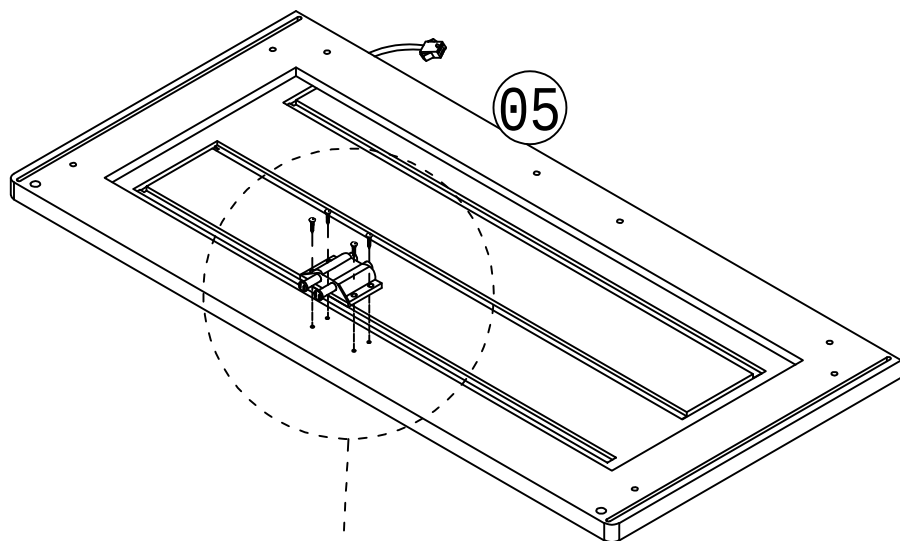


Step 13

(B)





x8

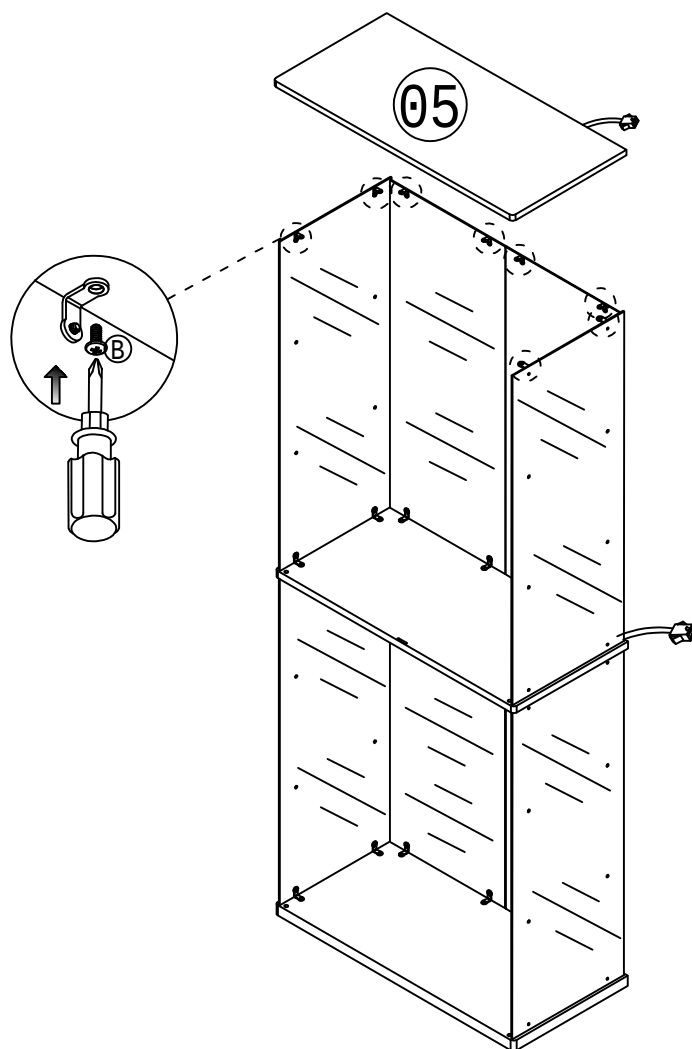


It is recommended to have two people assist with the installation.

Step 14

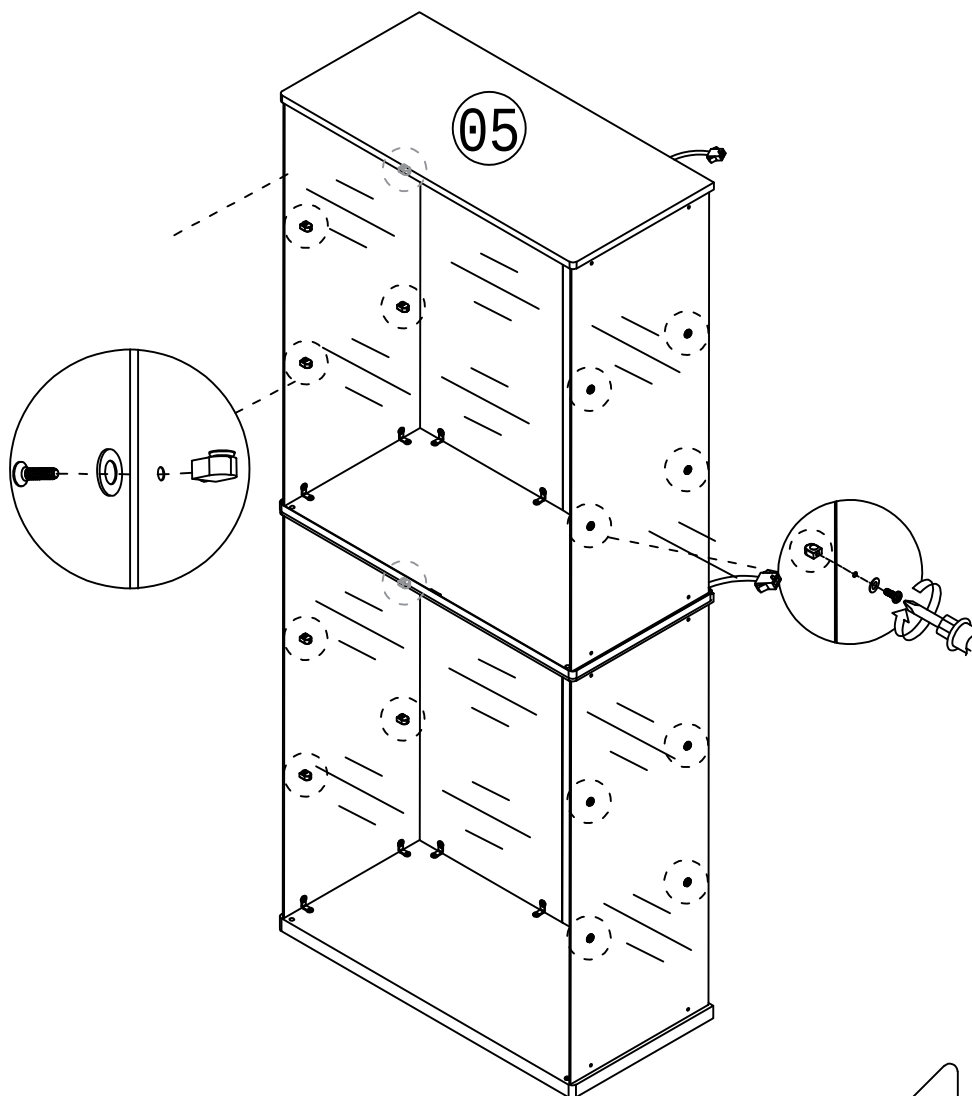


Step 15

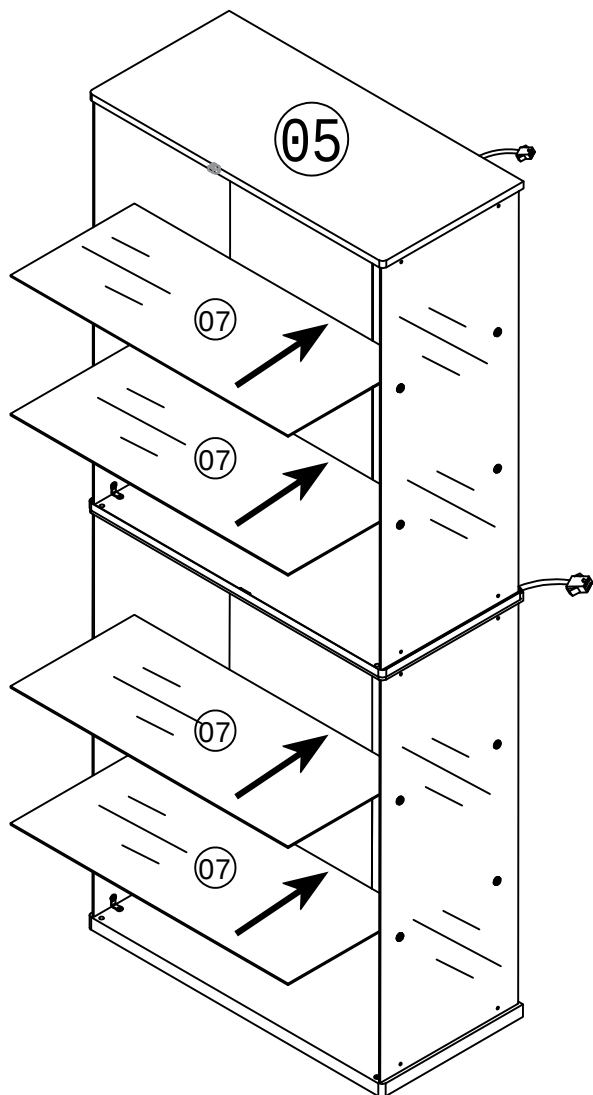


Step 16

First, completely unscrew the screws on the parts



Place the white gasket first, then install the hinge, and finally tighten the screws.



White gasket

①



x2




x2


Pay attention to the direction of the door hinge, and rotate the screws to compress the white gasket



White gasket



Locking screw



Iron sheet

06


If you feel loose, please pinch the accessory before installation

x2


19

Step 17


First, completely unscrew the screws on the parts



Place the white gasket first, then install the hinge, and finally tighten the screws.




White gasket



White gasket

Pay attention to the direction of the door hinge, and rotate the screws to compress the white gasket

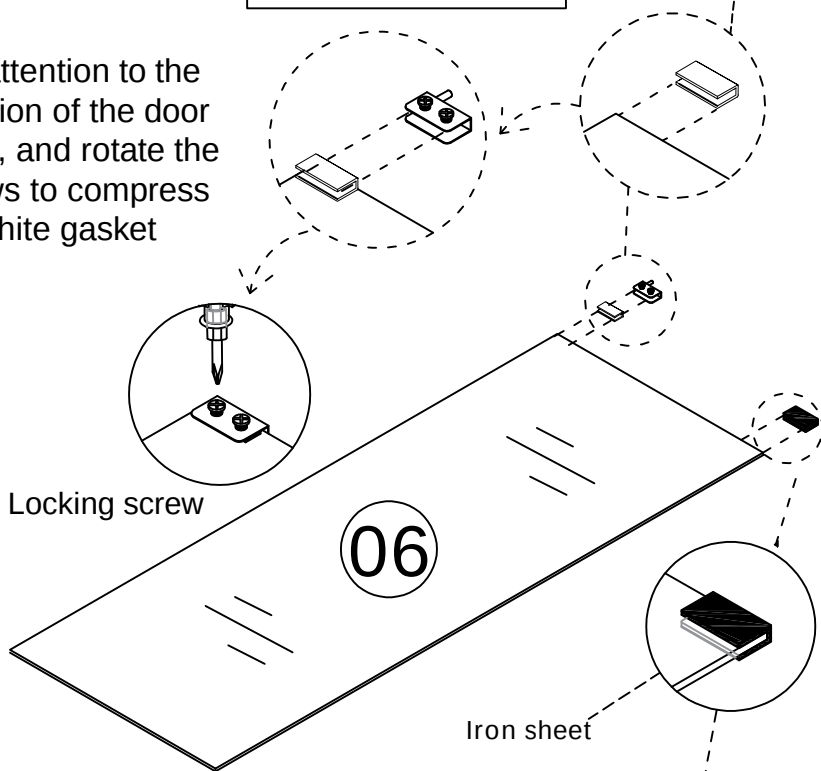



Locking screw

Iron sheet

If you feel loose, please pinch the accessory before installation

x2


Step 18

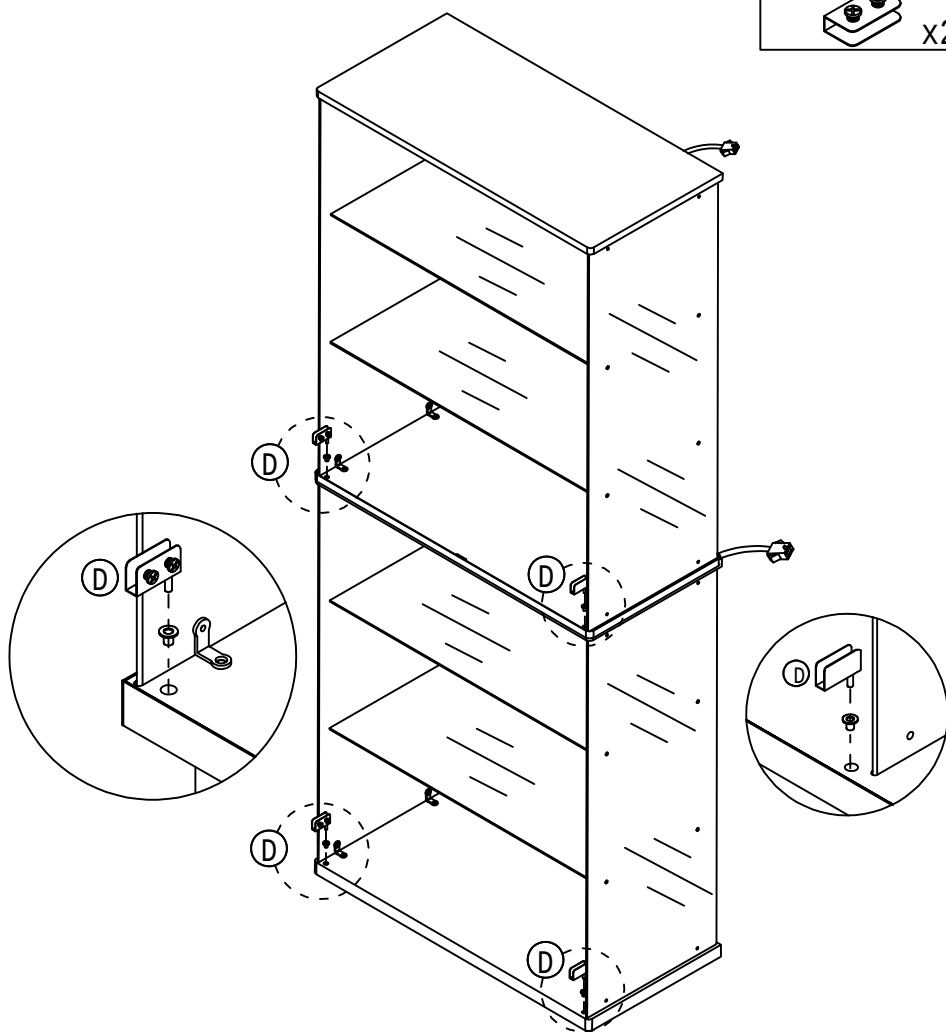


Step 19

Pay attention to the direction of the door hinge during installation


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.



first




second



third

Locking screw

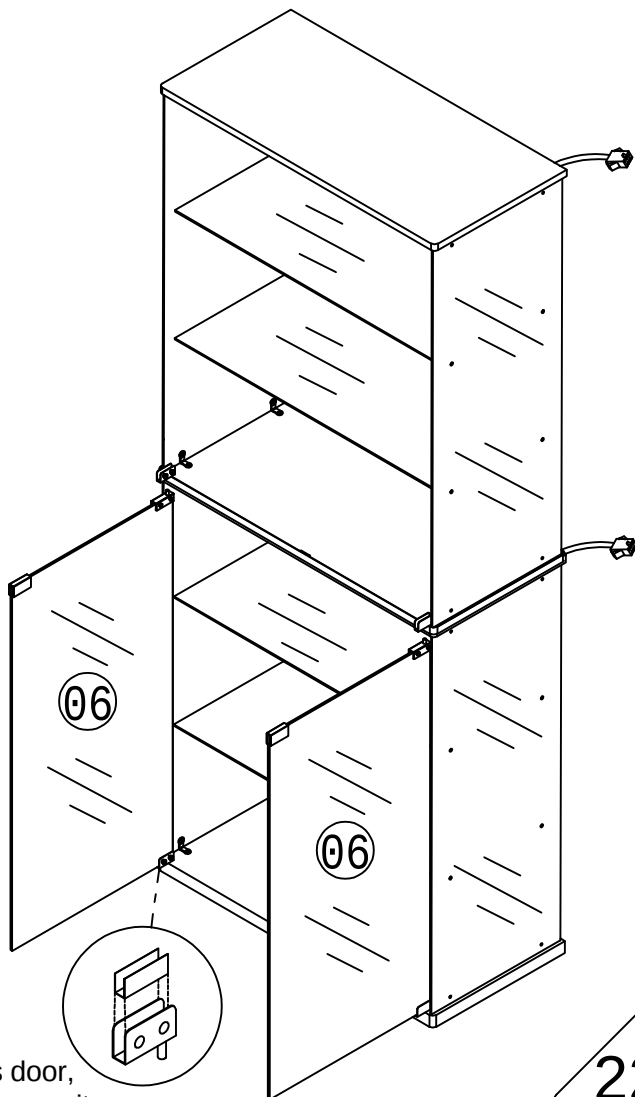


After aligning the glass door, tighten the screws to secure it.


Step 20

Pay attention to the direction of the door hinge during installation


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.



first




second




third

Locking screw

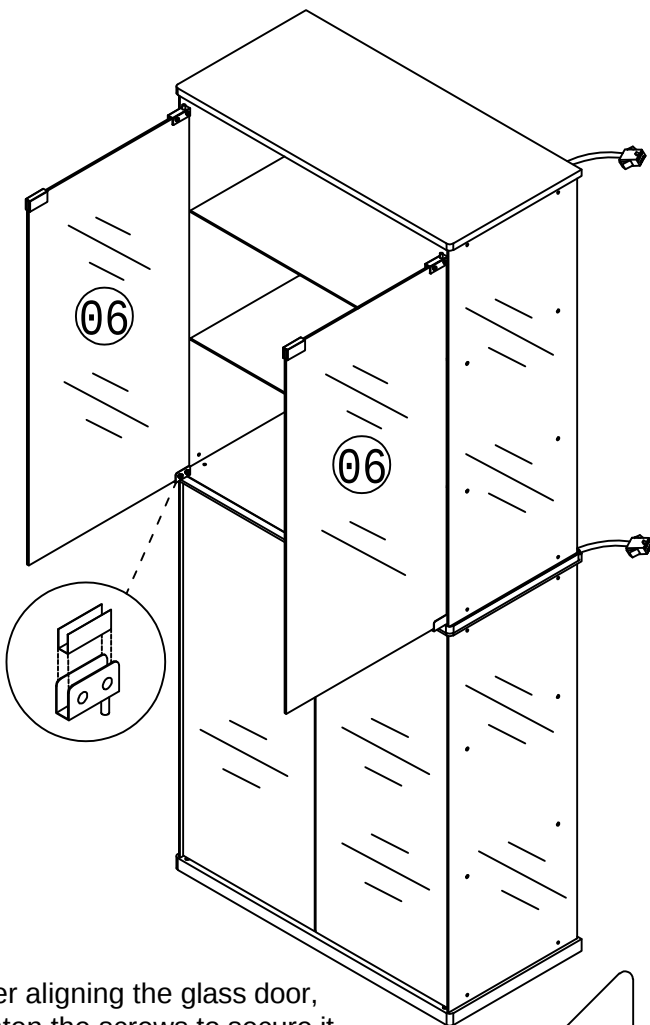


After aligning the glass door,
tighten the screws to secure it.

Locking Operation

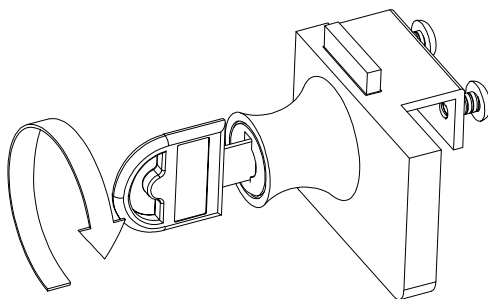

Turn the key clockwise →
The lock core extends →
Lock the door.

Unlocking Operation:

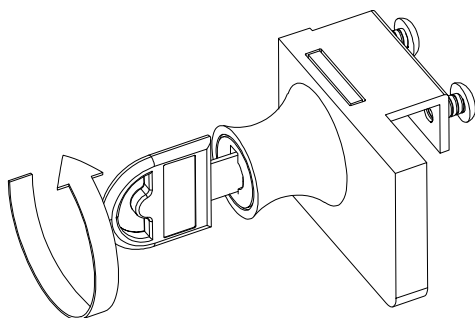

Turn the key counterclockwise →
The lock core retracts to its original position →
Open the door

Step 21


(E)



x1



x2

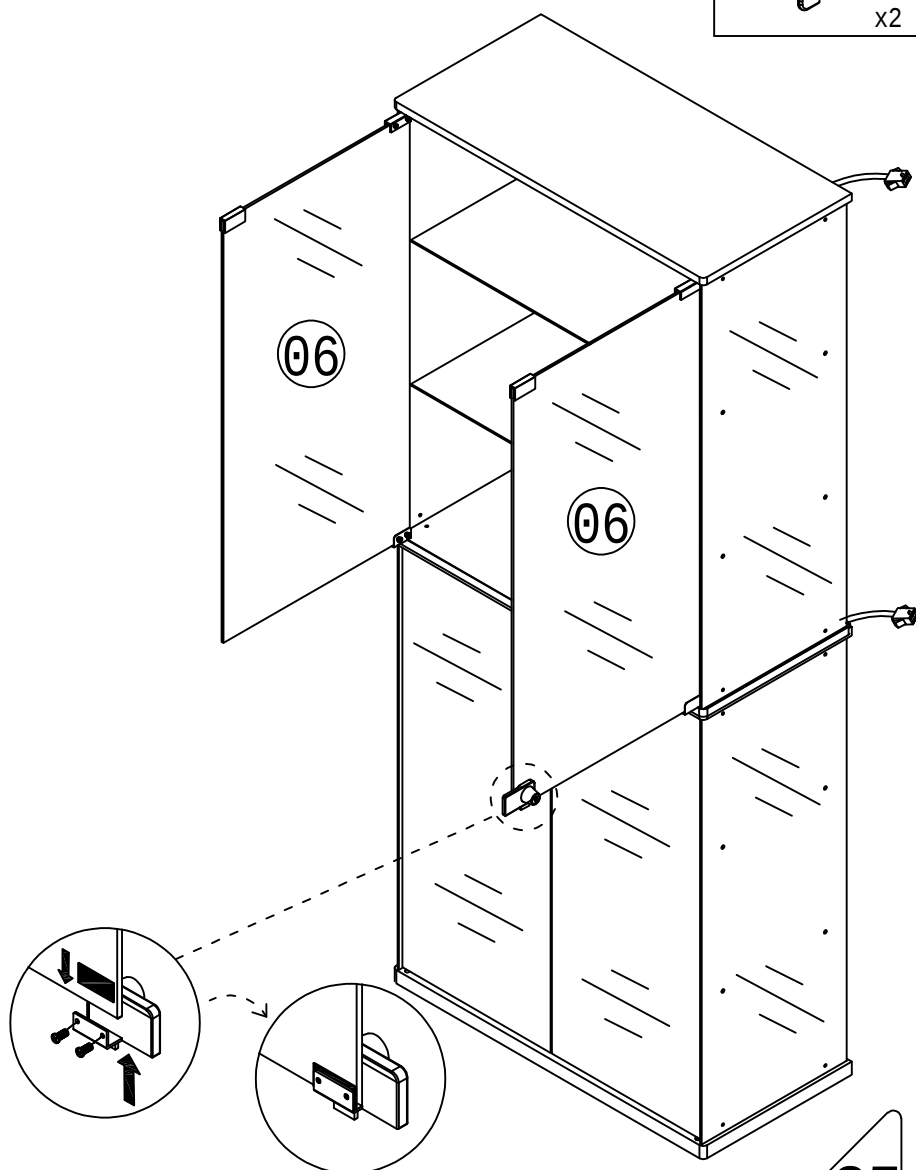

The black adhesive tape and the lock position should be aligned




25

Step 22



(F)





x1

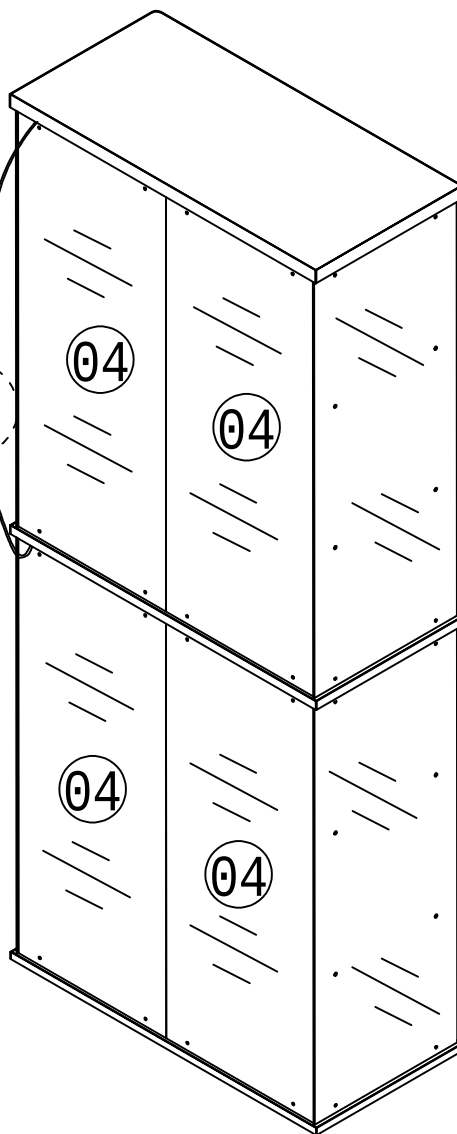

Step 23

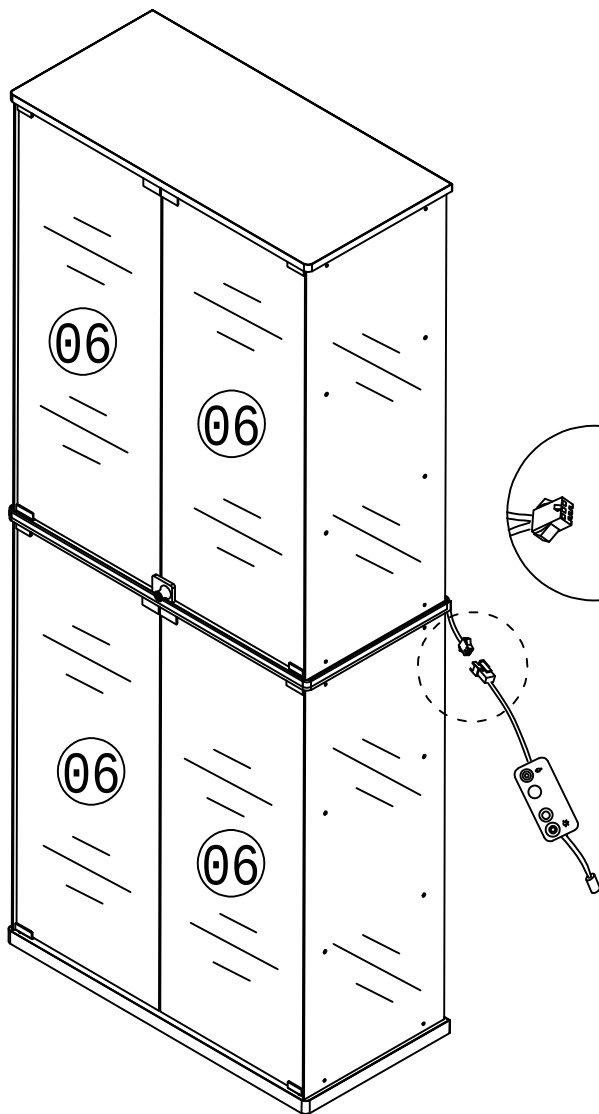

Step 24

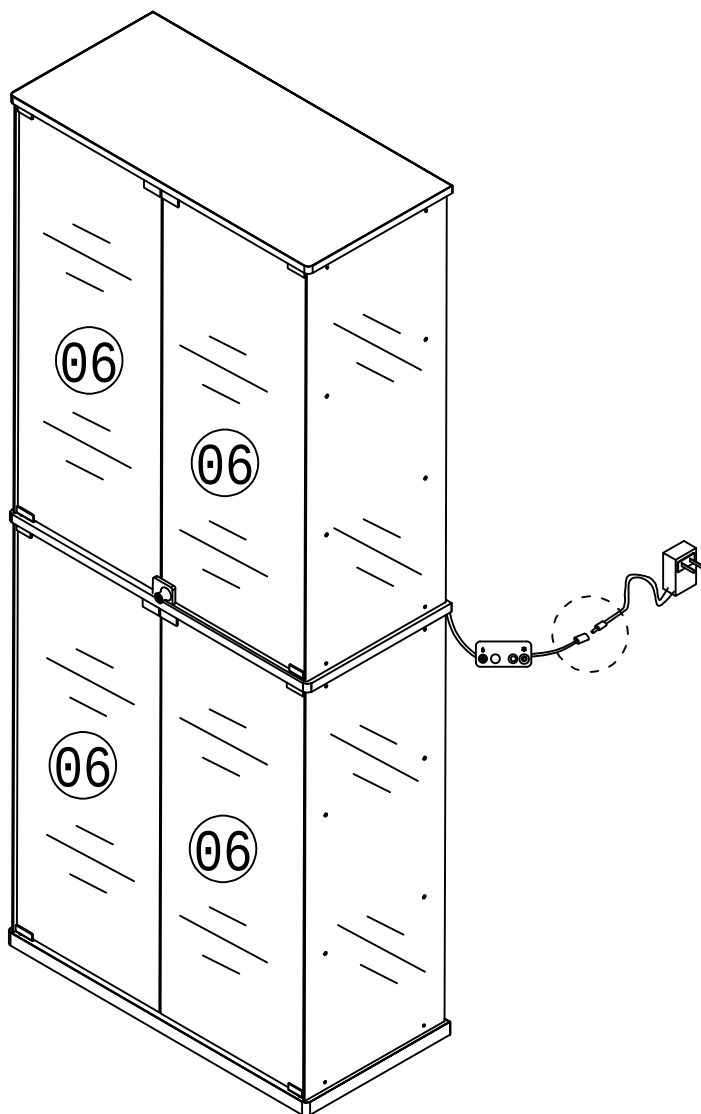

Step 25

Install as required

I



x2






x2

○ x2

3.5x14mm





Install the anti fall hardware on the cabinet as shown in the picture first



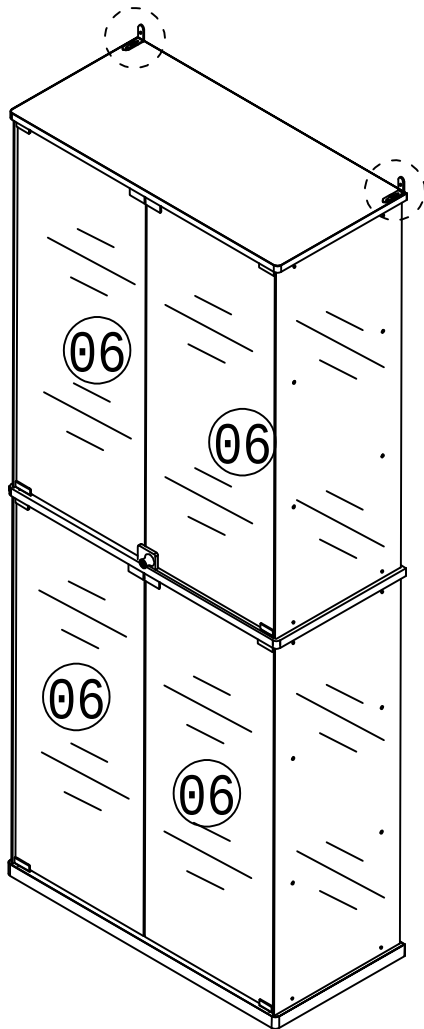


Then mark the wall with a pen through the holes in the anti-fall hardware

Step 26

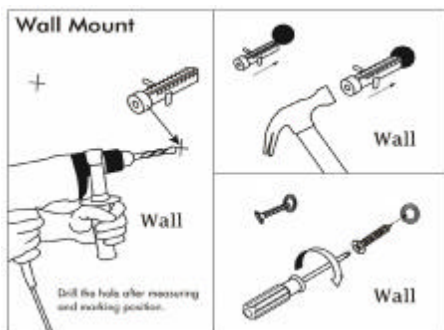

Drill the hole with an electric drill and punch in the colloidal particles

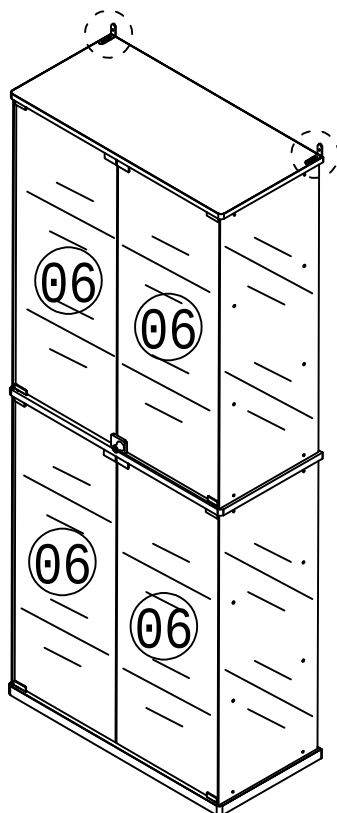

4x45mm

Fix the dressing table to the wall

30

User's Guide


Thank you for purchasing this product.

To use this product, please plug it into a 12V DC power supply.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. With 4 touch buttons, it can turn ON/OFF the light and turn ON/OFF the induction function, change light colors, and adjust the light luminance.

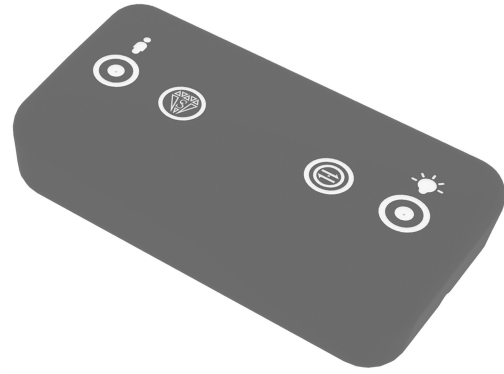

Operation



This touch button is the master switch of the smart box,

which can turn off all functions of the box and control the light strips on/off operation.

The operation that can be turned on and off with just a light tap. Press and hold to adjust the brightness.

Upon first power-up, the default light will be set to white.



This touch button is used to turn on/off the induction function.

A. touch this button once to turn on the induction function (indicator light on).

After the person leaves or remains stationary for more than 30 seconds, the light strip goes out; people and objects within a range of 1 meters move will light up the light strip.

B. Long press this button for 0.5 seconds to turn off the human body induction function (the indicator light goes out).

At this point, keep the light strip as it was before turning off and no longer be affected by human and object activities.

By default, induction function is enabled when powered on.



This touch button is the Dynamic Phantom Color Mode, which includes 5 magical lighting effects.

Simply tap to cycle through the options. (Attention: This mode cannot adjust the brightness)




This touch button controls the single-color switching function of the light strips,

offering 7 different colors to choose from.

Phantom Color Mode Button

7-Color Mode Button

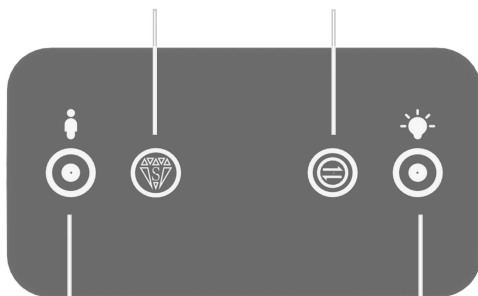

Induction Button

Master Switch Button



ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If you have any questions when installing, please feel free to contact us. Thank you.