



2-Person Patio Porch Swing


Installation & Assembly





Please ensure all parts included before assembly and feel free to contact us if there are any problems.

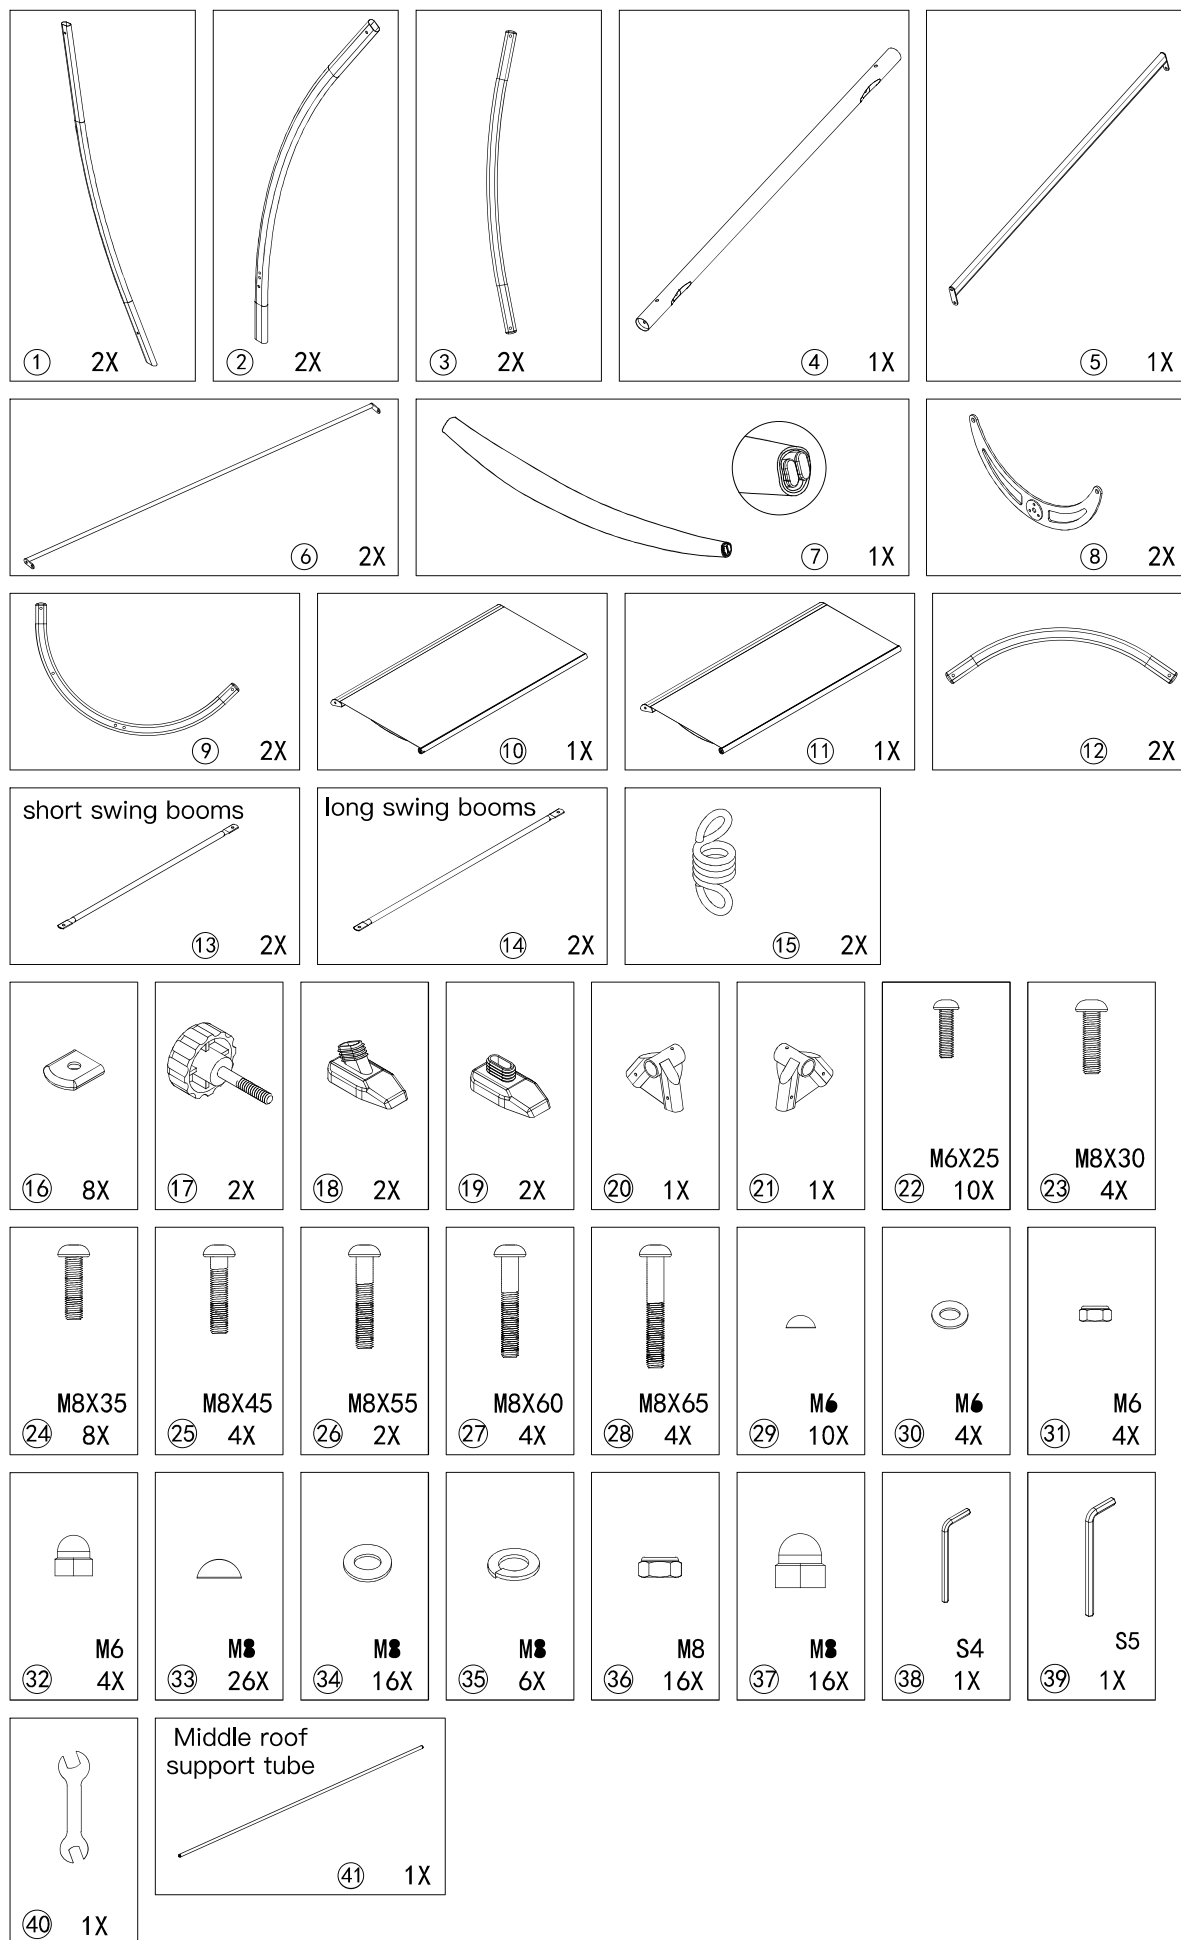


	
① 2X	② 2X
	
⑱ 2X	⑲ 2X

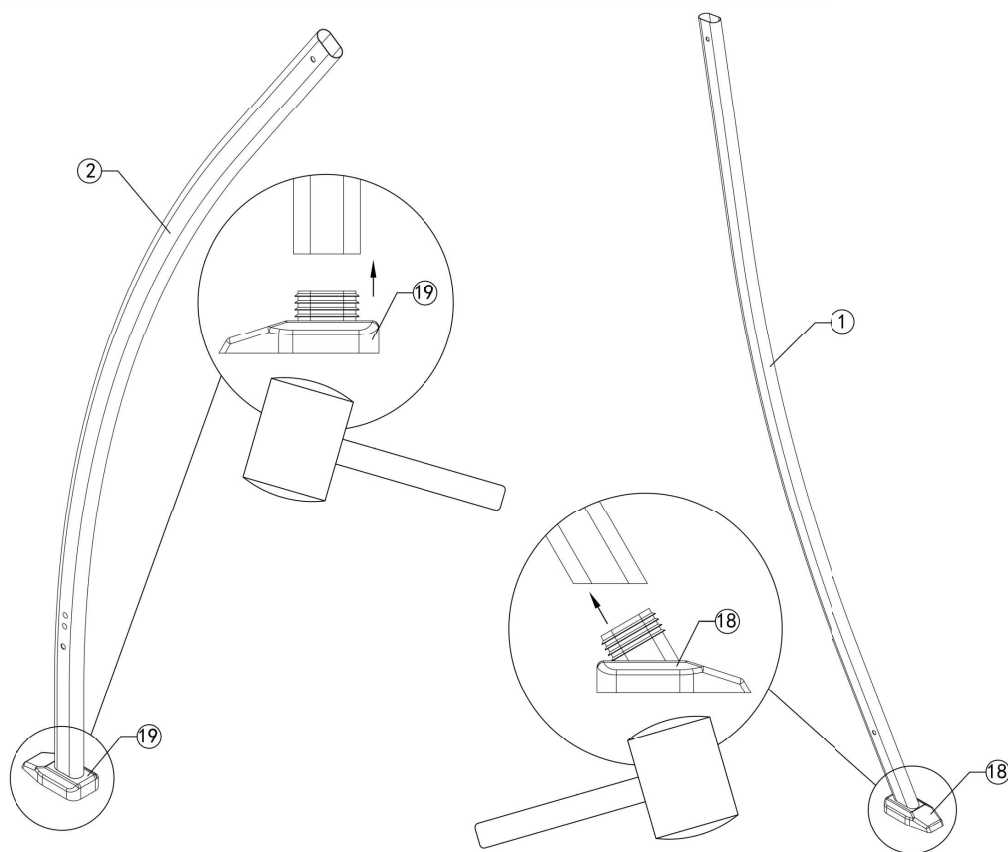


Step 1: Please find the required parts according to the instructions in the left frame, prepare a wooden hammer, and knock the plastic foot pad (Part 18) into the leg tube (Part 1), knock Part 19 into the Part 2 as shown.


	
⑳ 1X	㉑ 1X
	
㉕ 4X	M8X45
	
㉓ 4X	M8
	
㉔ 4X	M8
	
㉖ 4X	M8
	
㉗ 4X	M8
	
㉙ 1X	S5
	
㉚ 1X	

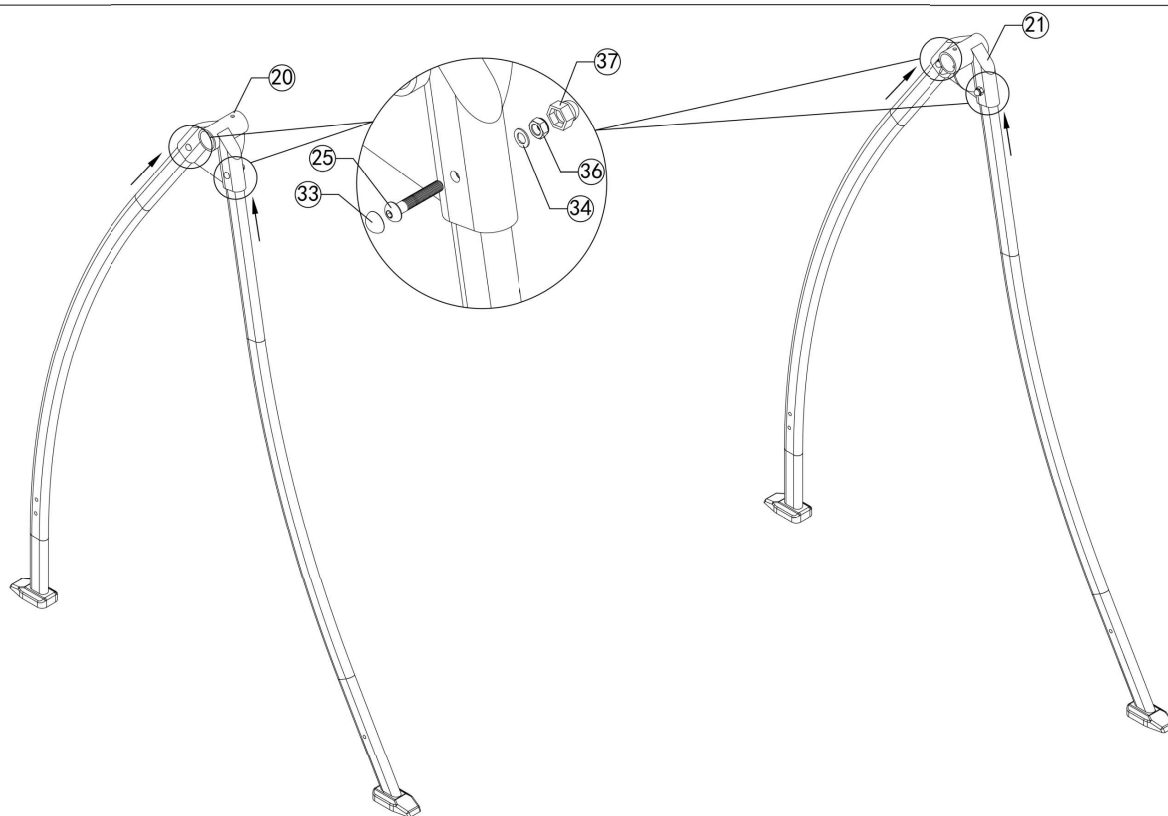

Step 2: Put the front and rear leg tubes (Part 1 is front leg tube, Part 2 is rear leg tube) into the fixator (Part 20 and Part 21) as shown, and secure with bolts and nuts as required (After all the bolts are assembled in place, tighten them together, finally cover the caps).


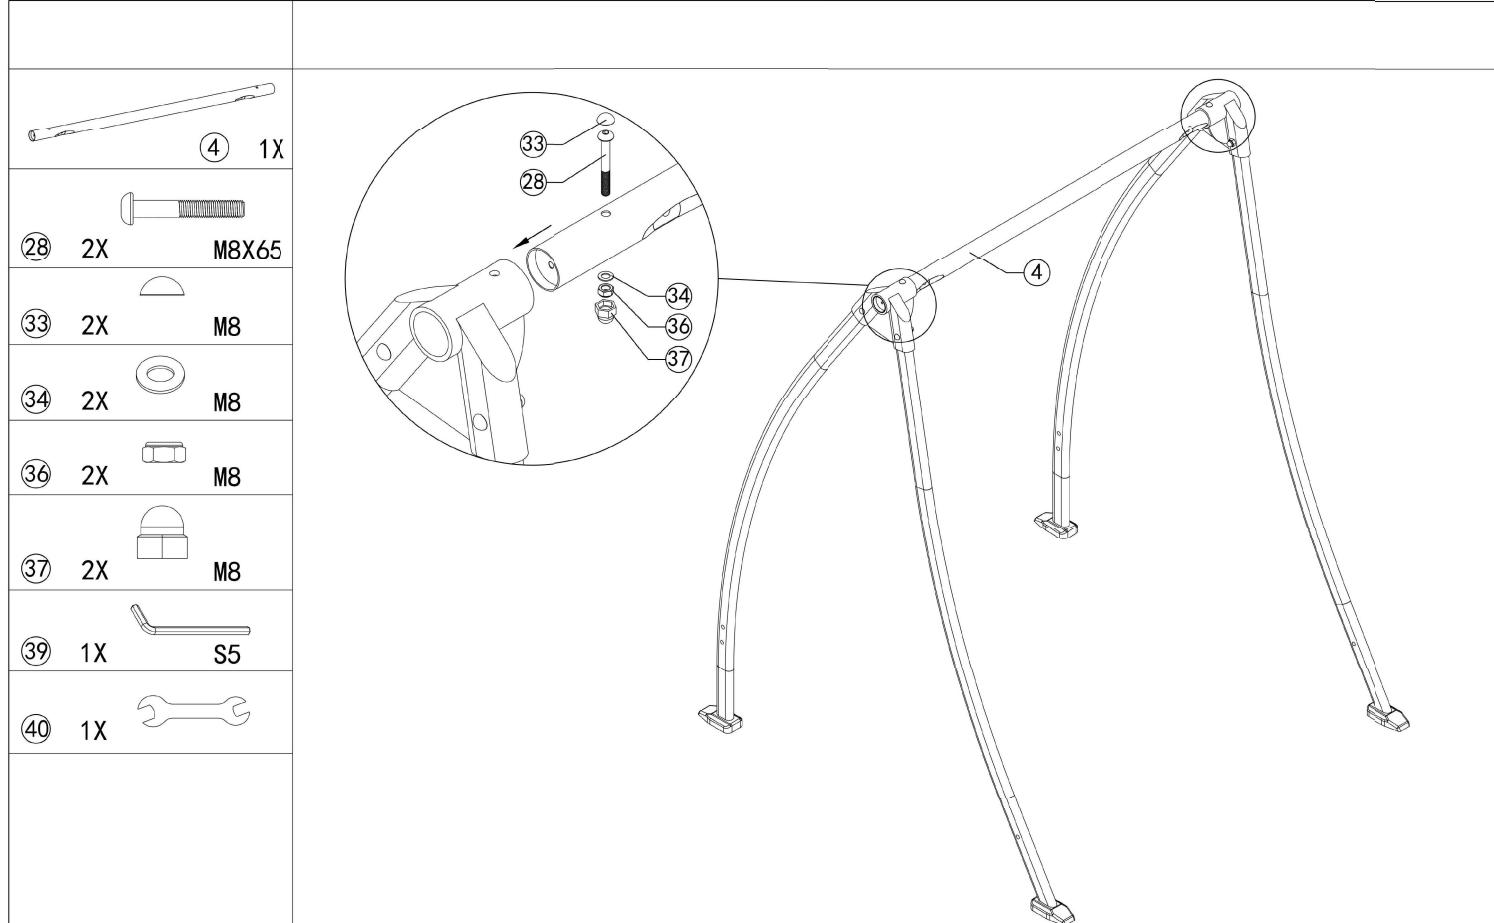



Step 3: Put the beam(Part 4) assembly into the fixator according as shown, and secure with bolts and nuts as required (After all the bolts are assembled in place, tighten them together, finally cover the caps).

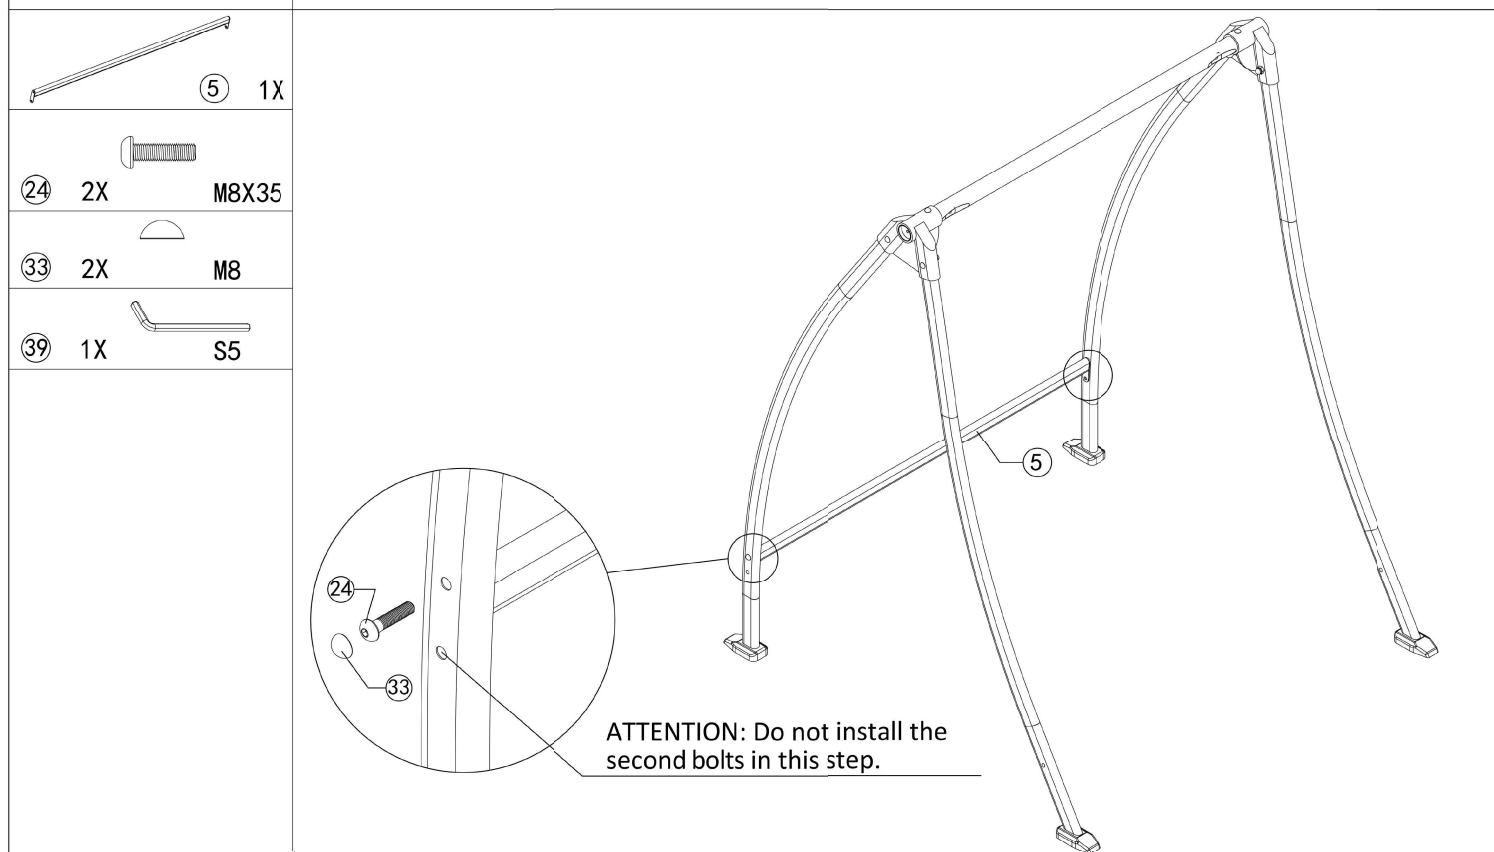

ATTENTION: Do not install the second bolts in this step.


Step 4: Connect the bar (part 5) to the rear leg tubes (Align the first holes and fix the bolts) as shown. After all the bolts are assembled in place, tighten them together, finally cover the caps.

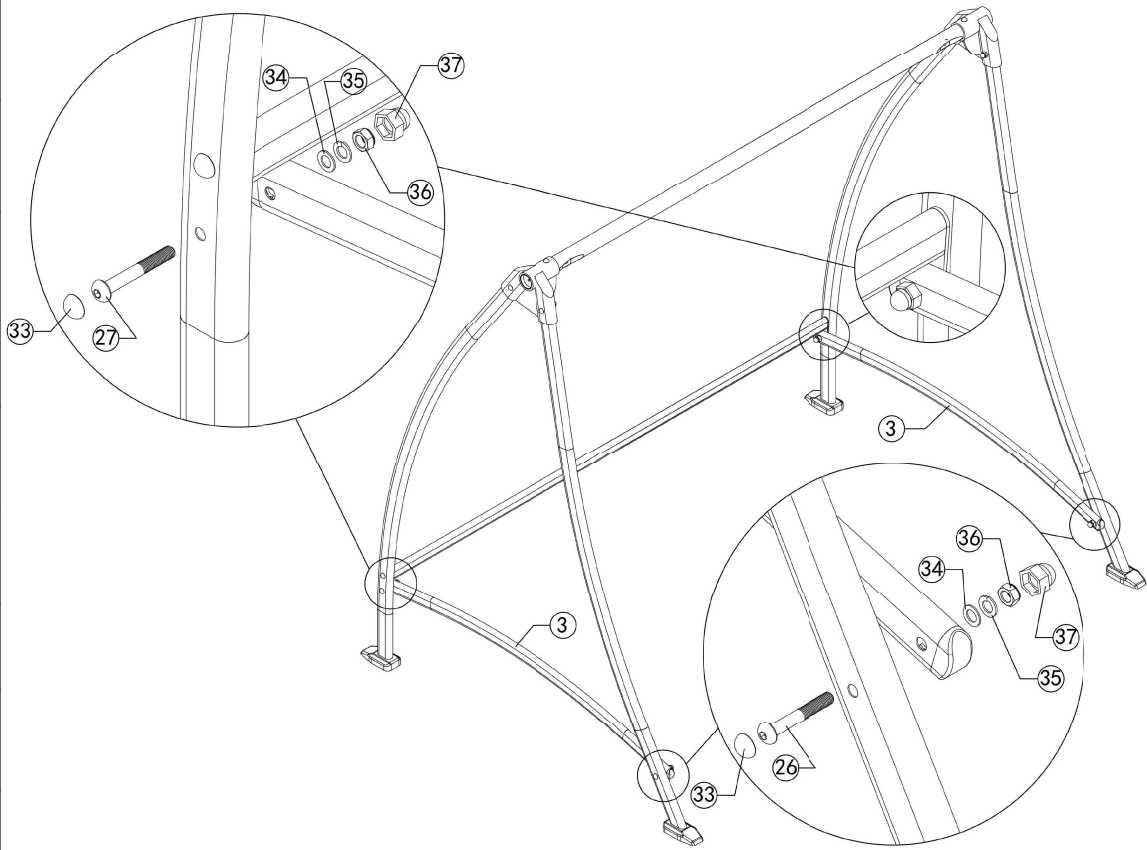 ③ 2X		
 ②⑥ 2X M8X55		
 ②⑦ 2X M8X60		
 ③③ 4X M8		
 ③④ 4X M8		
 ③⑤ 4X M8		
 ③⑥ 4X M8		
 ③⑦ 4X M8		
 ③⑨ 1X S5		
 ④⑩ 1X		Step 5: Assemble the Part 3 to the front and rear leg tubes (Align the second holes and secure the bolts). Secure with bolts and nuts as required (After all the bolts are assembled in place, tighten them together, finally cover the caps).

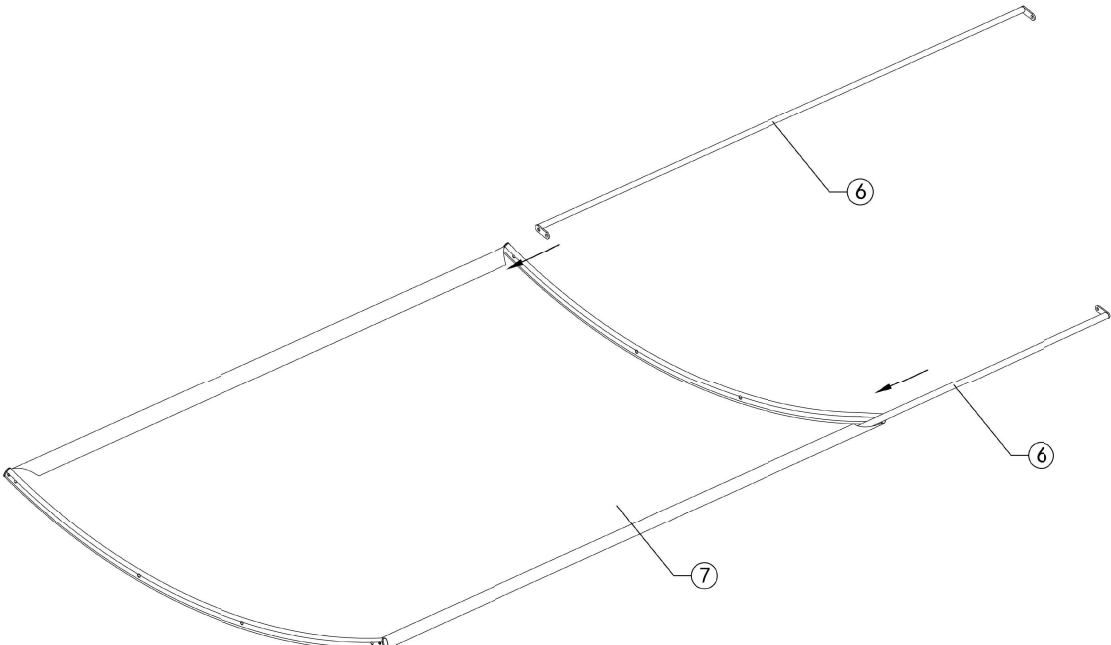
 ⑥ 2X	
 ⑦ 1X	


Step 6: Gently Insert the roof tubes (Part 6) into the canopy (Part 7).

		
22	8X	M6X25
		
29	8X	M6
		
30	4X	M6
		
31	4X	M6
		
32	4X	M6
		
38	1X	S4
		
40	1X	

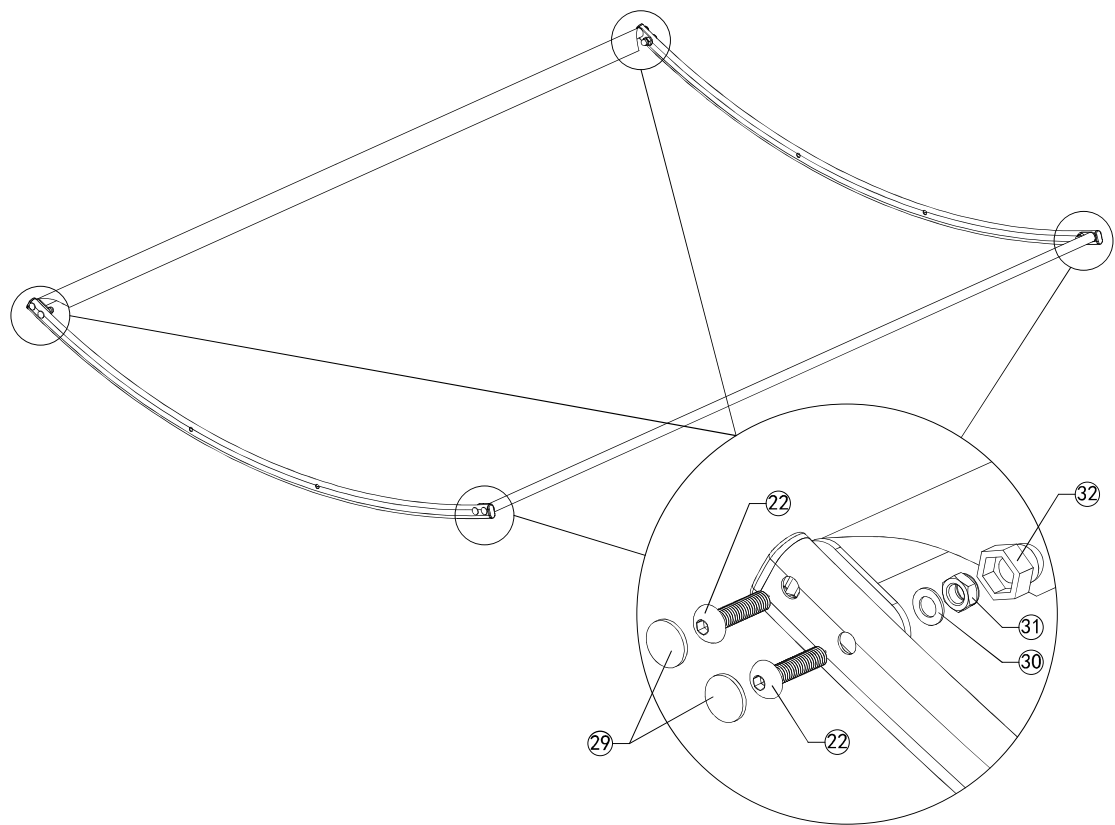


Step 7: Secure the four comers of the canopy with bolts and nuts as required
(After all the bolts are assembled in place, tighten them together, finally cover the caps).

		
41	1X	
		
22	2X	M6X25
		
29	2X	M6
		
38	1X	S4

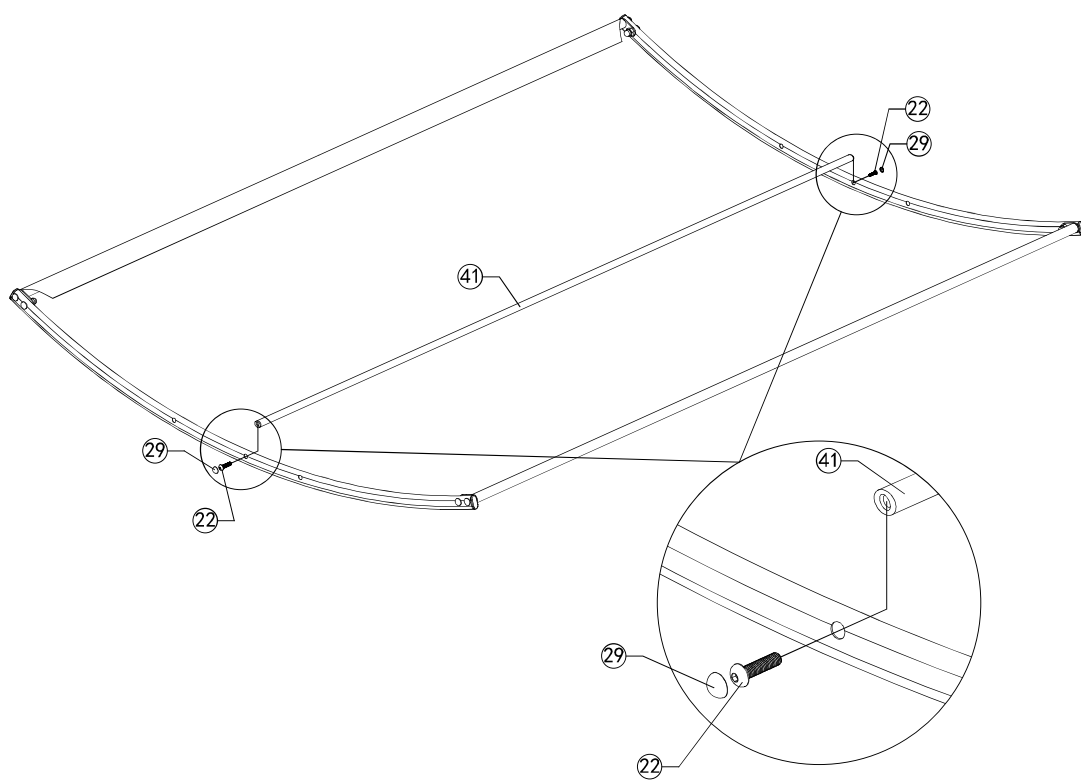



Use 2 bolts #22 to secure the middle roof support tube #41 to form the canopy frame.

- ⑧ 2X 
- ②③ 4X M8X30 
- ③③ 4X M8 
- ③④ 4X M8 
- ③⑥ 4X M8 
- ③⑦ 4X M8 
- ③⑨ 1X S5 
- ④① 1X 

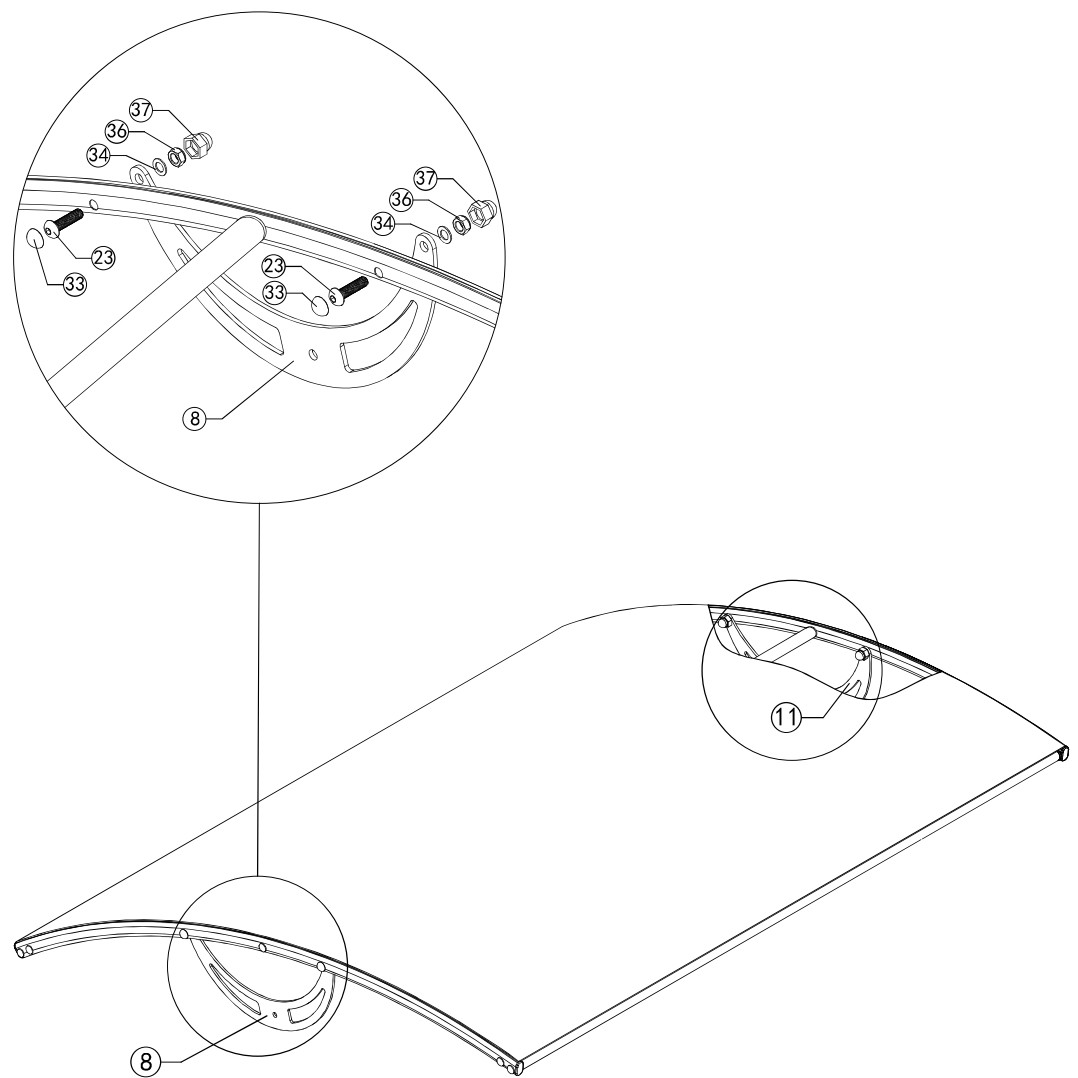

Step 8: Install Part 8 to top canopy. Align the holes and secure with bolts and nuts as required as required(After all the bolts are assembled in place, tighten them together, finally cover the caps).

⑪ 2X

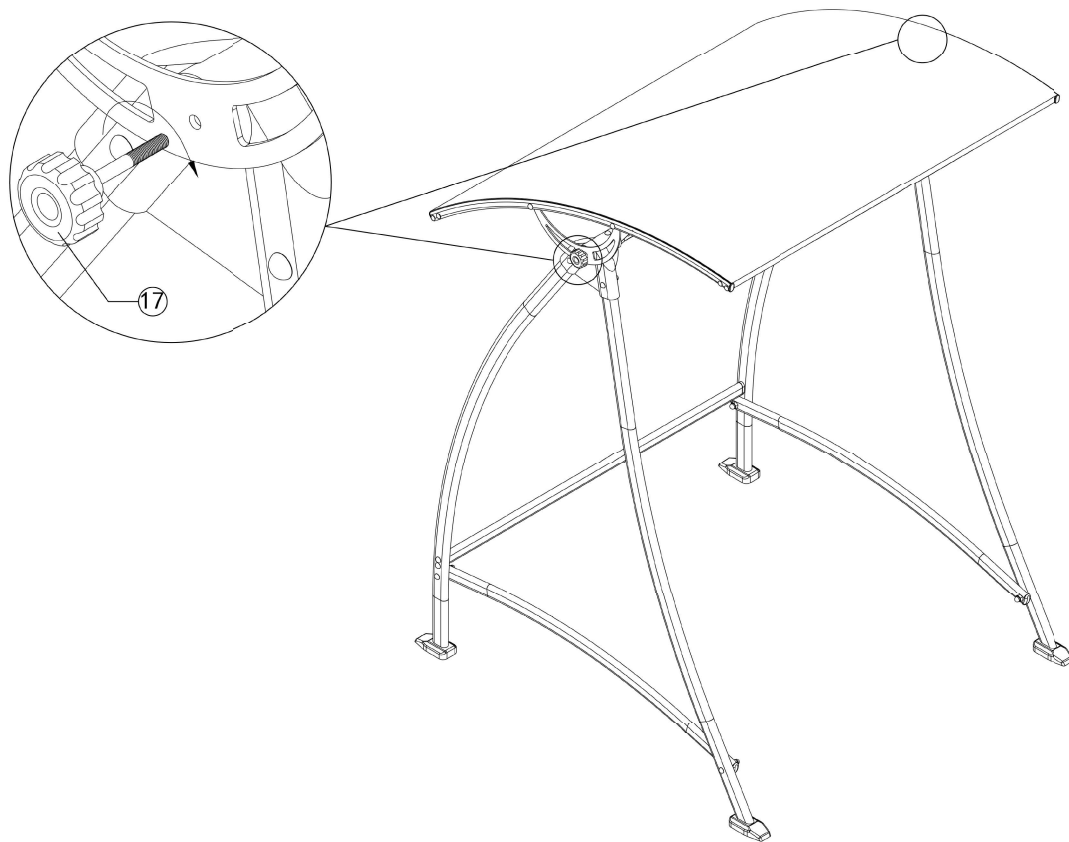

Step 9: Fix the canopy on the assembled leg frame with the adjusting knob (Part 17) as shown. Attention: According to your own requirements to adjust canopy roof, then tighten the knob.

⑨ 2X



⑩ 1X



⑪ 1X




③③ 6X M8



②④ 6X M8X35



③⑨ 1X S5

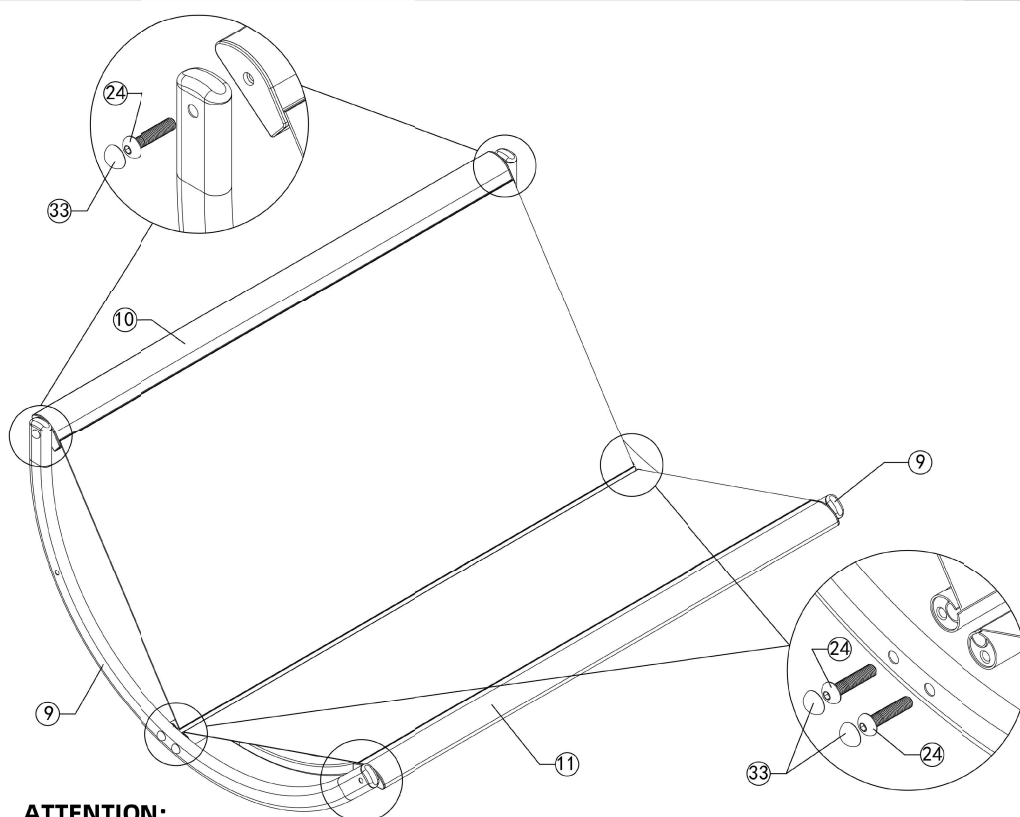

ATTENTION:
Do not install the bolts in this step.

Step 10: Use bolt #24 to secure fixing tube (Part 9) on back (part 10) and seat (Part 11) as shown, secure with bolts and nuts as required (After all the bolts are assembled in place, tighten them together, finally cover the caps).

12 2X



13 2X



14 2X



16 4X



27 2X M8X60



28 2X M8x65



33 4X M8



34 2X M8



35 2X M8



36 2X M8





37 2X M8



39 1X S5



40 1X

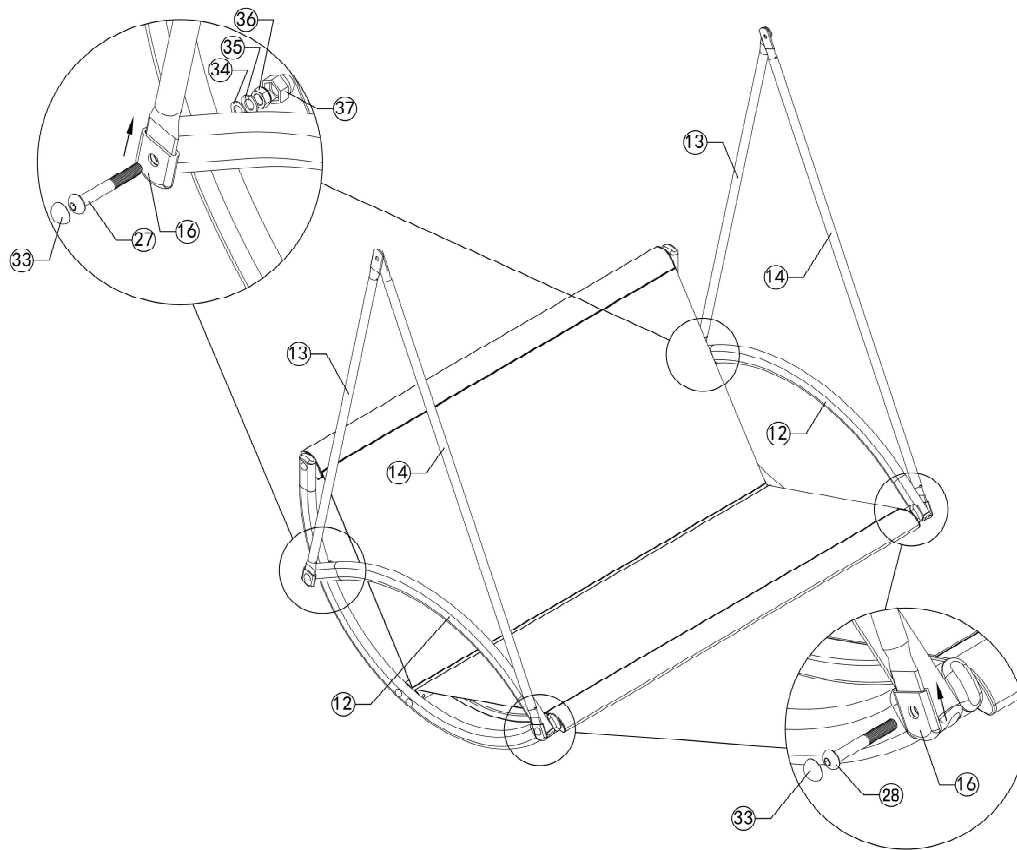


Step 11: Install swing booms and armrests. First fit part 16 on short swing booms (Part 13) and long swing booms (Part 14). Then align the holes and secure with bolts and nuts as required (After all the bolts are assembled in place, tighten them together, finally cover the caps).

16 4X



15 2X

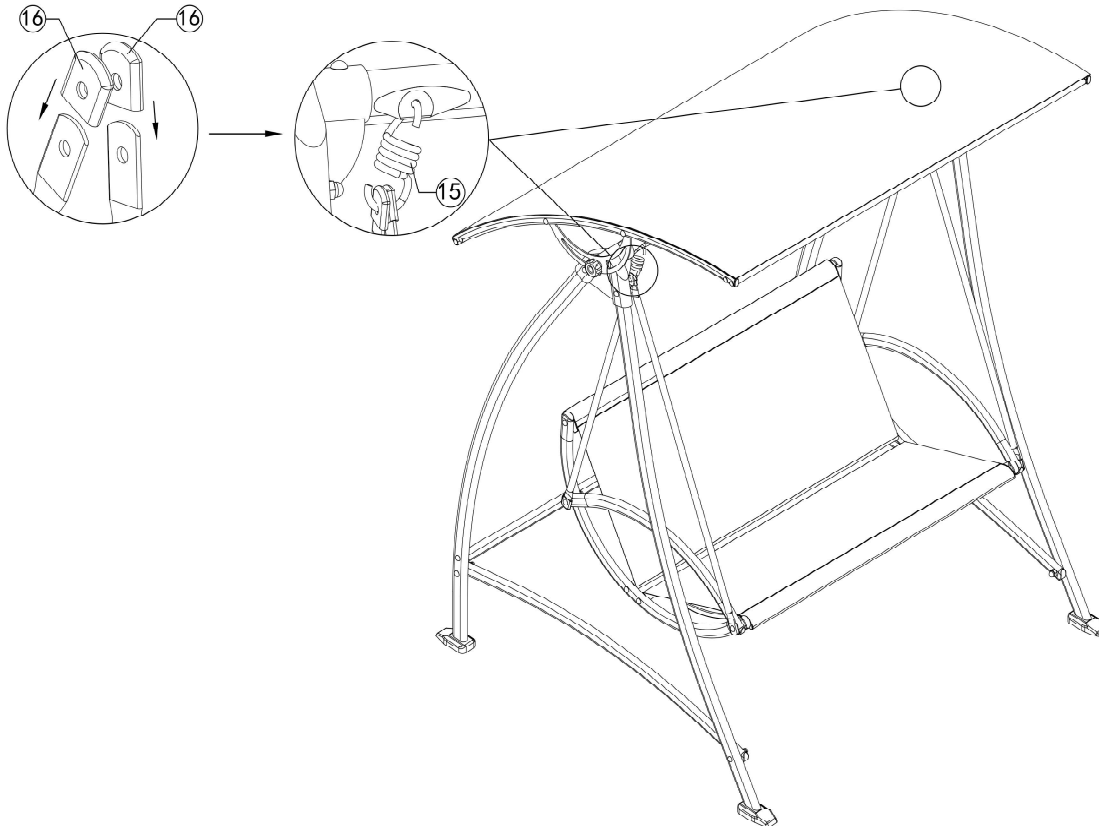

Step 12: Insert Part 16 into the swing booms as shown, and hang it on the swing beam with hanging spring (Part 15).



Thanks for your purchase.

At domi outdoor living, we believe in our products.

That's why we provide a 12-month warranty and friendly, easy-to-reach after-sales service. So if you have any questions about our product and assembly, please feel free to contact us. We will be here for you.

Please tell us your order ID when contact.

Attach photos of damaged part for instant reply.