

Installation steps:

***Before proceeding with the installation, disassemble all screws [2*sleeves; 1*threaded rods; 4*rolled edge cover] from the three different lengths of downrods (7.1 inches, 8.9 inches, 10.2 inches).** For illustration purposes, we'll demonstrate the installation using a small downrod (7.1-inch). The installation process for medium (8.9-inch) and large downrods (10.2-inch) is the same as for the small downrod:

1. Secure the small threaded downrod onto the lamp arm.
 2. Thread the rolled edge cover through the small threaded downrod.
 3. Thread the small sleeve through the small threaded downrod.
 4. Thread the rolled edge cover through the small threaded downrod.
 5. Thread the small threaded downrod through the holes on the iron plate.
 6. Thread the rolled edge cover through the small threaded downrod.
 7. Thread the small sleeve through the small threaded downrod.
 8. Thread the rolled edge cover through the small threaded downrod.* Repeat the above steps for the 8.9-inch medium threaded downrod and the 10.2-inch large threaded downrod.
 9. Thread the small downrod / medium downrod / large downrod through the three holes on the ceiling plate.
 10. Use nuts / star washers to tighten the three downrods onto the ceiling plate (one of the downrods fixes the ground wire).
 11. Connect the six white lamp head wires to the white main wire, and connect the six black lamp head wires to the black main wire.
 12. Secure the hanging plate to the junction box with screws.
 13. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
 - Connect the white wire from the fixture to the white wire from the power source.
 - Connect the black wire from the fixture to the black wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire nut.
- Carefully put the wires back into the outlet box.
- 14-15. Place the ceiling plate over the hanging plate, then tighten it securely with screws.
16. Install the light bulb (bulb not included).

* Install the small-sized lampshades on the longer lamp arm side, and install the large-sized lampshades on the shorter lamp arm side.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.


1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.



Small threaded downrod (7.1-inch) * 1pcs




Medium threaded downrod (8.9-inch) * 1pcs



Large threaded downrod (10.2-inch) * 1pcs




Rolled Edge Cover *12pcs



Iron Plate *1pcs



Hanging Plate *1pcs




Small-sized Lampshade *3pcs



Wire Nut *5pcs



Nut *3pcs



Main Wire *1pcs



3.15-inch small sleeve *4pcs




4.72-inch medium sleeve *1pcs



6.3-inch large sleeve *1pcs




Screw *2pcs



Ceiling Plate *1pcs



Green Grounding Screw *1pcs




Large-sized Lampshade *3pcs



Mounting Screw *2pcs



Star Washers *3pcs

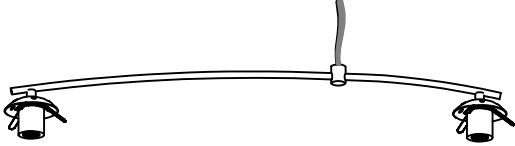

Lamp Arm With The Socket *3pcs