


INSTALLATION INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS:

1. Please read through all the instructions carefully and completely before beginning assembly and installation.
2. This product must be installed in accordance with installation instructions and all safety and building codes. It is strongly suggested that all direct wired fixtures be installed by a licensed electrician.
3. Be sure the electricity to the wires you are working on is shut off, either the fuse is removed or the circuit breaker is turned off. Turning the power off using the light switch is not sufficient to prevent electrical shock.
4. To avoid the risk of fire, do not exceed the recommended wattage.
5. Keep away from children
6. The manufacturer and distributor accepts no liability for incorrect installation.
7. For indoor use only.

WARNING:

Improper installation may cause electrical shock, fire or equipment damage. The person performing the installation must be familiar with the construction and operation of the product and associated hazards.




Please proceed in an alphabetical order:

Attach the crossbar to the existing electrical box, using the two crossbar screws, which are not supplied and should already in your electrical box. Slide the fastener ring back up over the hang ring up, pass the hang ring up through canopy, connect with the threaded pipe under side of the crossbar.

Pass the main wire and ground wire through the hang ring down, the chain, the fastener ring, the canopy, the hang ring up and the crossbar until the end of the main wire reaches the electrical box, where you can make the appropriate connections. Be sure when connecting the wire, use electrician approved junction caps. Stow the excess wire in the electrical box. Raise the canopy and fastener ring, attach canopy to ceiling, slide fastener ring over hang ring up and hold the canopy.


PART LIST AND ASSEMBLY INSTRUCTION

Note: some parts may be pre-installed or pre-assembled.

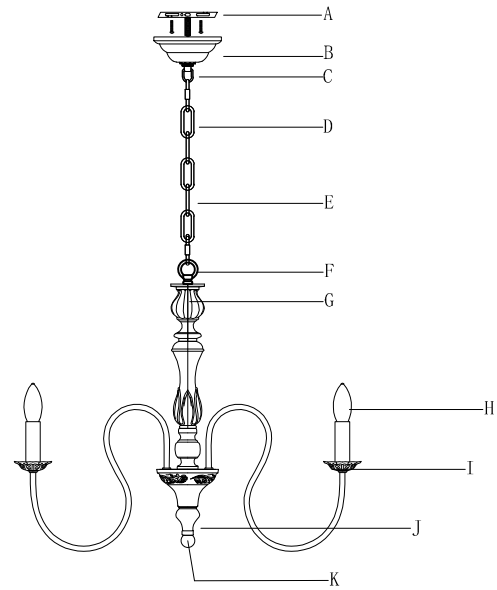


- A. MOUNTING BRACKET
- B. CANOPY
- C. HANG RING
- D. FASTENER RING
- E. CHAIN


- F. HANG STRAIGHT
- G. MIDDLE POLE
- H. SOCKET COVERS
- I. ARM
- J. BOTTOM PART
- K. FASTENER




1. Fasten the ARM to the lamp body by the screws.




2. Attach the bolt to the rod joint of the lamp body.




3. Attach the MID POLE to the lamp body, fasten it by the HANG STRAIGHT.




4. Attach the BOTTOM PART to the lamp body, fasten it by the FASTENER.




5. Open the quick link at one end of the CHAIN, attach it to the HANG STRAIGHT, let the cable go through the CHAIN.
6. Release the FASTENER RING from the HANG RING, let the FASTENER RING and CANOPY go through the CHAIN and cable.



7. Open the quick link at the end of the CHAIN, Hang it to the HANG RING. Let the main wire go through the MOUNTING BRACKET.
8. Fasten the MOUNTING BRACKET to the ceiling Junction box, connect the wire.



9. Position CANOPY over MOUNTING BRACKET, then lock the CANOPY by HANG RING.



10. Put on the SOCKET COVER and then fasten the light bulbs to the lampholders, E12x6 pcs, type B, 60W Max is recommended.