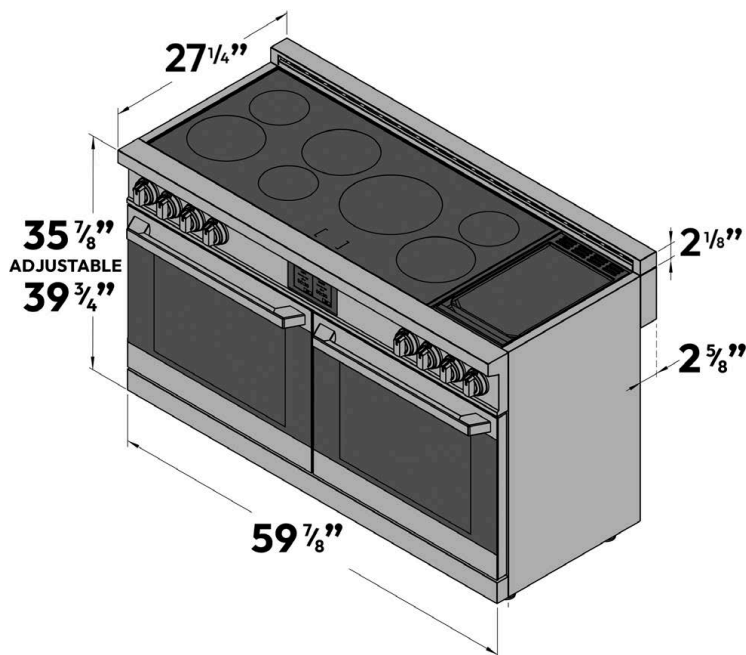


60" LUXURY SERIES INDUCTION RANGE

ALL FINISHES — STAINLESS · BLACK STAINLESS · VEGA · ORION

INDUCTION
HARDWARE

SPECIFICATIONS

SKUs	S-IR60-SS · -BS · -SS-VEGA · -BS-ORION
Overall W (cased) × D × H	59 $\frac{7}{8}$ × 27 $\frac{1}{4}$ × 35 $\frac{7}{8}$ –39 $\frac{3}{4}$ in
Cabinet opening / recess	60 in · 52 in recess
Electrical service	240 V · 50 A · NEMA 14-50
Oven cavities	Dual — 24 $\frac{1}{2}$ × 17 $\frac{1}{4}$ × 17 in each
Product weight	480 lb
Shipping weight	580 lb
Package W × D × H	66 × 32 × 48 in
Certification	ETL

Installation — Freestanding slide-in. Anti-tip bracket required. Full dimensions, oven cavity and the cutout drawing follow on pages 3 and 4; all four finishes are shown on page 5.

CLEARANCES

Cooking surface to hood	30–36 in
Side to combustible surface	Min 6 in
Countertop / base cabinet depth	25 in / 24 in
Electrical zone above floor	5–20 in

OVERVIEW

The 60-inch flagship platform: dual convection ovens plus a built-in induction griddle zone on the hob — one range for a full brigade, no gas line anywhere.

KEY FEATURES

- Built-in induction griddle zone
- Dual convection ovens · self-clean & steam clean
- Full-surface induction hob
- Celestial Edition gold hardware on Vega / Orion
- Lifetime parts warranty · Restore & Renew refurbishment

60" LUXURY SERIES INDUCTION RANGE

S-IR60-SS · S-IR60-BS · Celestial Edition: Vega · Orion



ALL-ELECTRIC INDUCTION COOKING

Roughly 90% of energy reaches the pan, against about 40% for gas. No combustion, no flame, no indoor exhaust gases.

CLEANER INDOOR AIR

Removing combustion from the kitchen removes the byproducts that come with it. Nothing burns at the cooking surface.

ONE FINISH SYSTEM

Stainless Steel and Signature Black Stainless run across every category, with Celestial Edition gold on knobs and handles. Mix nothing, match everything.

NET-ZERO MANUFACTURING

Built in solar-powered, net-zero facilities. Engineered in Lake Tahoe, Nevada; headquartered in Reno.

90-SECOND BOIL

Full power reaches the vessel instantly and stops the moment it is switched off, for control gas cannot hold.

OVER-THE-AIR UPDATES

The range improves after it is installed. New modes and refinements arrive over the air, without a service call.

LIFETIME PARTS WARRANTY

Parts are covered for the life of the appliance, and the Restore & Renew program returns used units to service rather than to landfill.

BEST OF KBIS 2026

Named a Sustainable Standout at KBIS 2026 for the all-electric platform this range is built on.

FINISHES

Stainless Steel	S-IR60-SS
Signature Black Stainless	S-IR60-BS
Vega — gold on stainless	S-IR60-SS-VEGA
Orion — gold on black stainless	S-IR60-BS-ORION

PLANNING AT A GLANCE

Cutout width	Min 60" [152.4 cm]
Cooktop to hood	Min 30" [76.2 cm]
Side to combustible surface	Min 6" [15.3 cm]

Floor to countertop	Min 36" [91.5 cm]
Countertop depth	25" [63.5 cm]
Electrical service	240 V · 50 A

OVERALL DIMENSIONS

60" Luxury Series Induction Range

S-IR60-SS · S-IR60-BS · CELESTIAL EDITION: VEGA · ORION
DIMENSIONS IN INCHES [MILLIMETERS]

SPECIFICATIONS

Overall width, cased	59 ⁷ / ₈ "
Cabinet opening	60"
Recessed area behind range	52"
Overall depth to backsplash	27 ¹ / ₄ "
Overall height, adjustable	35 ⁷ / ₈ –39 ³ / ₄ "
Backsplash rail above surface	2 ¹ / ₈ "
Oven cavity W × H × D	24 ¹ / ₂ · 24 ¹ / ₂ × 17 ¹ / ₄ × 17"
Total oven capacity	5.1 + 5.1 cu ft
Induction elements	7 + griddle zone
Electrical service	240 V · 50 A
Supply connection	NEMA 14-50P
Certification	ETL


ATTENTION ELECTRICIAN

240 V · 50 A service on a dedicated circuit, terminating in a **NEMA 14-50P** cord fitted at the factory. The electrical zone sits 5–20" above the finished floor, centred behind the range — see the installation drawing overleaf.

Height is set by the leveling feet. 35⁷/₈–39³/₄" covers the full adjustment range on every width in the series. Set the range to the counter before committing the backsplash.

Oven cavity. The 60" carries two convection ovens, both 24¹/₂" wide, each 17¹/₄" high × 17" deep.

PRODUCT VIEWS — SIDE AND FRONT ELEVATION

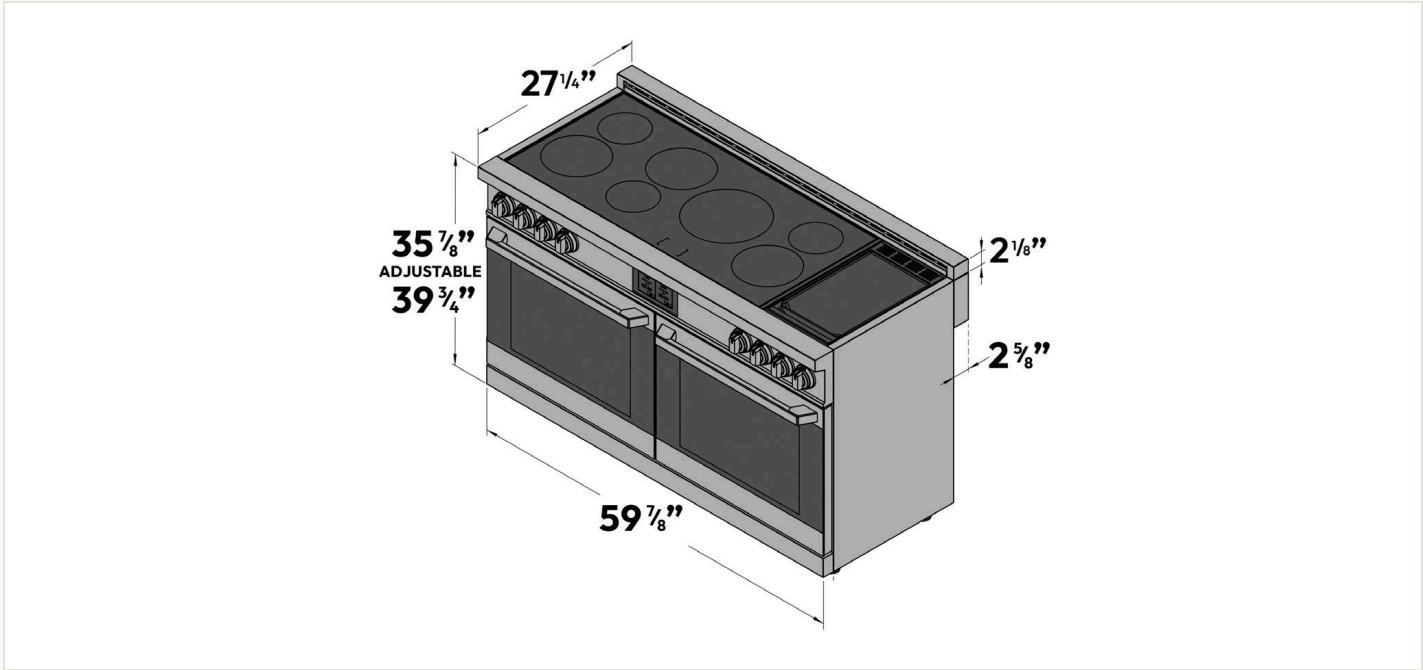


Cabinet opening, recess and electrical zone

FRONT ELEVATION — CABINET OPENING


60" Induction Range — installation opening

Freestanding · 240V · 50A dedicated circuit · NEMA 14-50P plug fitted · anti-tip bracket required

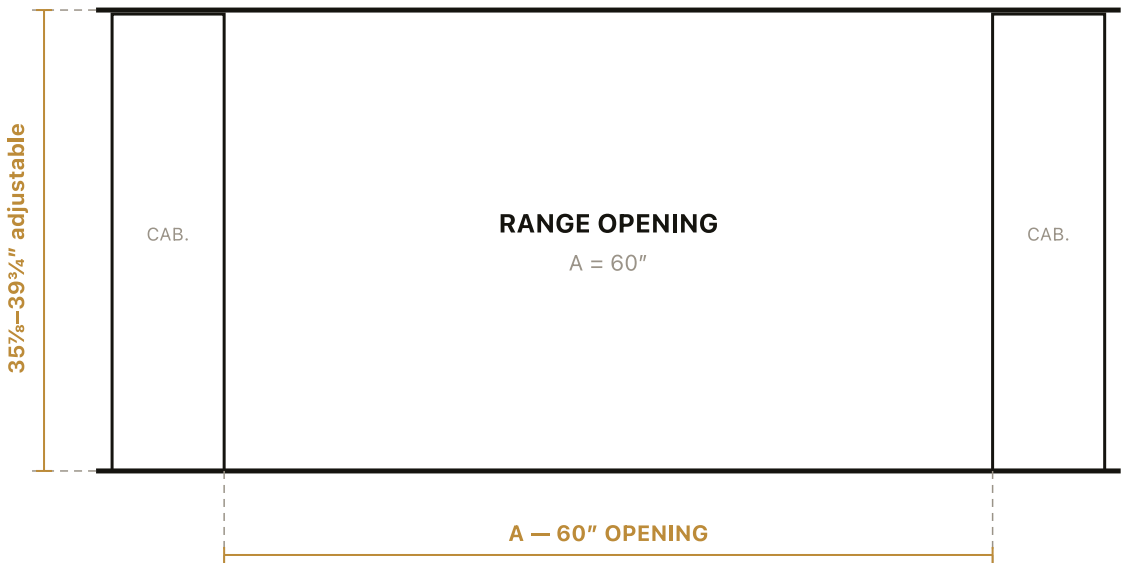

REAR WALL — ELECTRICAL ZONE

Receptacle must fall inside the shaded zone — the full width of recessed area B.

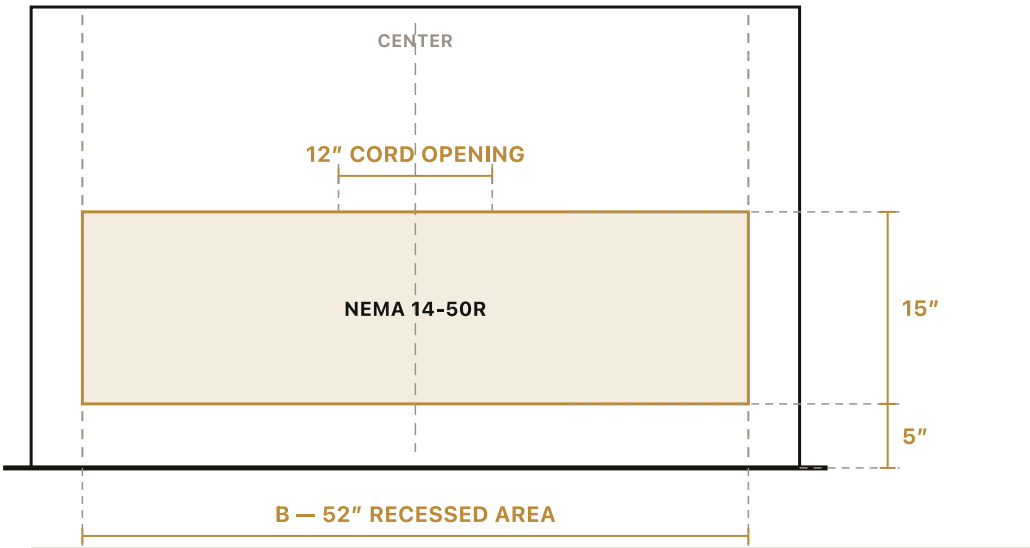

Counter depth 25" · cabinet depth 24" · the recessed area is set back 4" from each side of the cabinet opening. Anti-tip bracket: fix to FLOOR (Loc A or B) or REAR WALL (Loc C). The rear levelling leg must engage the bracket. Do not fully remove the rear levelling legs — the bracket uses one of them to secure the range to the floor.

INDUCTION HARDWARE · 60" RANGE INSTALLATION · DIMENSIONS IN INCHES · VERIFY ON SITE BEFORE CUTTING

FINISHES

FOUR FINISHES — ONE PLATFORM

Dimensions, cutout, oven cavity, electrical service and performance are identical across all four finishes. Only the SKU, the hardware treatment and the exterior finish change.

**Stainless Steel****S-IR60-SS**

Brushed 304 stainless with stainless knobs and handles

**Signature Black Stainless****S-IR60-BS**

Fingerprint-resistant black stainless with matching hardware

**Vega — Celestial Edition****S-IR60-SS-VEGA**

Gold knobs and handles on brushed stainless

**Orion — Celestial Edition****S-IR60-BS-ORION**

Gold knobs and handles on black stainless