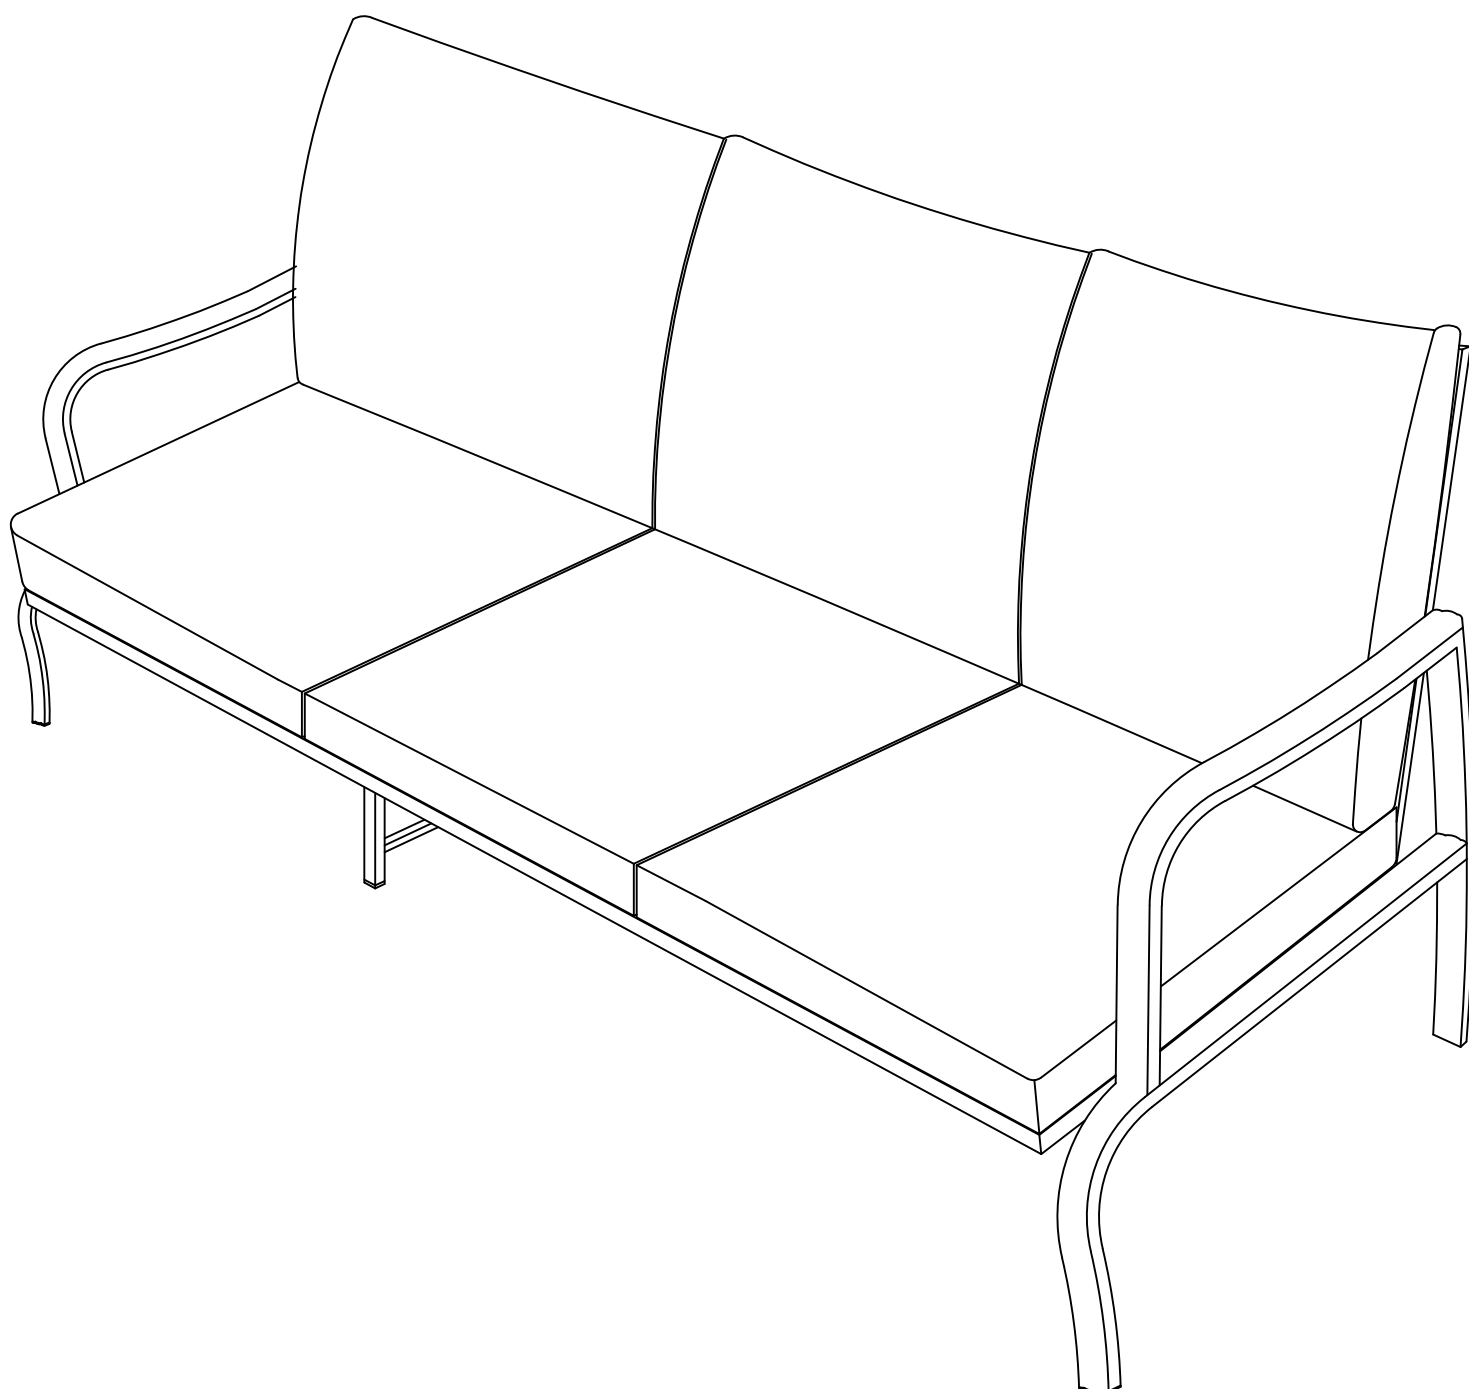



Assembly Manual

3-people seat

















**Please read this manual carefully before any operation
and keep it properly for future use.
If any problems on our product, please feel free to contact us.**

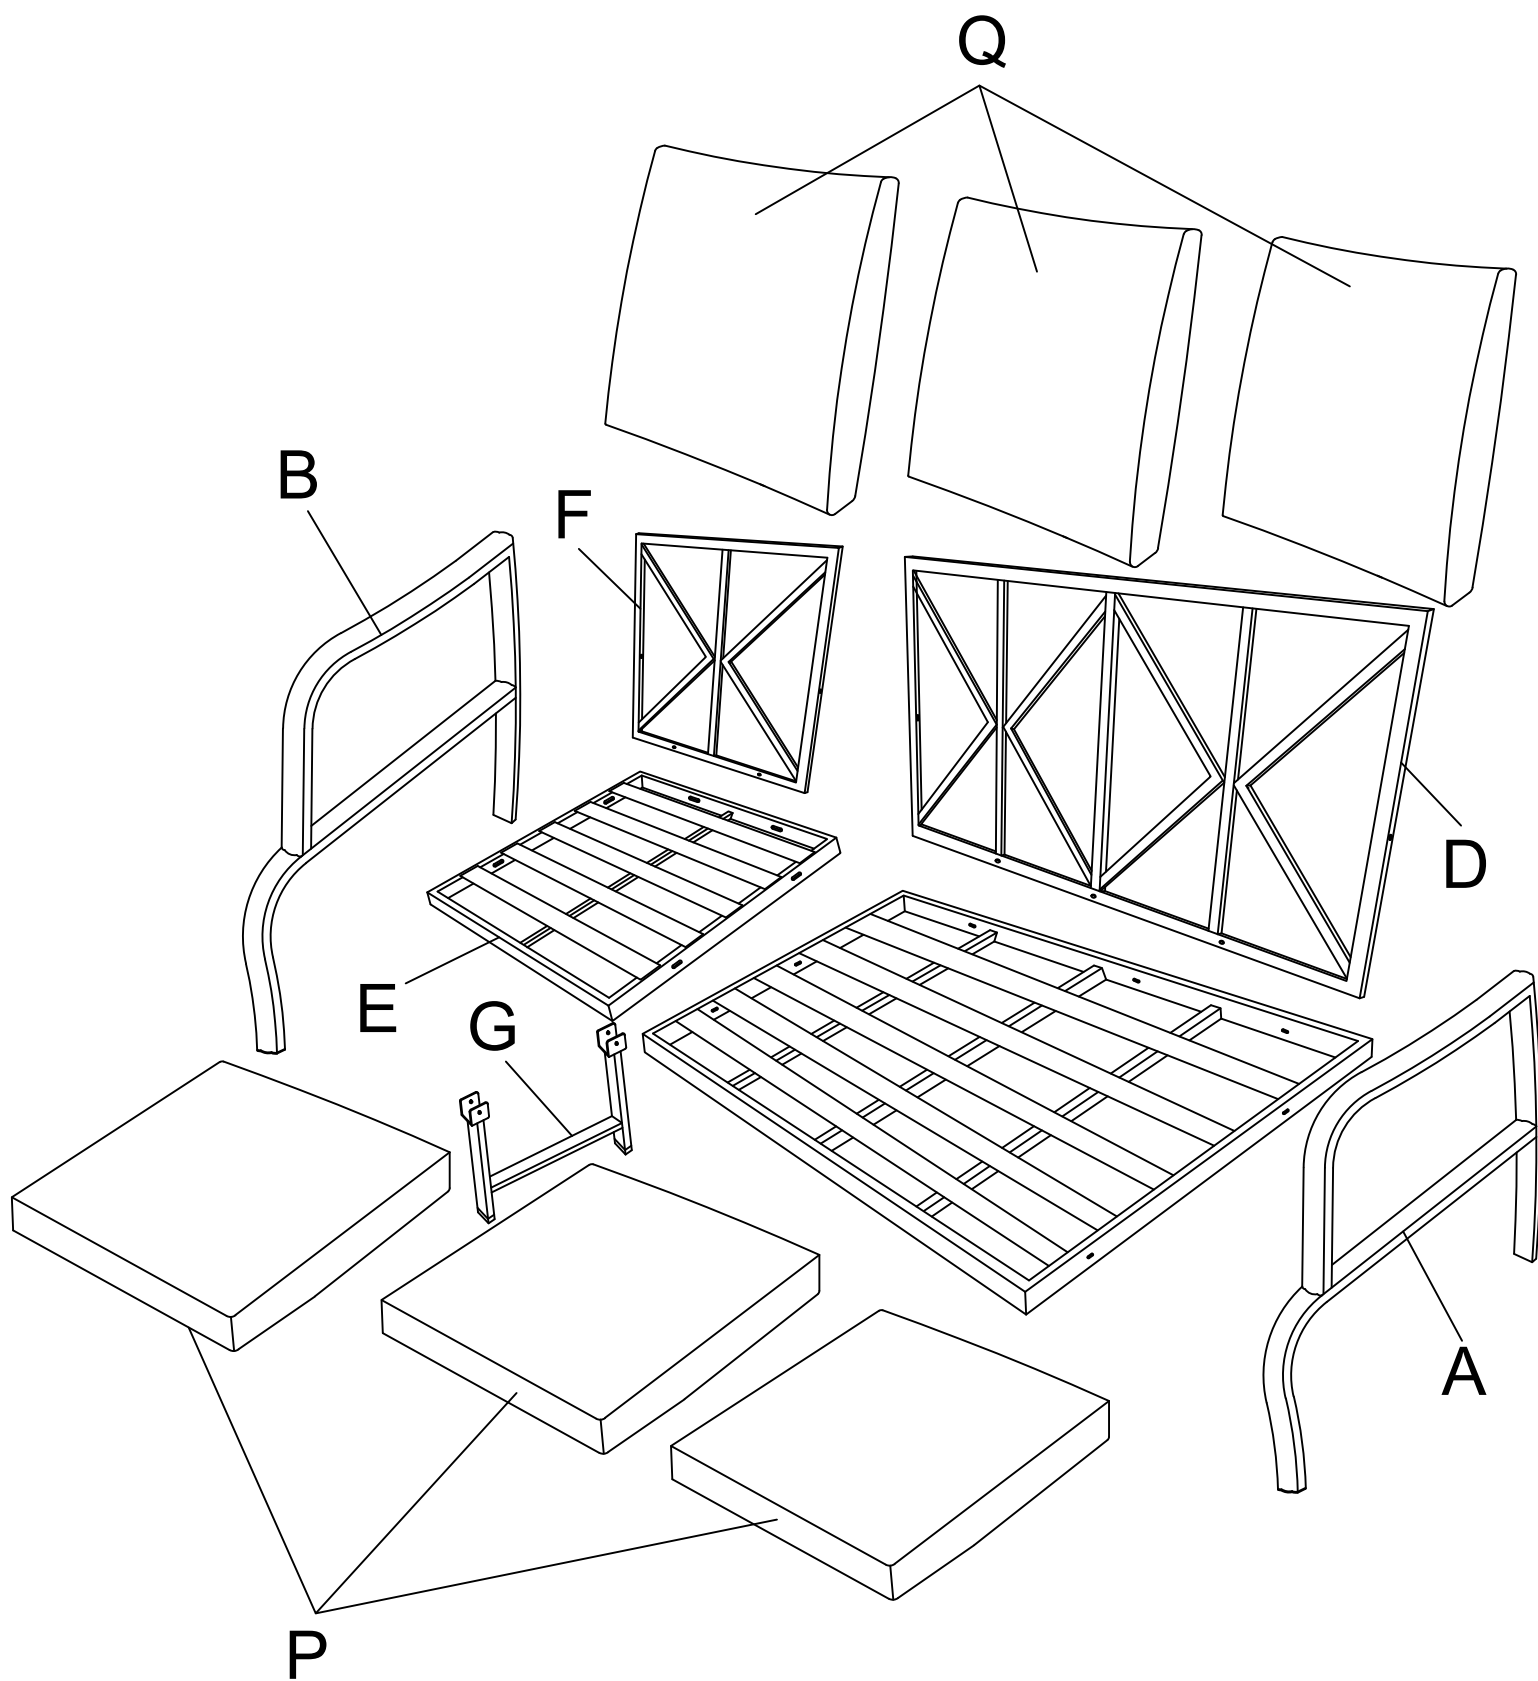Exploded View





Components List

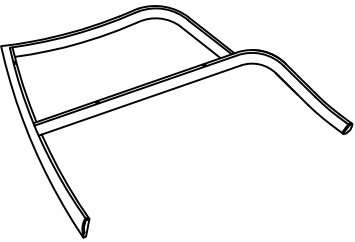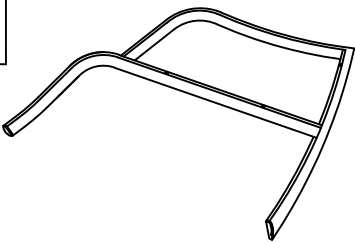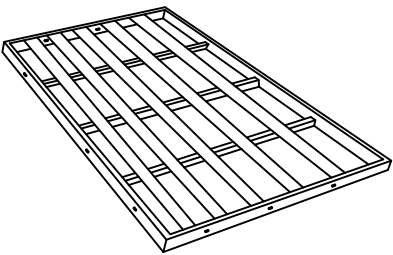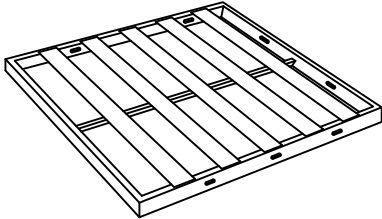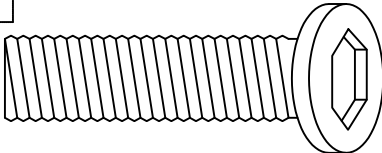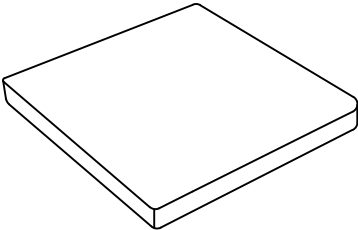

A  Left Armrest1PC	B  Right Armrest1PC	C  Double Seat1PC
D  Double Back1PC	E  Seat1PC	F  Back1PC
G  Leg1PC	H  BoltM6X3010PCS	I  BoltM6X403PCS
J  BoltM6X453PCS	K  BoltM6X653PCS	L  NutM65PCS
M  WasherM624PCS	N  Allen wrenchM61PC	O  wrenchM61PC
P  Seat Cushion3PCS	Q  Back Cushion3PCS	

ASSEMBLY INSTRUCTION

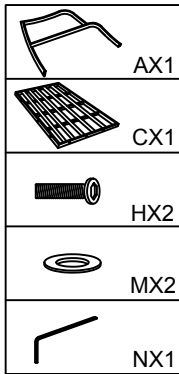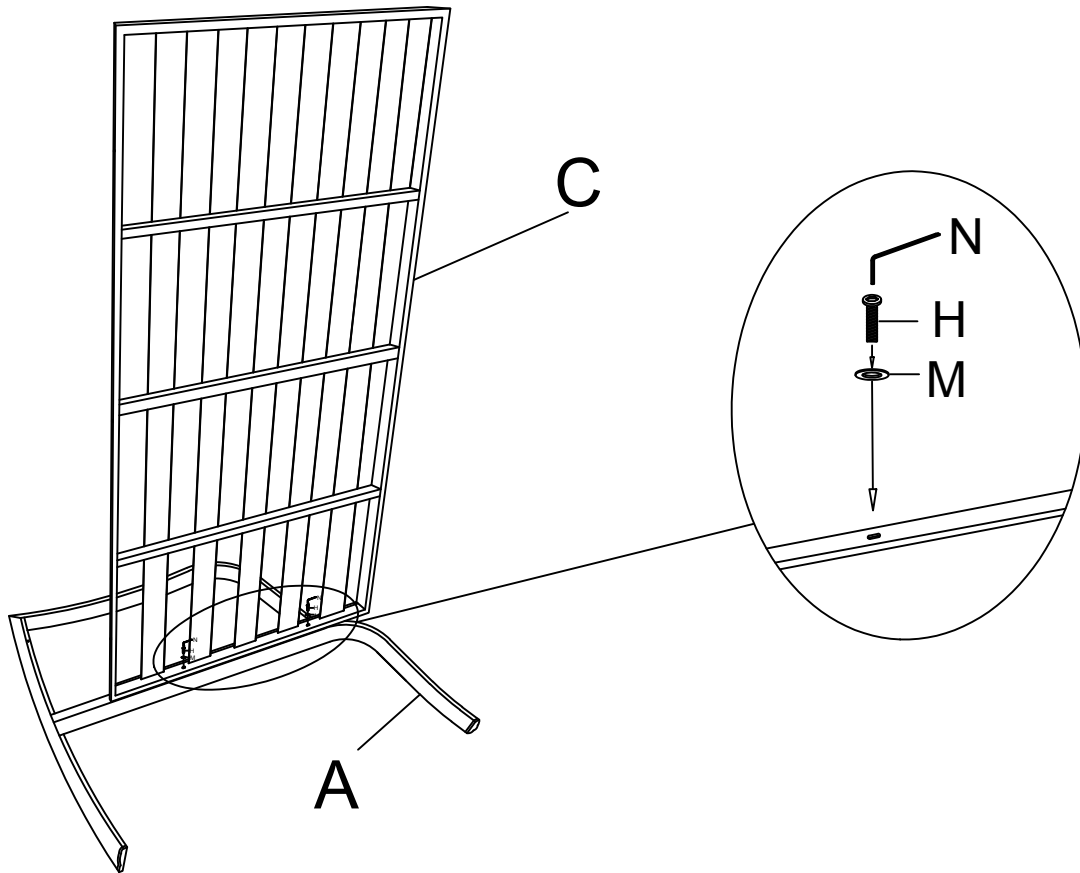Step 1 Attach left armrest(A) to the seat board(C) using washers(M), bolts(H) and Allen wrench(N). **Hand-tighten all screws to about 80% first. After all screws are in place, tighten them fully in sequence**



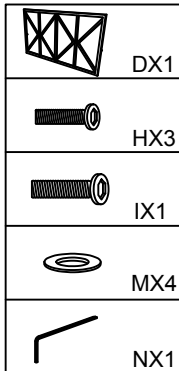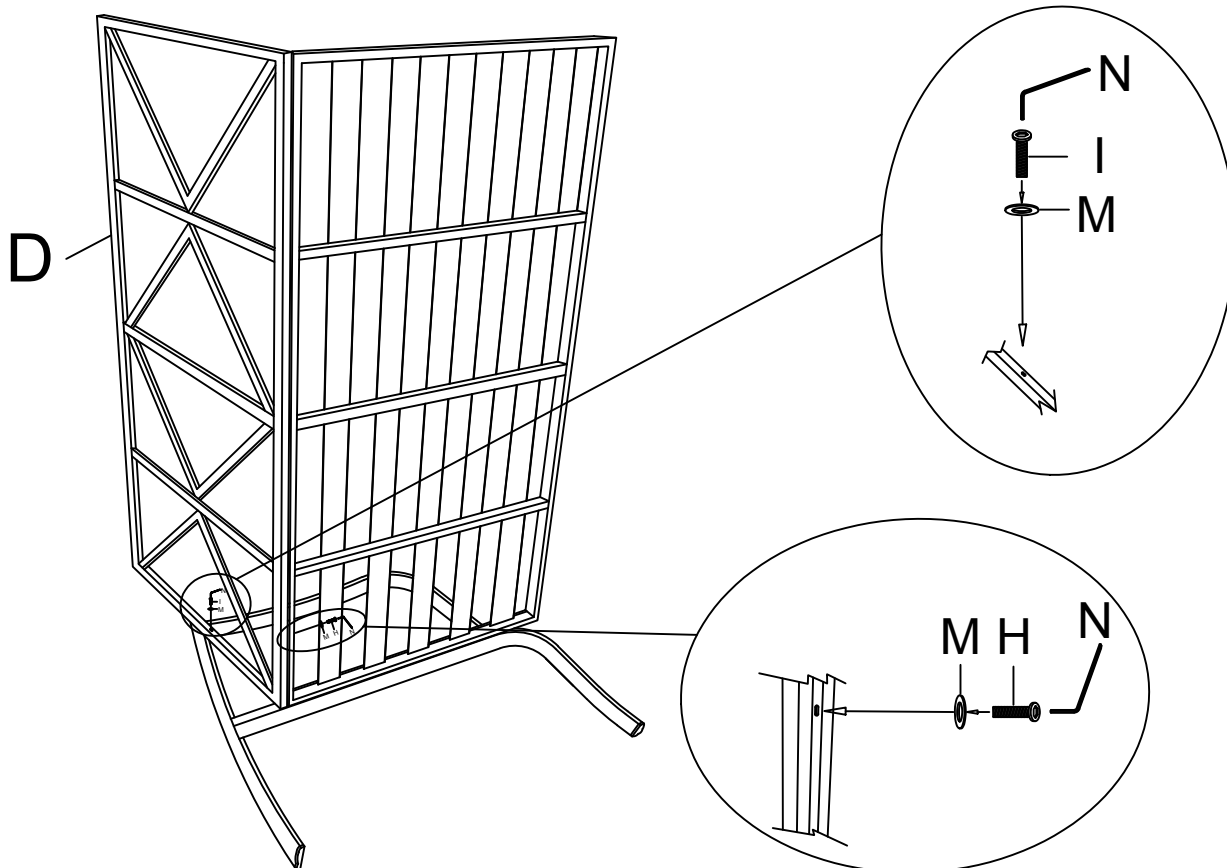
Step 2 Attach back frame(D) to the seat frame using washers(M), bolts(H&I), and Allen wrench(N). **Hand-tighten all screws to about 80% first. After all screws are in place, tighten them fully in sequence**



ASSEMBLY INSTRUCTION

Step 3

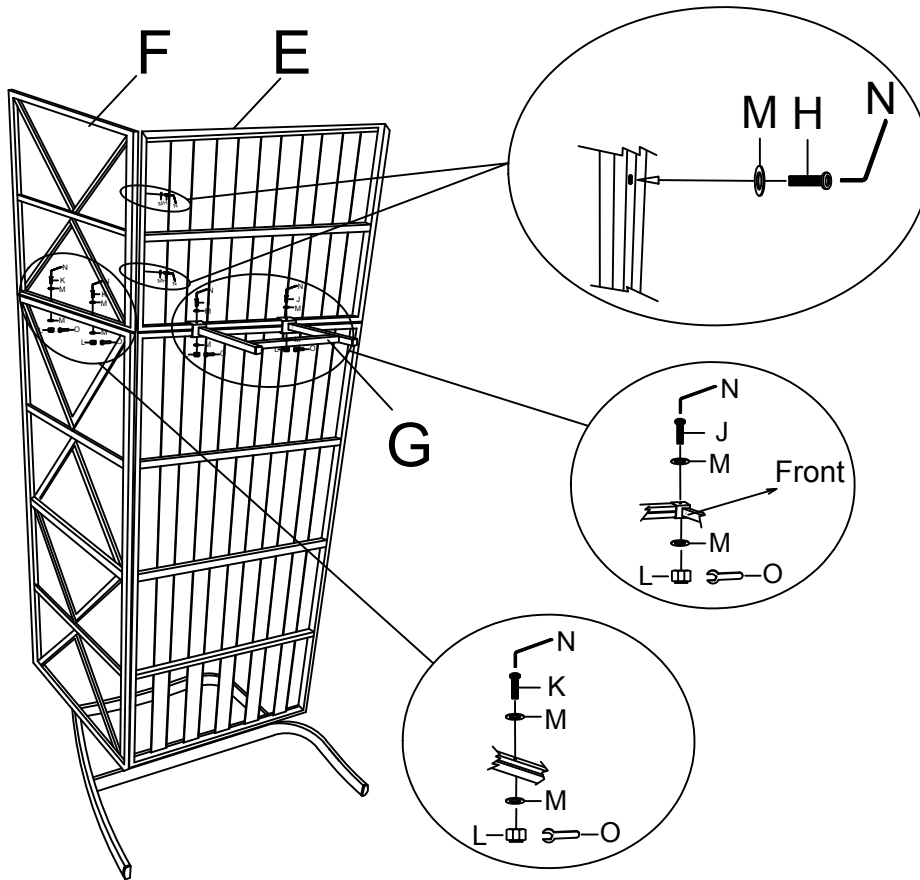
Attach back frame(F) to the seat frame(E) using washers(M), bolts(H), and Allen wrench(N). Attach single seat to the love seat frame using nuts(L), washers(M), bolts(K), and Allen wrench(N&O). Attach middle leg(G) to the seat frame using nuts(L), washers(M), bolts(J), and Allen wrench(N&O). **Hand-tighten all screws to about 80% first. After all screws are in place, tighten them fully in sequence**



	EX1
	FX1
	GX1
	HX2
	JX2
	KX2
	MX10
	LX4
	NX1
	OX1

Step 4

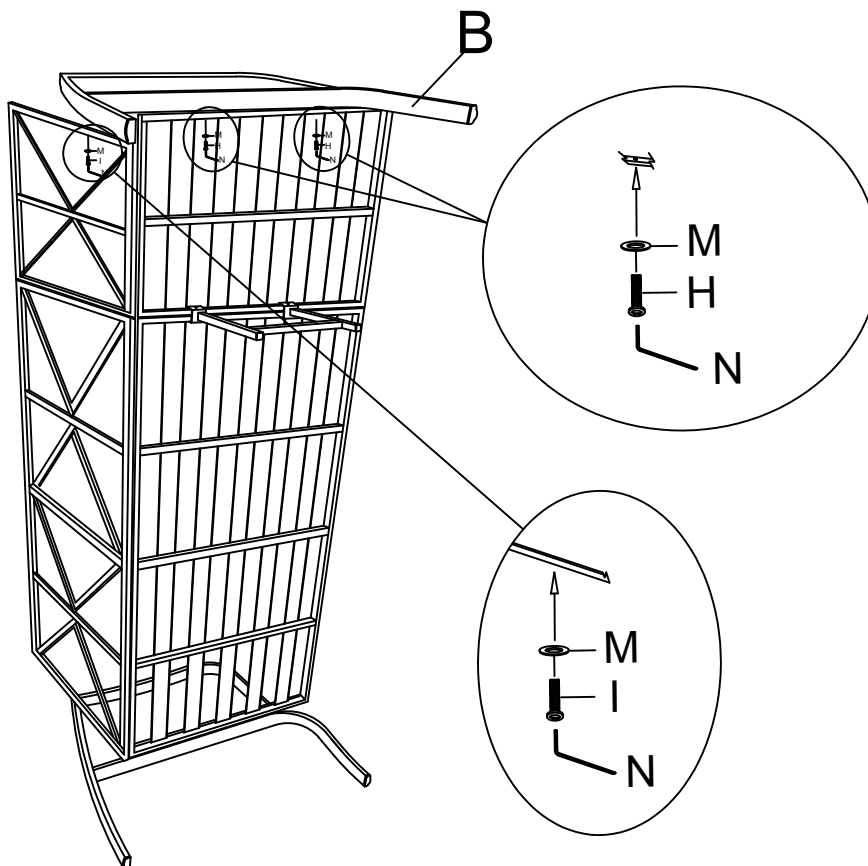Attach right armrest(A) to the seat board(C) using washers(M), bolts(H&I) and Allen wrench(N). **tighten all screws to about 80% first. After all screws are in place, tighten them fully in sequence**



	BX1
	HX2
	IX1
	MX3
	NX1

ASSEMBLY INSTRUCTION

Step 5

Tighten all bolts 100%, and flip the seat over. Put the seat cushion(P) and back cushion(Q) on the seat frame. The assembly is done.

