


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE**

- NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

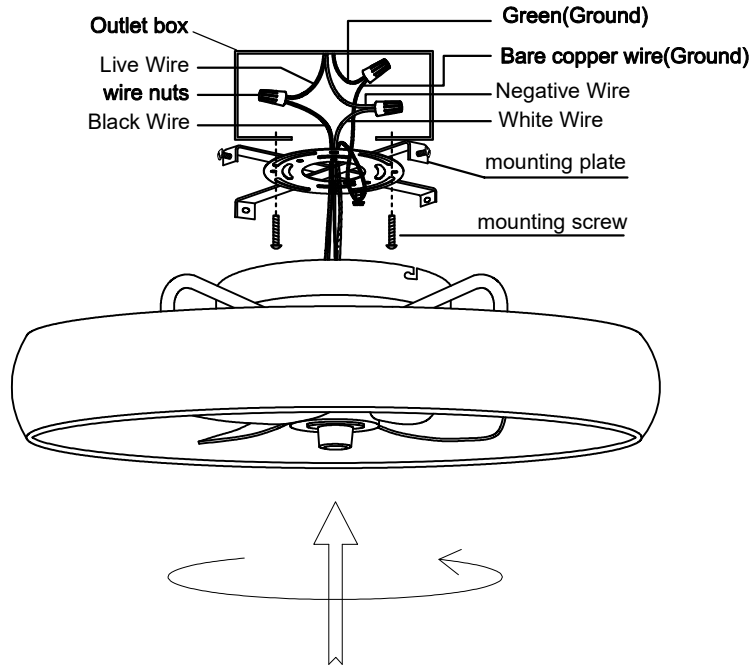


1. Attach the mounting plate to the outlet box by using two mounting screws.
2. Pull out the wires and grounding wire from the outlet box. Make wire connections using the wire nuts, as follow:
  - Connect the hot wire(usually black insulation)from the fixture to the black wire from the power source.
  - Connect the neutral wire(usually white insulation)from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire(usually green insulation or bare wire)to the mounting strap with the green grounding screw.Then connect it to the house grounding wire with the wire nut.
 Carefully put the wires back into the outlet box.
3. Insert the ceiling plate of the lamp body into the mounting plate screws and tighten them

**Turn on the power at fuse or circuit box.**

## Remote Control Instructions

### 1. Control

- Button 1: All off, short press to turn off the main light & color light & fan;  
 Button 2: Fan mode, short press to switch between natural and comfortable wind;  
 Button 3: Fan direction, short press to switch between forward and reverse;  
 Button 4: fan rocker switch, only some models support this function;  
 Button 5: Fan switch, short press to turn on/off the fan, long press the button for 5 seconds to enable the device to enter the App distribution network mode;  
 Button 6: Fan speed, short press to adjust the speed of 6 levels  
 Button 7: White light switch, short press to turn on/off the white light;  
 Button 8: Color light switch, short press to turn on/off color light;  
 Button 9: Brightness addition and subtraction, short press to adjust the brightness of 10 levels, and long press to adjust the brightness steplessly;  
 Button 10: Addition and subtraction of temperature, short press to adjust the 10-level temperature, long press to adjust the temperature steplessly;  
 Button 11: Color static cycle switching (red, yellow, green, blue, purple, white);  
 Button 12: Color dynamic cycle switching;  
 Button 13: 1 hour/4 hours countdown timer off, fan & white light & color light all off at the same time;

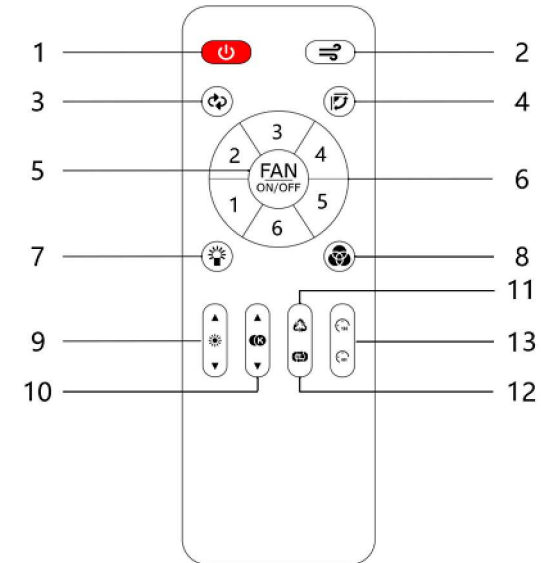

### 2. Pair code

- Connect the device to the power supply and confirm that the device can work normally (the light turns on slowly);  
 Turn off the power of the device for 5~10 seconds and then turn on the power again;  
 Long press Button 1 until the device flashes 3 times quickly, then let go;  
 The code pairing of the remote control is successful. At this time, you can press the button to control the device.

### 3. Clear code

- Connect the device to the power supply and confirm that the device can work normally (the light turns on slowly);  
 Turn off the power of the device for 5~10 seconds and then turn on the power again;  
 Long press Button 2 until the device flashes 3 times quickly, then let go;  
 The remote control is successfully cleared. At this time, the remote control can no longer control the device and needs to be re-paired before it can be used.

If you have any question,Emailus via [techsupport@cattleyalighting.com](mailto:techsupport@cattleyalighting.com)