




Product Installation Instructions

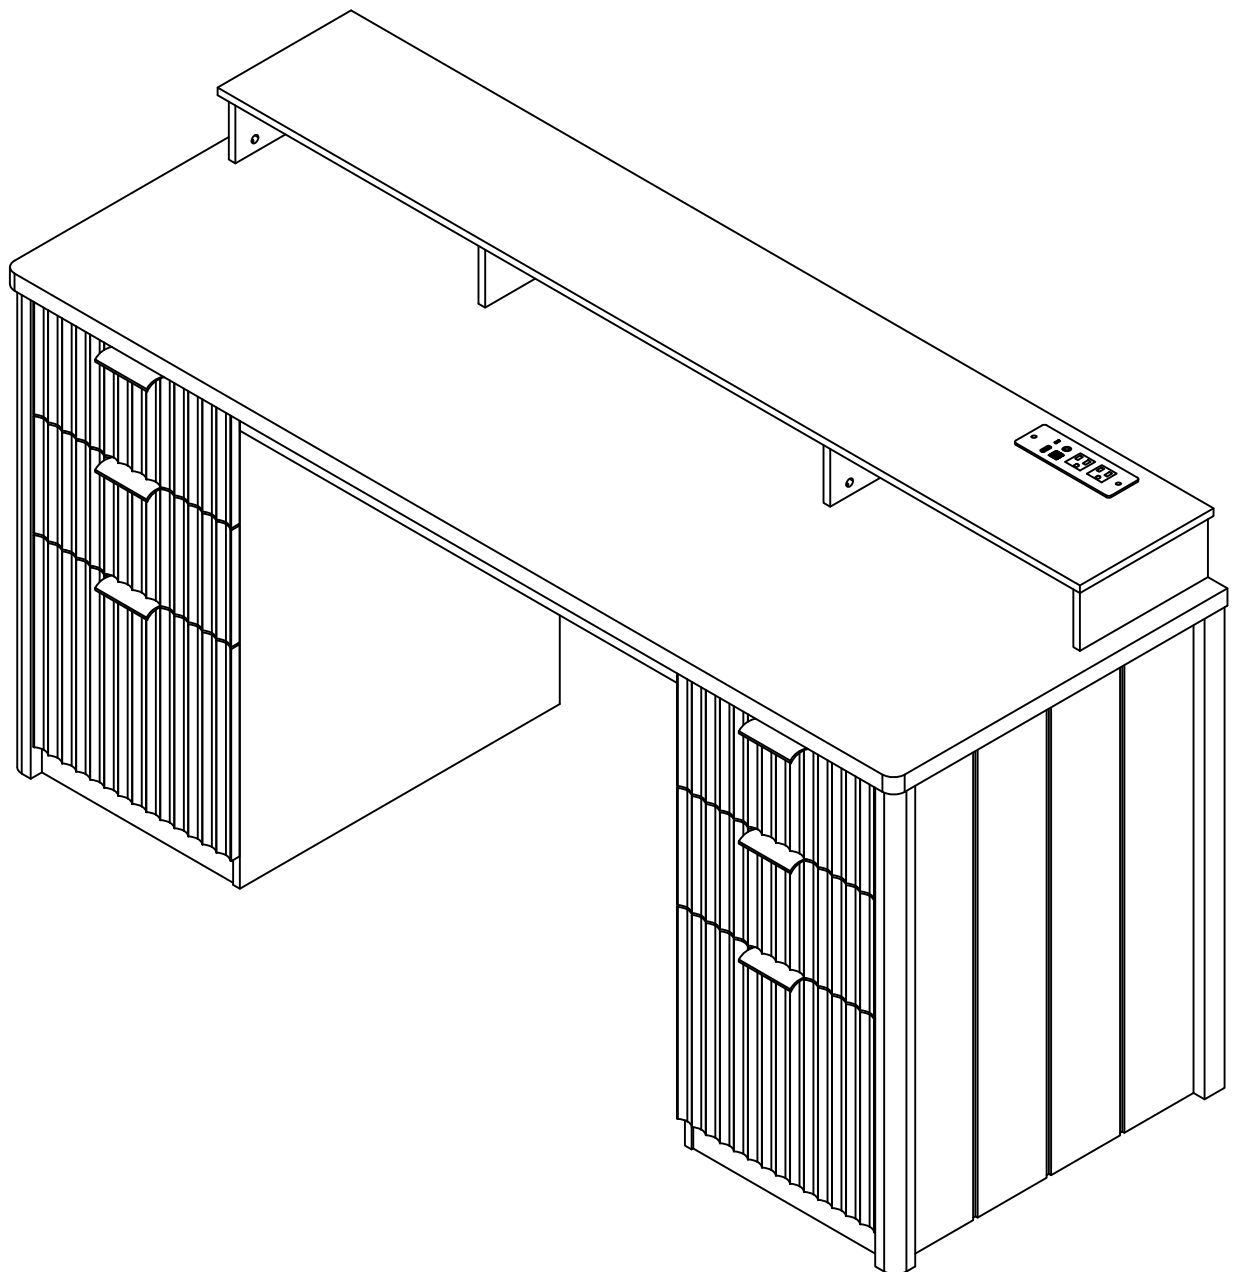





1x2




2x2




3x2




4x2




5x1




6x1




7x4




8x8




9x1




10x1




11x1




12x2




13x4




14x1




15x1



16x1



17x1



18x4



19x1




20x1




21x1




22x1




23x2







24x1




25x1




26x1

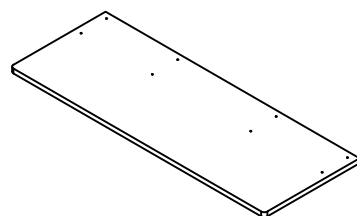


27x1




28x2




29x1



30x1













31x1

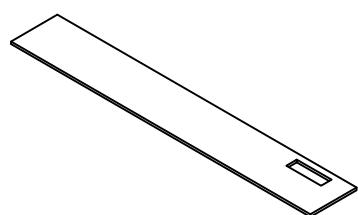

32x1


Accessories list

A		Two In One Screw (6x28mm)	160pcs +6pcs
B		Two In One Nut (10x12mm)	160pcs +6pcs
C		Wood Chipping (6x30mm)	12pcs +2pcs
D		Screw & Guide (12 inch) (3.5x12mm)	8pcs 40pcs +8pcs
E		Screw & Guide(14 inch) (3.5x12mm)	4pcs 20pcs +4pcs
F		Handle & Screw (3.5x10mm)	12pcs +2pcs 6pcs
G		Back plate buckle & Screw (3x16mm)	12pcs +2pcs
H		Iron wire(310-mm)	4pcs
I		Non-slip pads	12pcs +2pcs
J		Wire Clamp	2pcs +1pcs
K		Power Socket & Screw (3.5x10mm)	2pcs +1pcs 1pcs
L		Anti inverted right angle	2pcs
		Screw(4x45mm)	2pcs
		grommet	4pcs
		Screw(3.5x14mm)	2pcs
		Countersunk head tapping	2pcs




1pcs





Double-head screwdriver, use as required

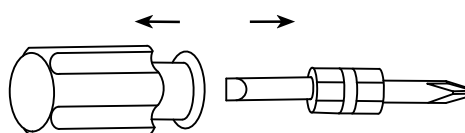


3

Product Installation Instructions

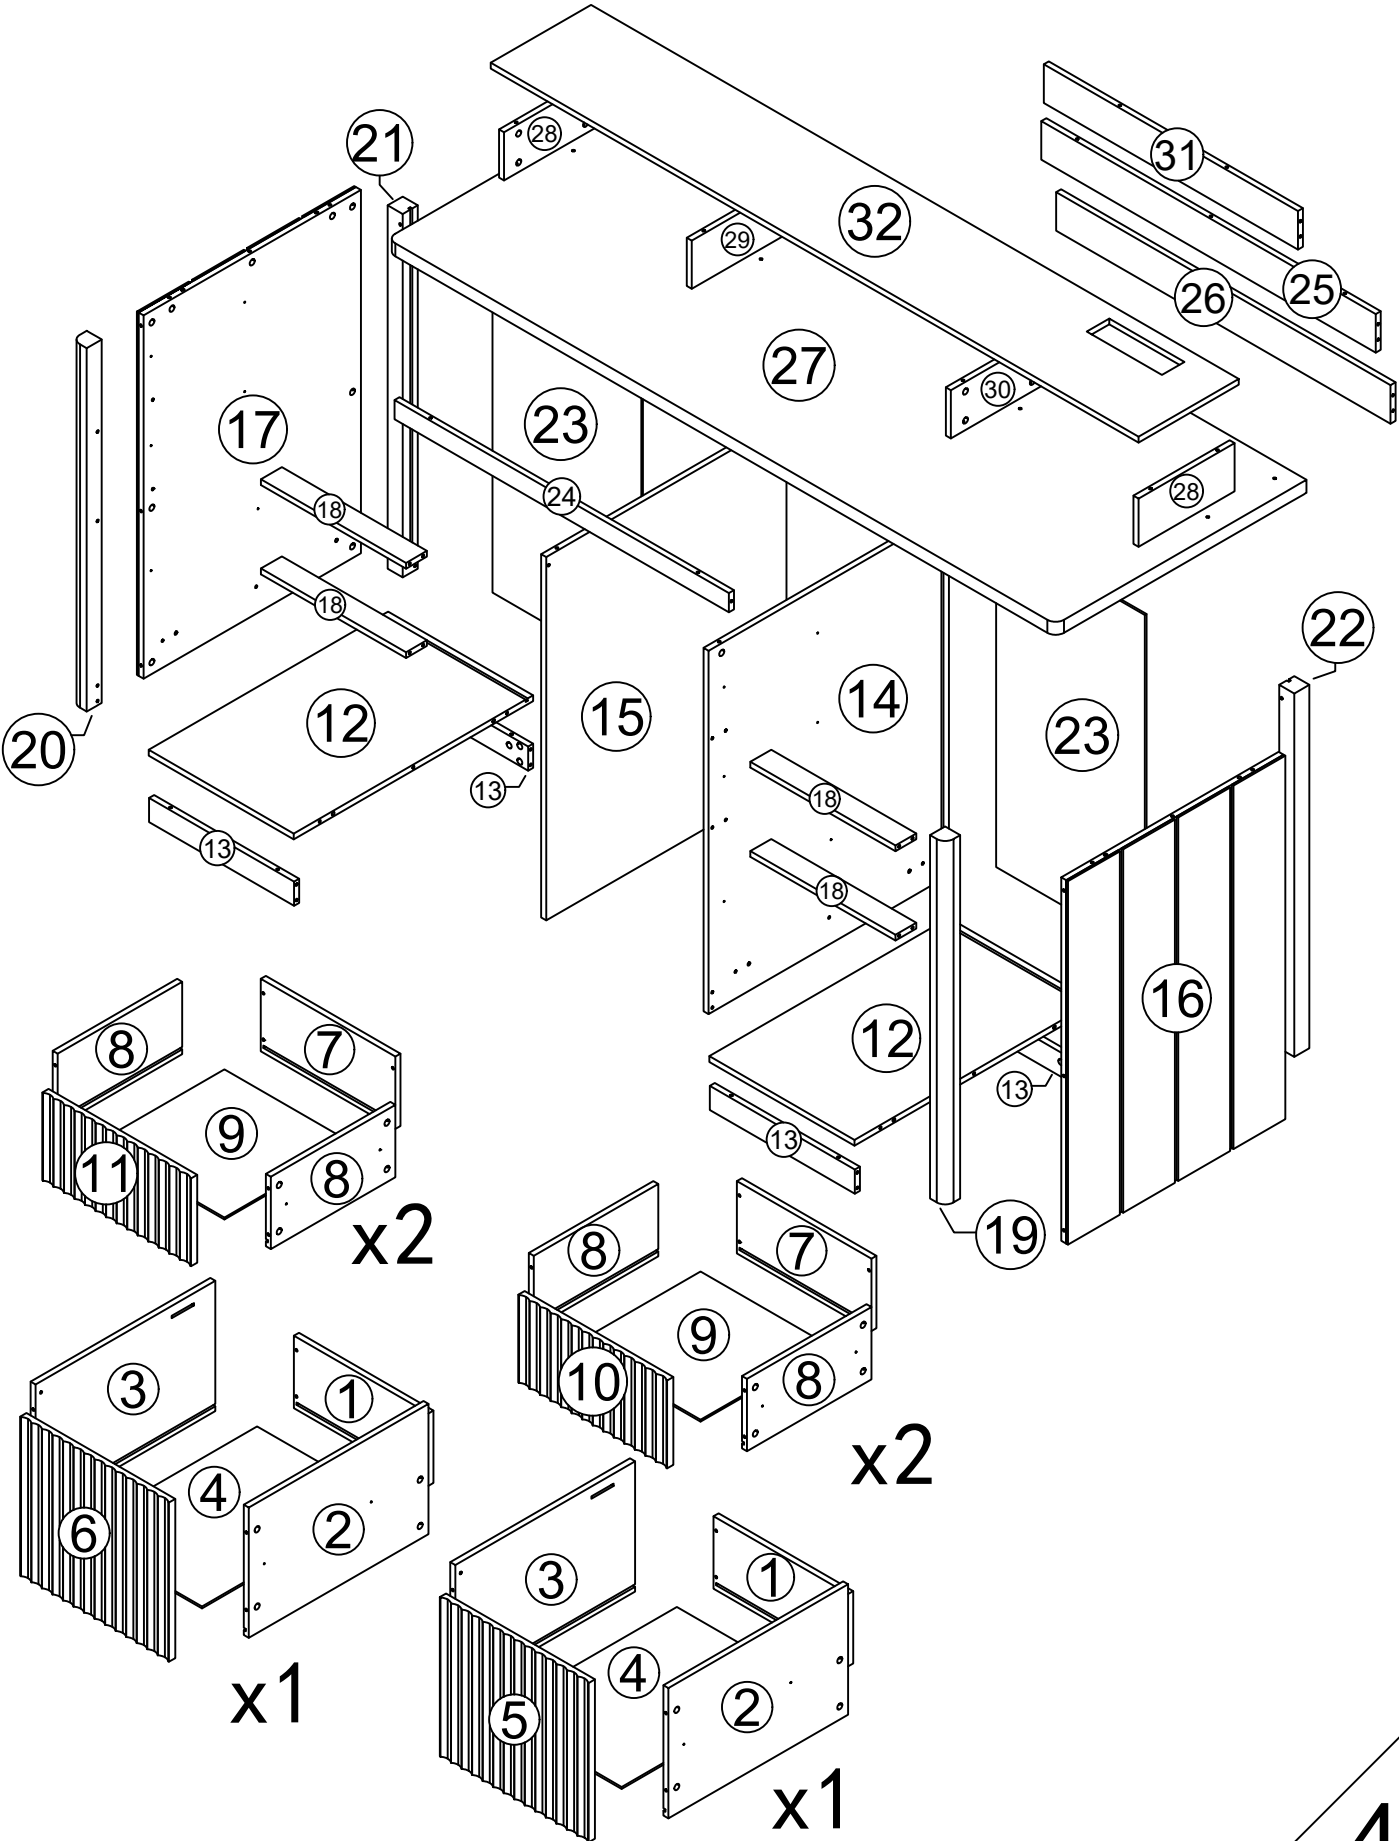


A		48pcs	D		8pcs 16pcs
B		48pcs	F		12pcs 6pcs
H		4pcs	E		4pcs 8pcs

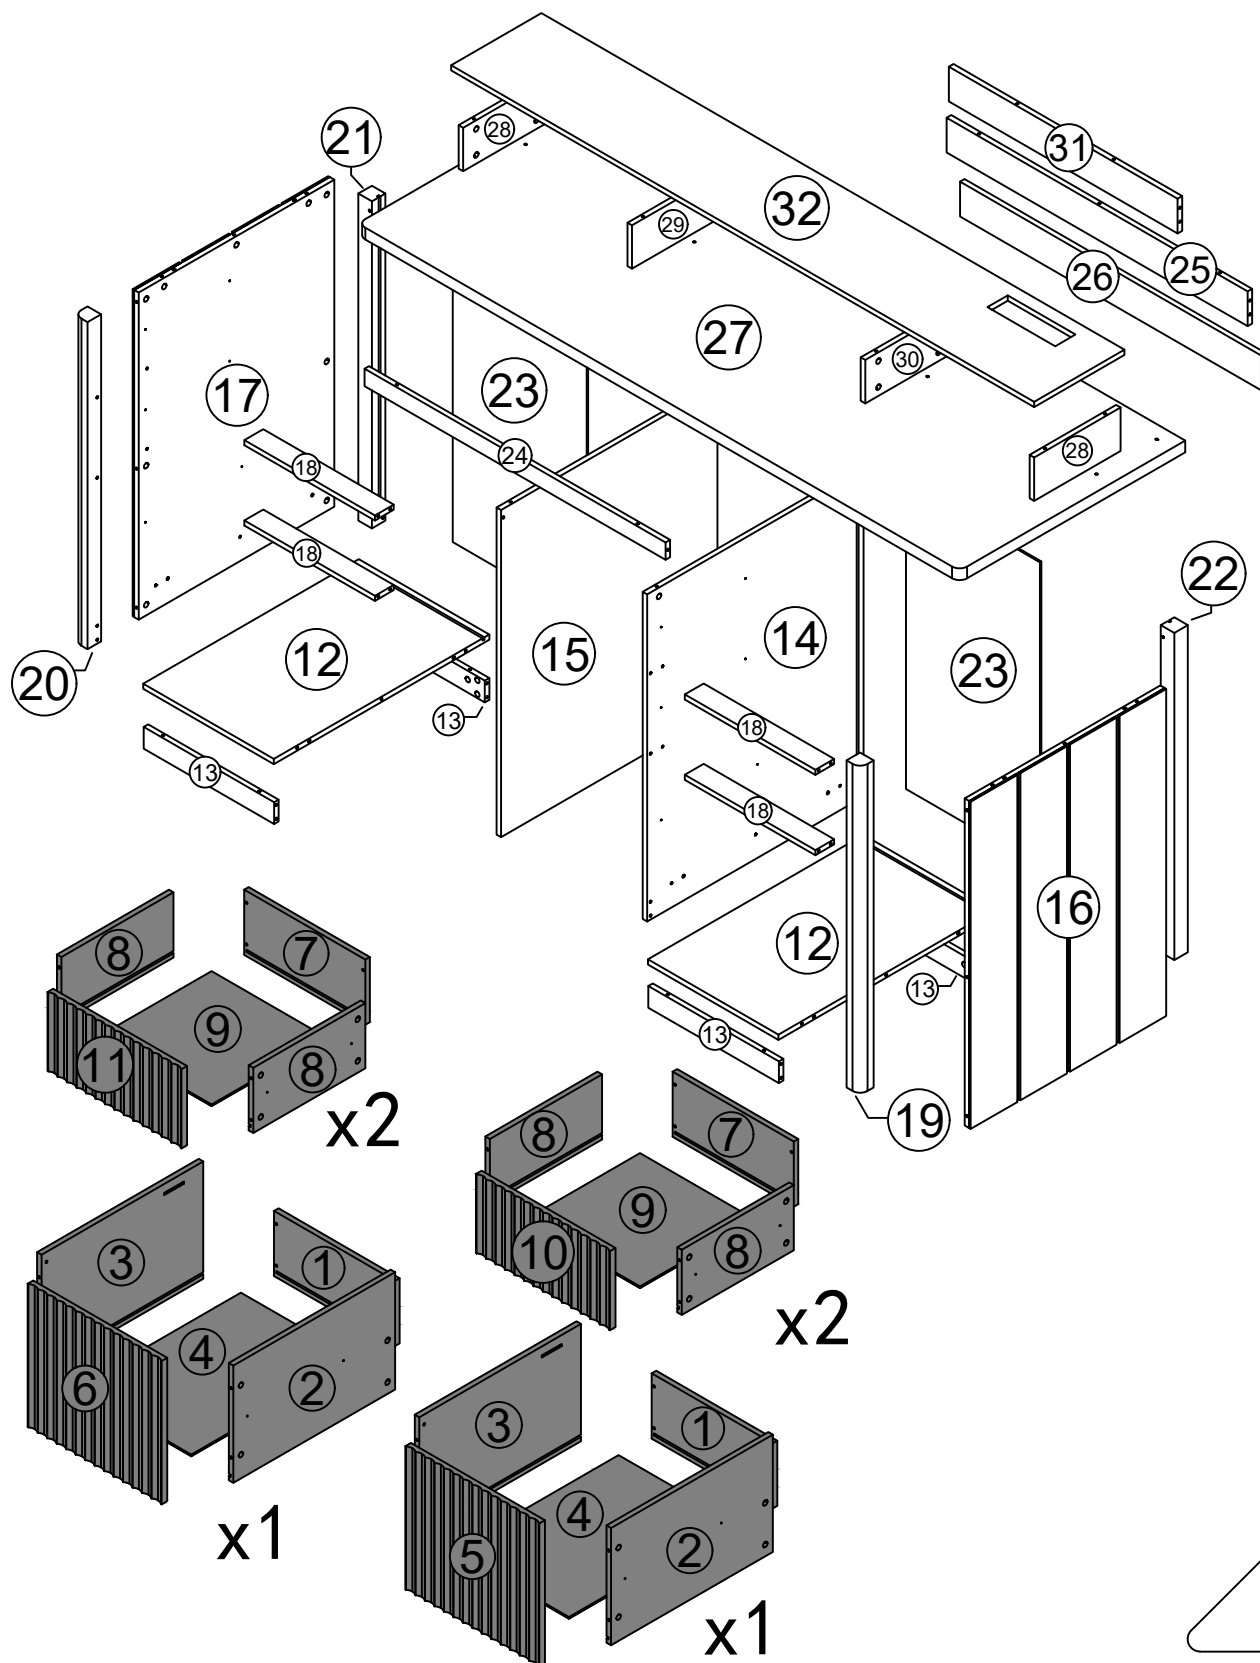


Use parts ① and ②



Step1

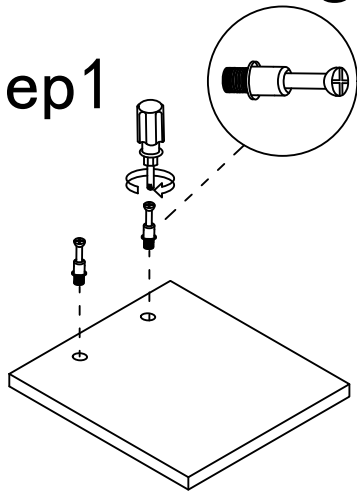


Step2

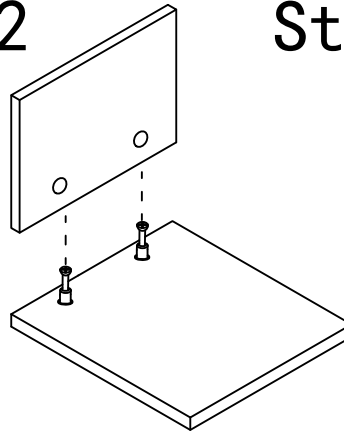

Step3

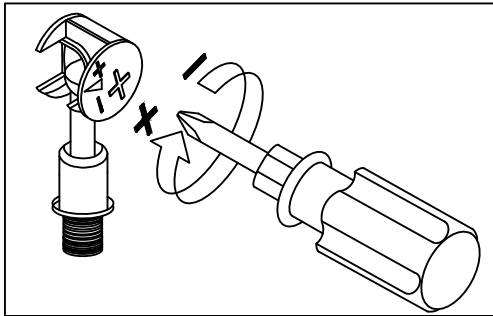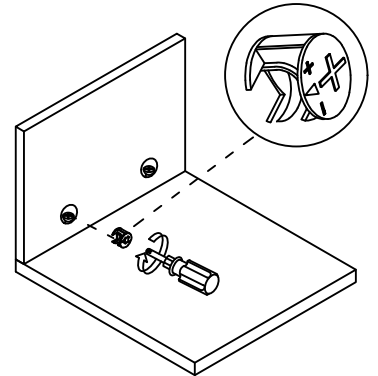


Use a screwdriver to lock in the direction of the "+" sign

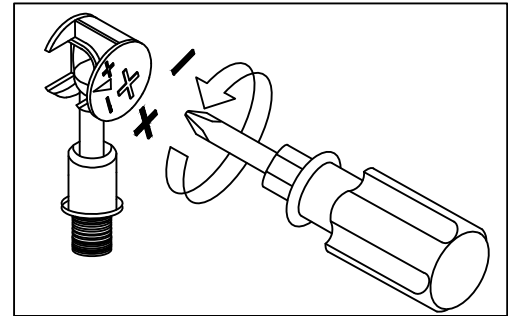


Disassemble along the direction of "-" sign

Step 1

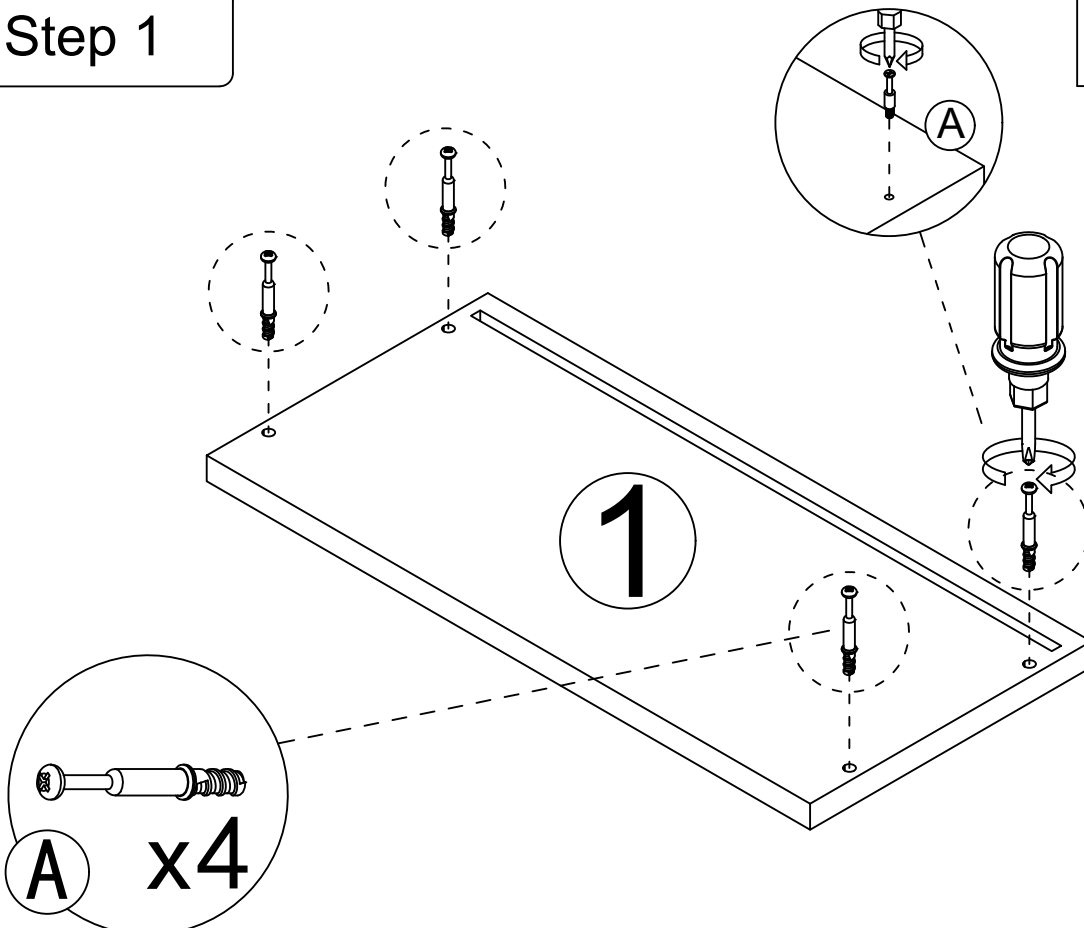

①



x 4



①

x4

6


Step 2

Insert the iron wire into the slot.

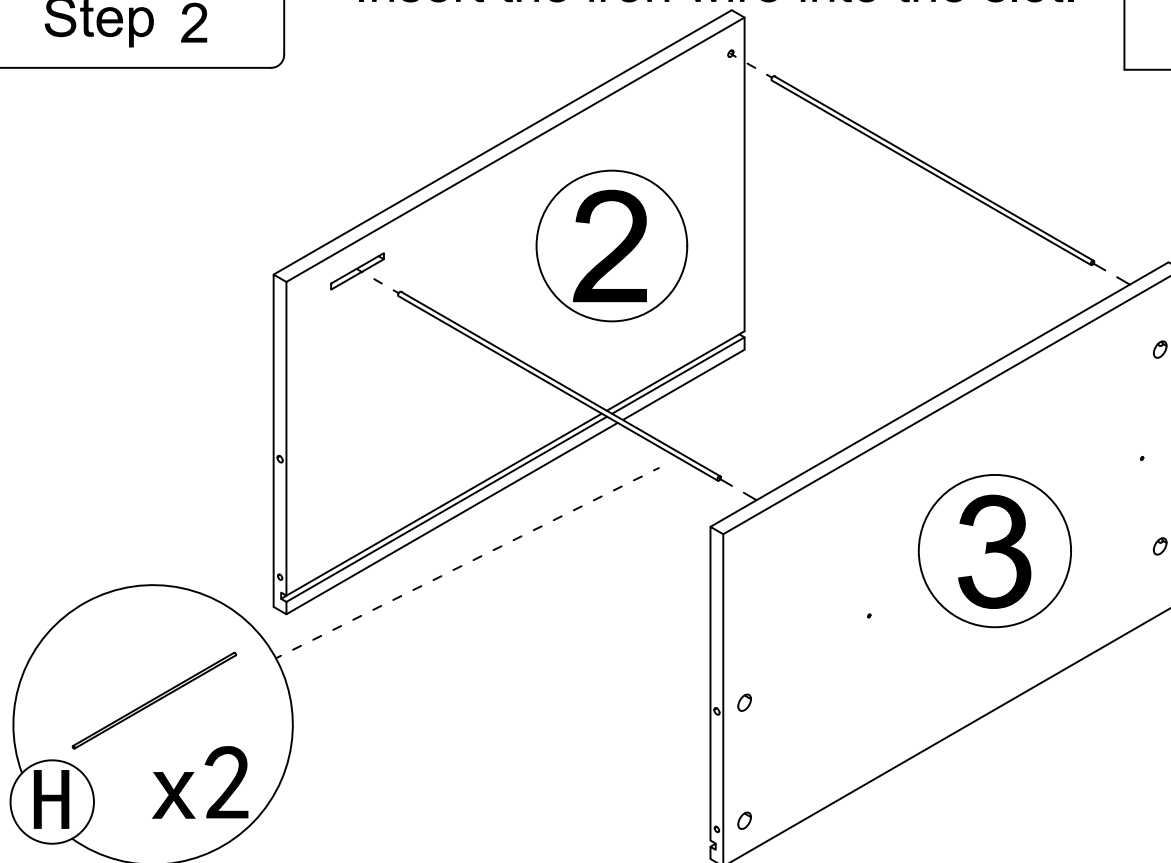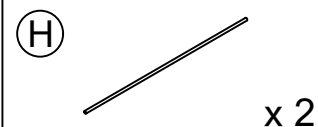


The elongated slot allows you to adjust the position of the iron wire as needed according to the size of the document.


Step 3

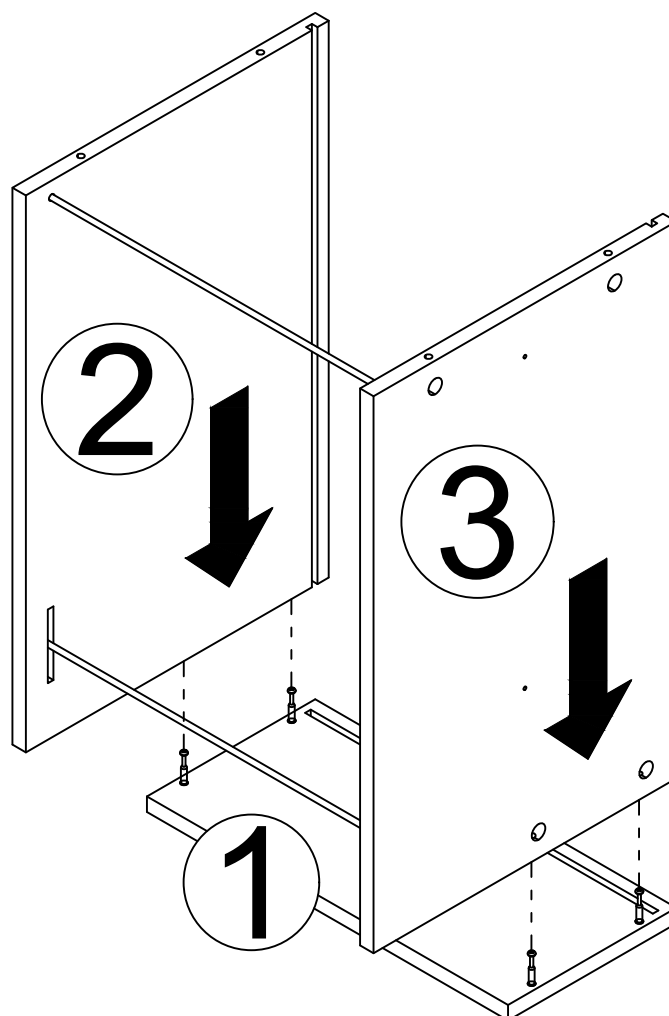

Step 4

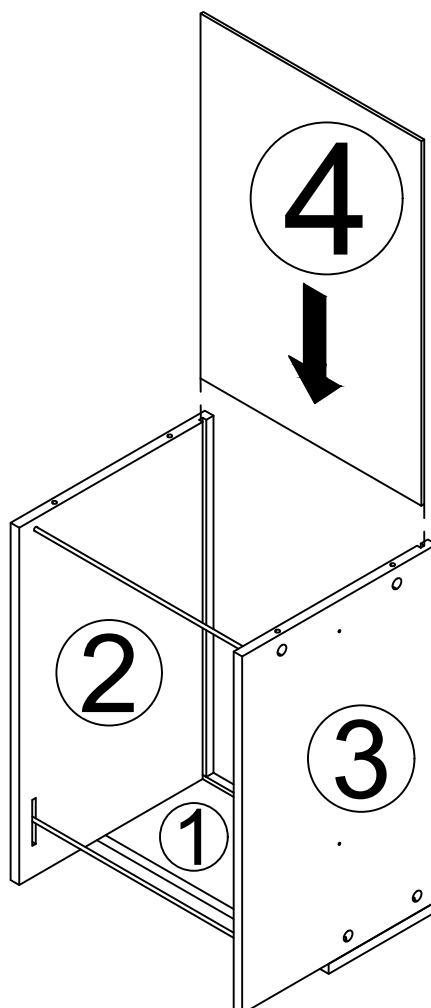

Step 5

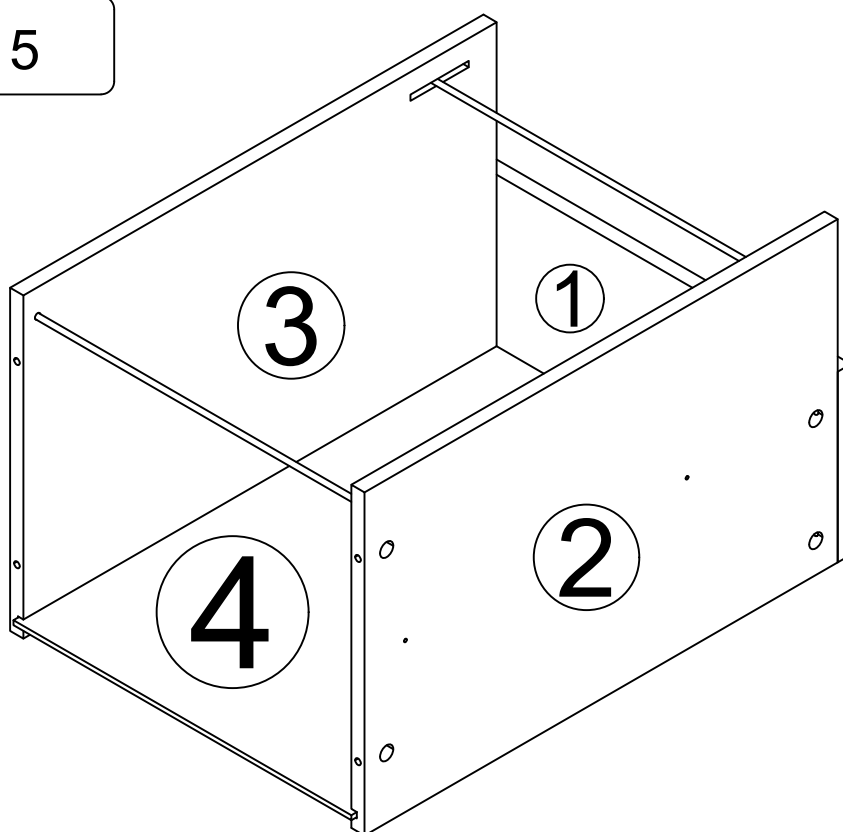


①		x 1
②		x 1
③		x 1
④		x 1
(H)		x 2
(A)		x 4

Install the second component following the previous steps.

Step 6

(A)

x 8

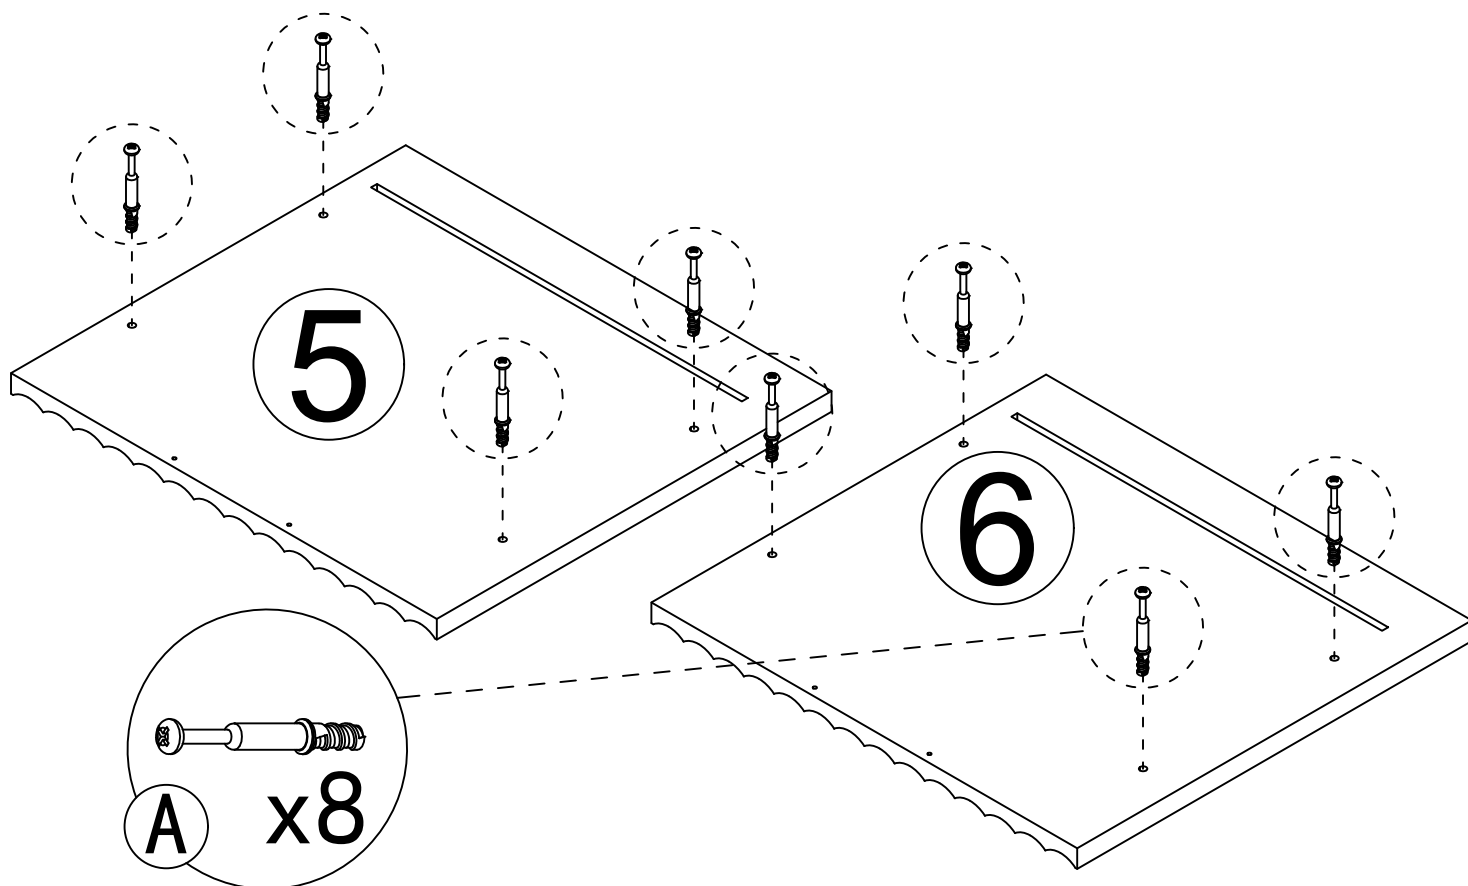


Step 7

(F)




x2
x4

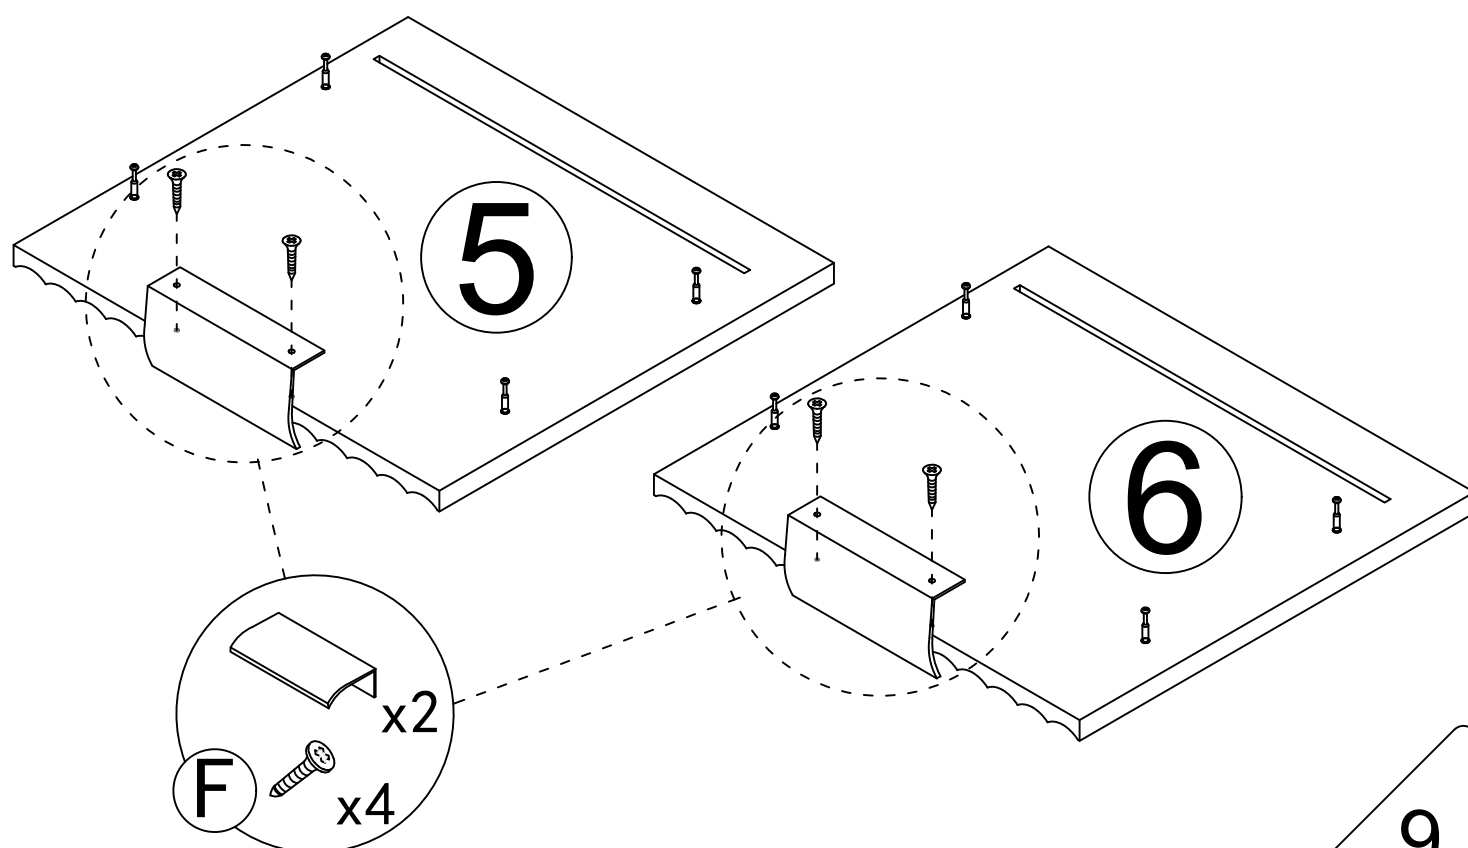


9

Step 8


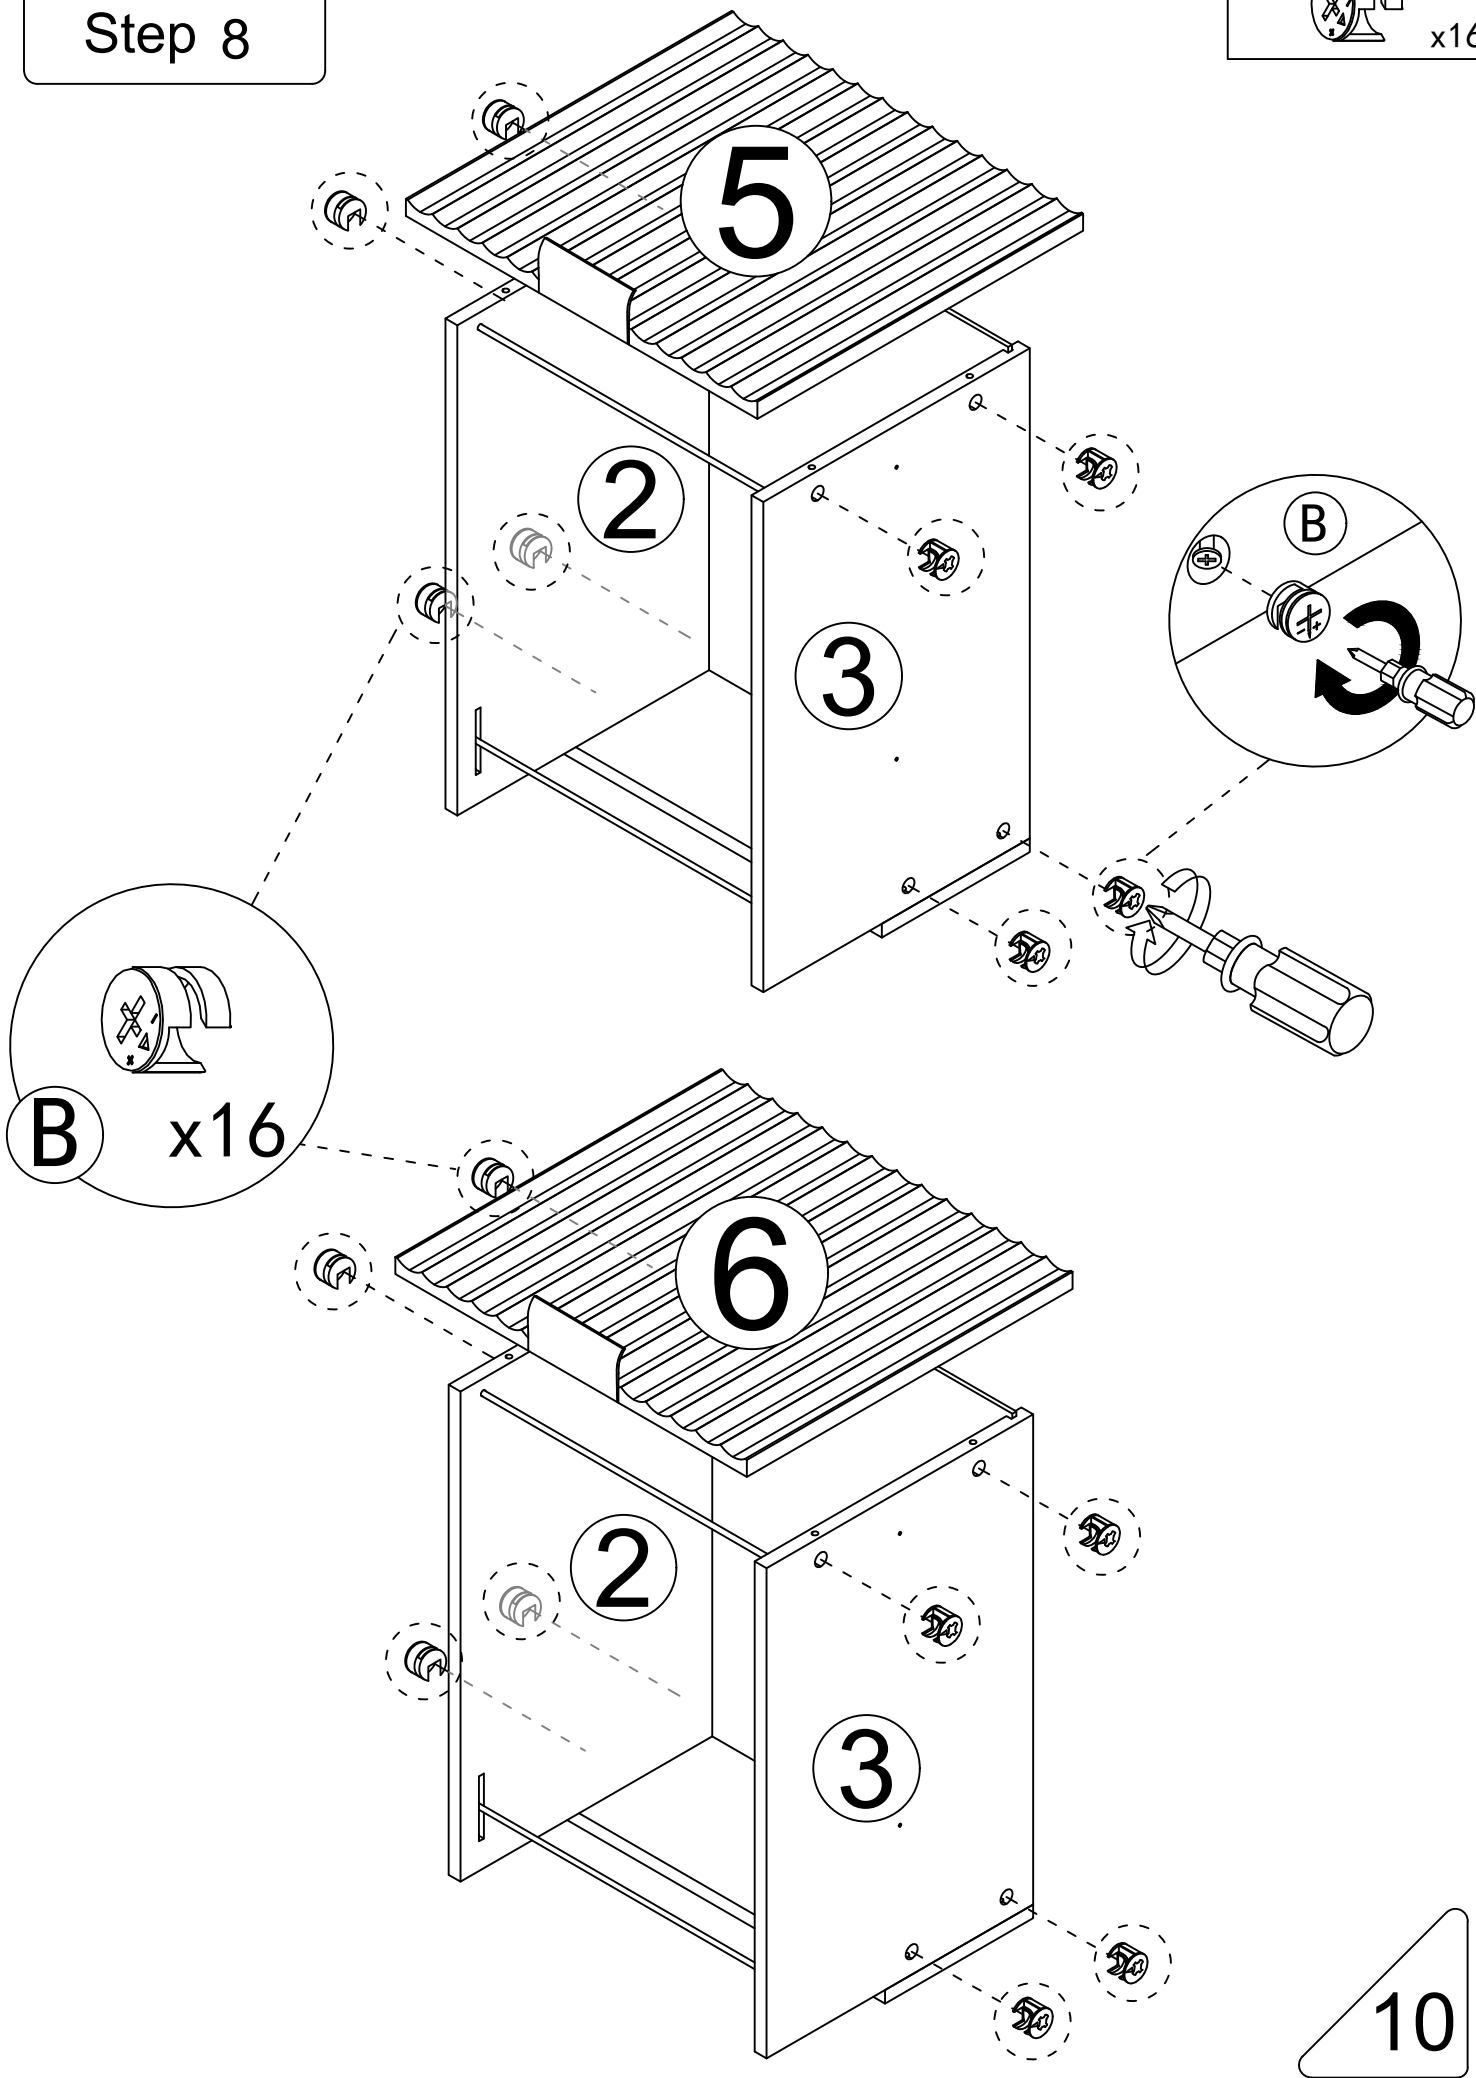


Drawer rail breakdown diagram (E)







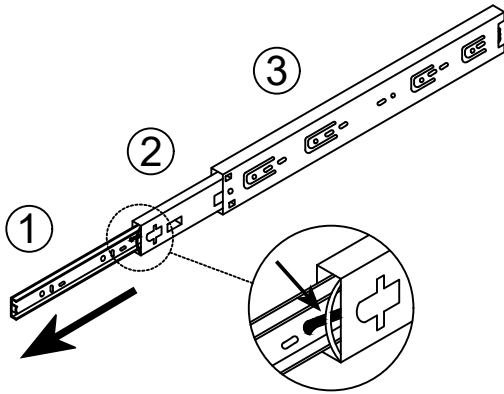


Step 1 : Pull the rails apart

Step 2 : Push the nylon buckle outward ①

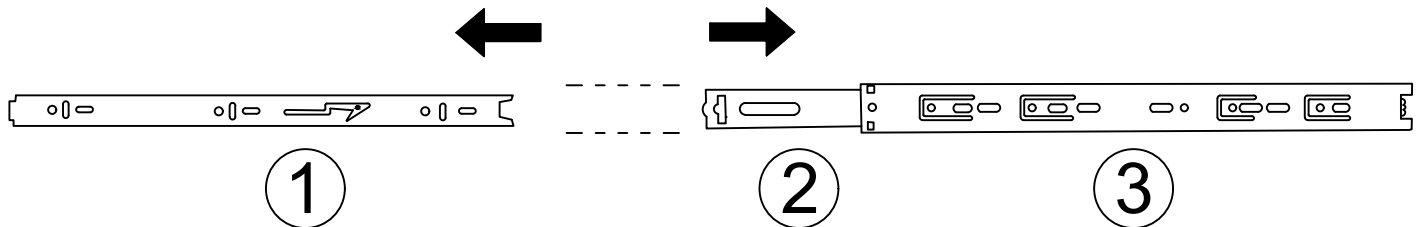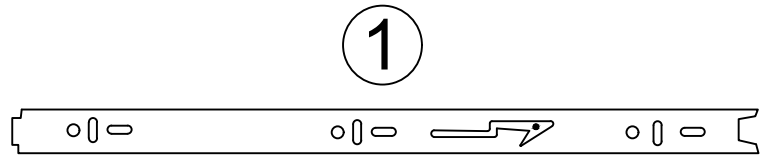

Step 9

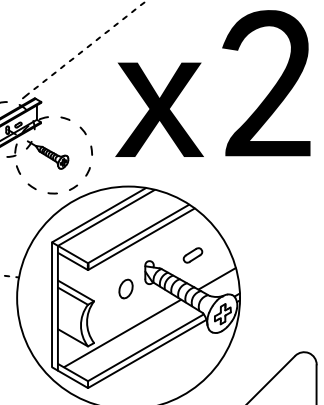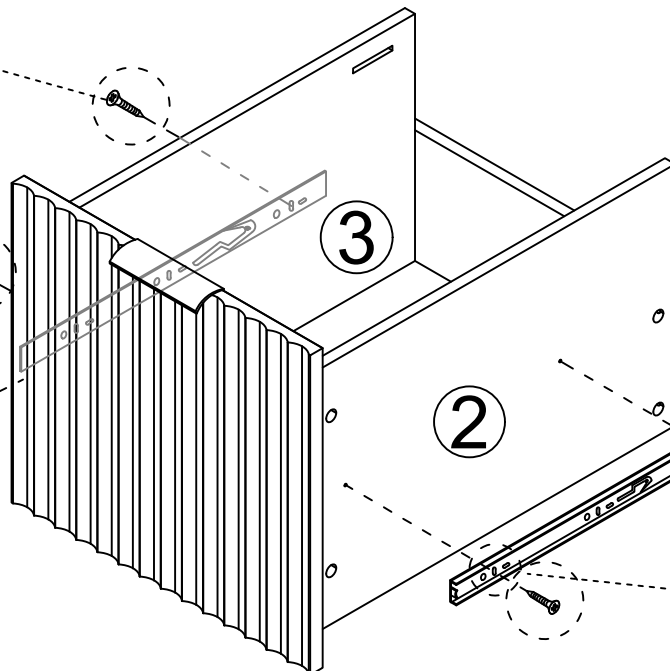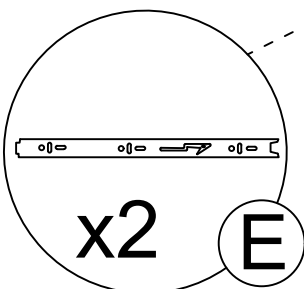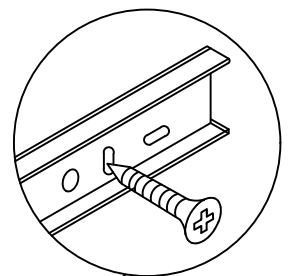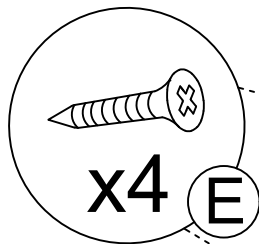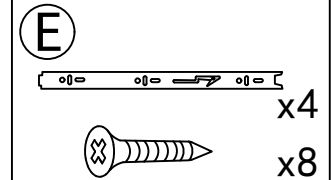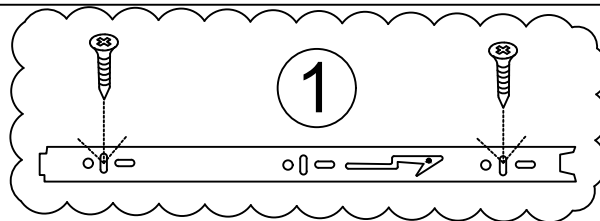


Install guide rails on the two pre-assembled components separately, following the same installation procedure.


Step 10

A


x 4

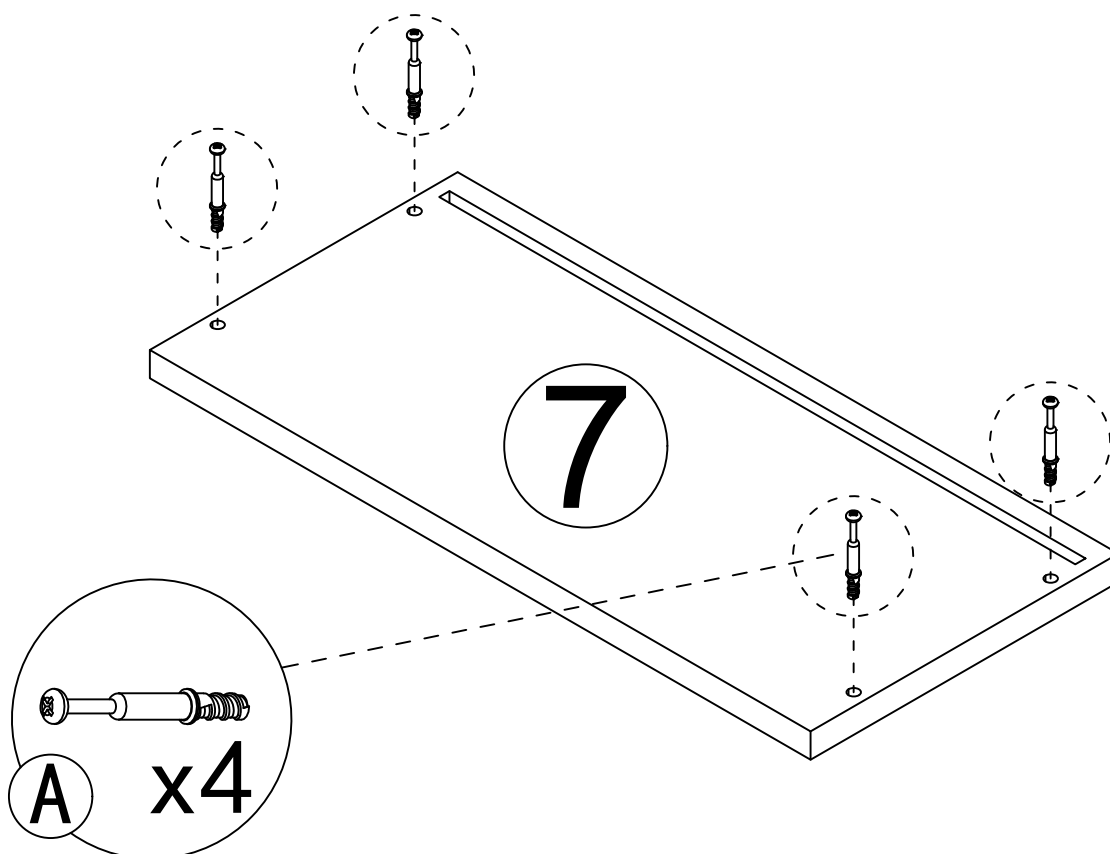


Step 11

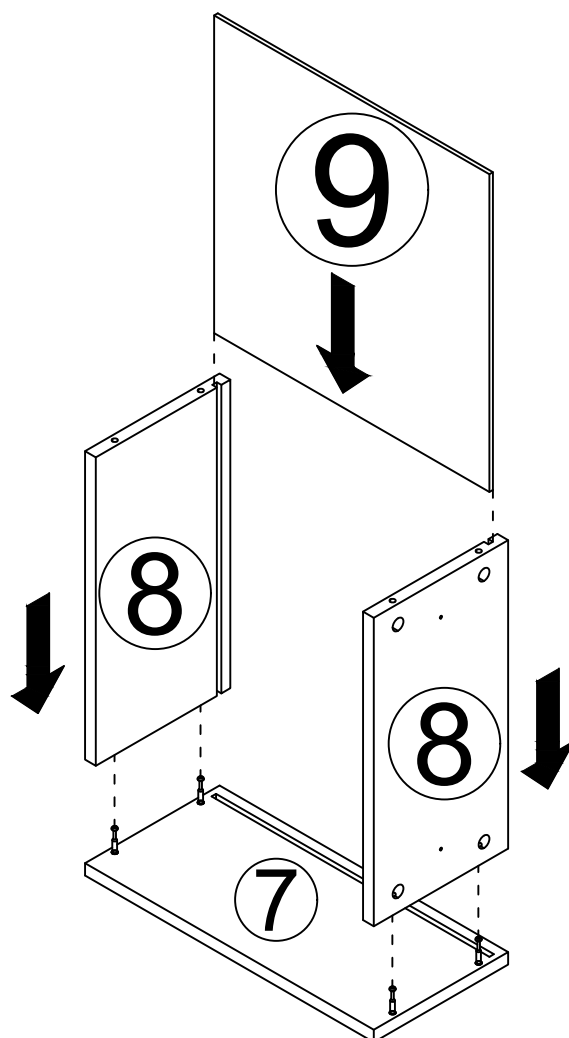

Step 12


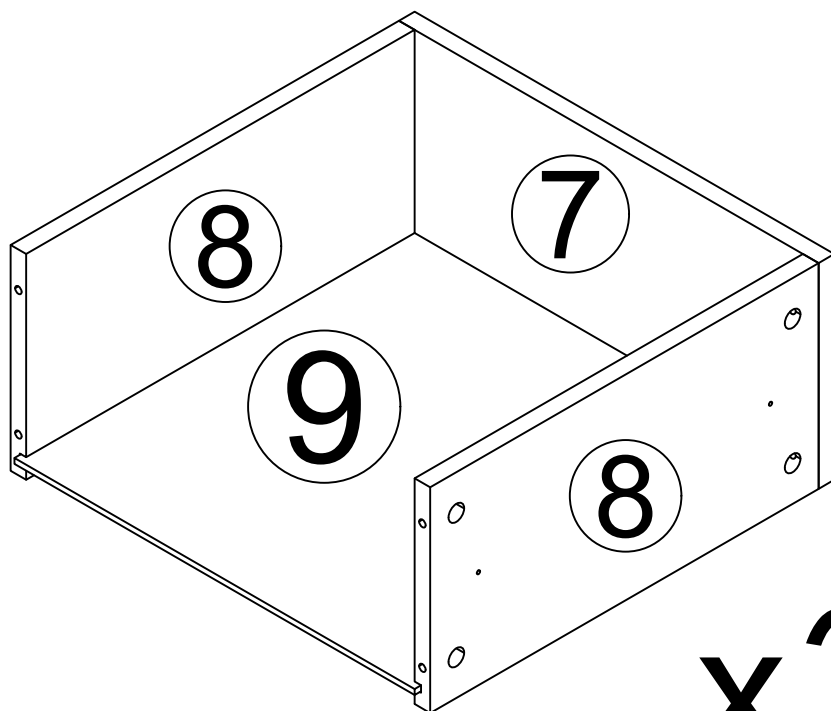


x3

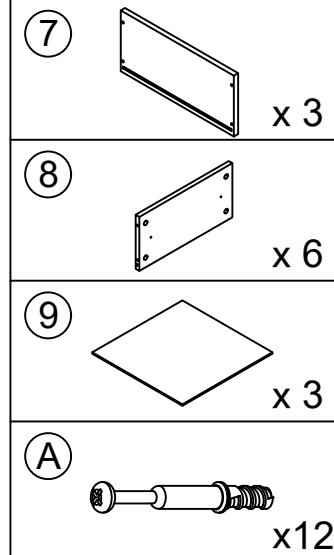


Install the remaining three components following the previous steps.

Step 13

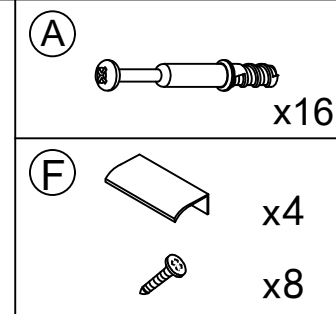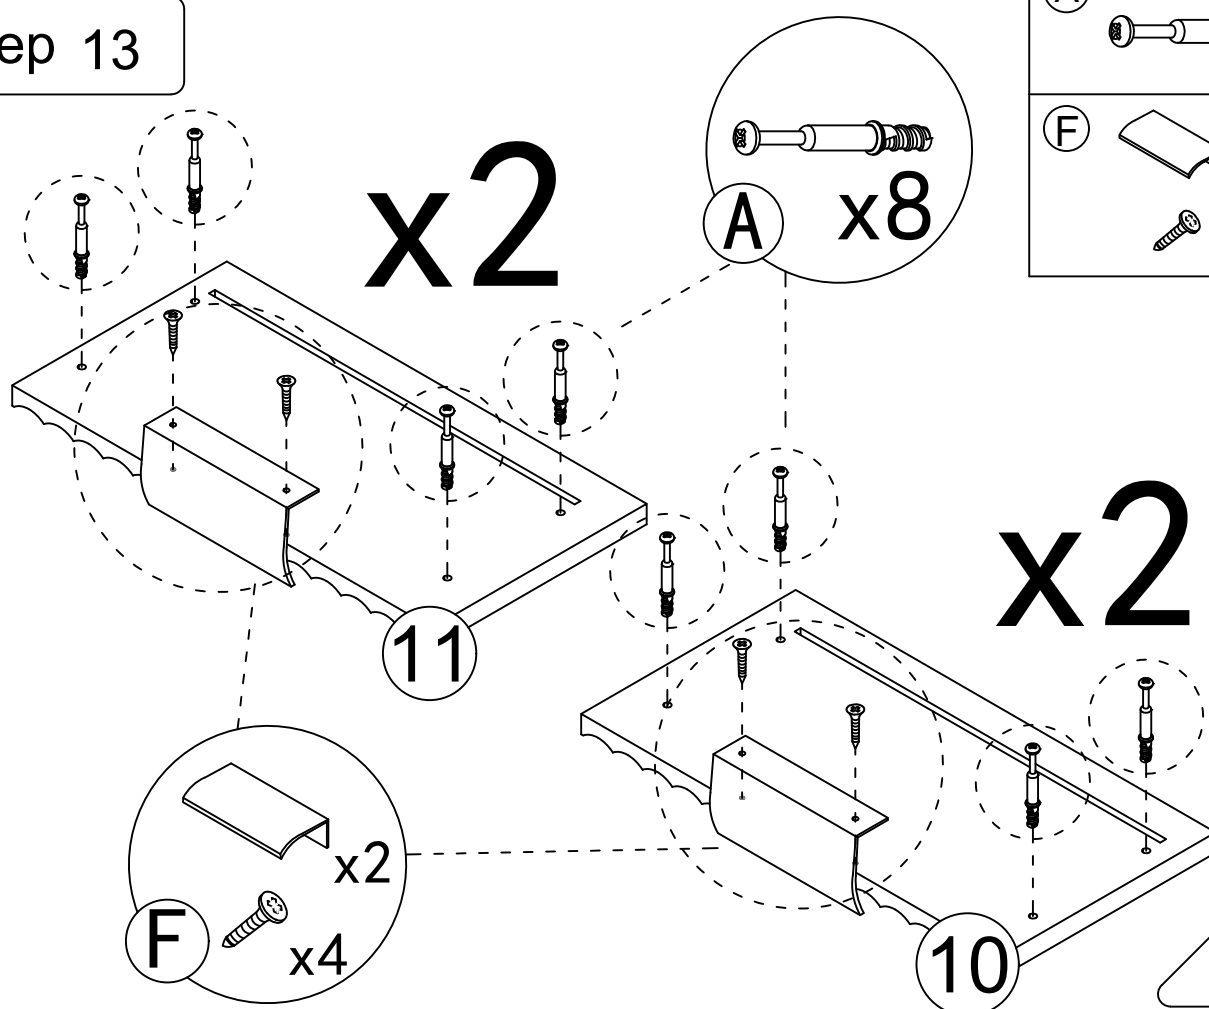


13

Step 14


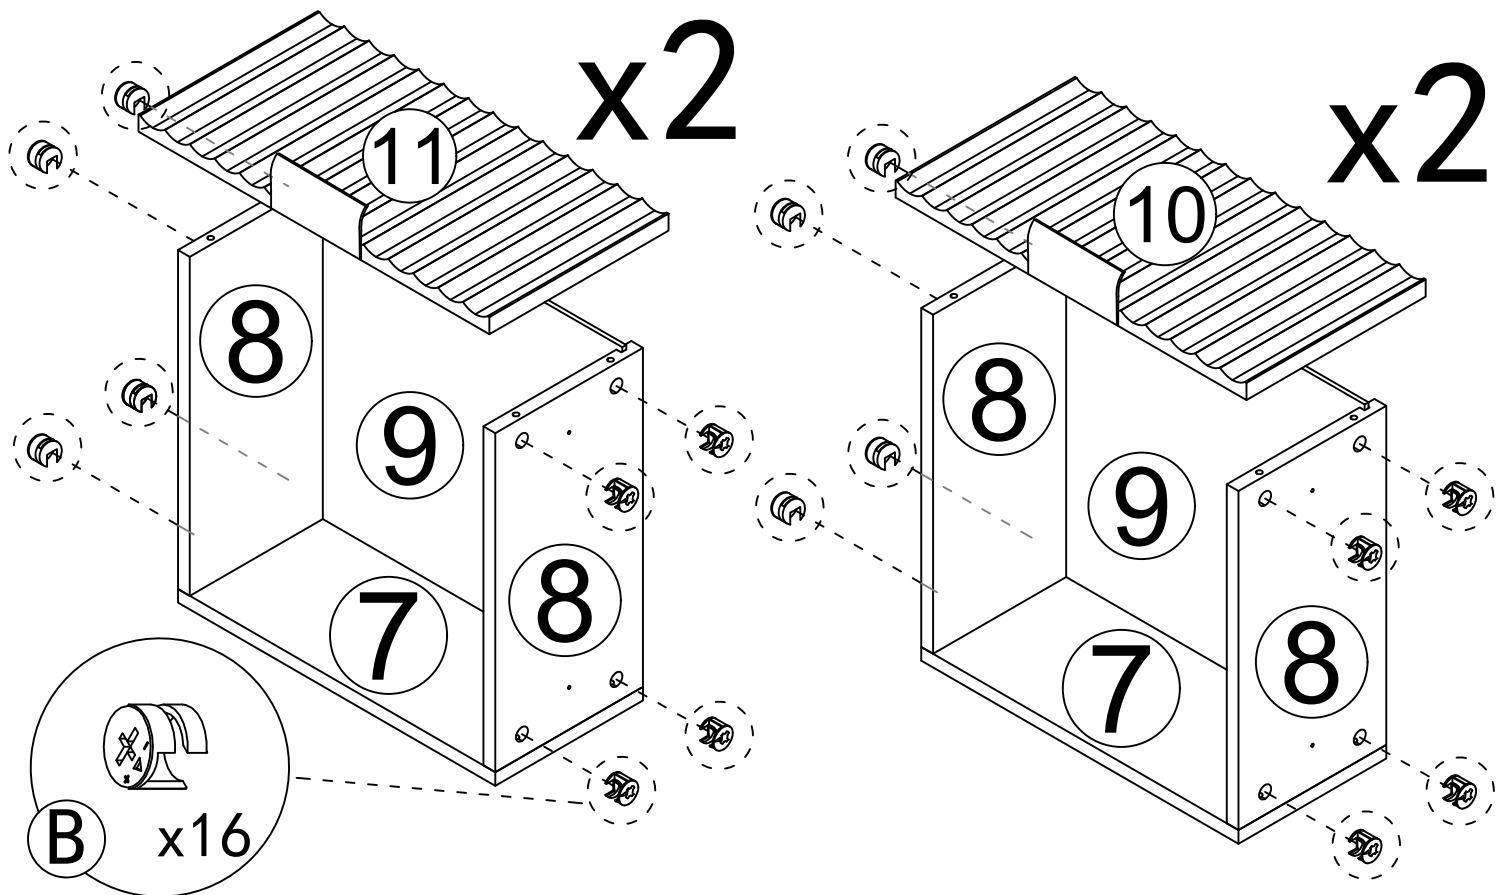


Drawer rail breakdown diagram D

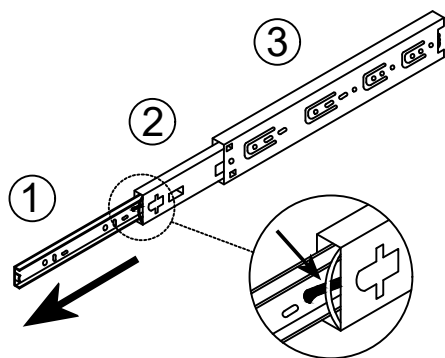


Step 1 : Pull the rails apart

Step 2 : Push the nylon buckle outward ①

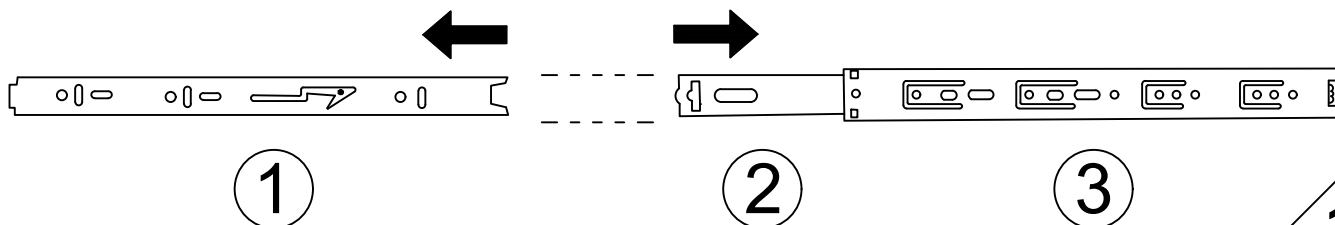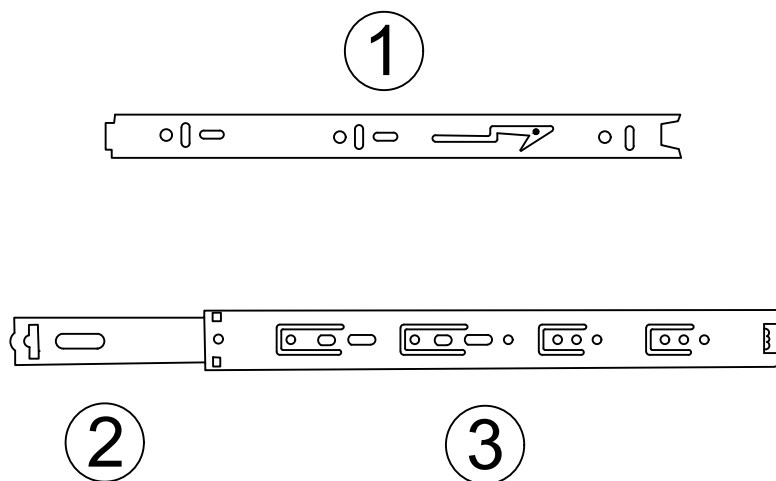


Step 15

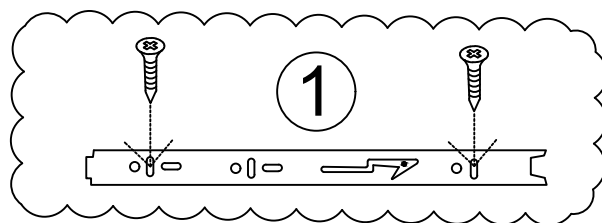


D

x4
x8

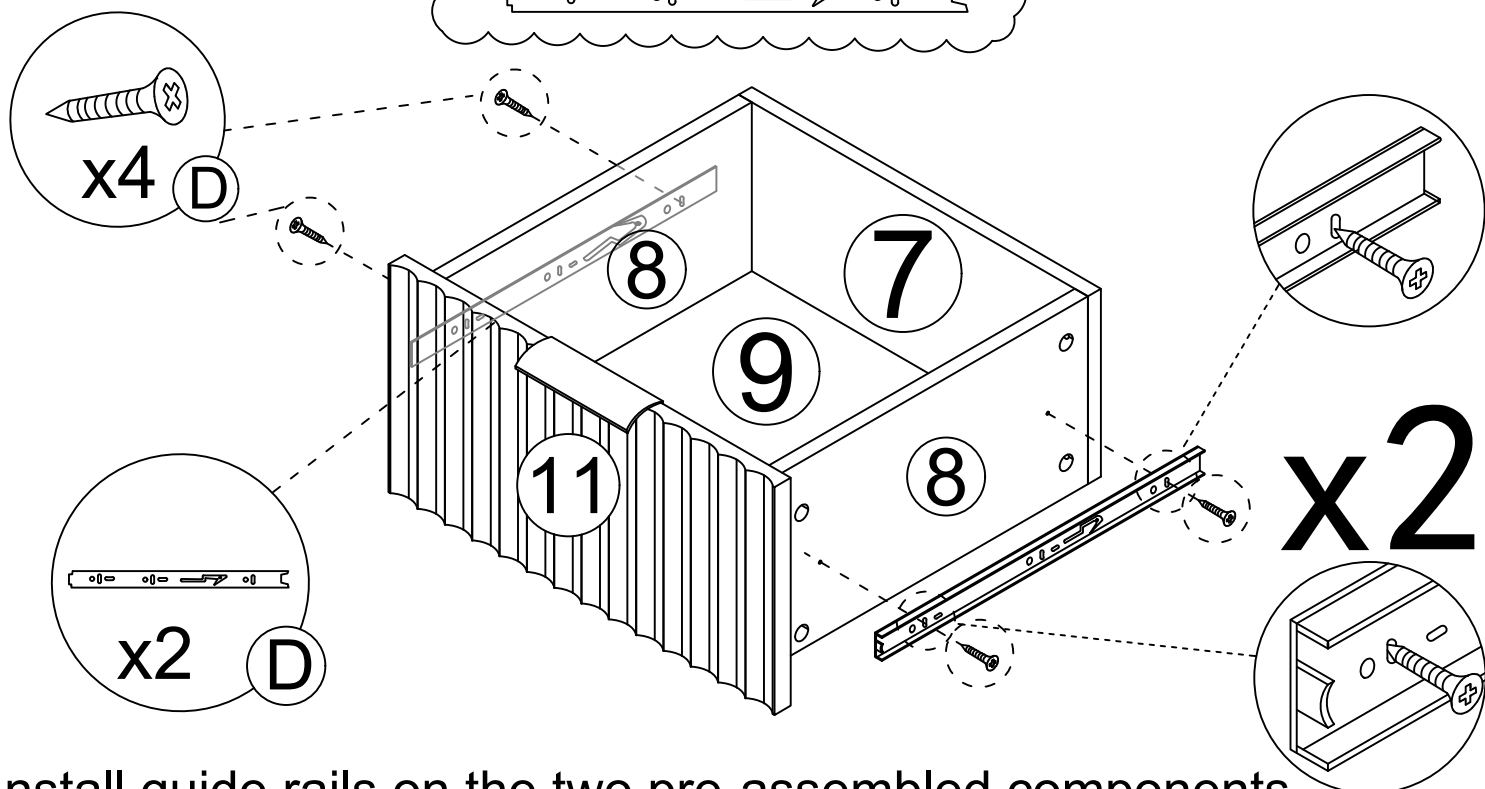


Install guide rails on the two pre-assembled components separately, following the same installation procedure.

Step 16



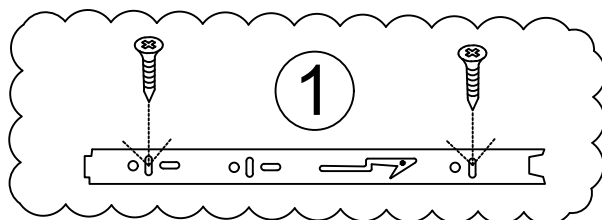



D

x4
x8



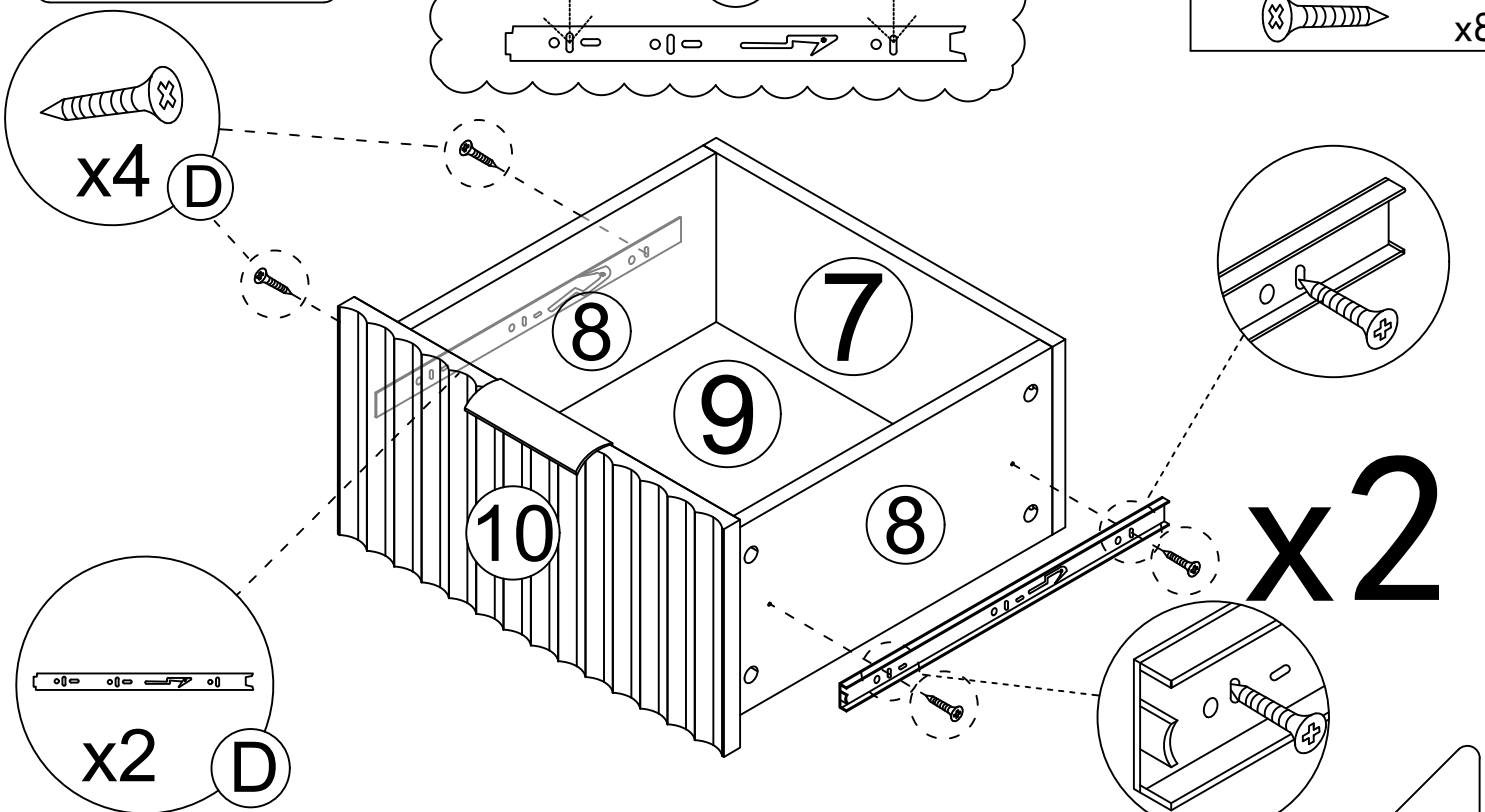


Install guide rails on the two pre-assembled components separately, following the same installation procedure.




A		90pcs	D		8pcs 24pcs
B		90pcs	C		12pcs
E		4pcs 12pcs	I		12pcs

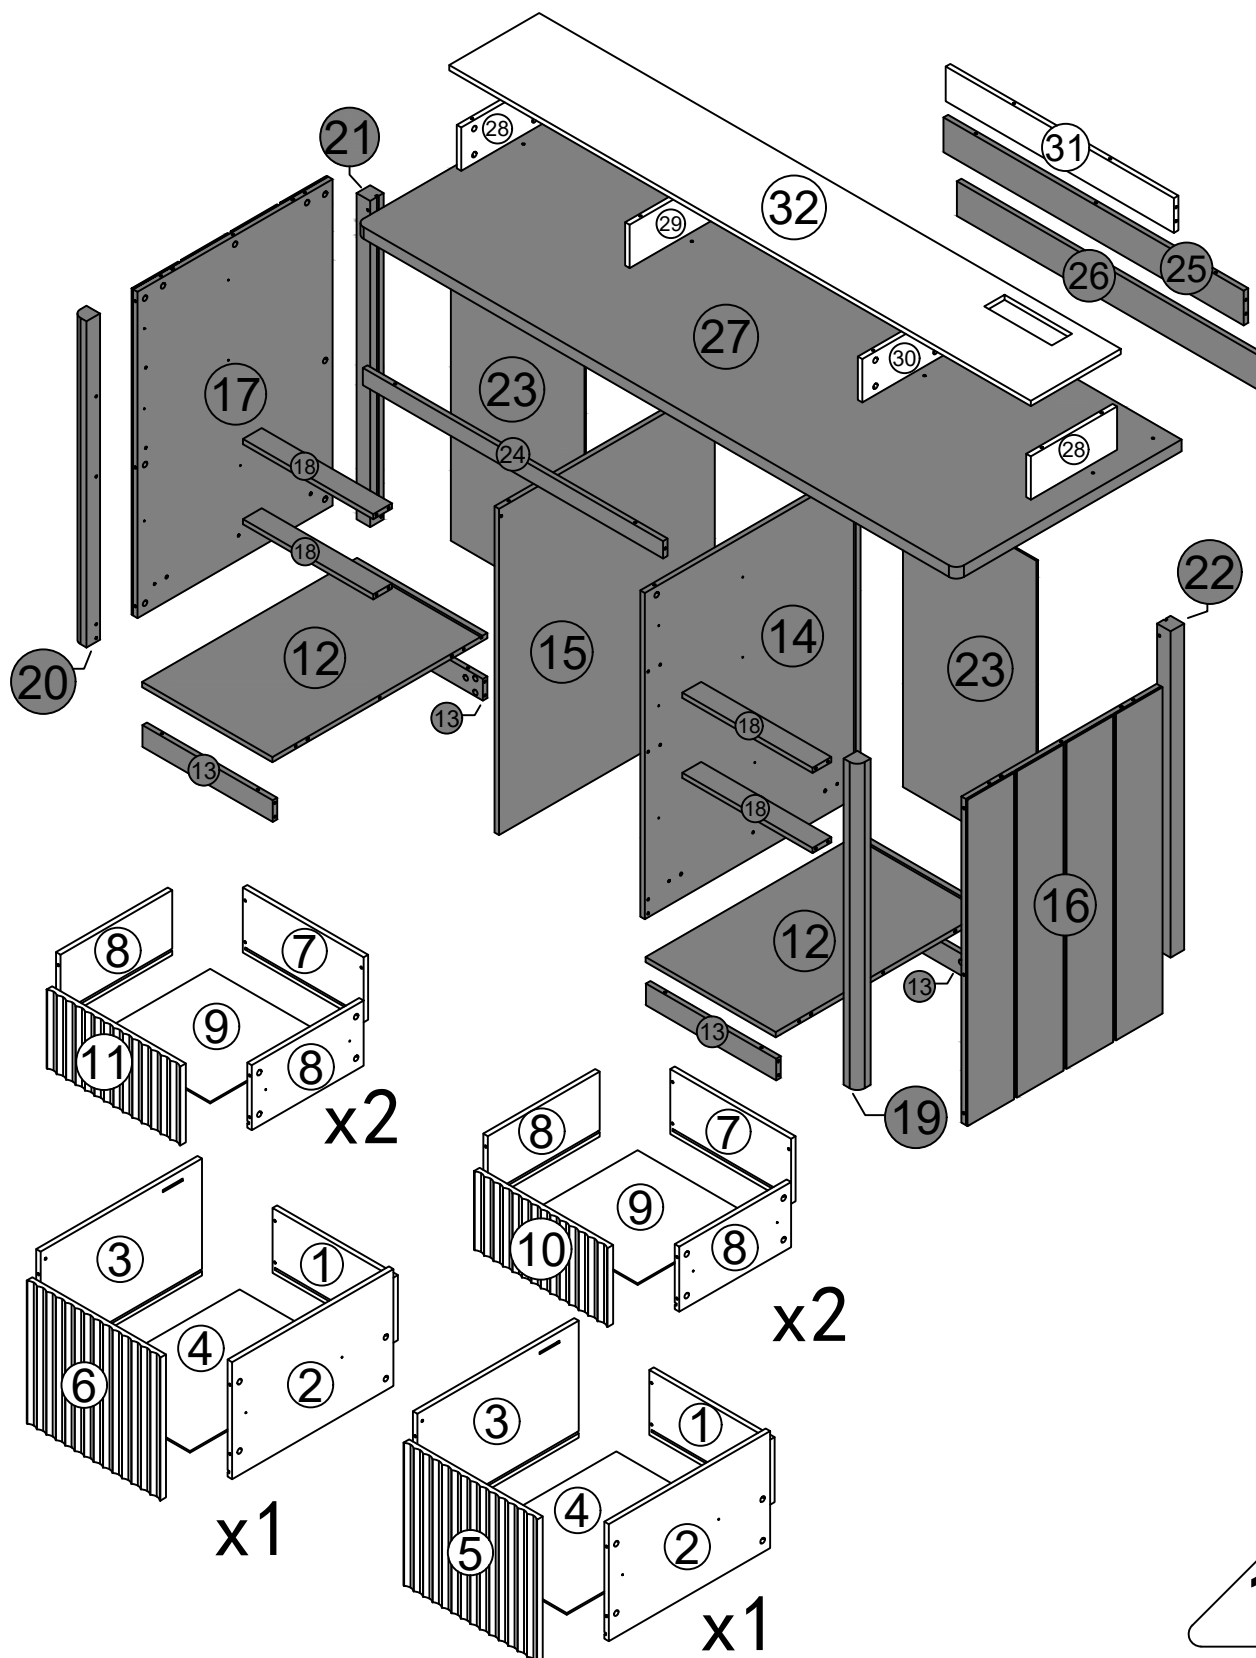


Step 17

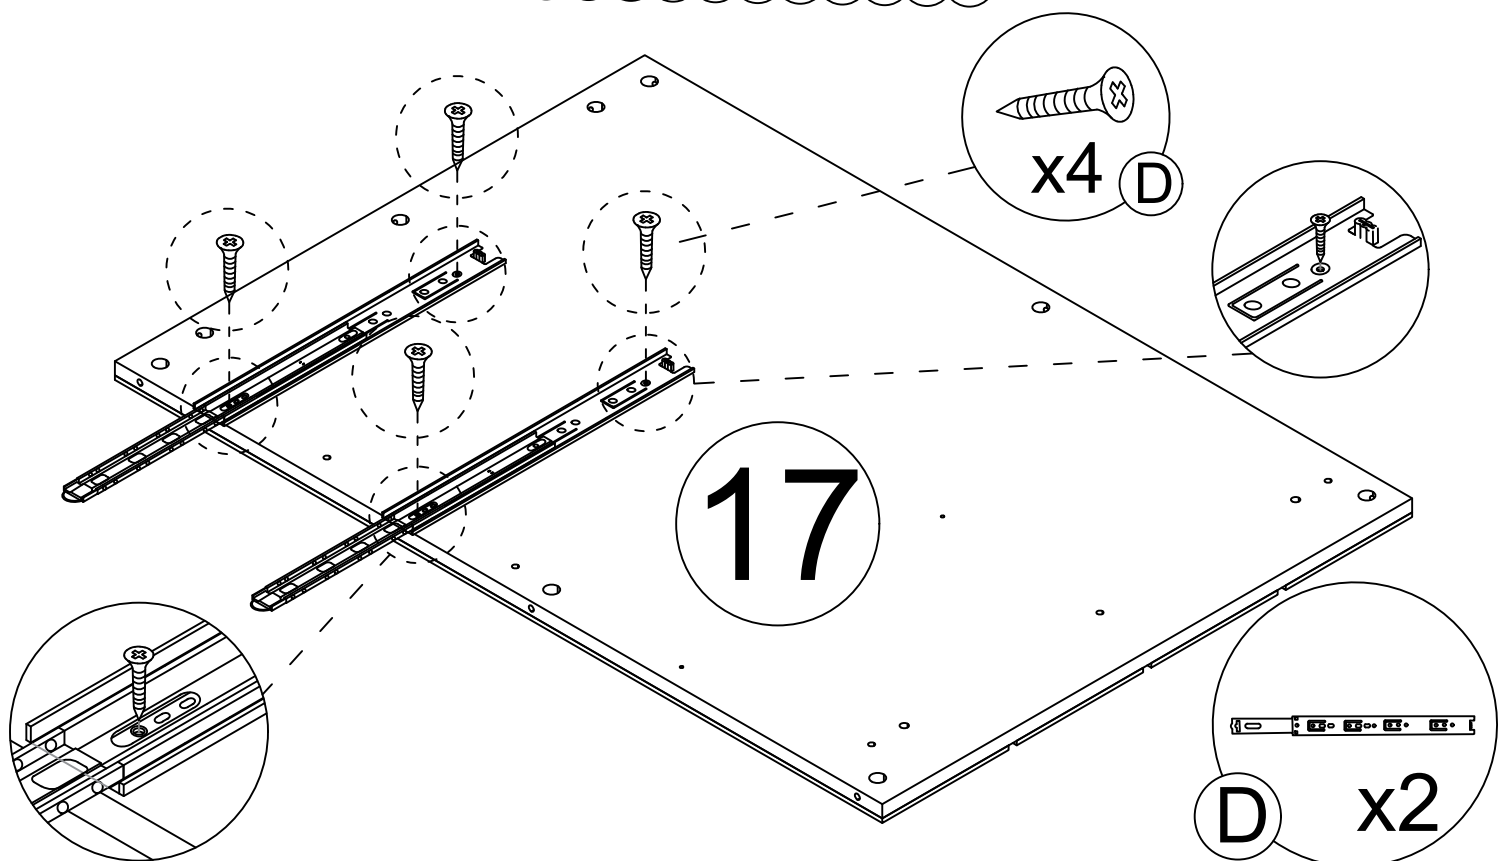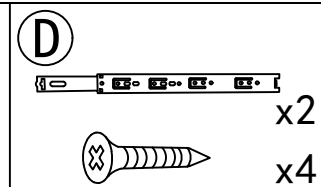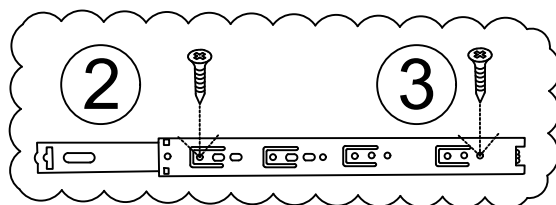

Step 18

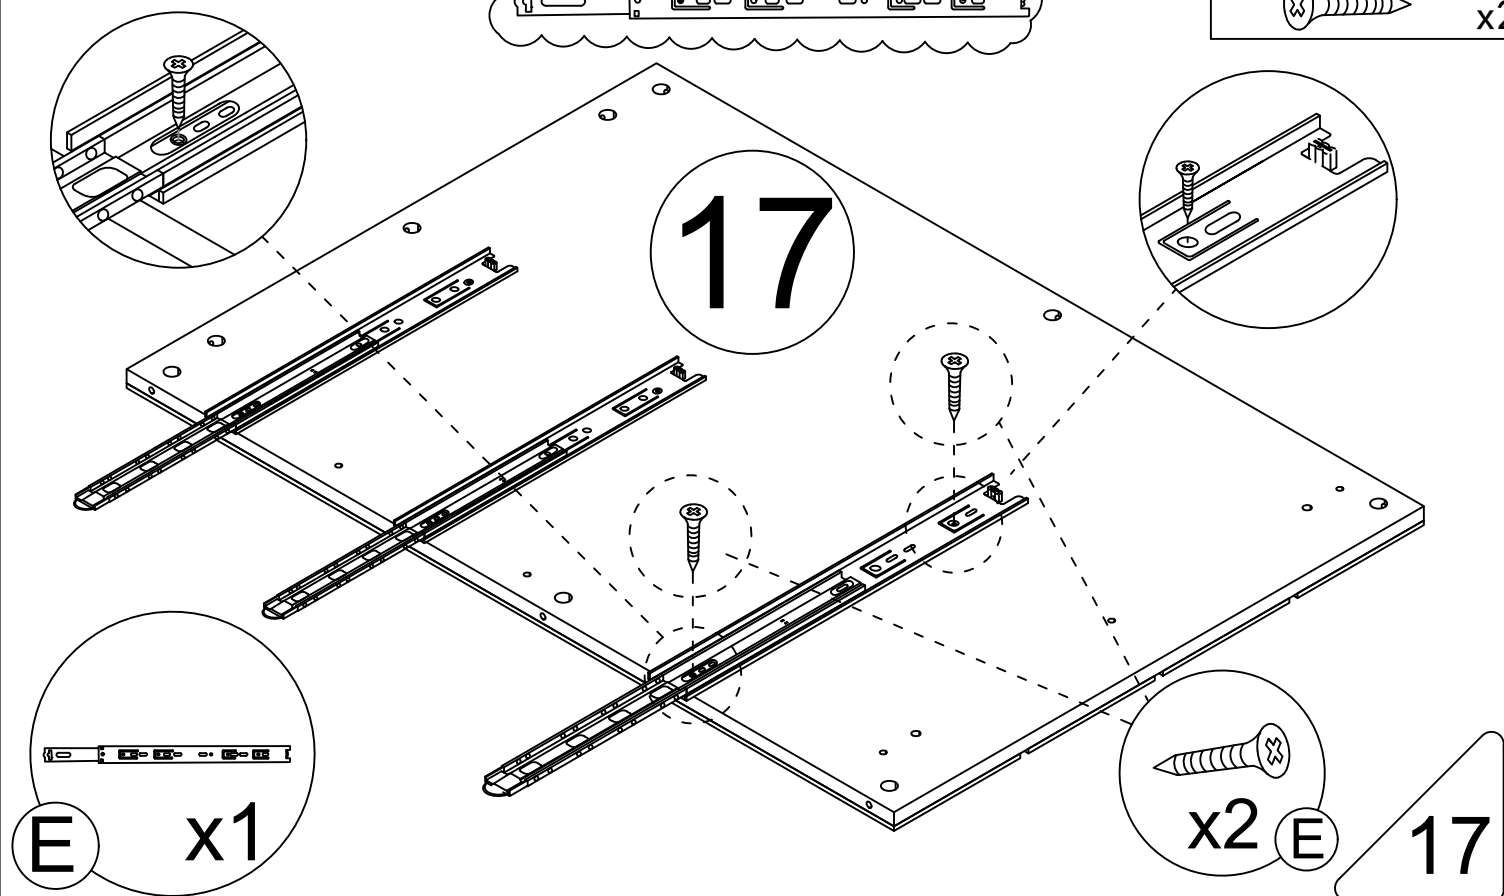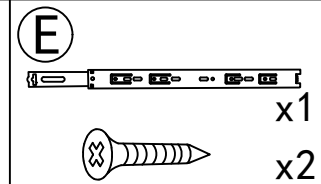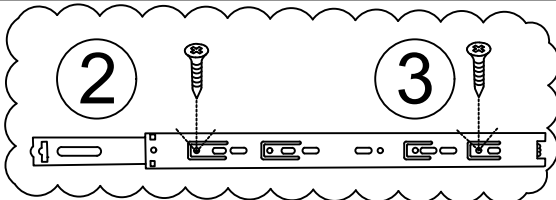


Step 19



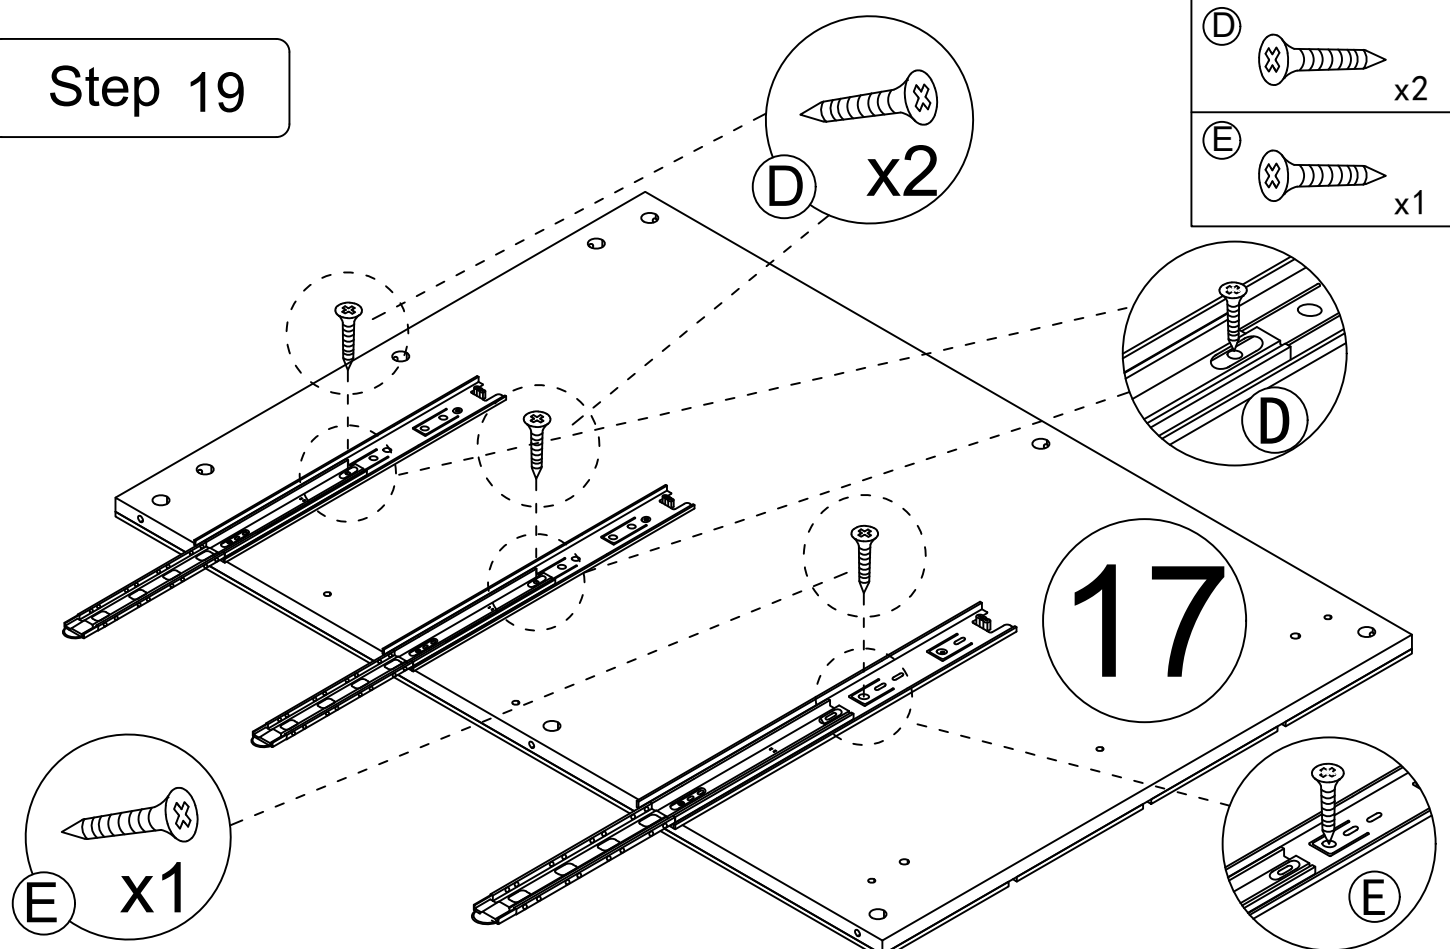


This hole is for strengthening fixed hole customers can choose to install according to their needs.




Step 20

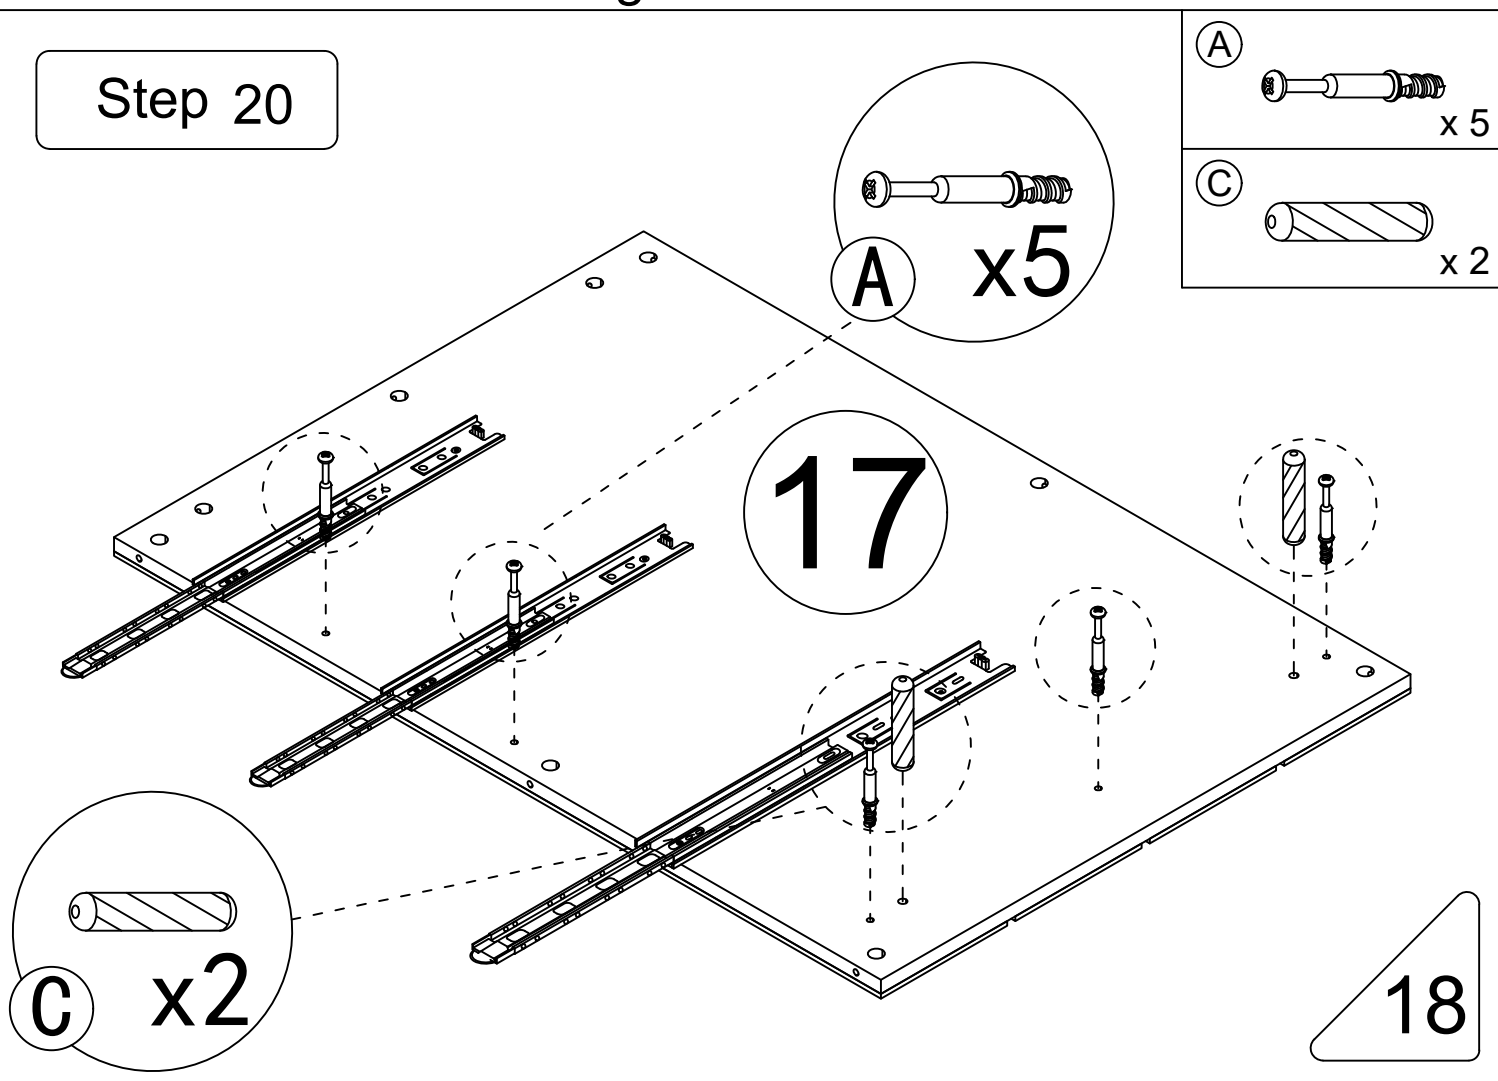


Step 21

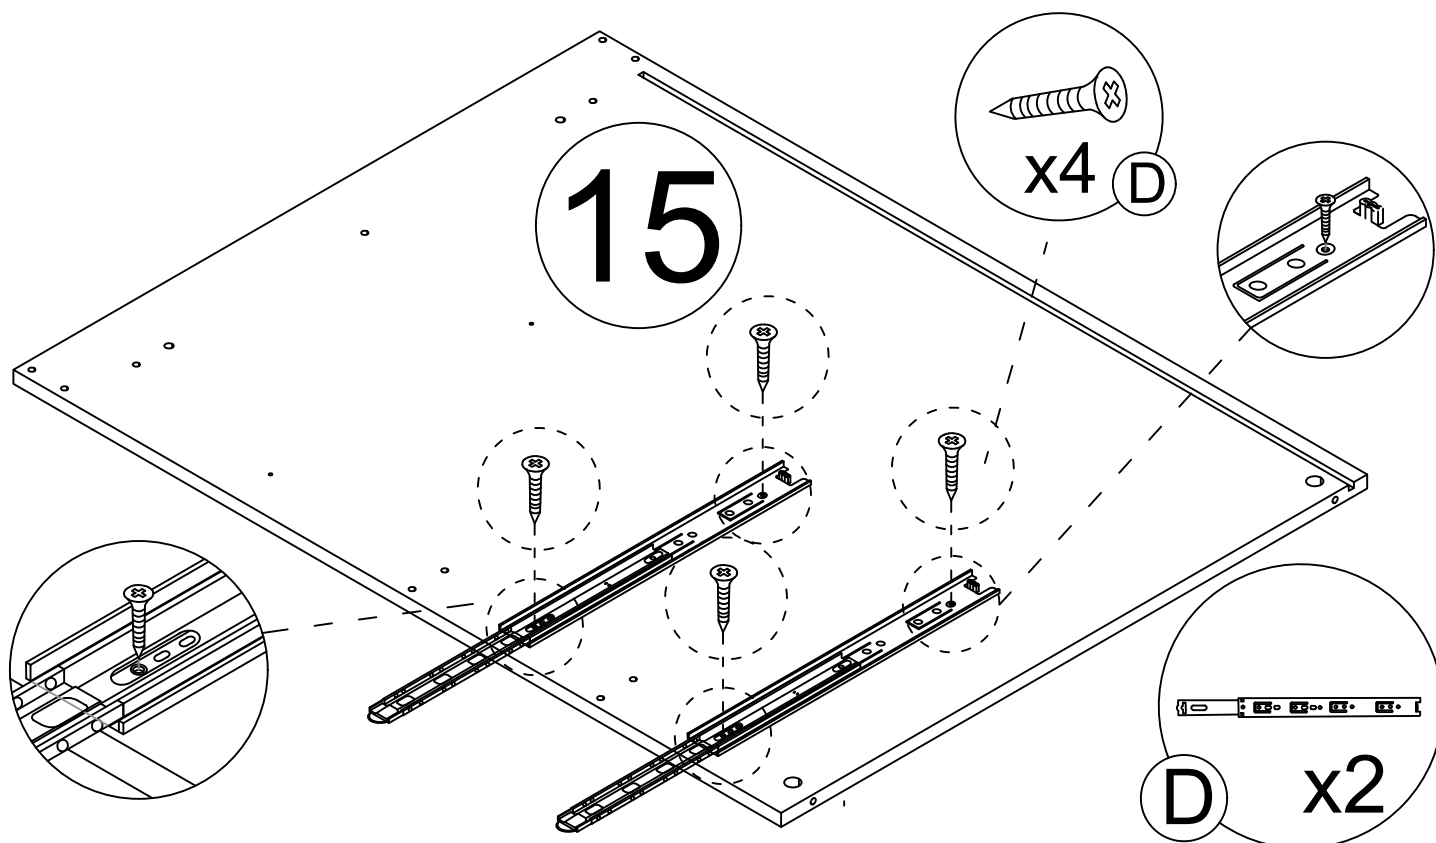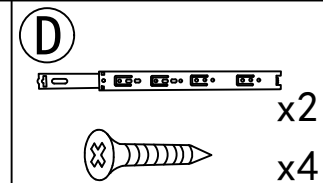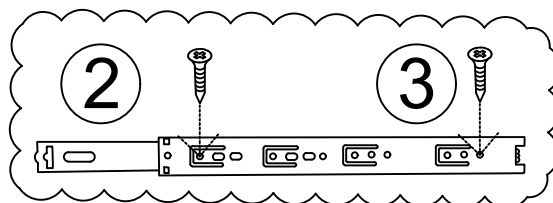

Step 22

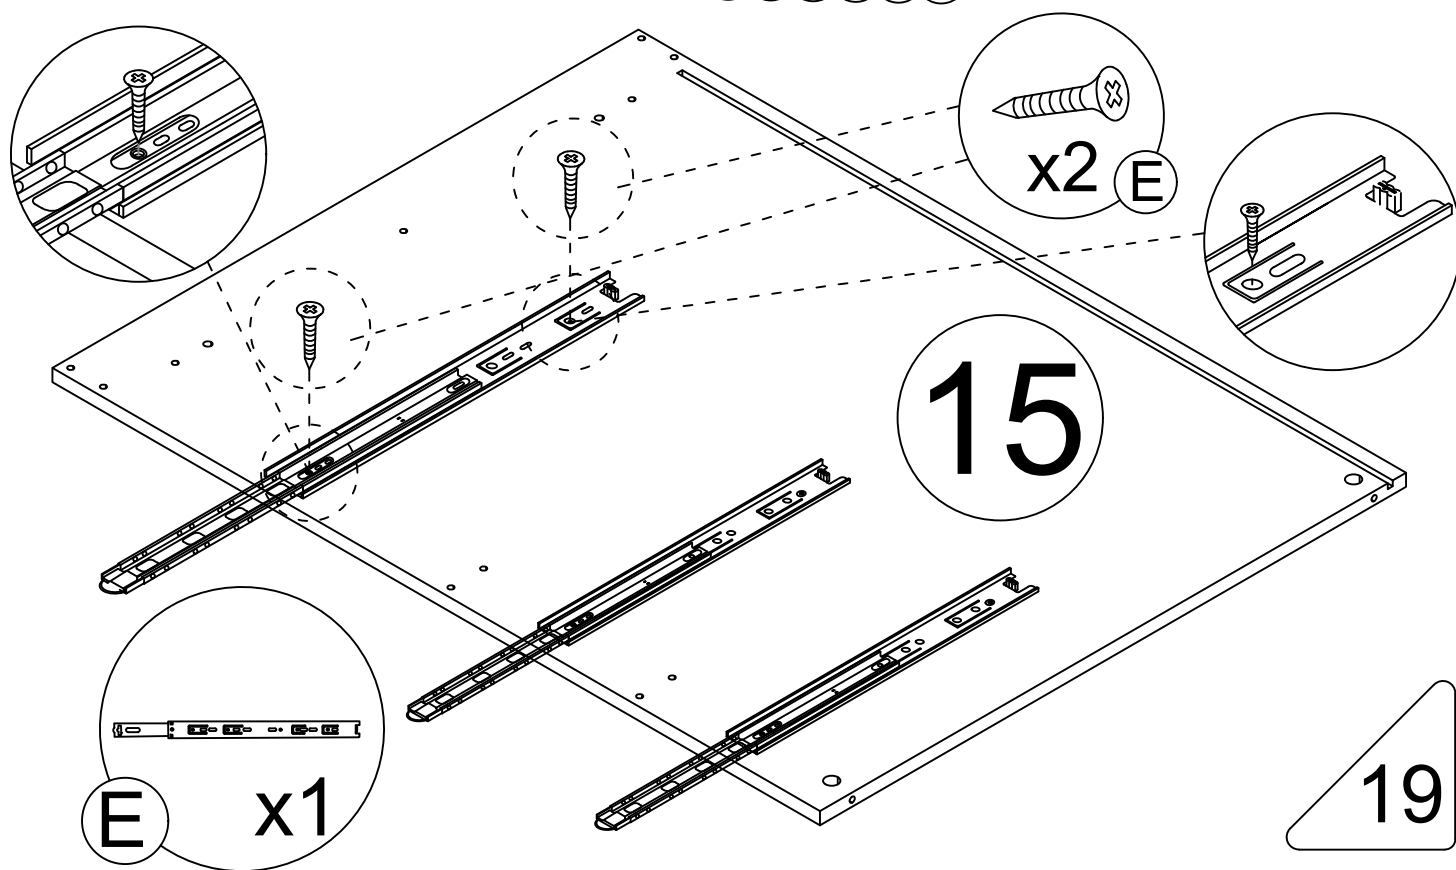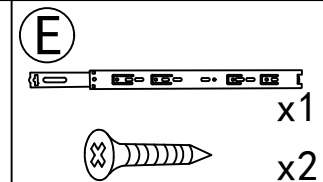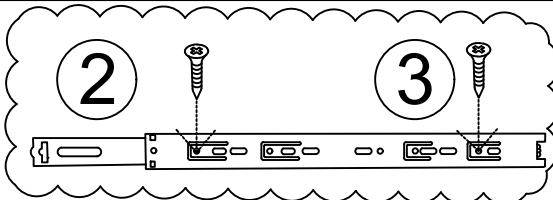


Step 23

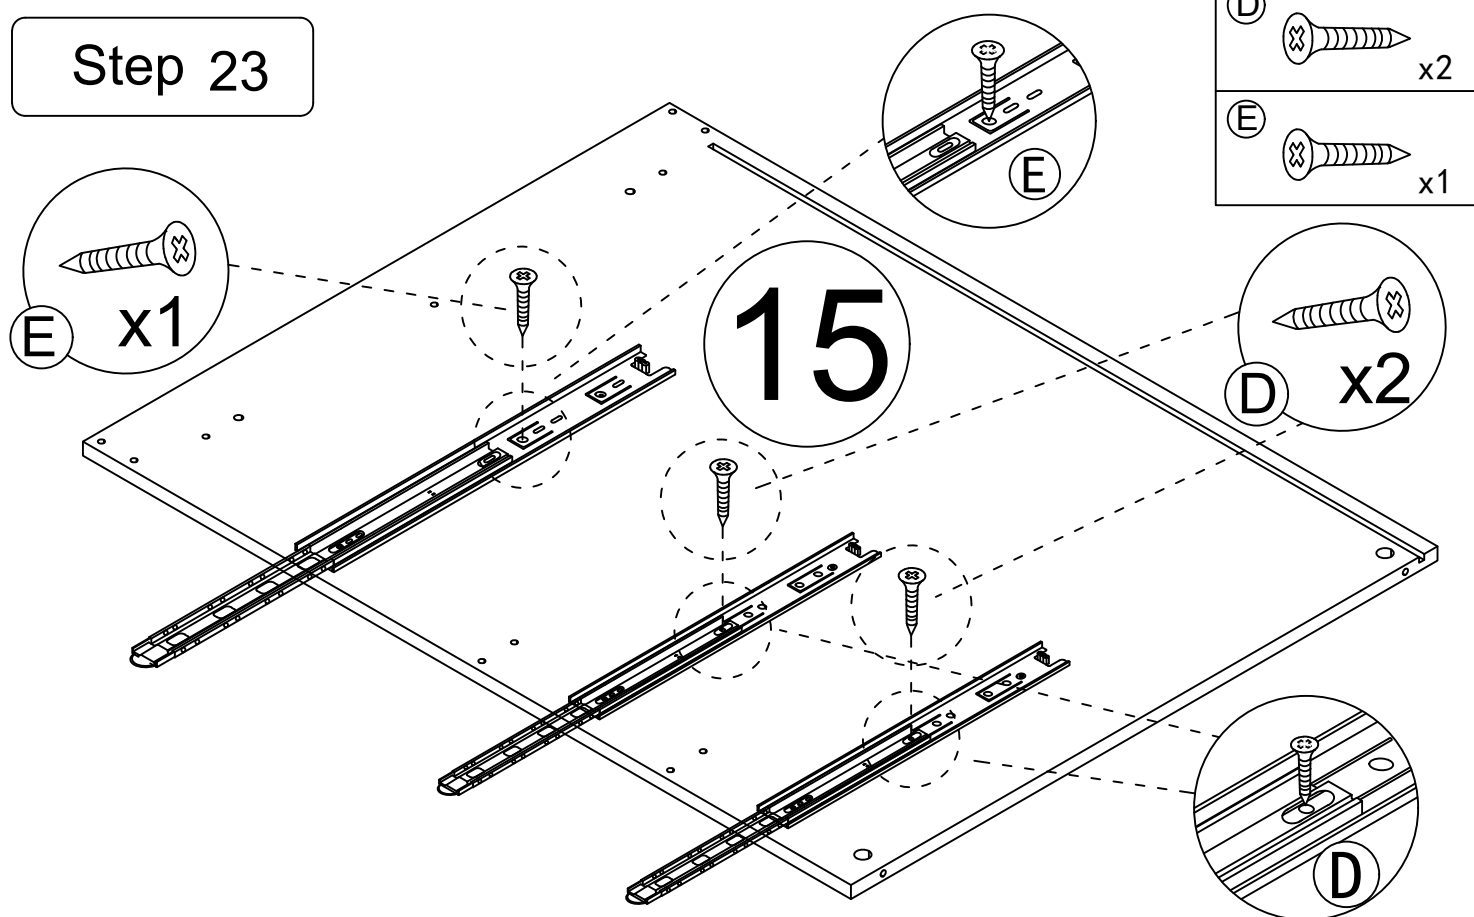

This hole is for strengthening fixed hole customers can choose to install according to their needs.

Step 24

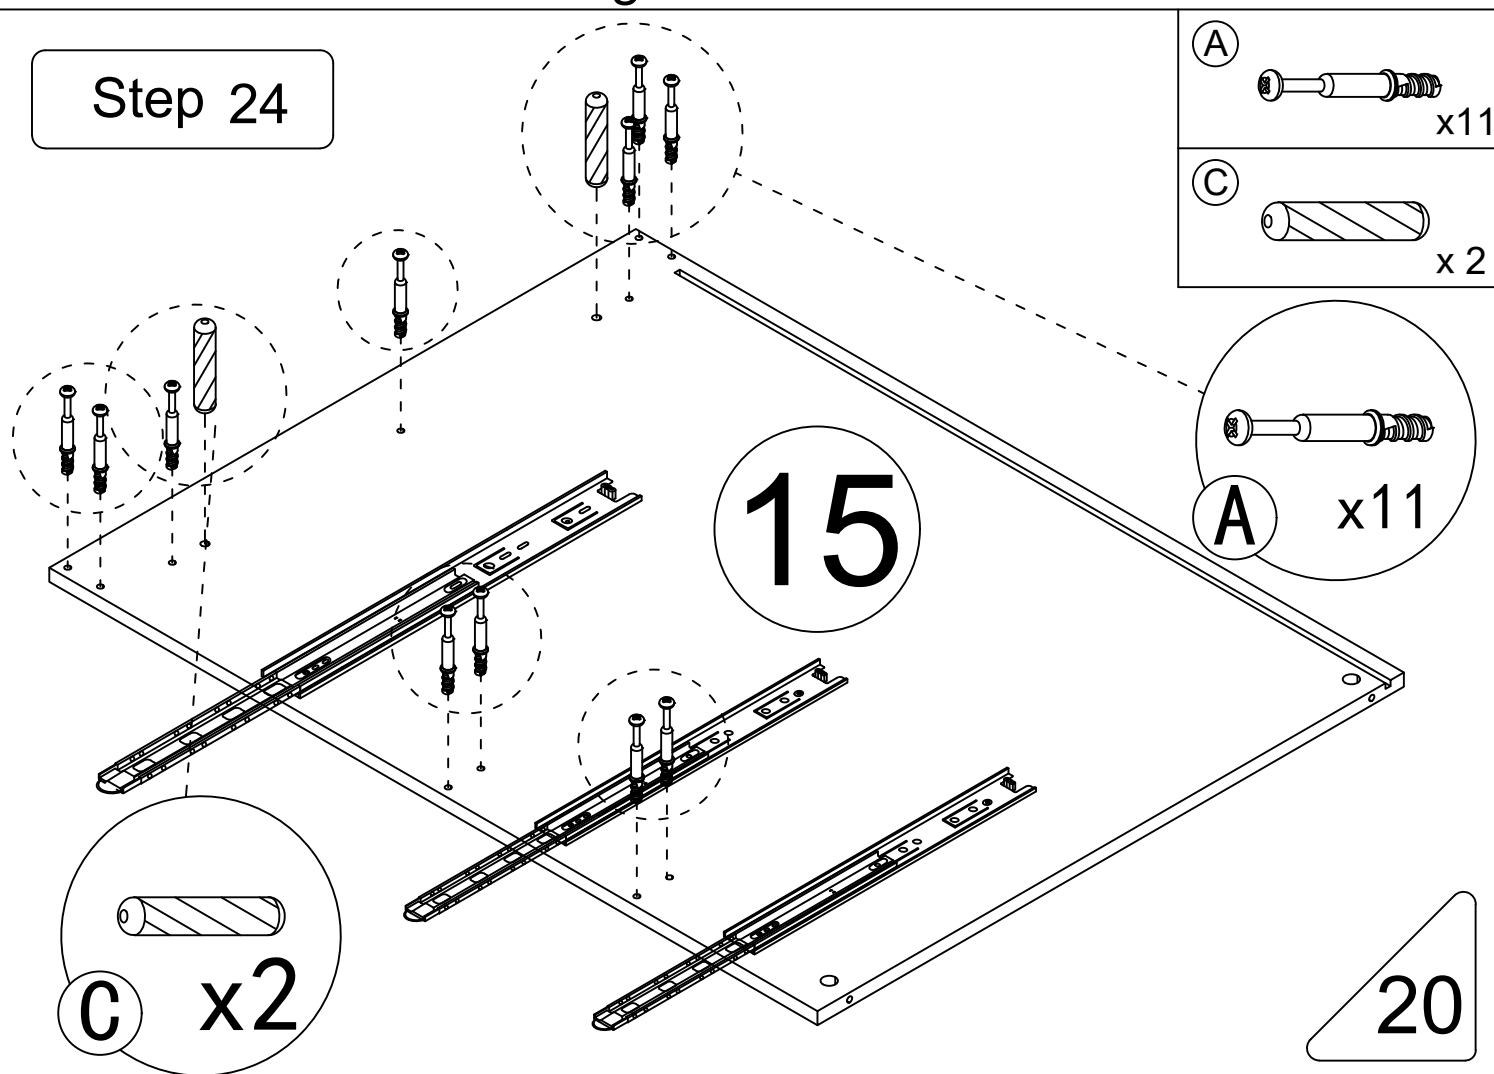


Step 25


2

3

D



x2



x4

x4

D

14

D

x2

Step 26


2

3

E



x1



x2

14

E


x1

x2

E


21

Step 27




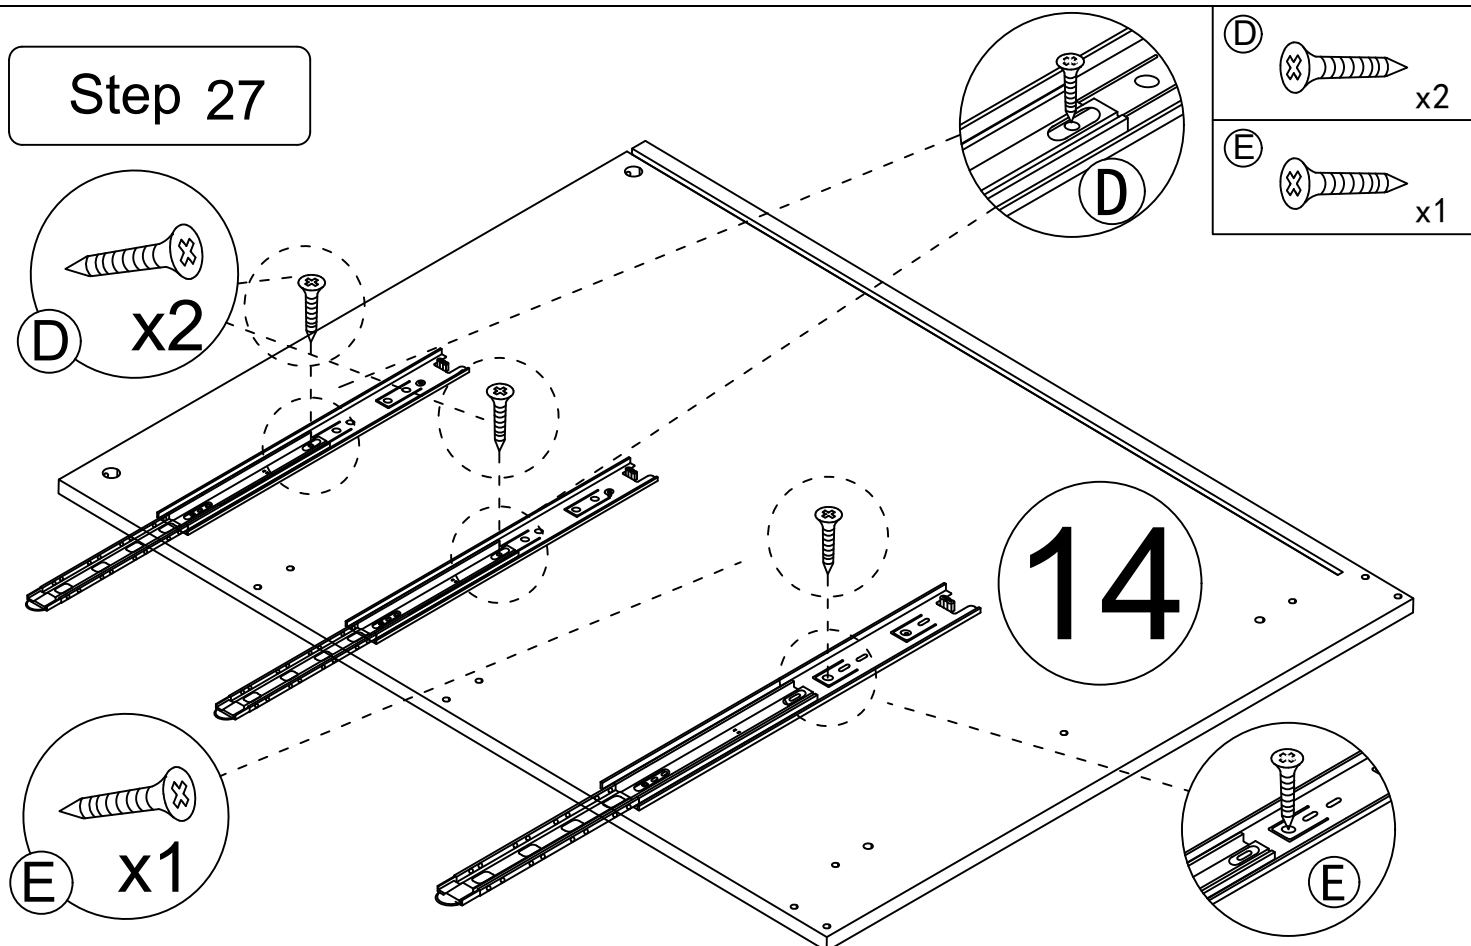


This hole is for strengthening fixed hole customers can choose to install according to their needs.





Step 28

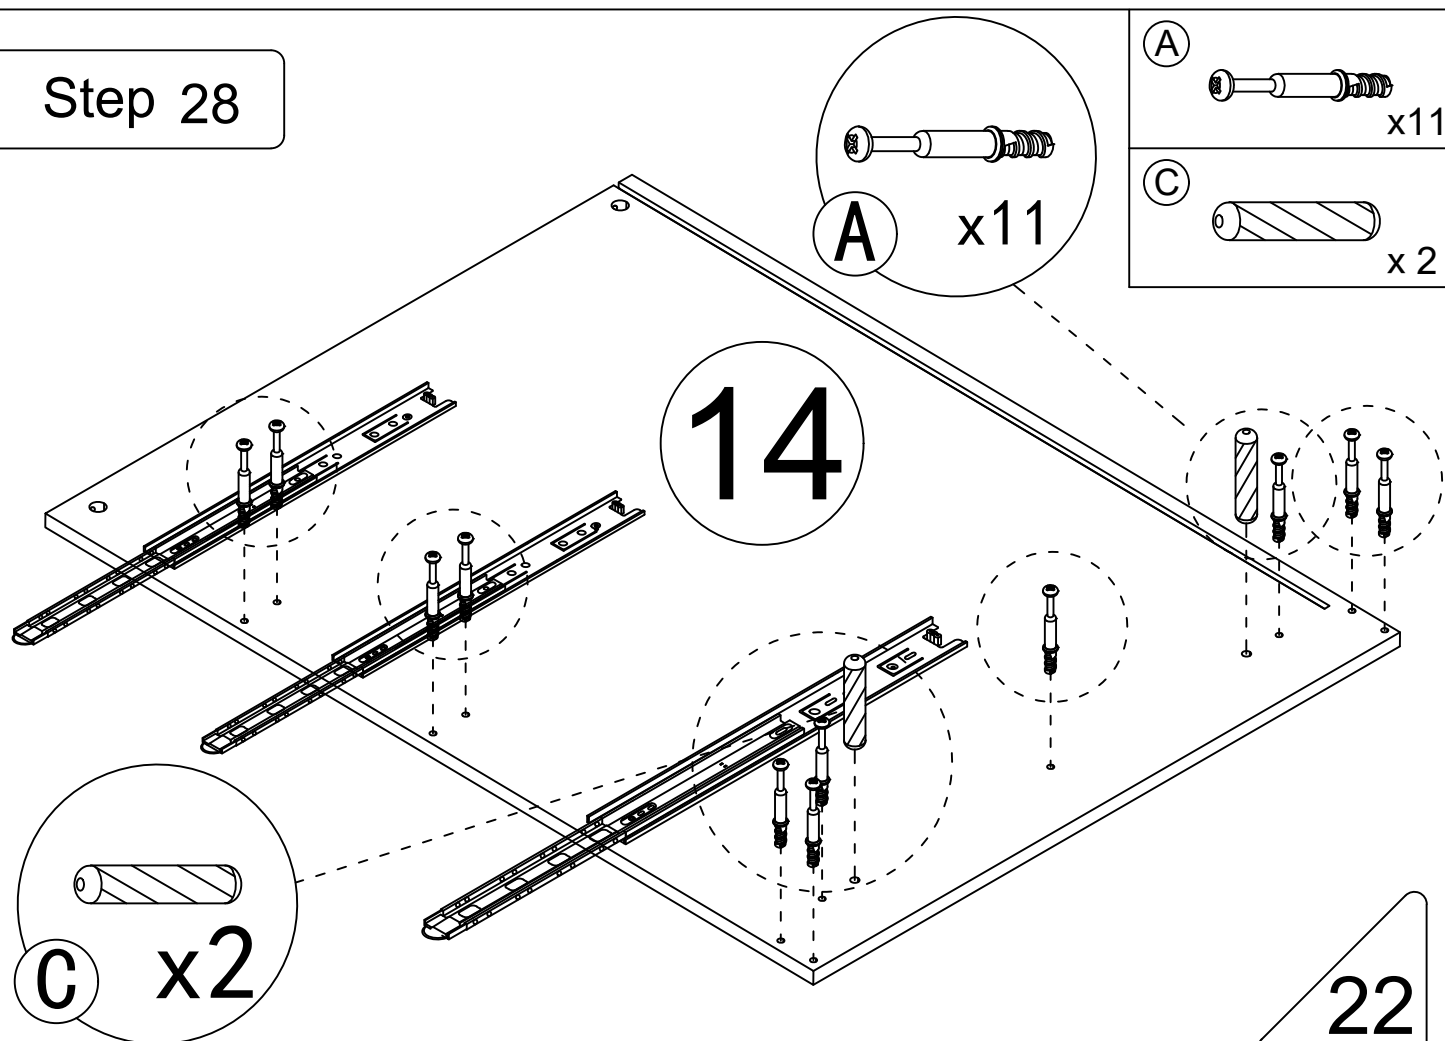


Step 29

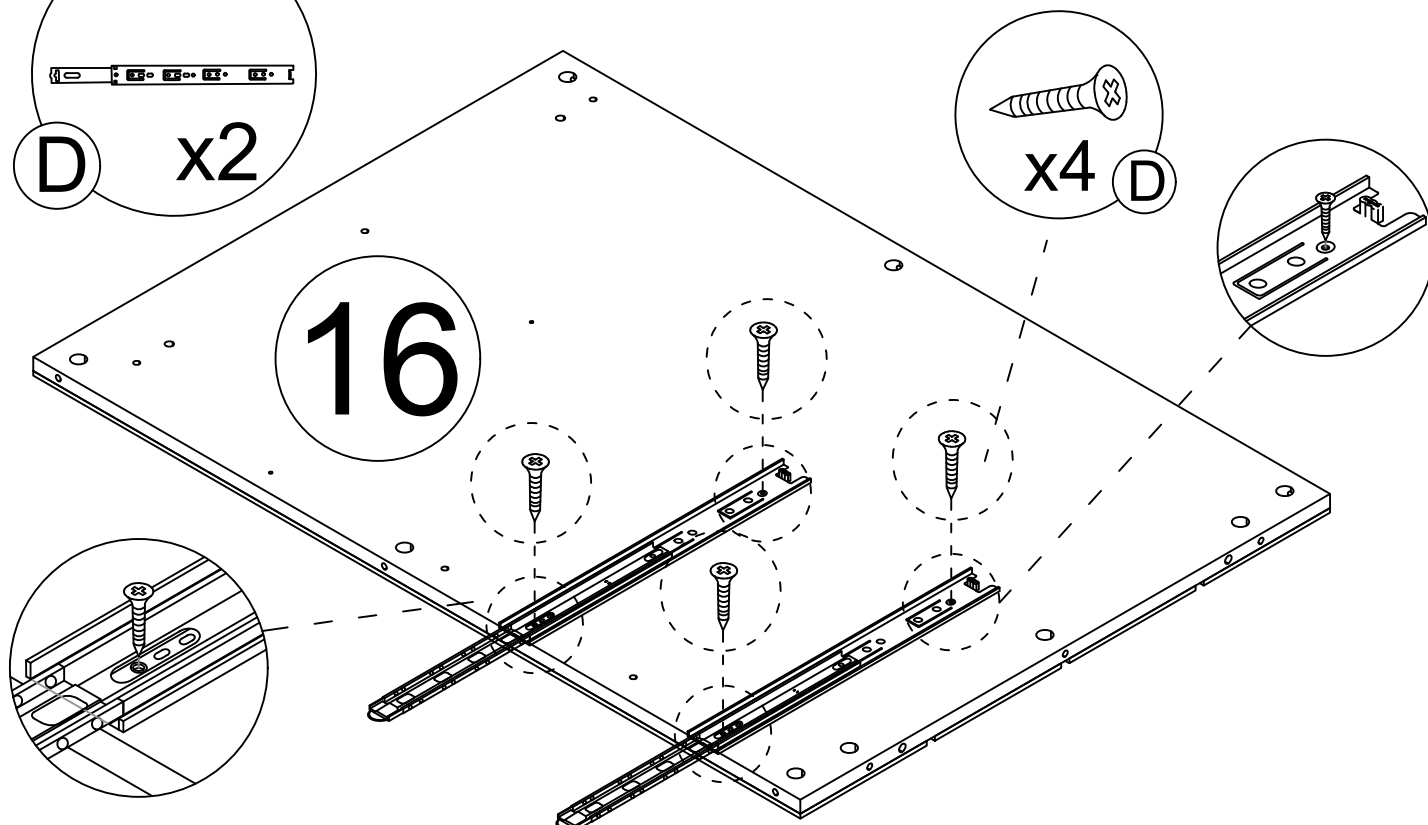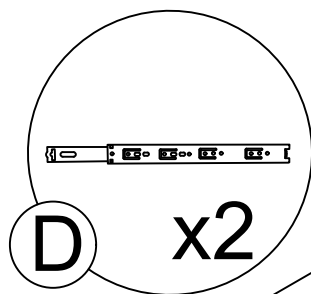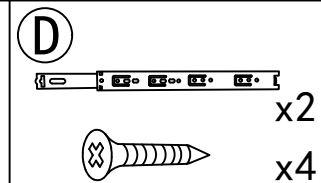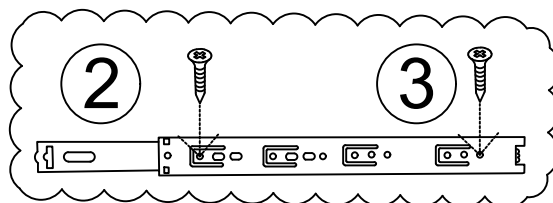


Step 30

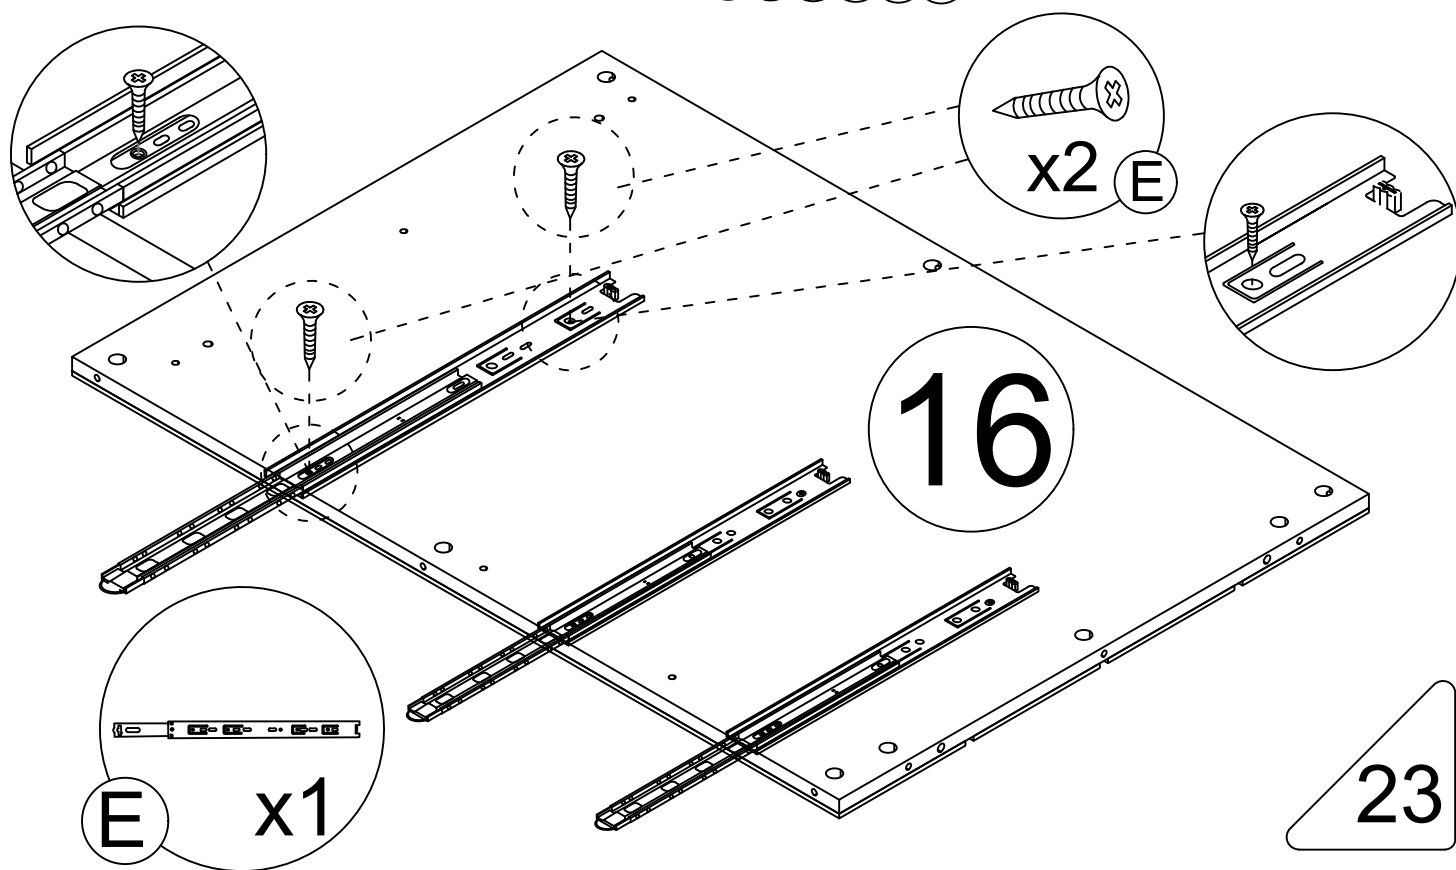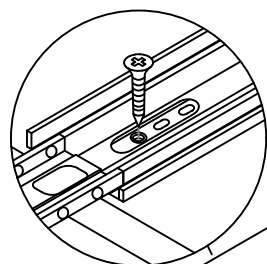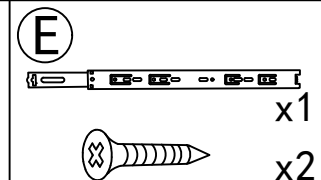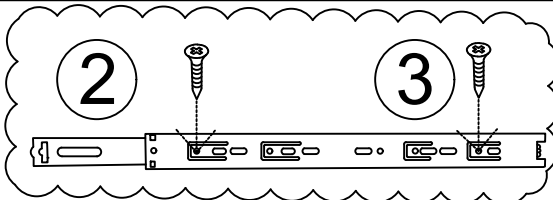

Step 31

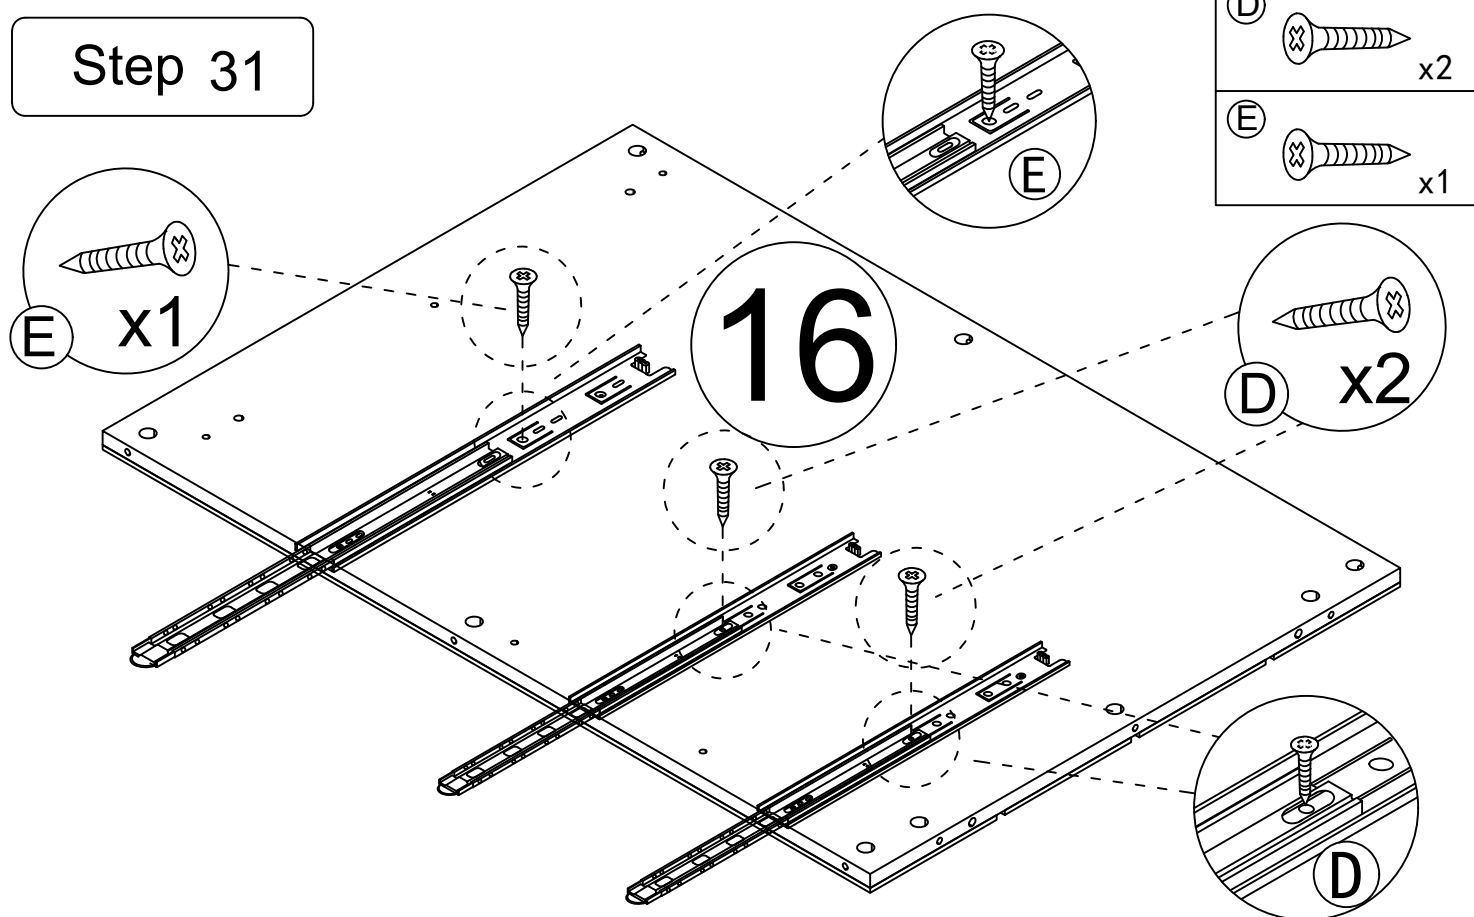


Step 32

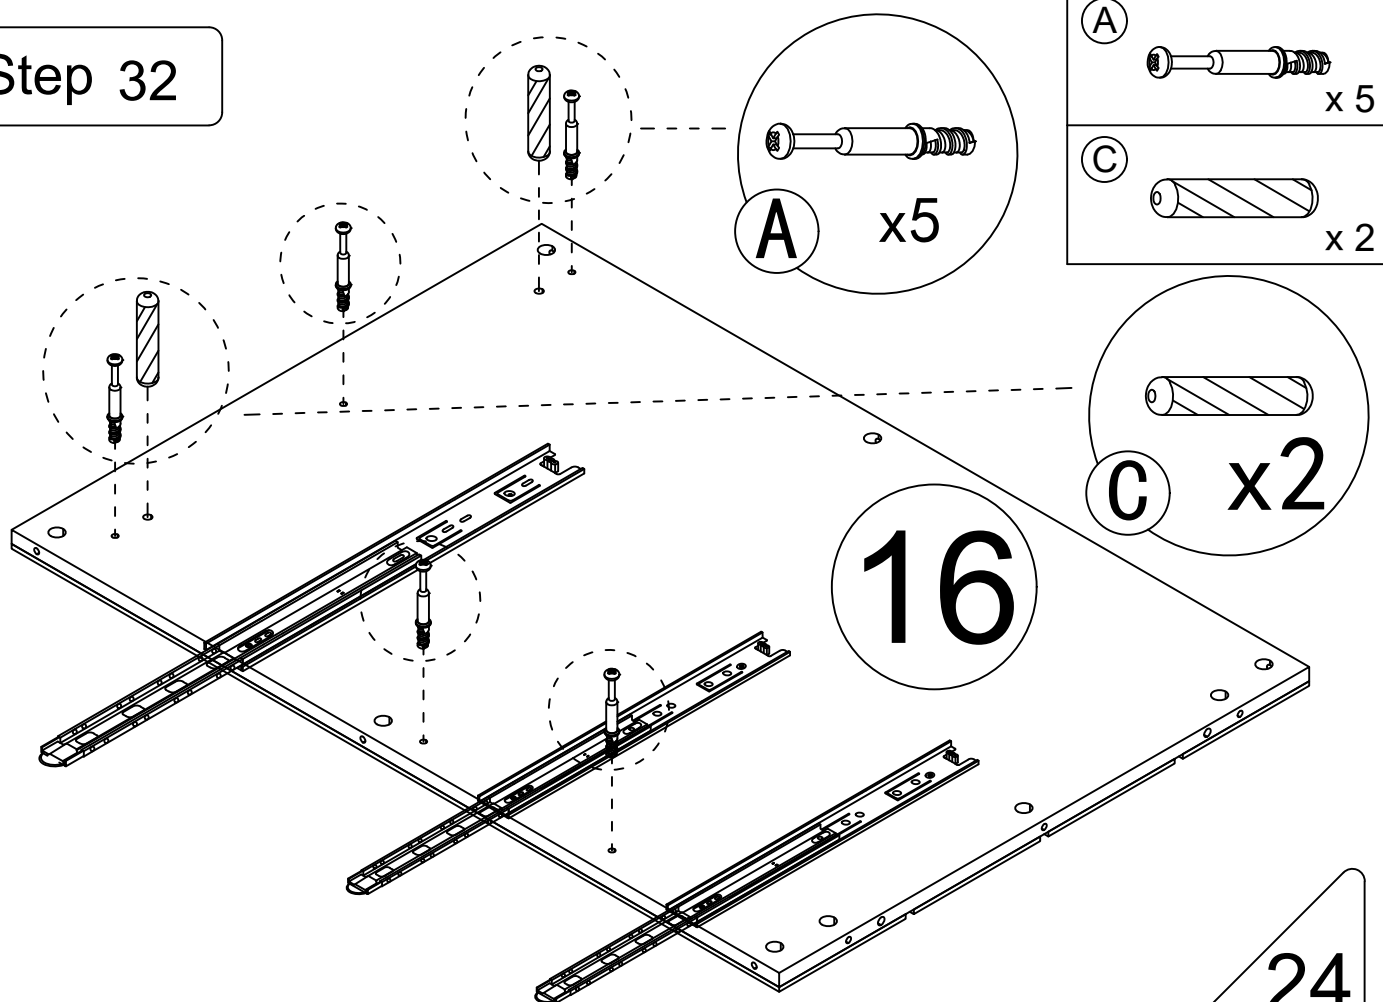


Step 33

(A)



x12

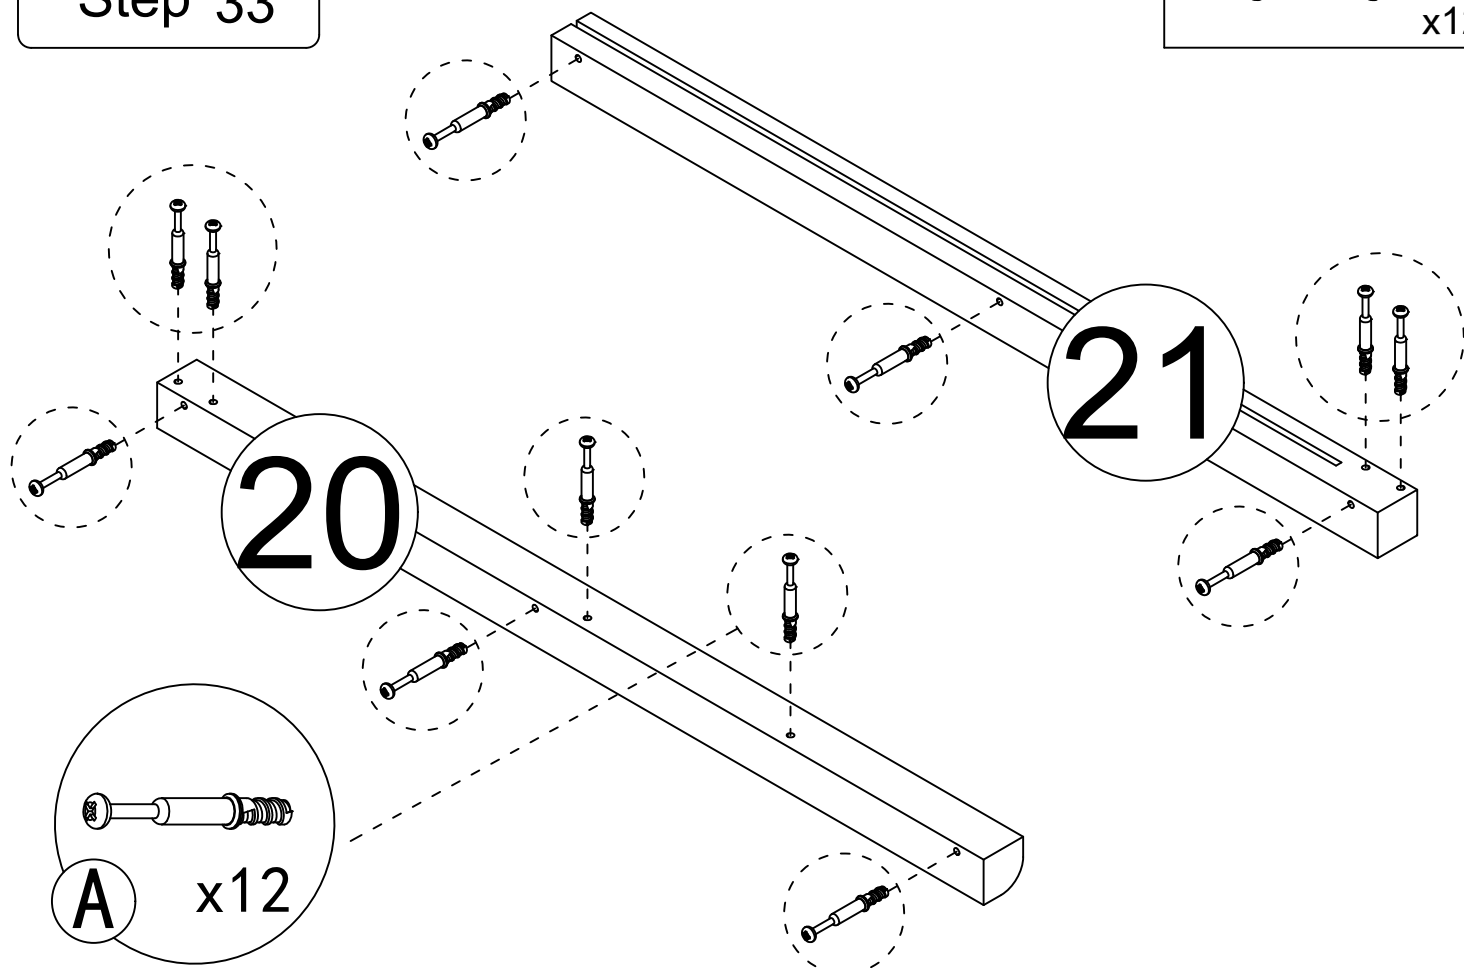


Step 34

(B)



x6

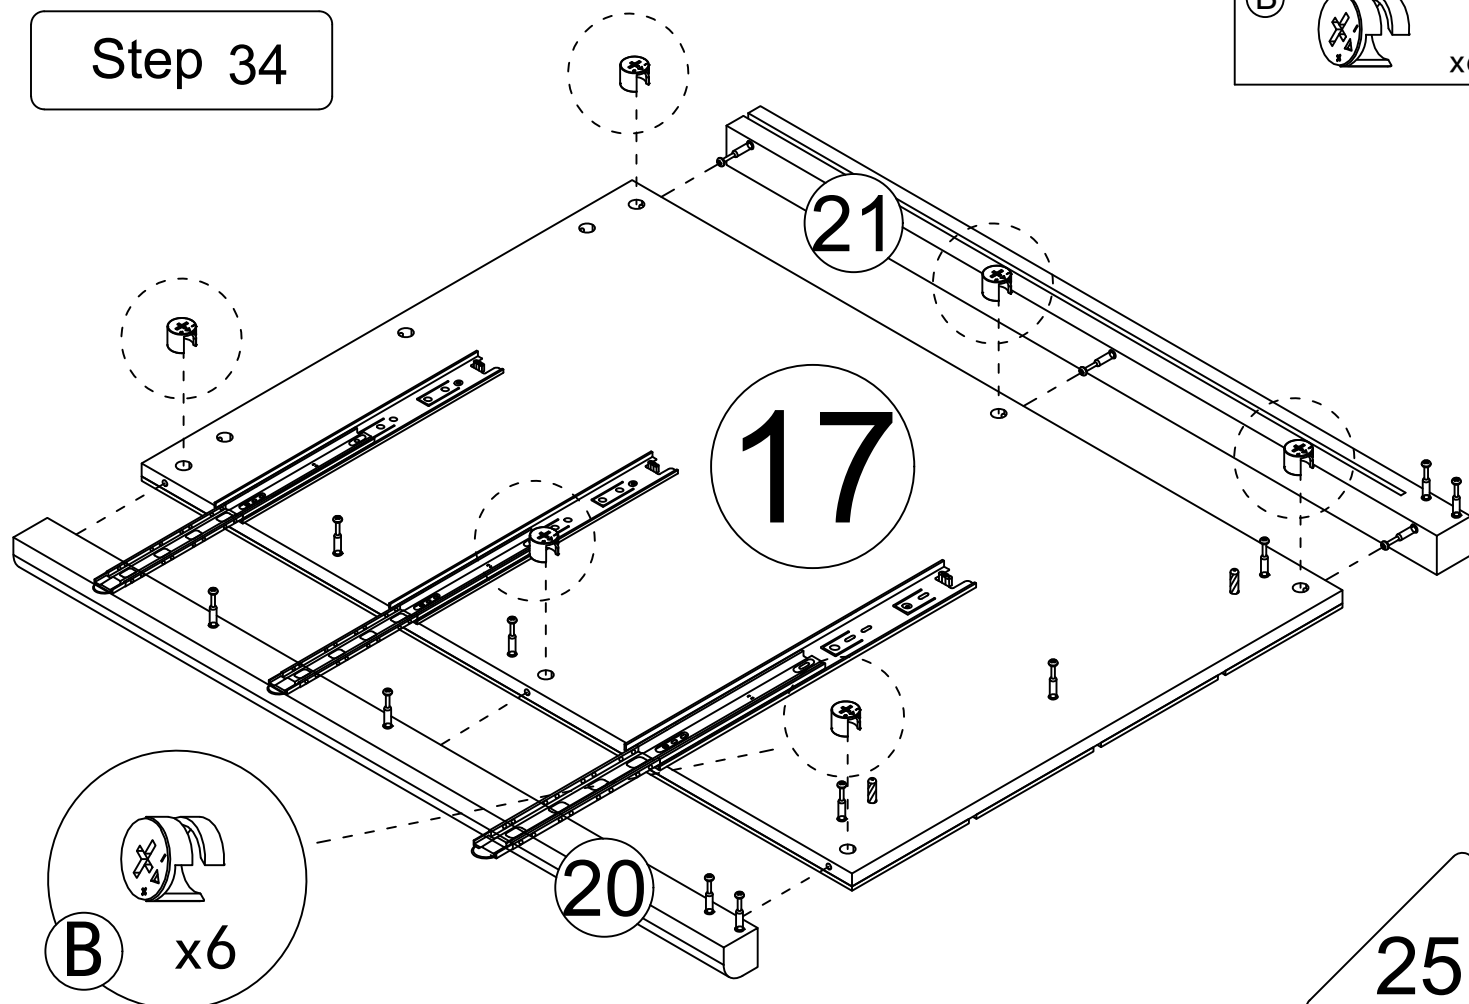


(B)

x6


25

Step 35

(A)



x12

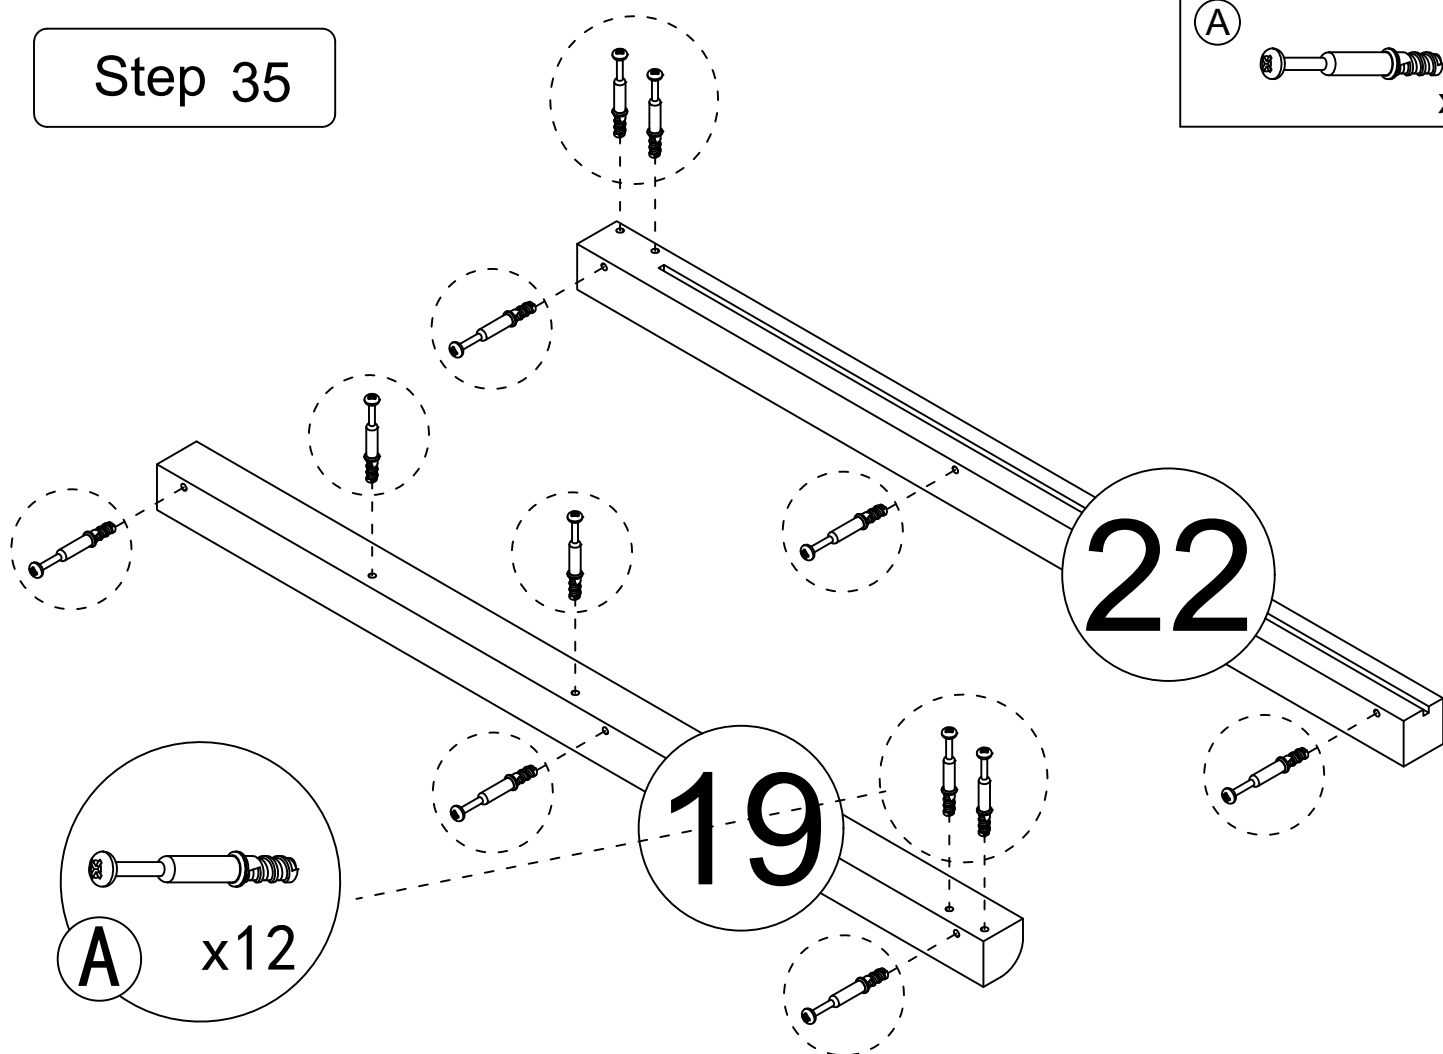


(B)





x6

Step 36

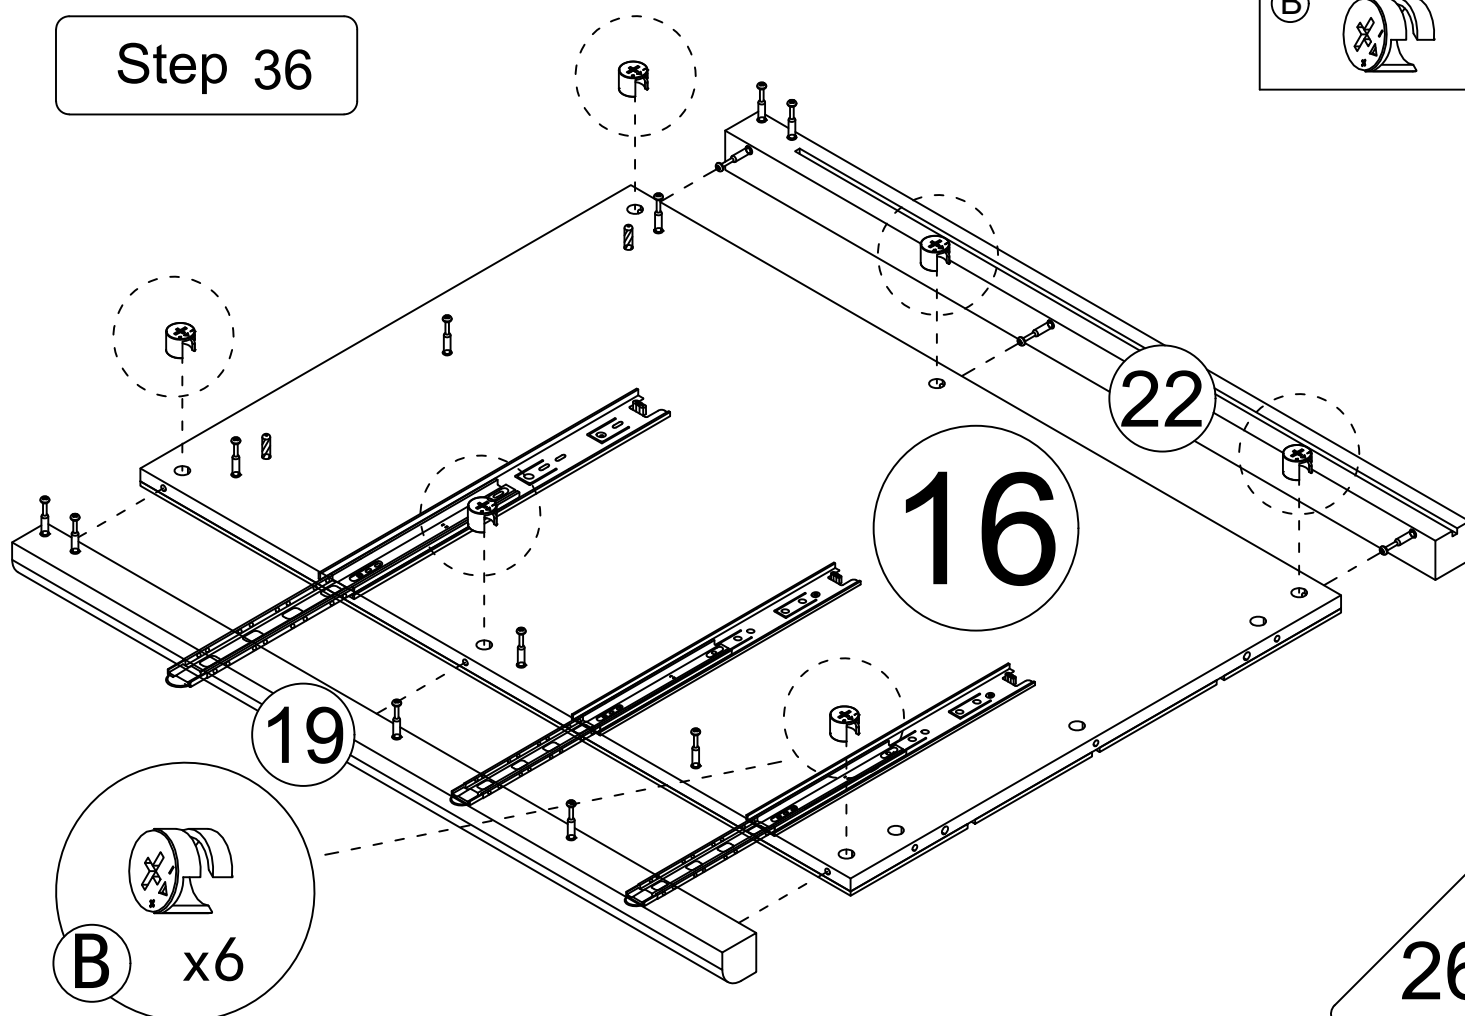


26


Step 37

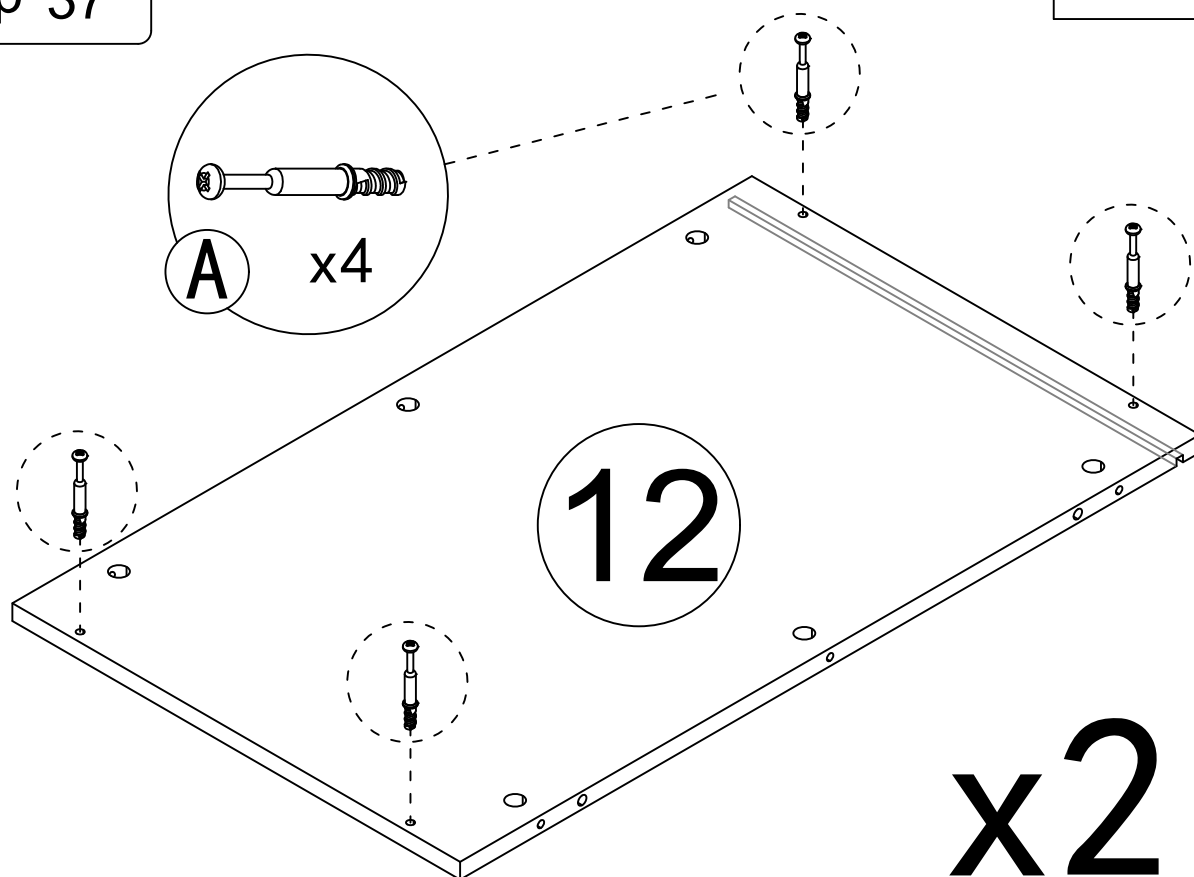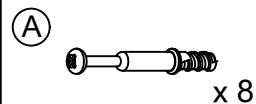


Step 38

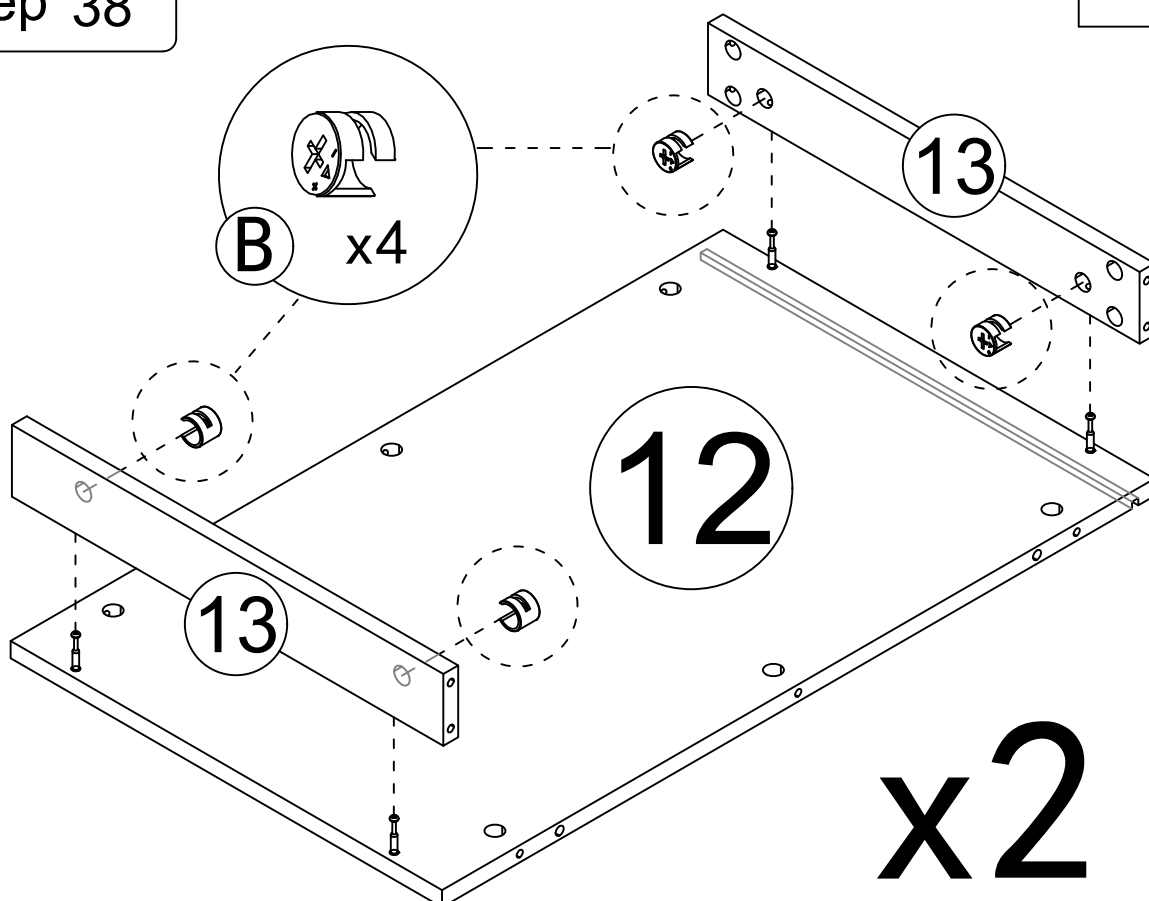

Step 39

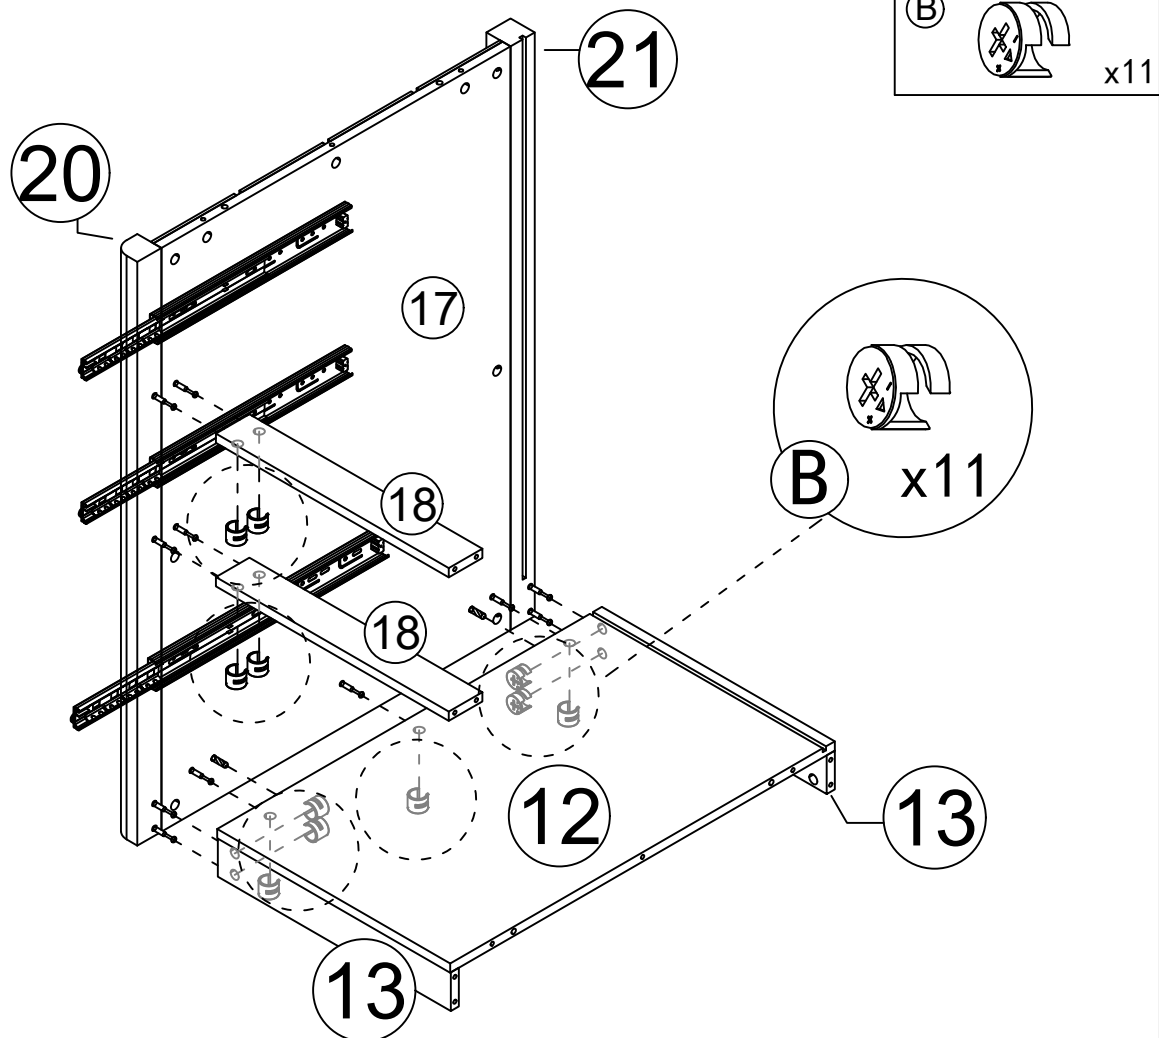


Step 40

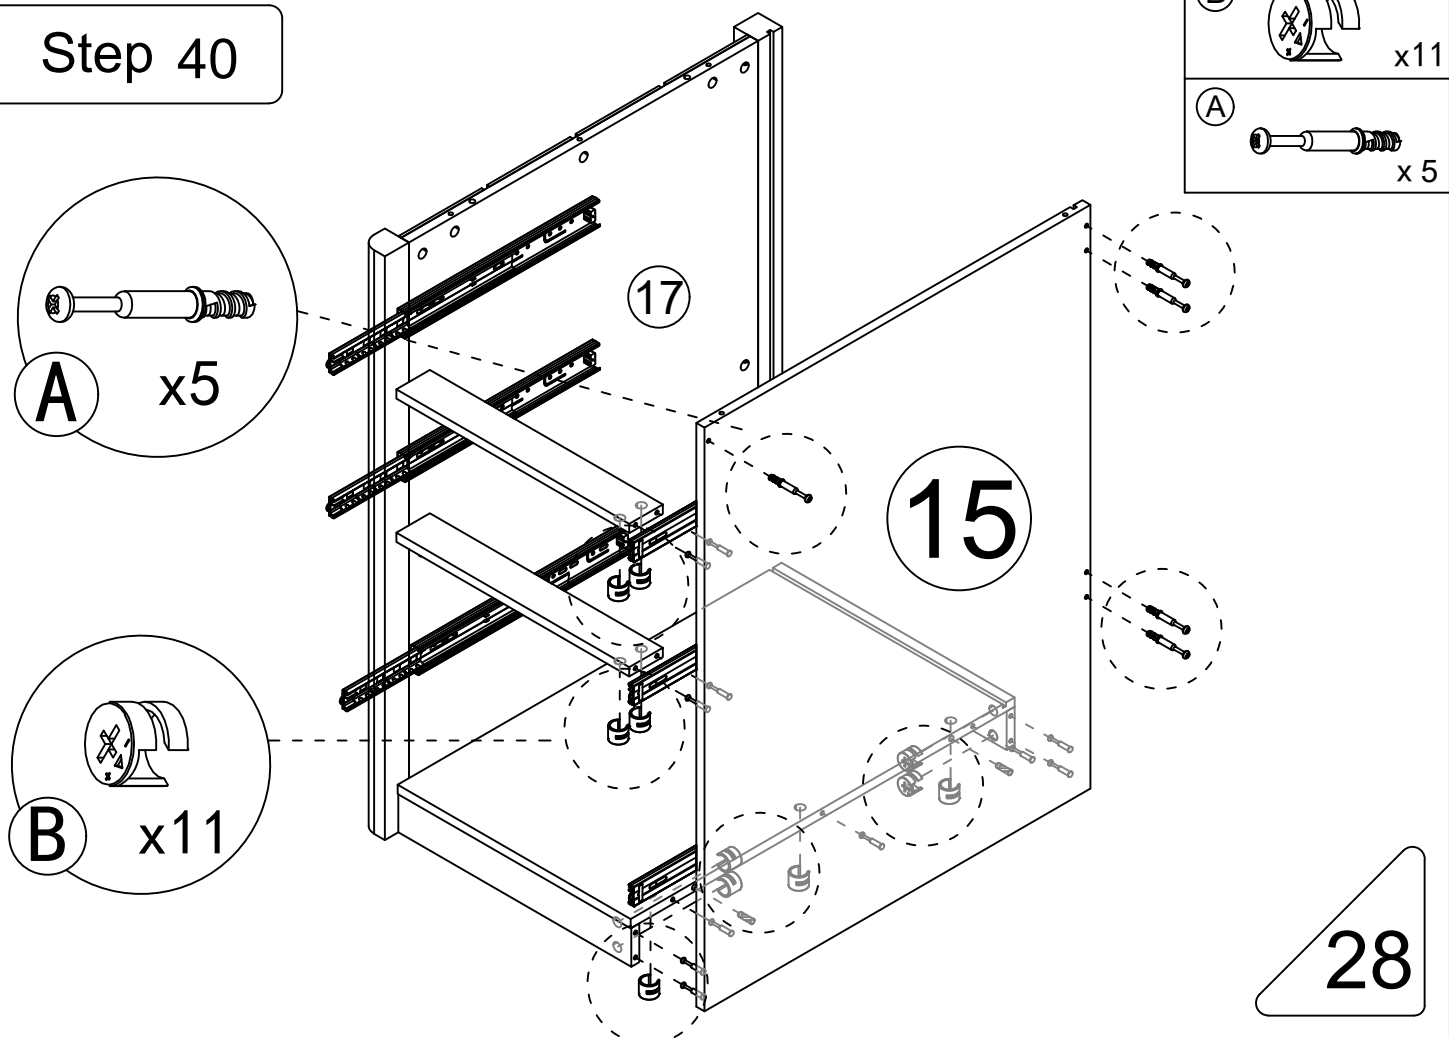


Step 41


Ⓑ  x11

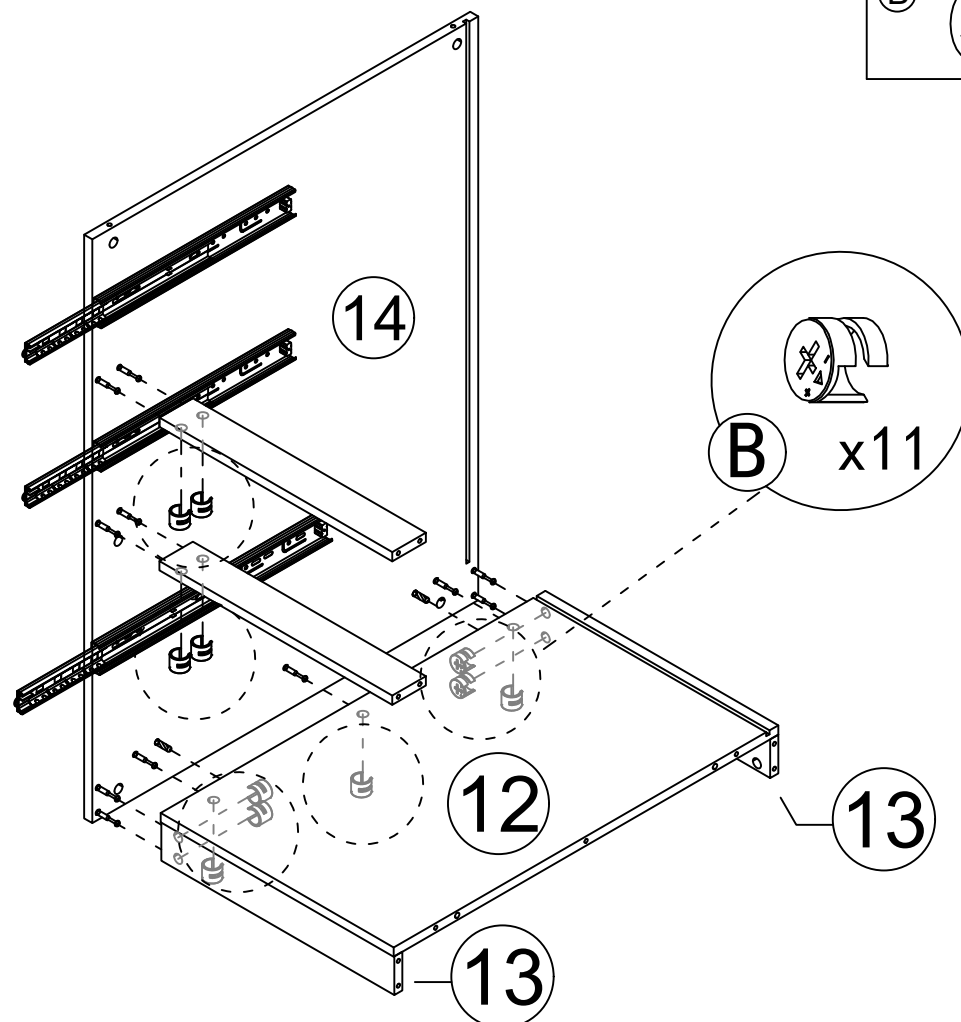


Step 42

Ⓑ  x11


Ⓐ  x5

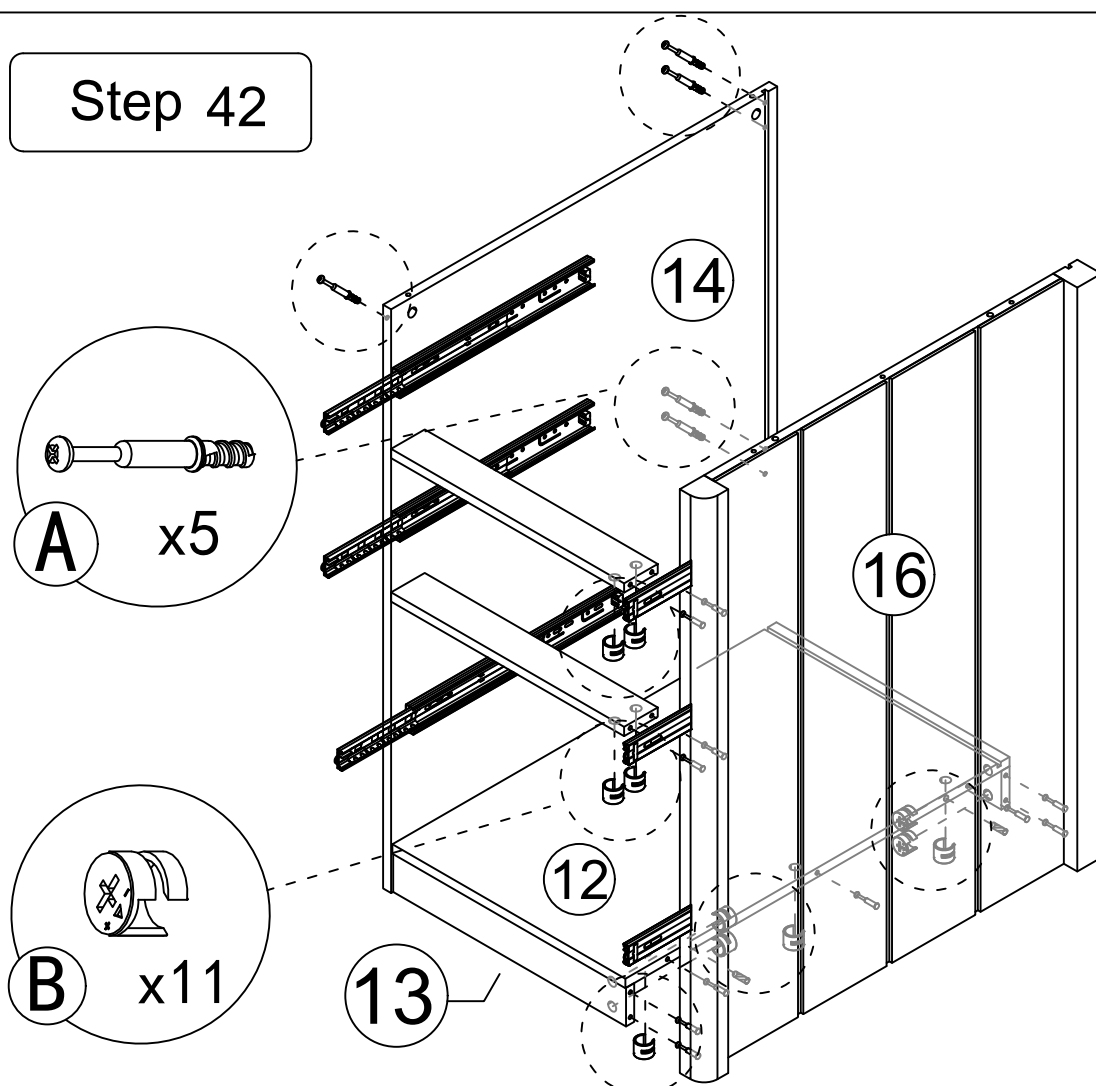



Step 43

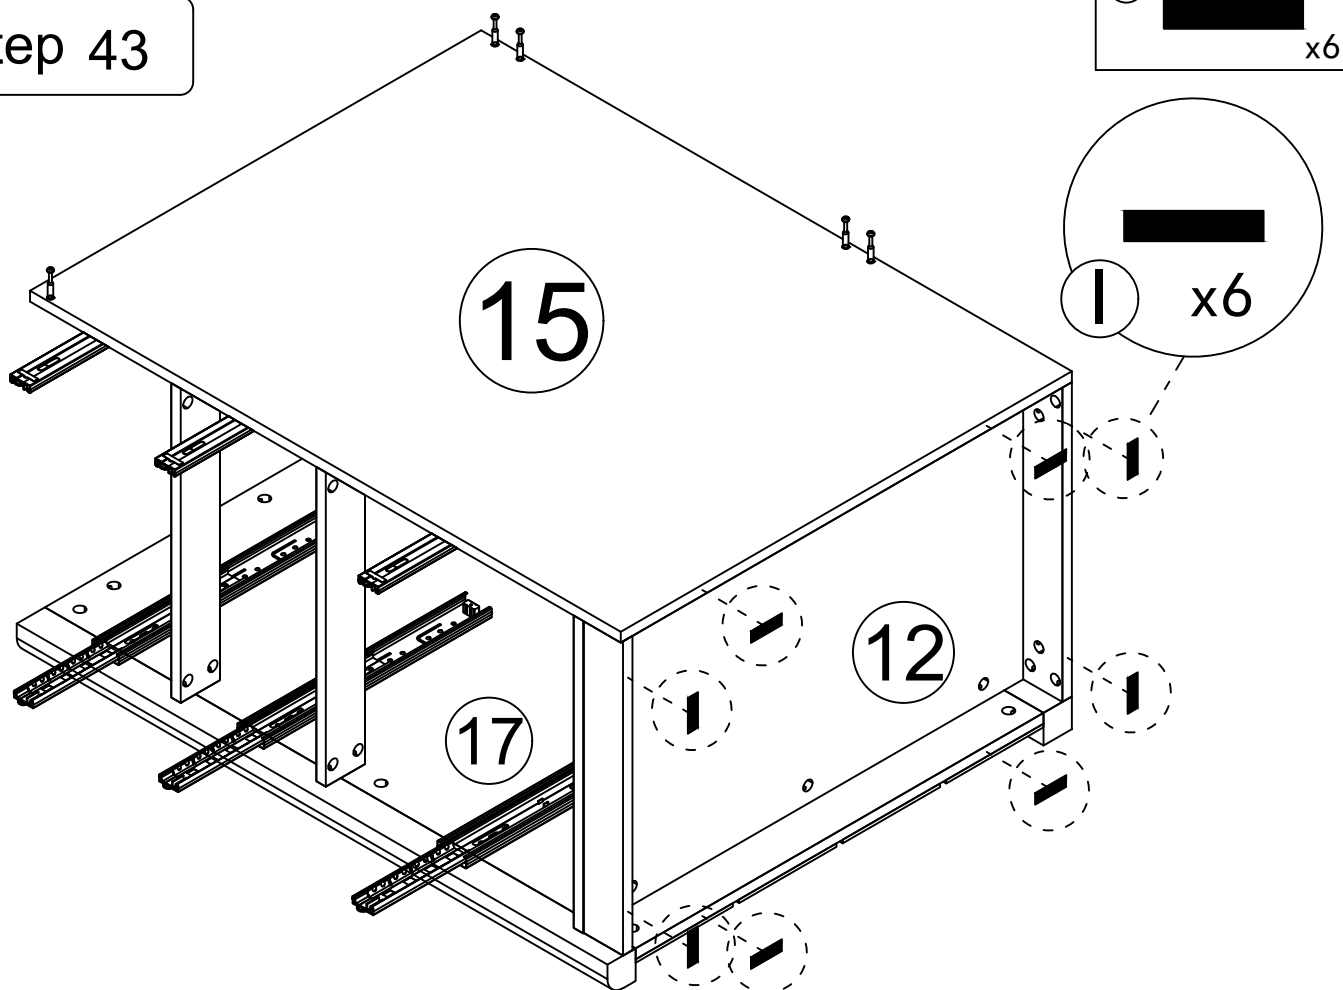

Step 44


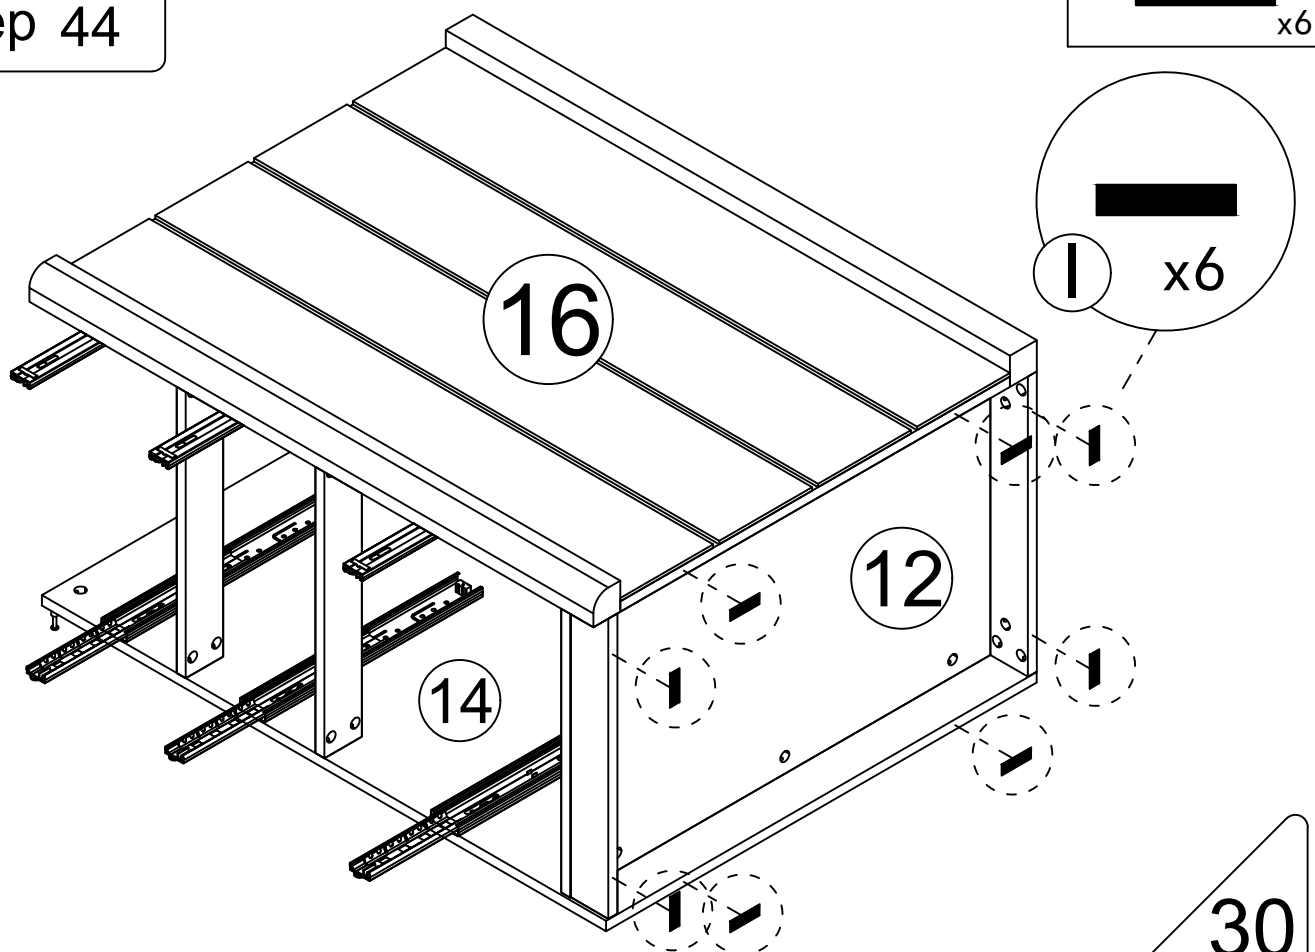


Step 45

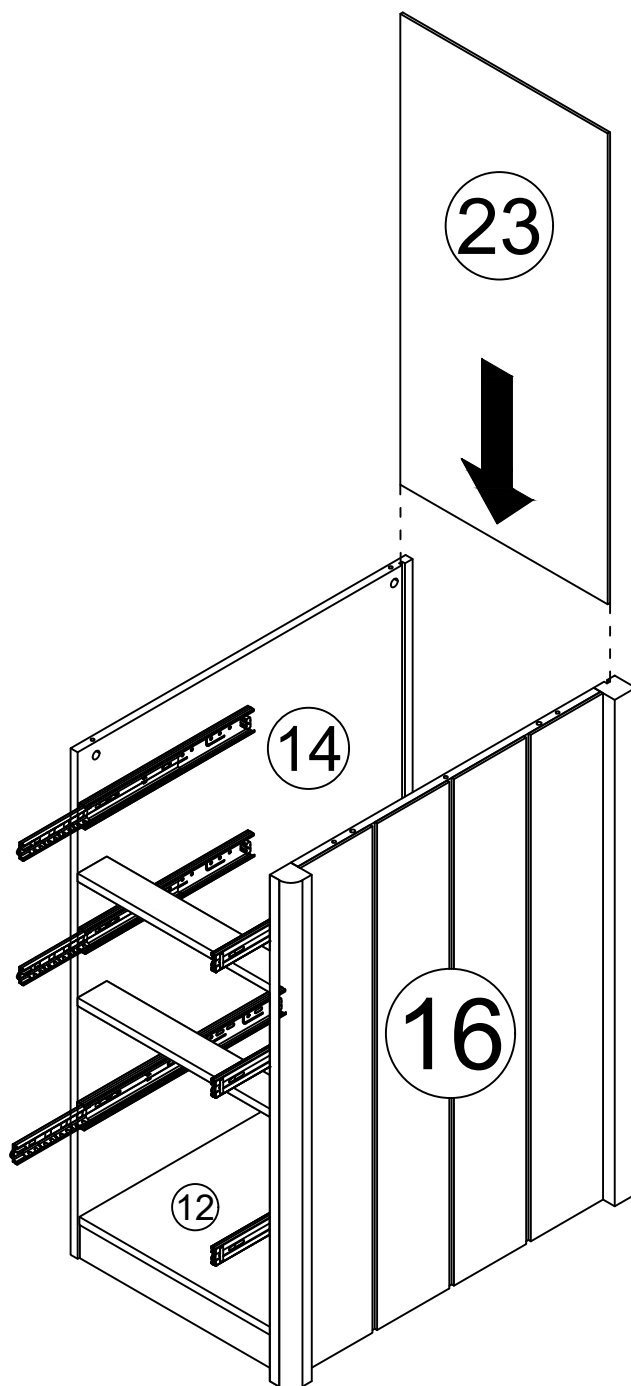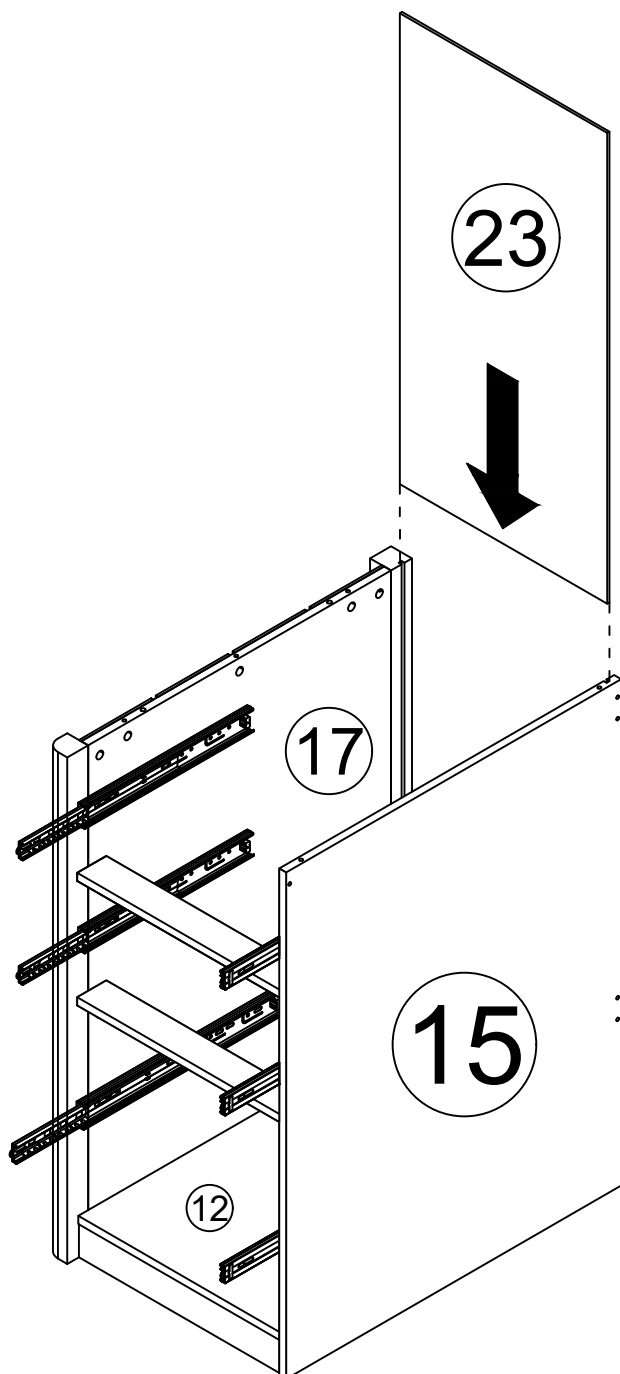


For the subsequent steps, it is recommended that two people work together to install the structural wood panels.

Step 46

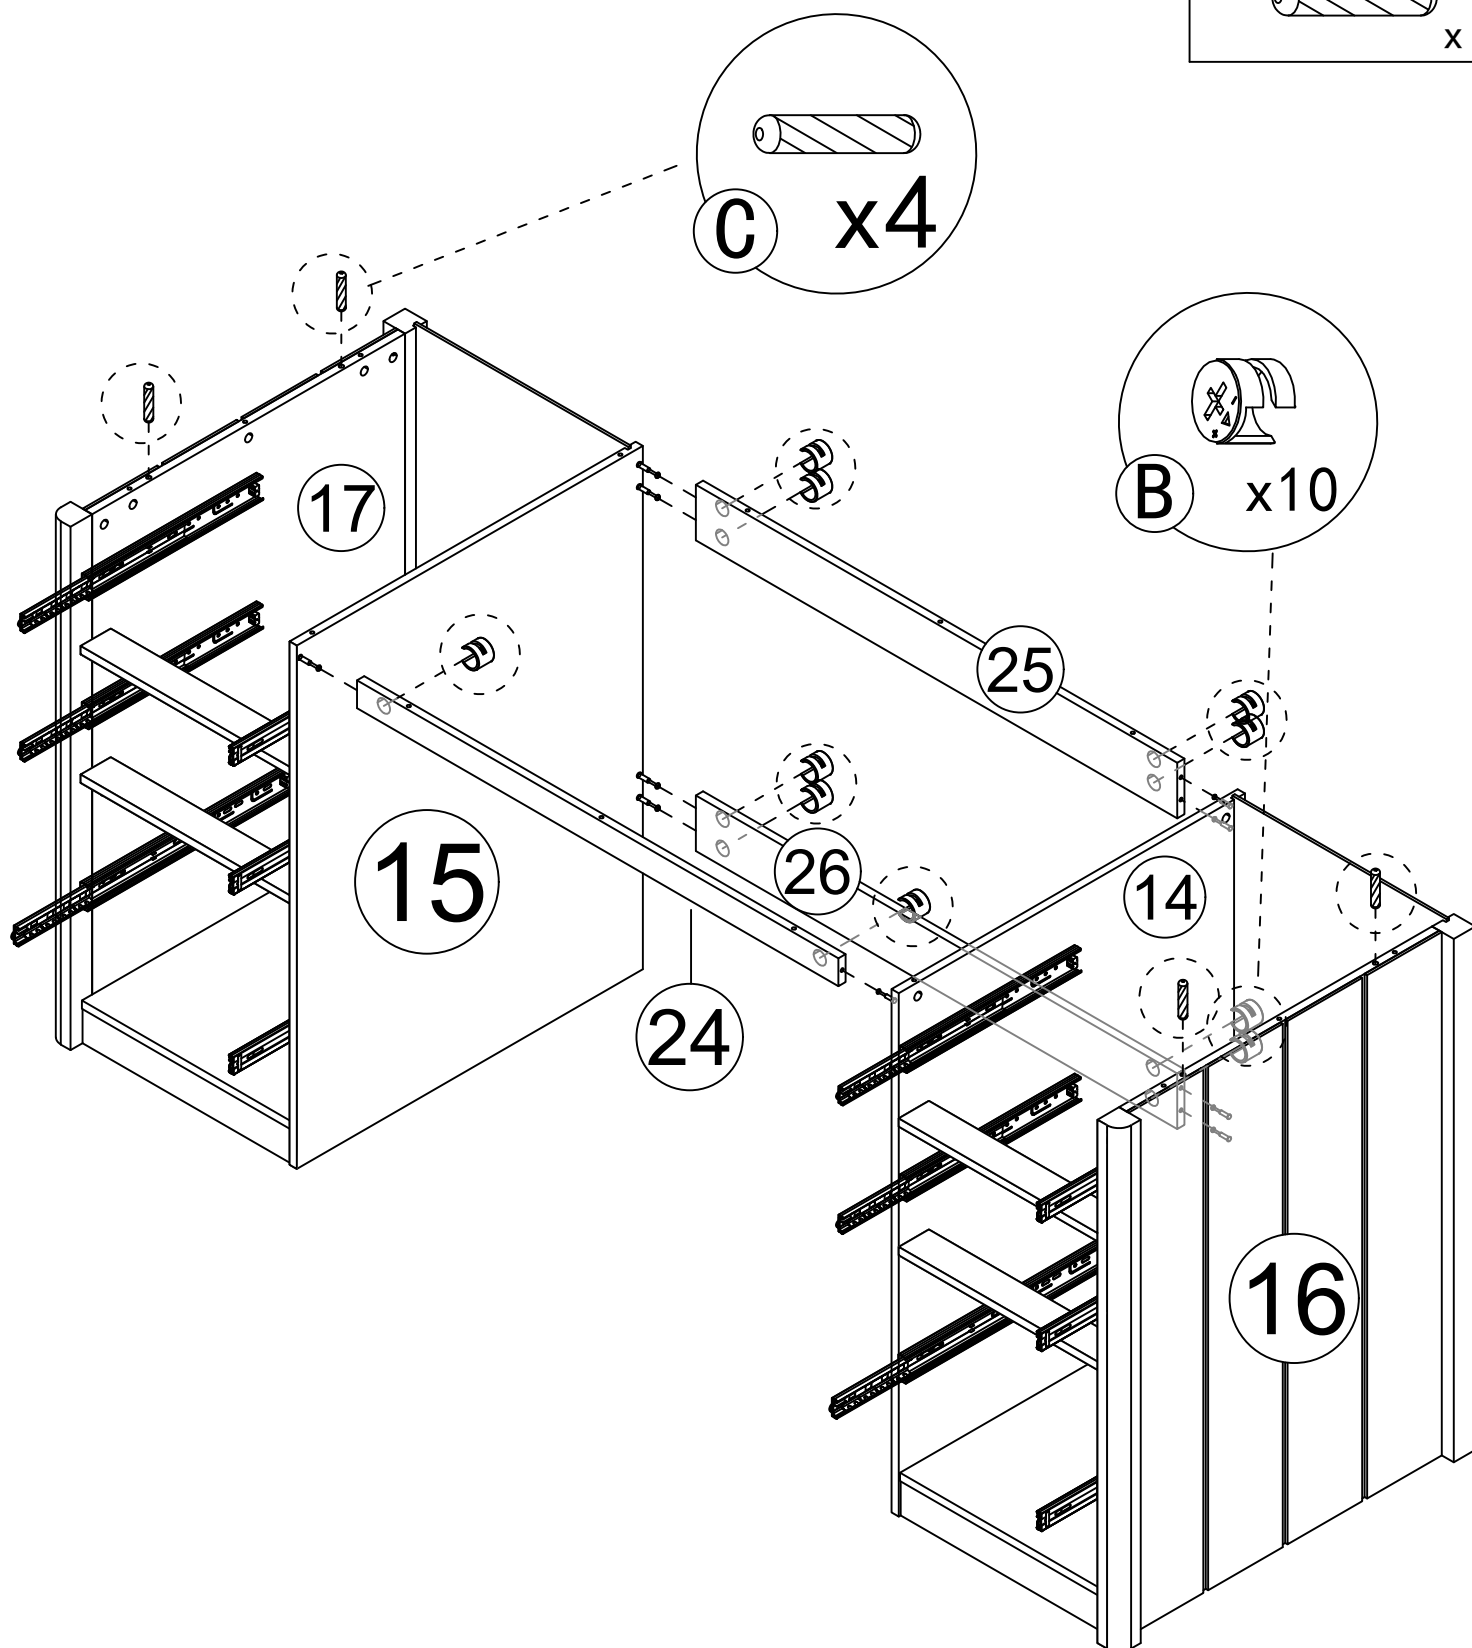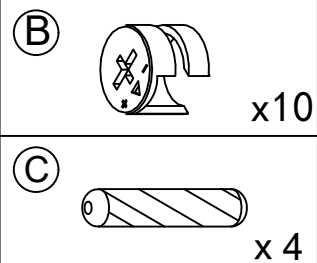


Step 47

A



x16

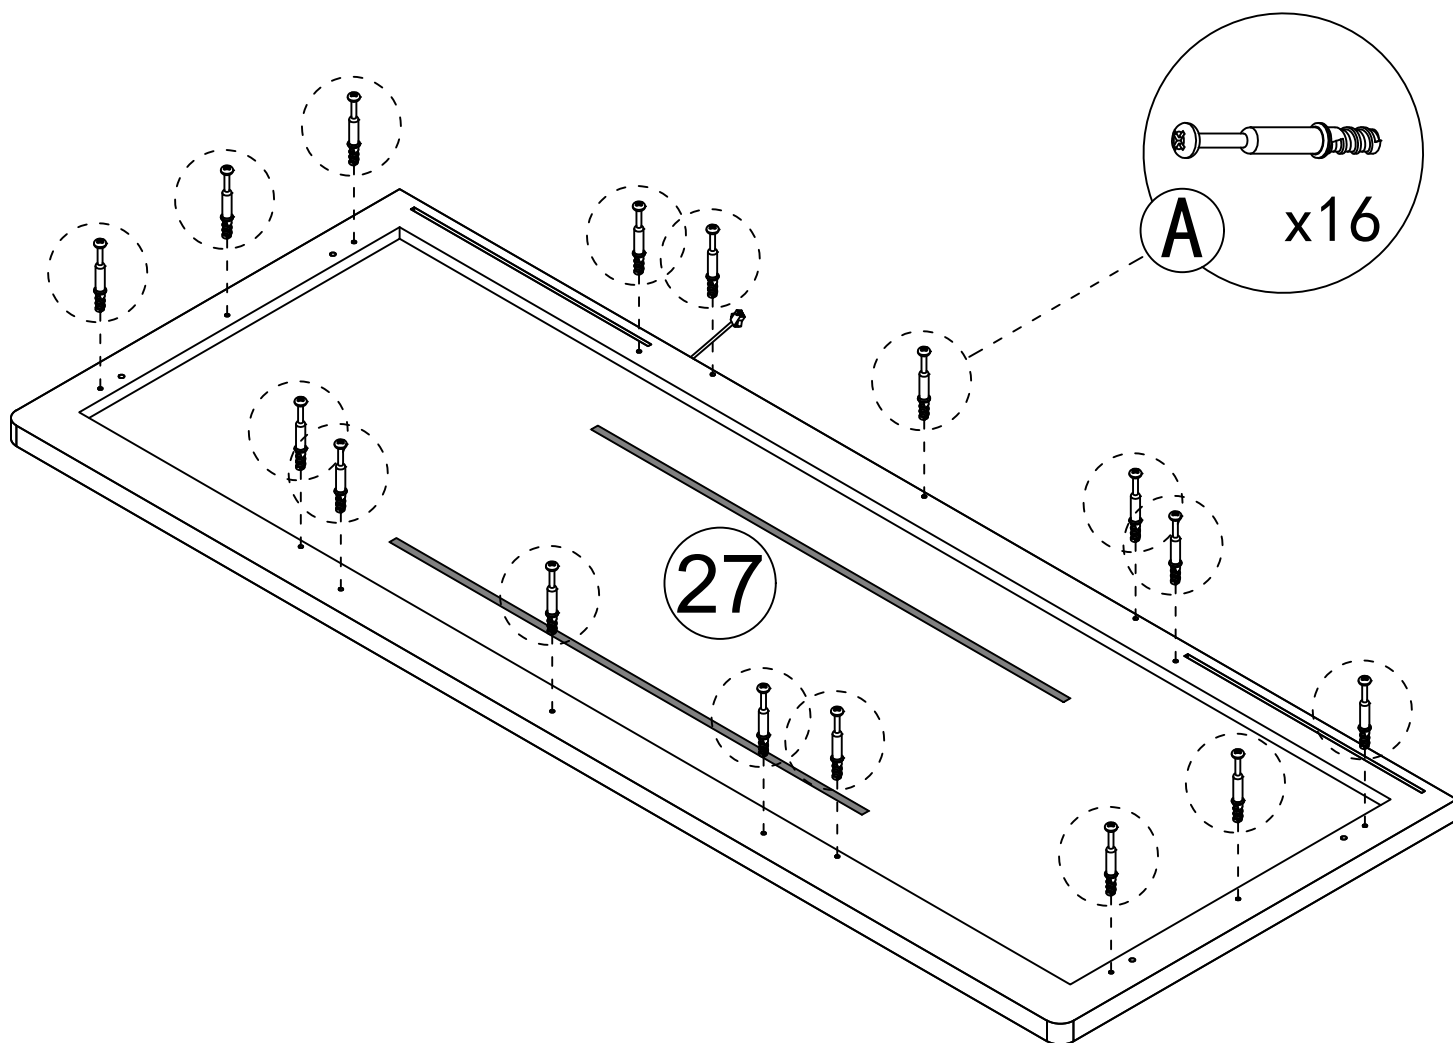


Step 48


(B)



x16

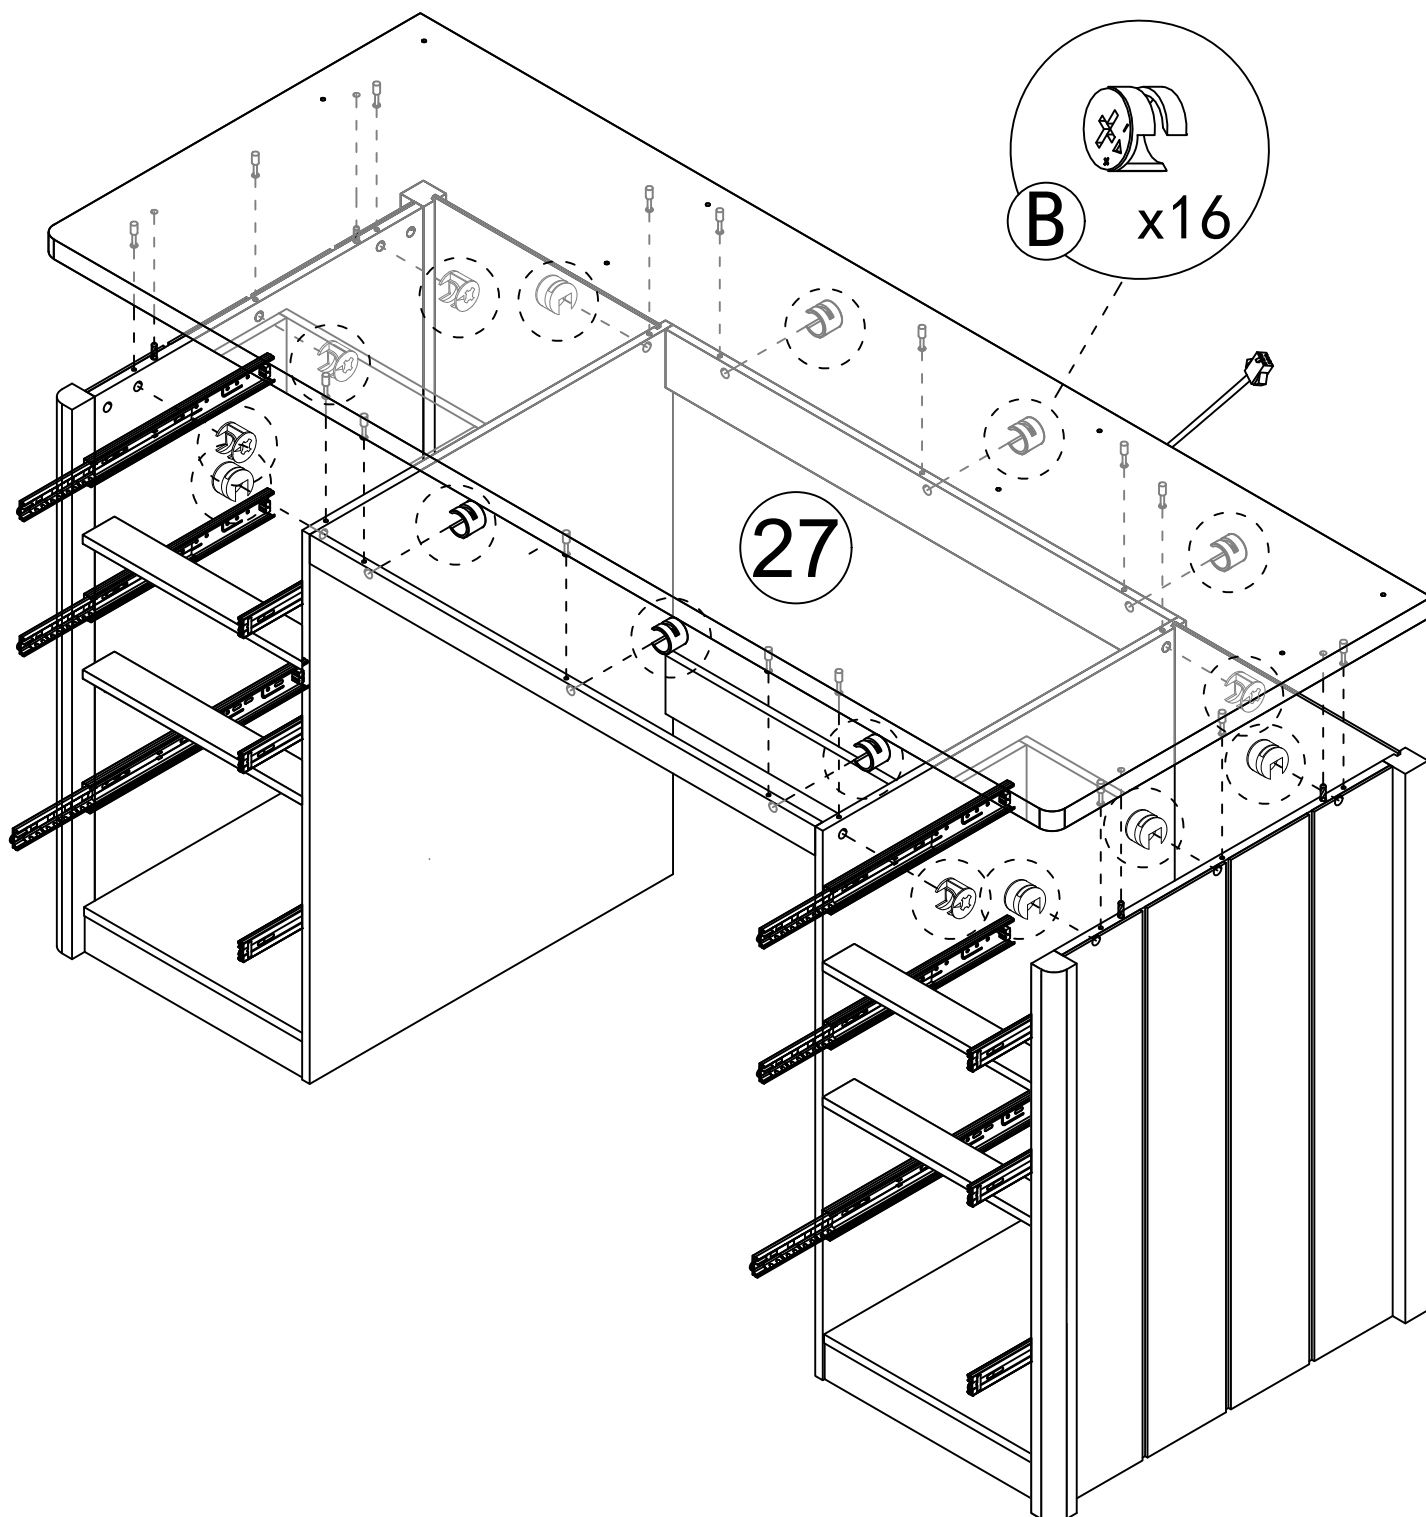


Step 49


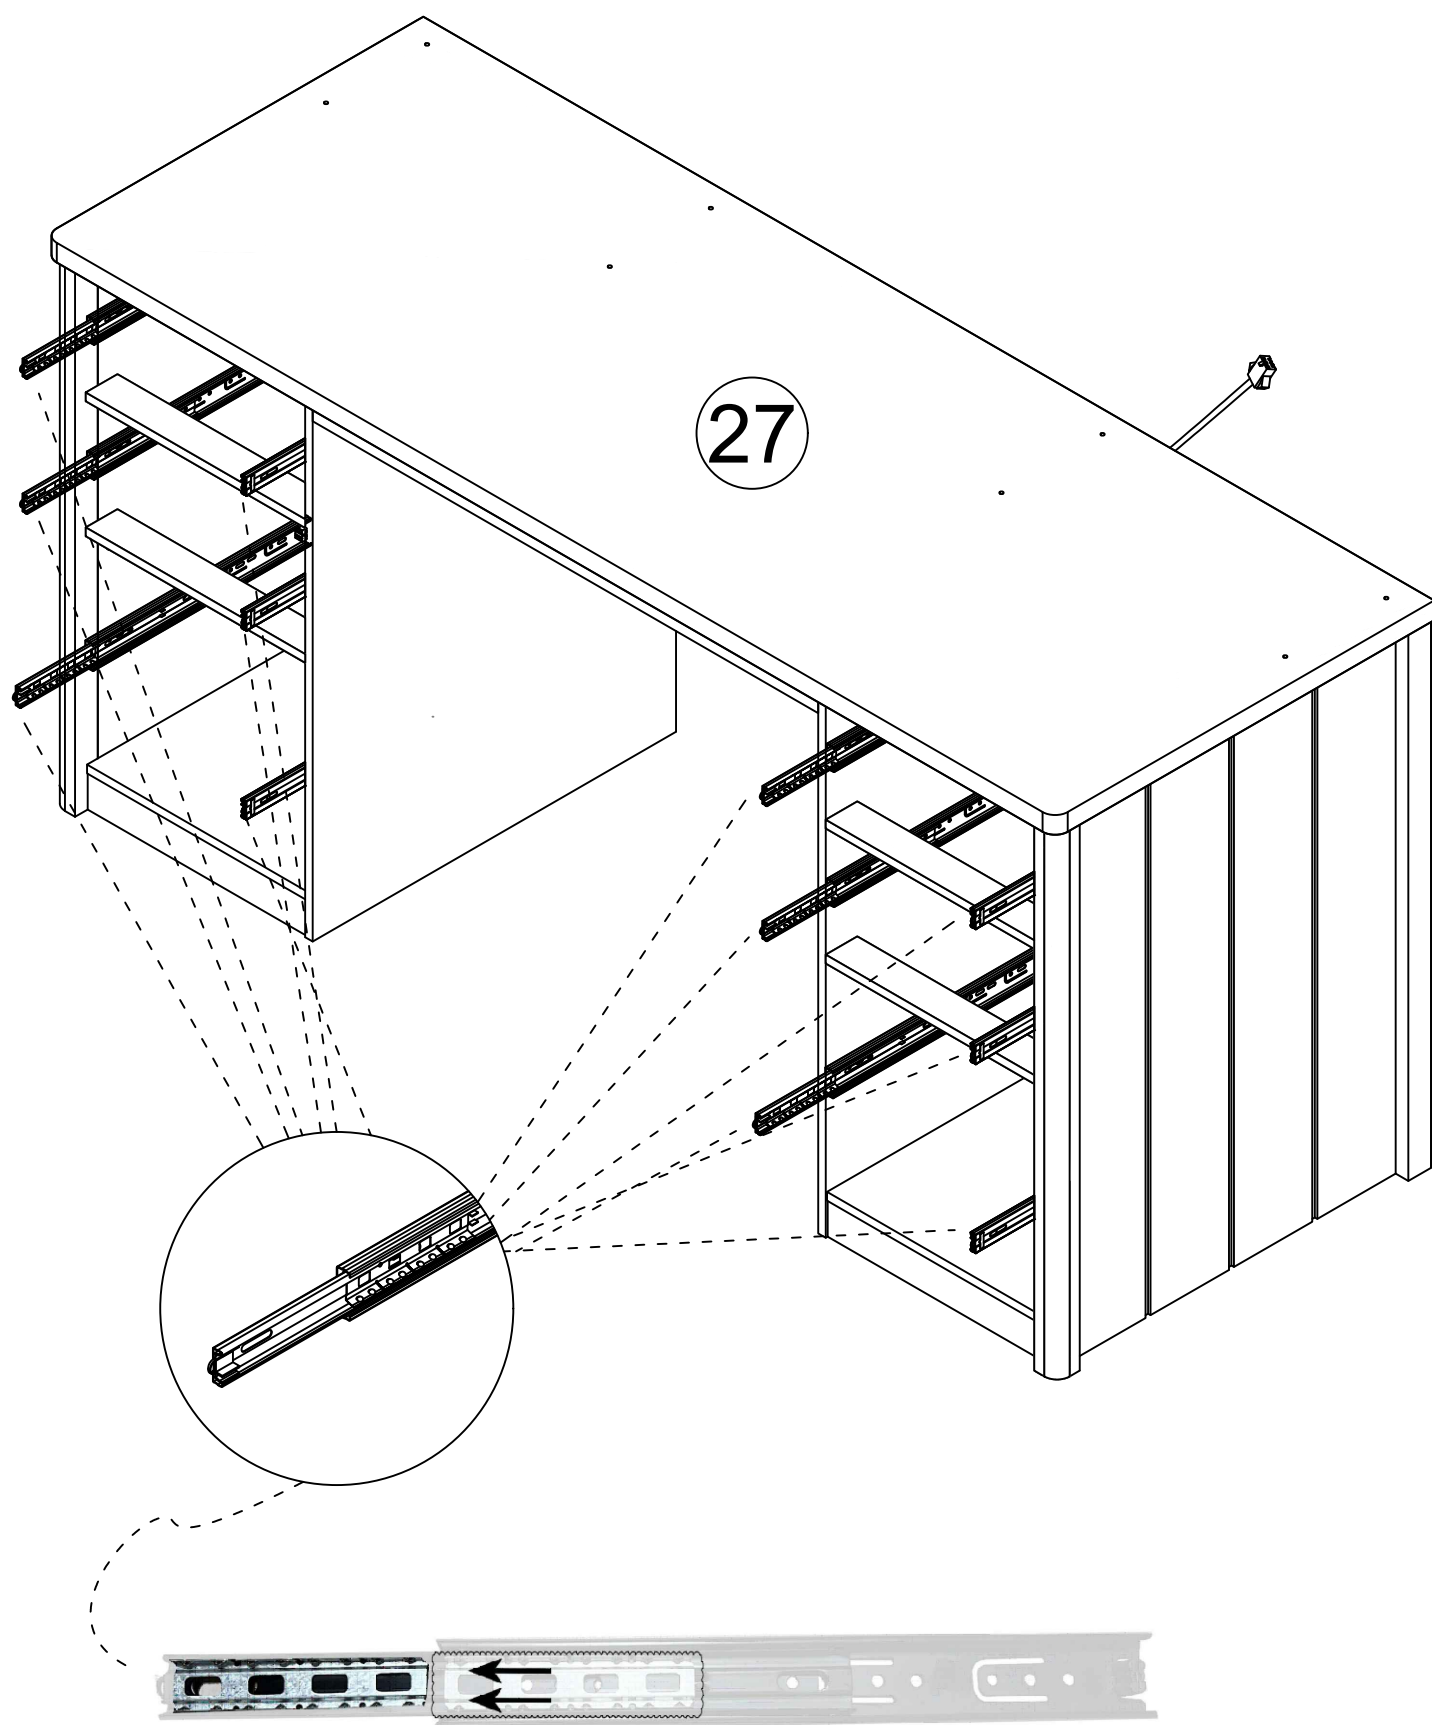



As shown, When installing the drawer,
pull the guide rail out first, Slide beads are also pulled out.

Step 50

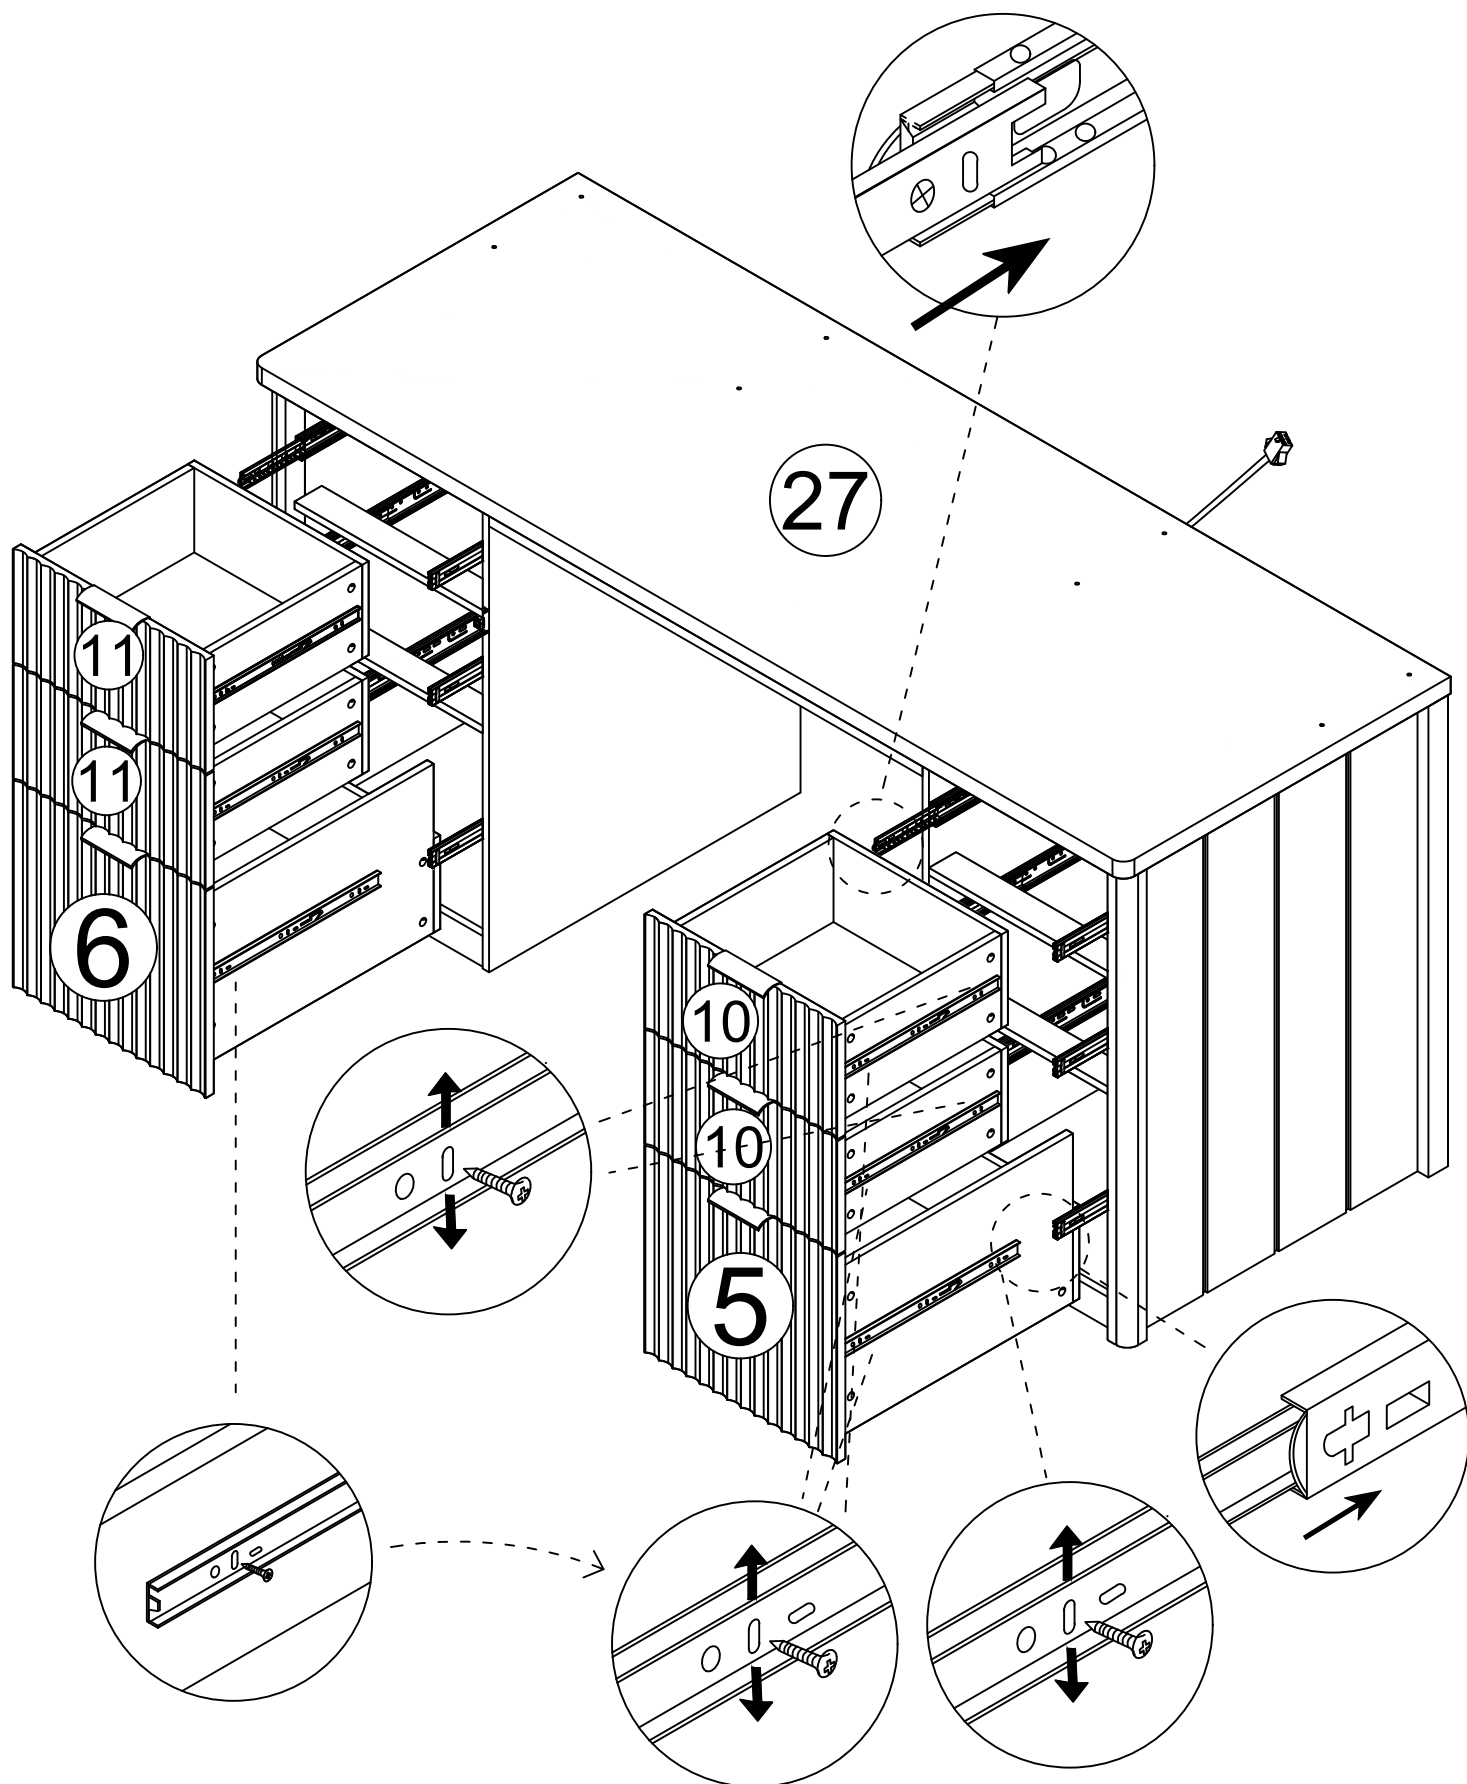


If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap.

A		22pcs	K	 	1pcs 2pcs
B		22pcs	G	 	12pcs 12pcs
L	 2pcs  4pcs  2pcs  (3.5x14mm) 2pcs  (4x45mm) 2pcs				

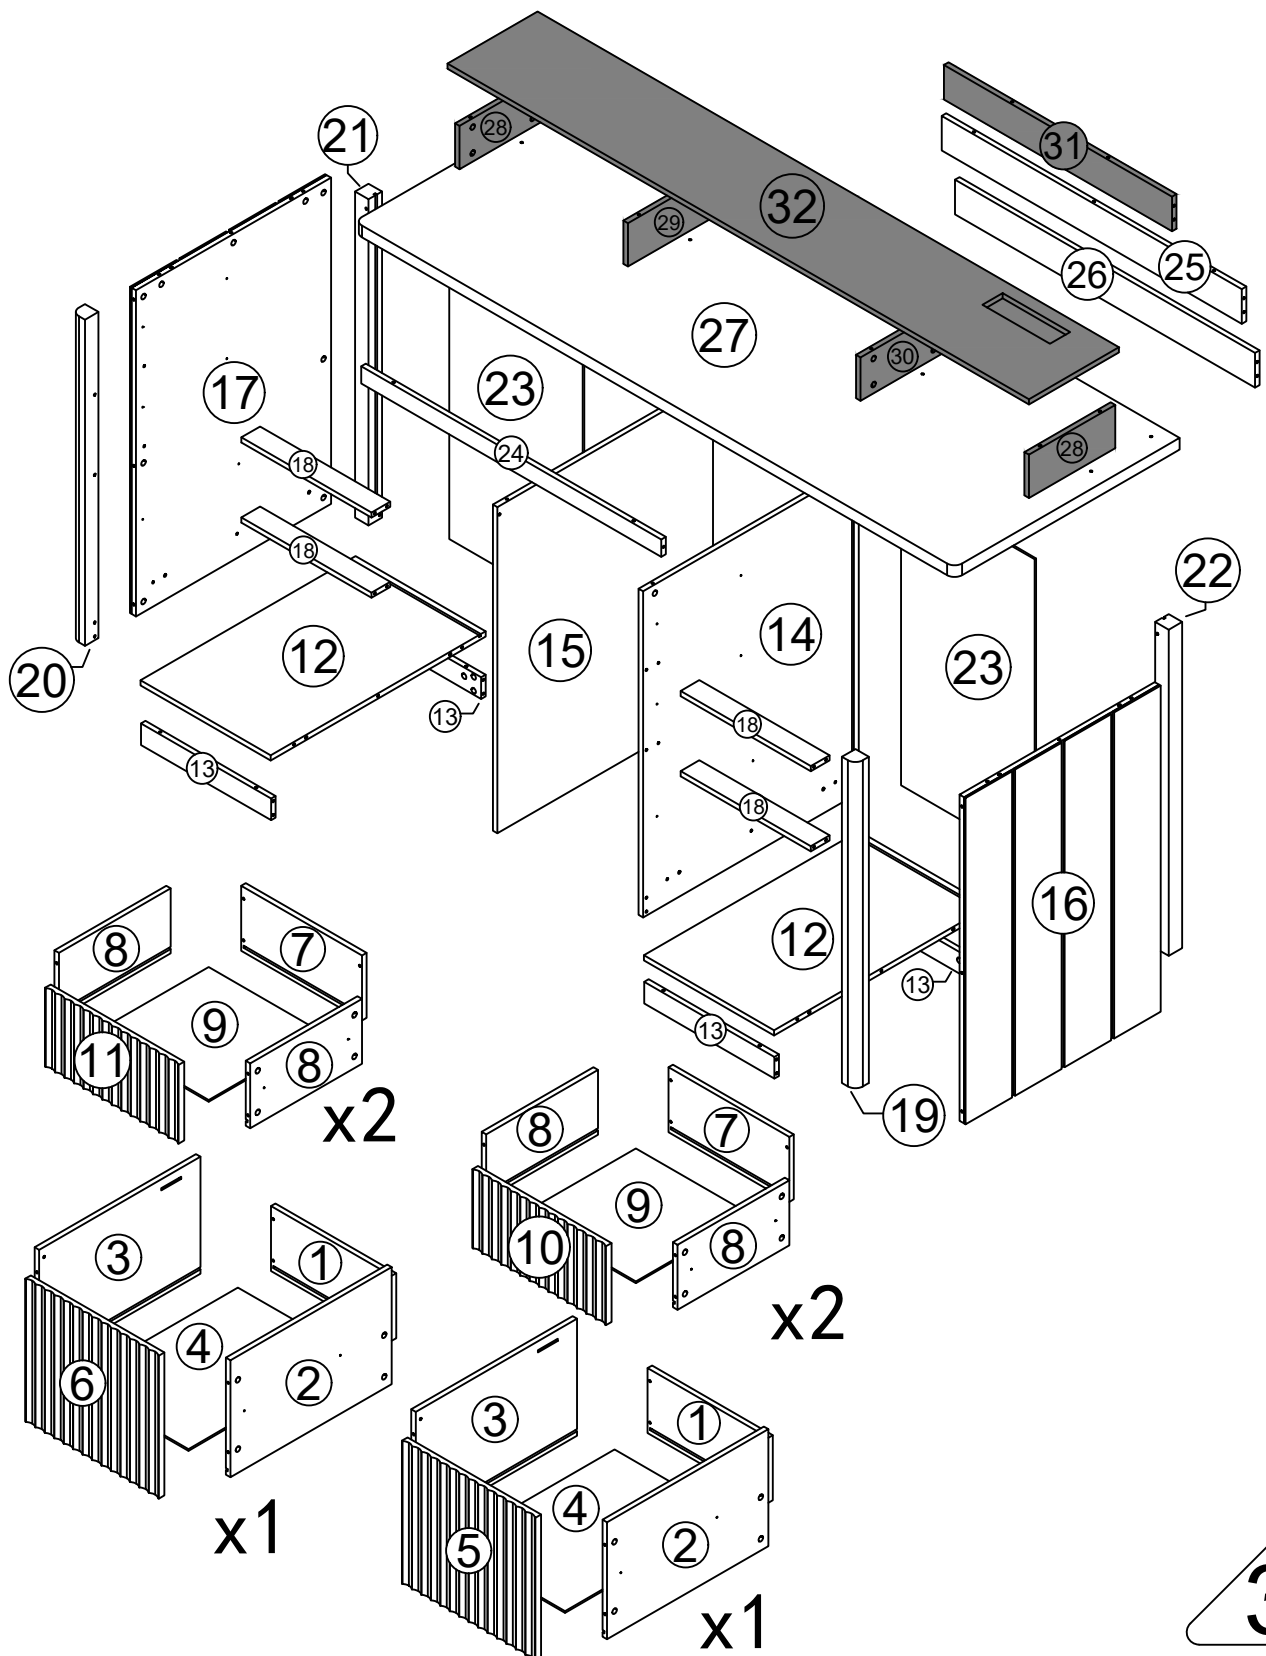


Step 51

A



x 4

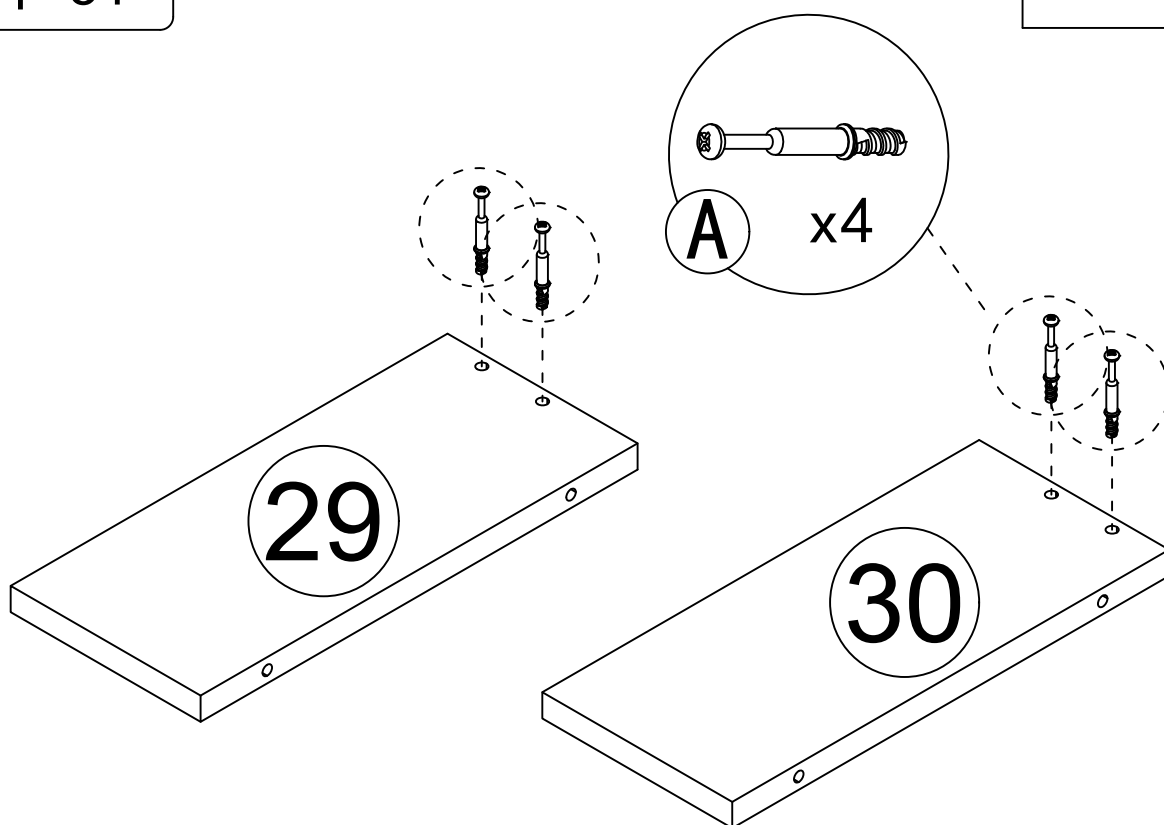


Step 52

B




x 4

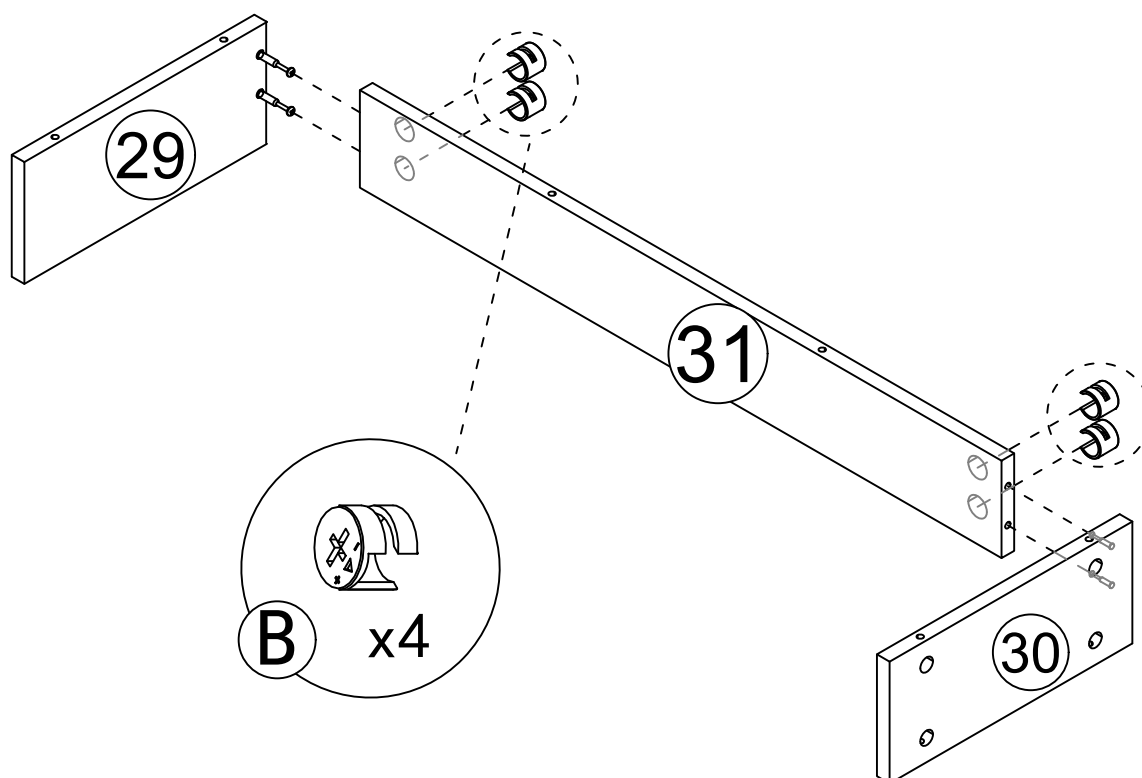


38

Step 53



A





x 8

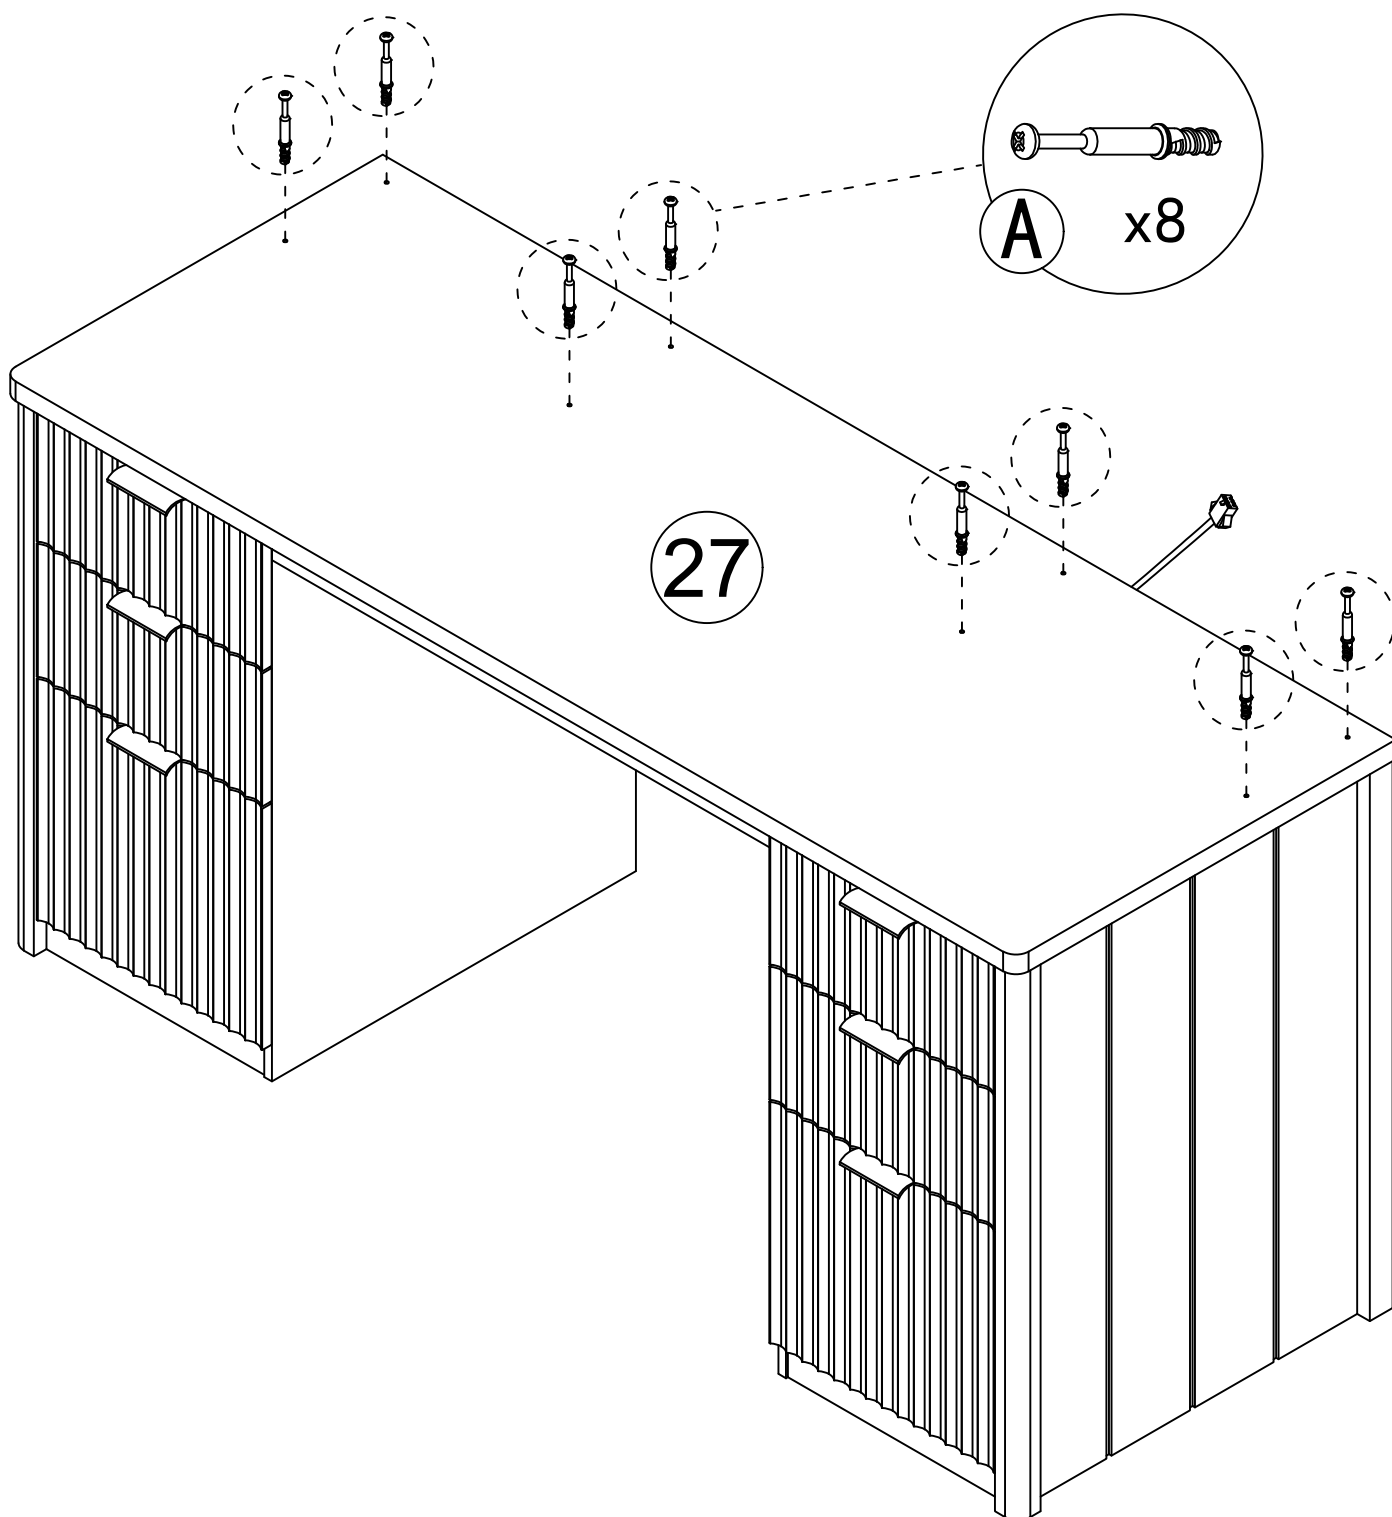


Step 54

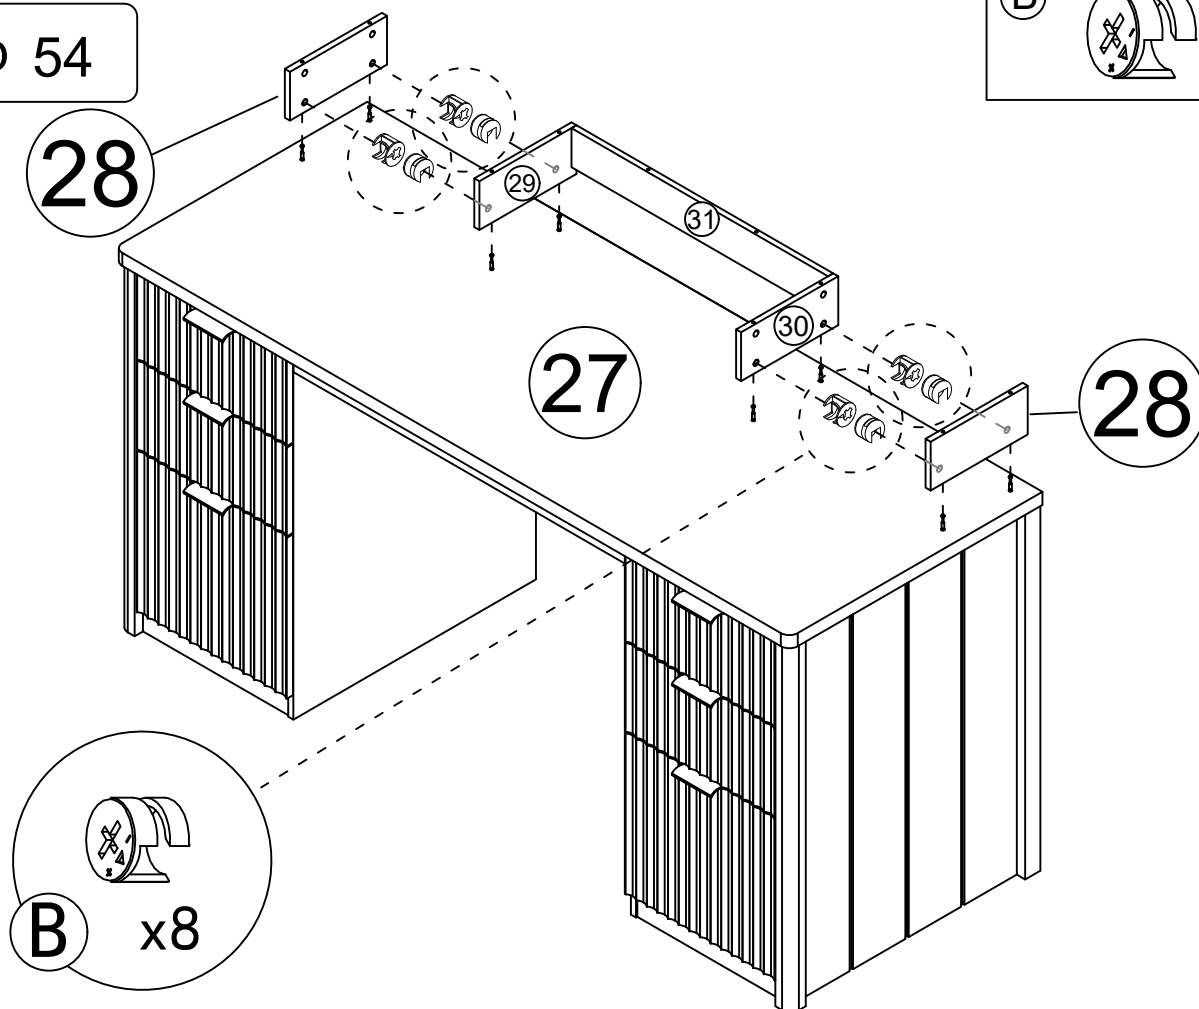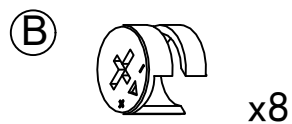





Step 55

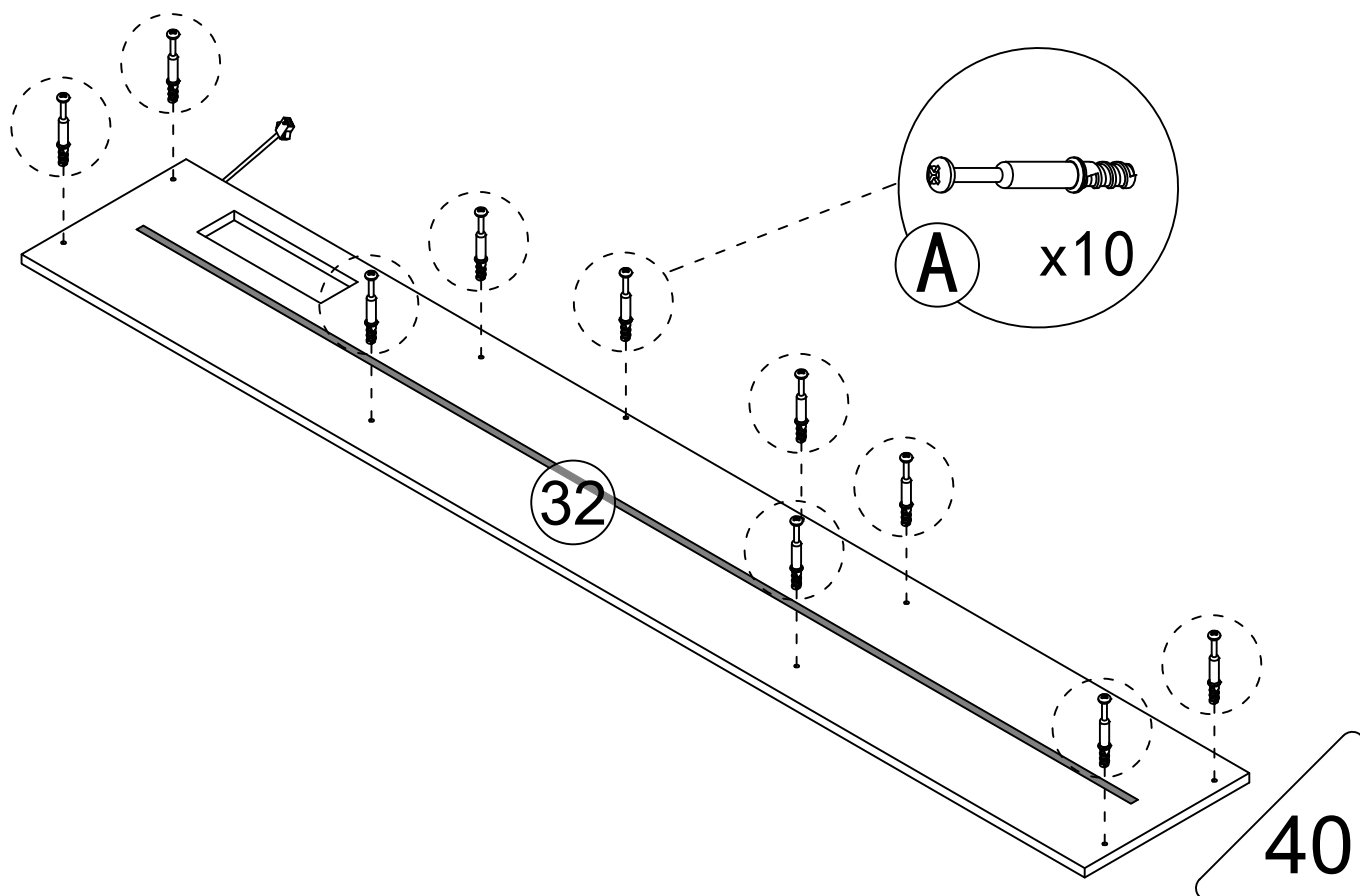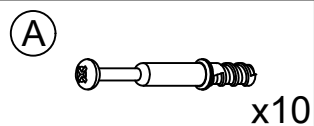



Step 56

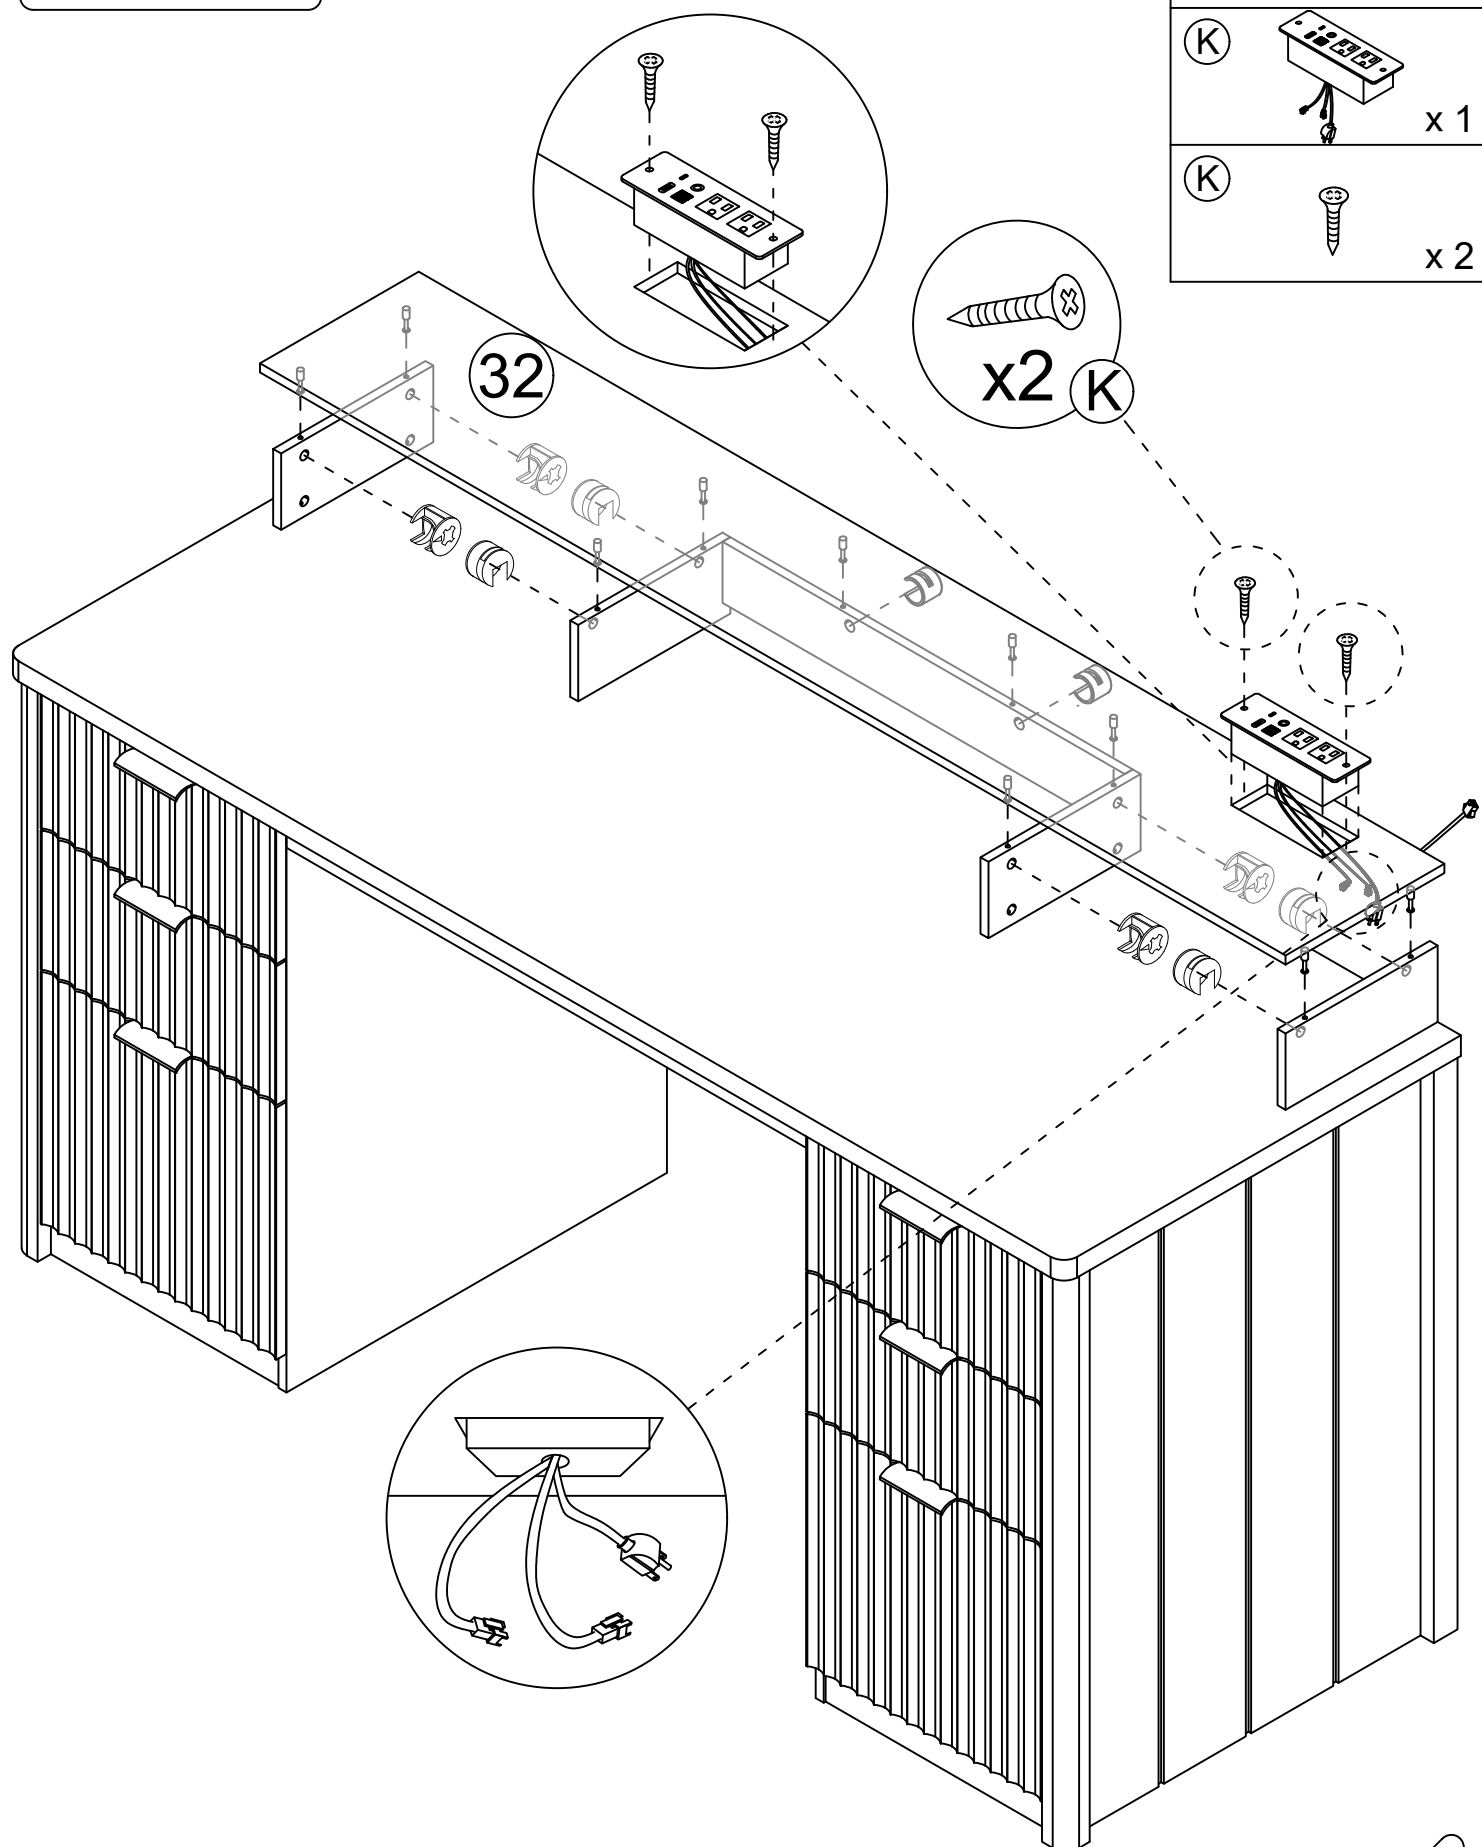

Step 57

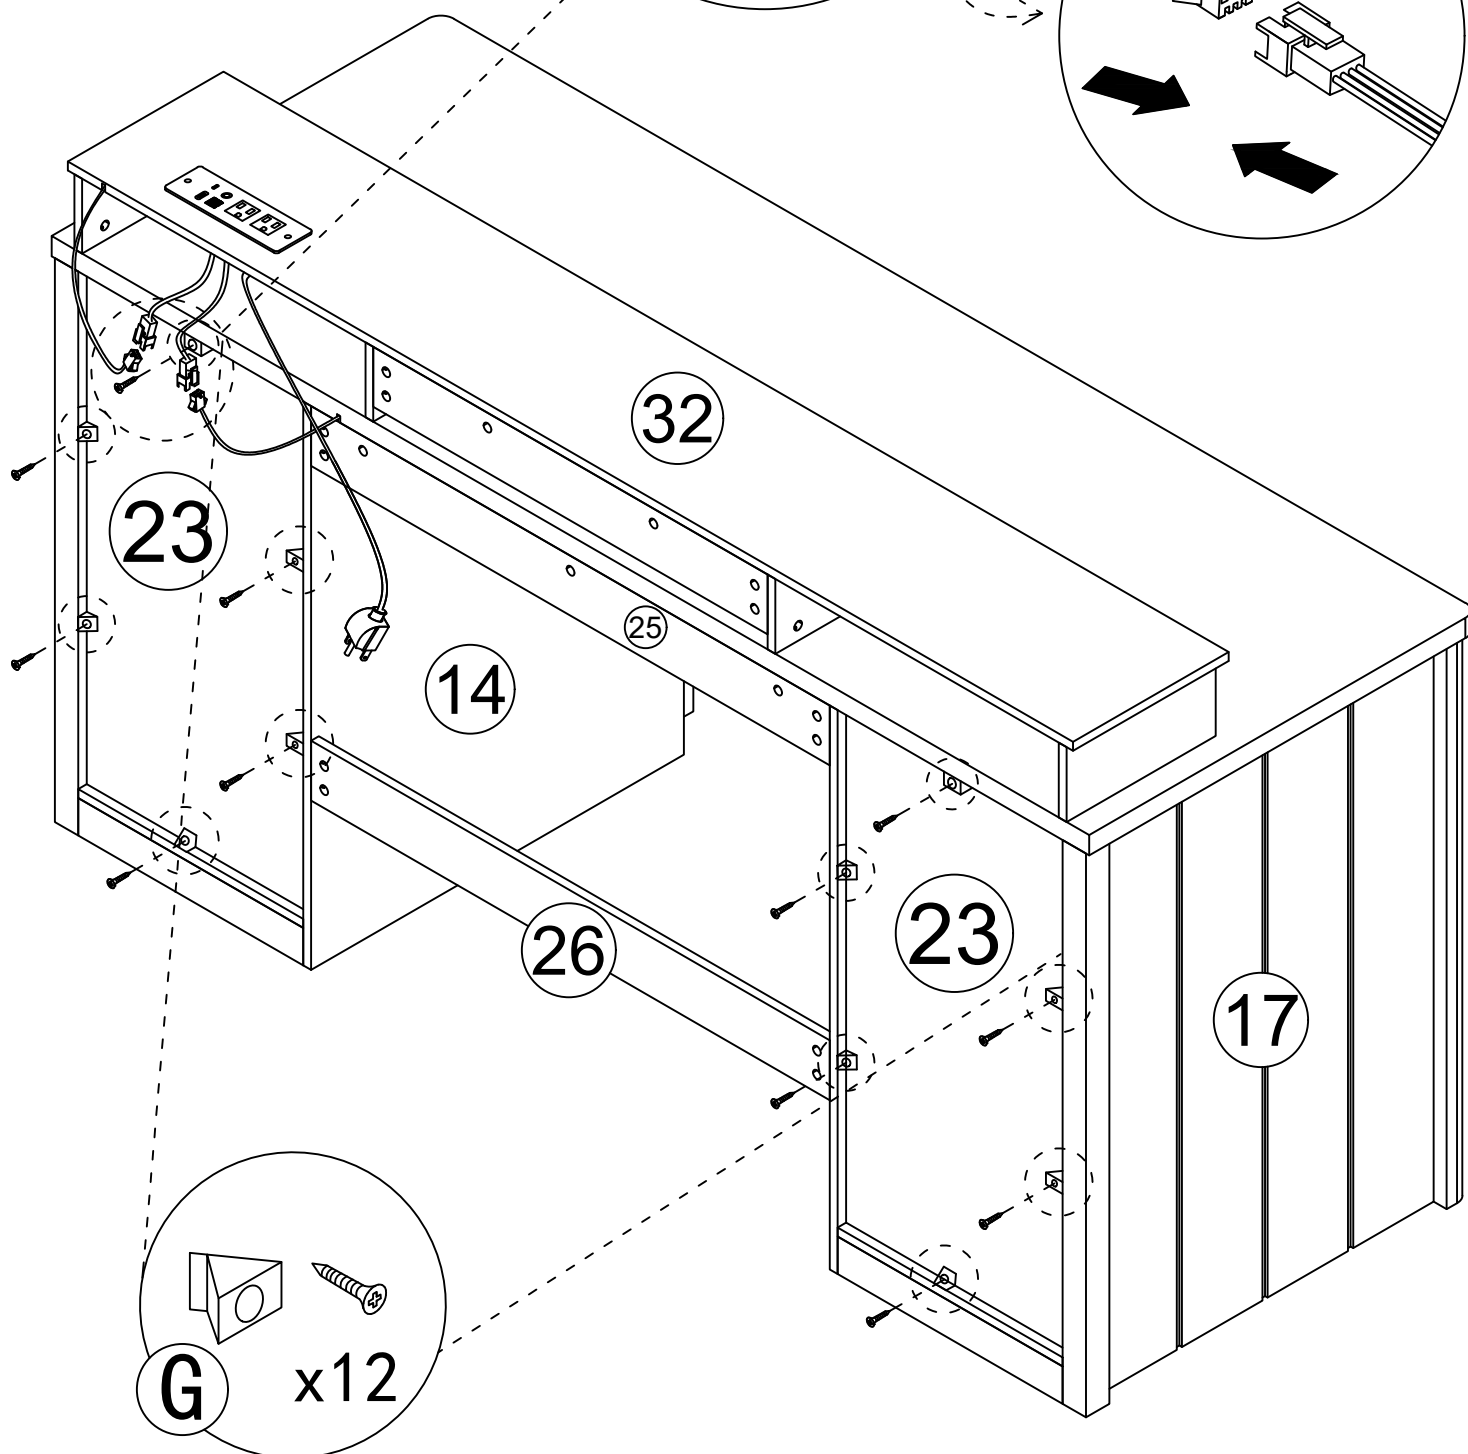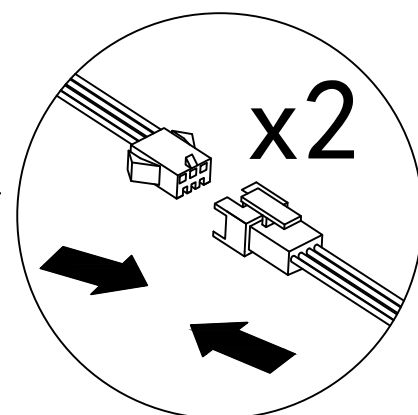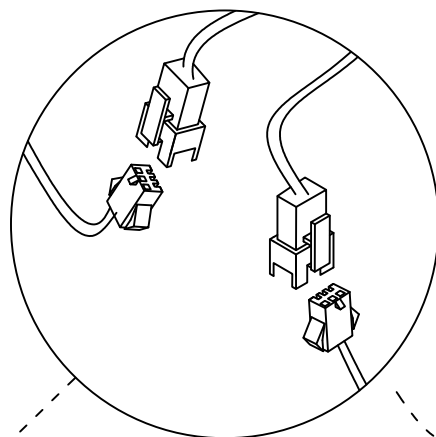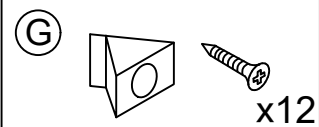


Step 58

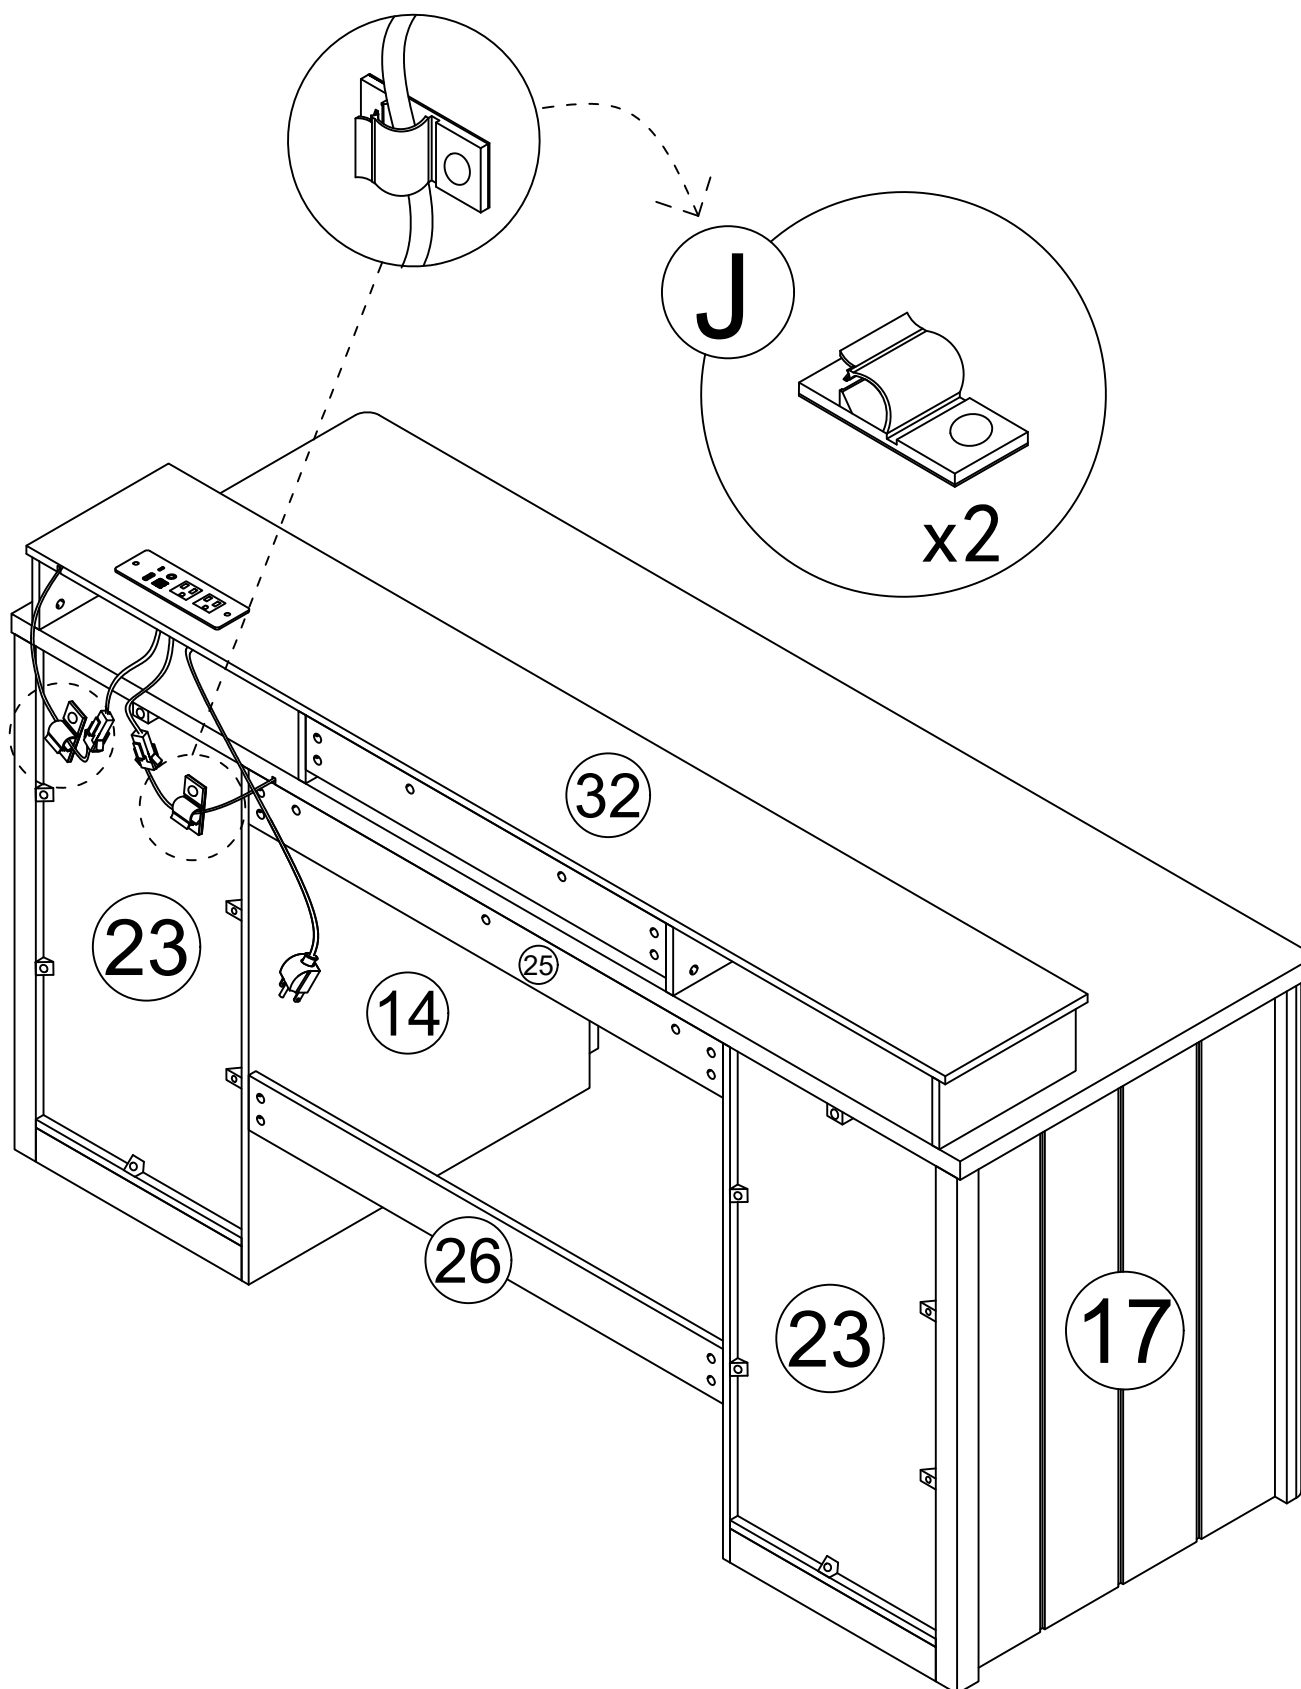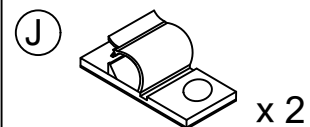


Tear off the release paper and stick the wire organizer on the board

Step 59

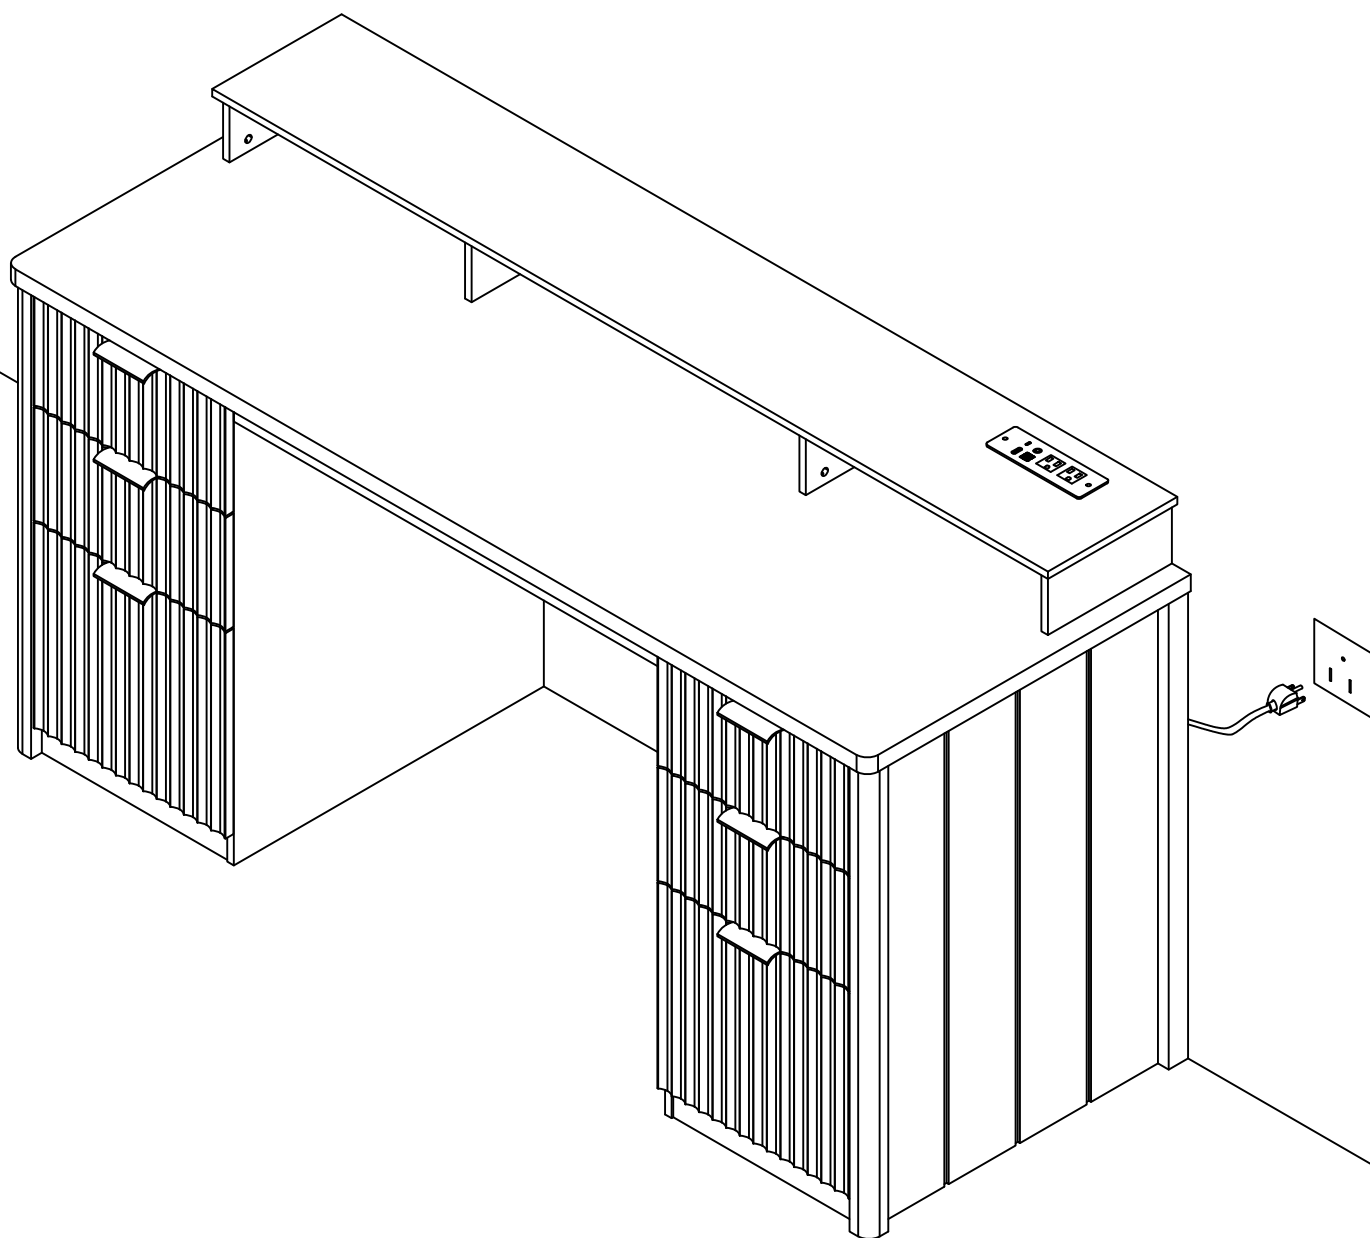


Step 60



Install as required

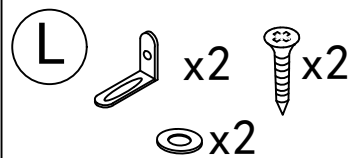


3.5x14mm







Install the anti fall hardware on the cabinet as shown in the picture first

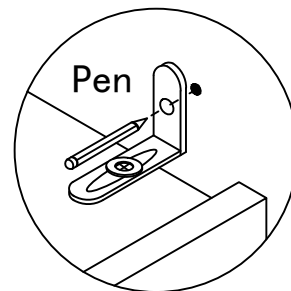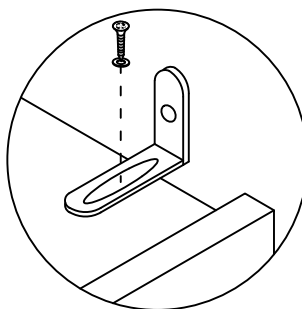

Then mark the wall with a pen through the holes in the anti-fall hardware

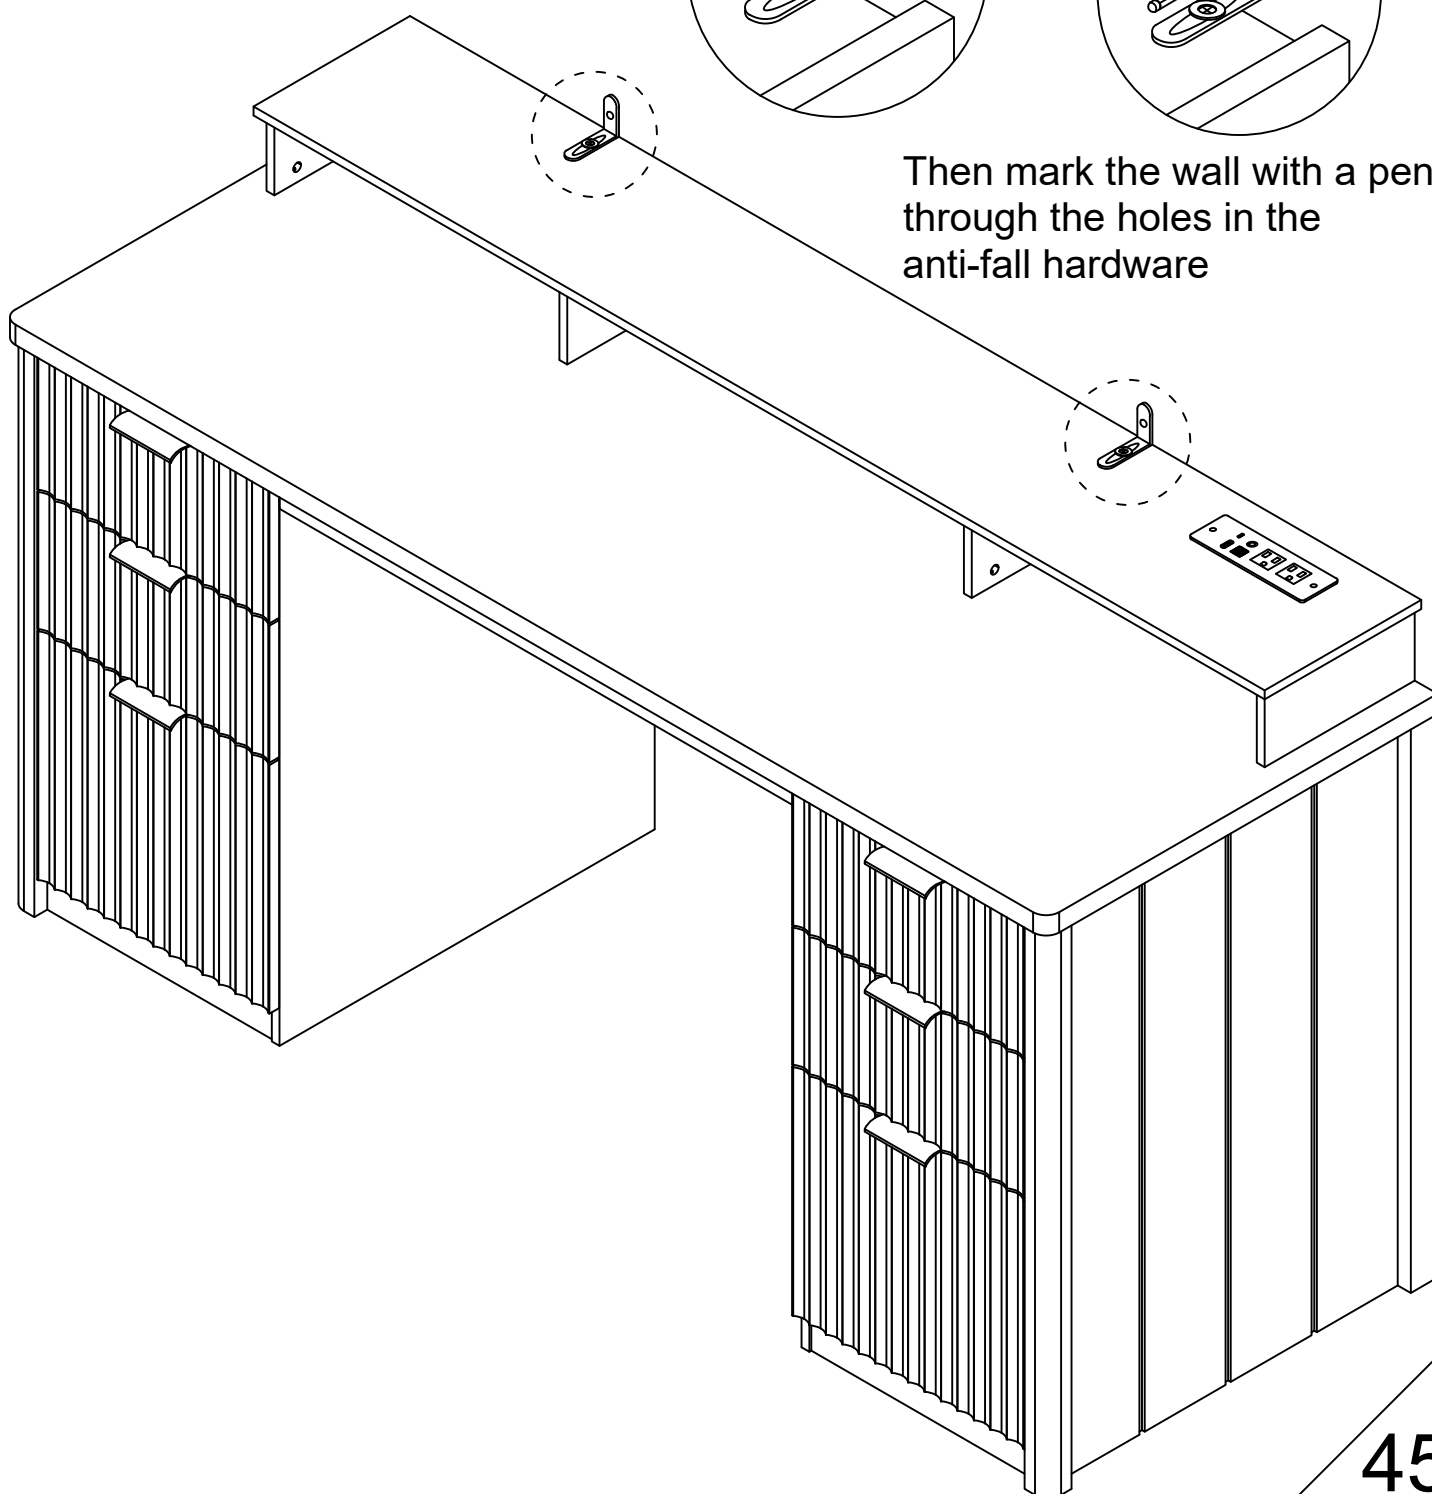


Step 61

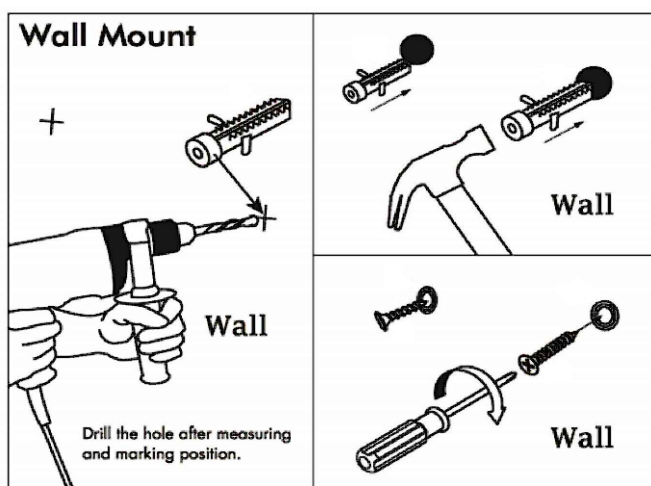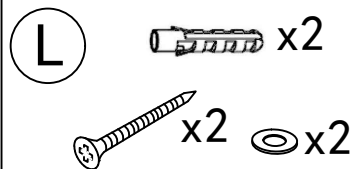

4x45mm

Fix the dressing table to the wall

Drill the hole with an electric drill and punch in the colloidal particles

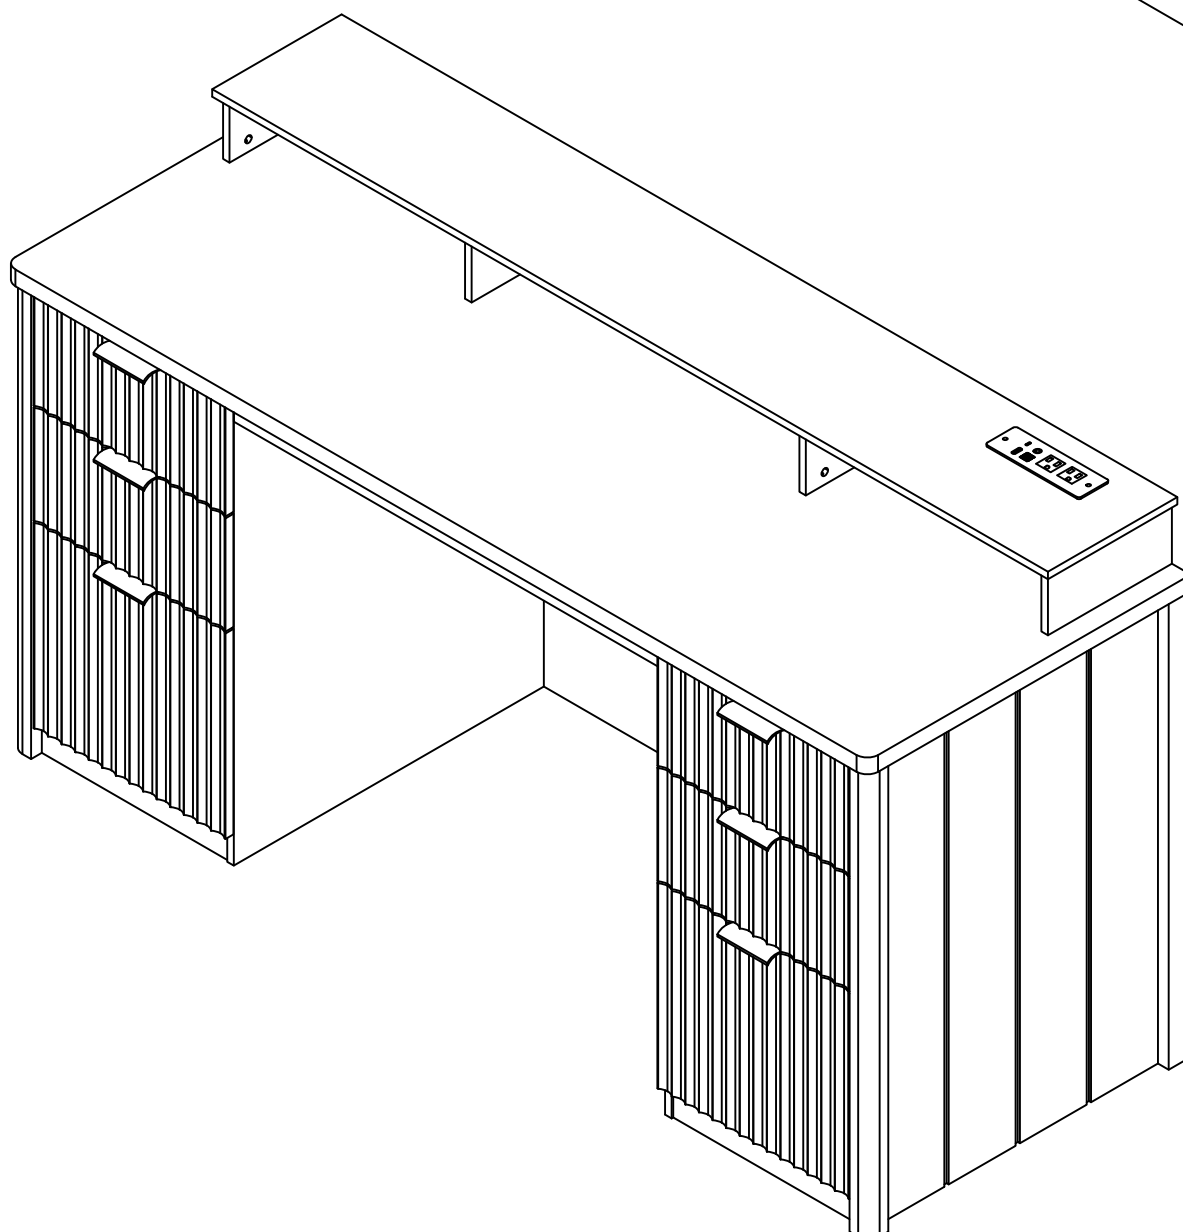



User's Guide

Thank you for purchasing this product.

To use this product, please connect it to a power source.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. It has 1 USB output port 1 Type-c port .

With 2 touch buttons, it can turn. ON/OFF the light, change light colors, and adjust the light luminance.it can and turn ON/OFF the induction function.

Operation




This touch button is used to turn on/off, change colors, and adjust brightness.

- A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off.
- B. Long touch -> adjust the luminance. (The brightness of each color can be adjusted individually)



This touch button is used to turn on/off the induction function.

- A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.
- B. Long touch to turn off the induction function.
- C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.

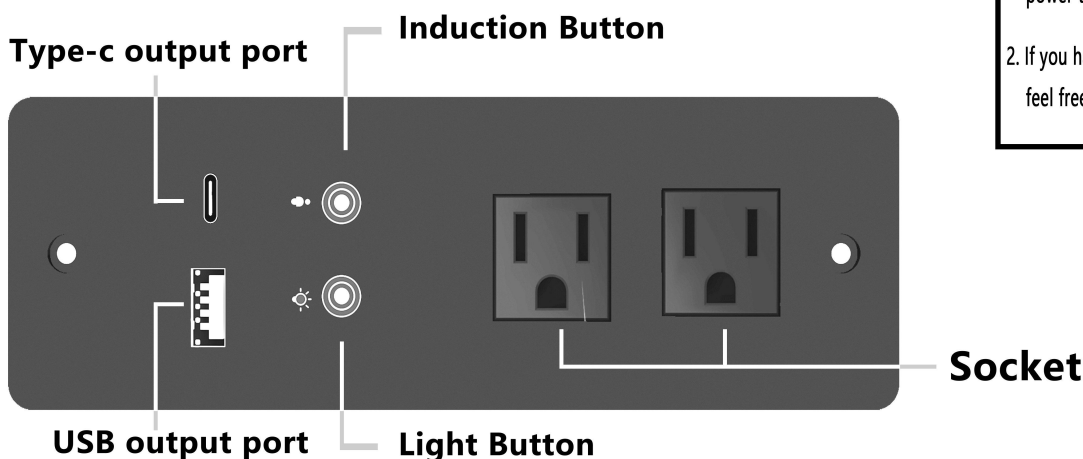

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If you have any questions when installing, please feel free to contact us. Thank you.