


**Item Number: A02335**





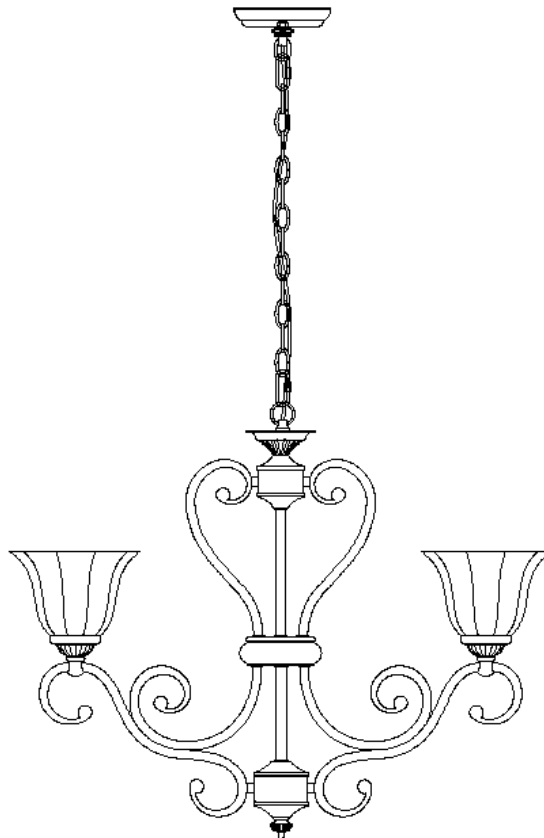

**WARNING** (To reduce the risk of fire, electric shock, or injury to persons):

1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “**OFF**” position. B). Place the wall switch in the “**OFF**” position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **60W** per bulb.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

**IMAGE FOR FINISHED PRODUCT:**


## TOOLS REQUIRED (NOT INCLUDED):

Before doing assembly and installation please prepare the needed tools as below picture

					
Ladder	Screwdriver	Electrical tape	Wrench	Wire cutter/stripper	Chain plier

## PARTS INCLUDING:

- (B) Single bar (1)
- (C) Green ground screw(1)
- (E) Hex nut (1)
- (F) Nipple (1)
- (G) Canopy(1)
- (H) Threaded ring (1)
- (I) Screw collar loop (1)
- (J) Quick link (2)
- (K) Long chain (1)
- (L) Loop (1)
- (M) Washer (1)
- (N) Top trim (6)
- (O) Decorative cap (2)
- (P) Small arm(6)
- (Q) upper fixture (1)
- (R) lower fixture(1)
- (S) Finial (1)
- (T) Socket ring (6)
- (U) Glass shade(6)
- (V) Big arm(6)

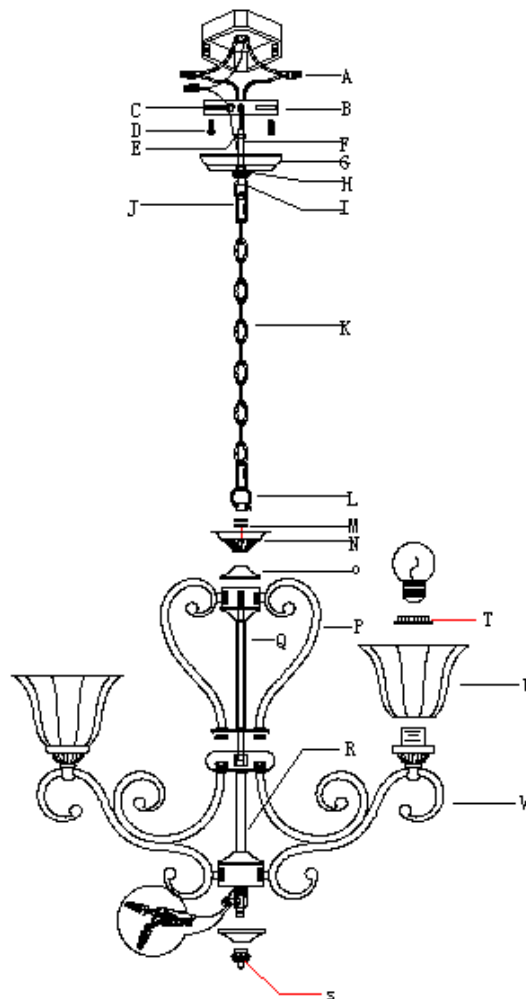


## ACCESSORIES ENCLOSED:

- (A) Plastic wire connector (3)
- (D) Mounting screw(2)

## ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration
2. Make assembly

**If the group of parts are not already assembled:**

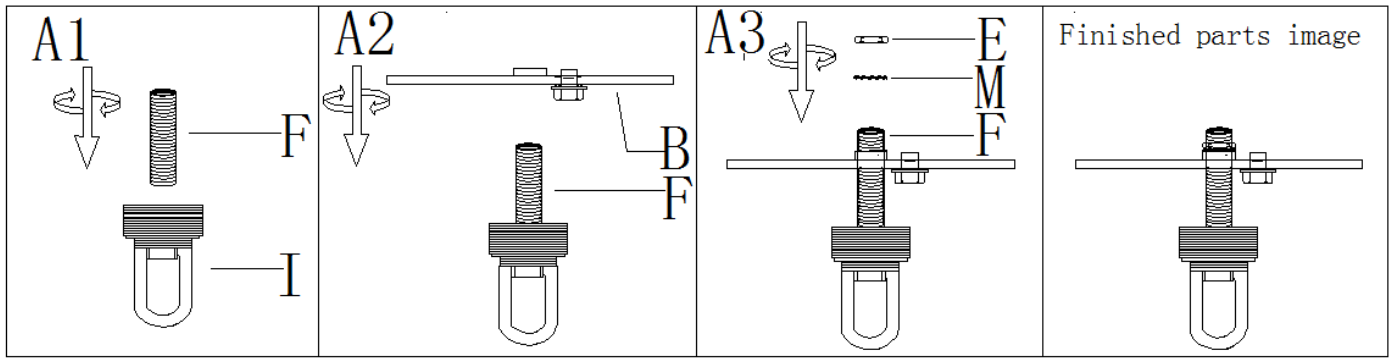


Step A1: Thread the nipple (F) into the screw collar loop (I) until snug

Step A2: Thread the another end of nipple (F) into single bar (B) then place hex nut (E) and washer (M) over the top of nipple (F).

Step A3: Tighten the hex nut (E) until tight. At this point, the side of single bar marked "GND" must face to the screw collar loop (I).

**Make upper fixture assembly**

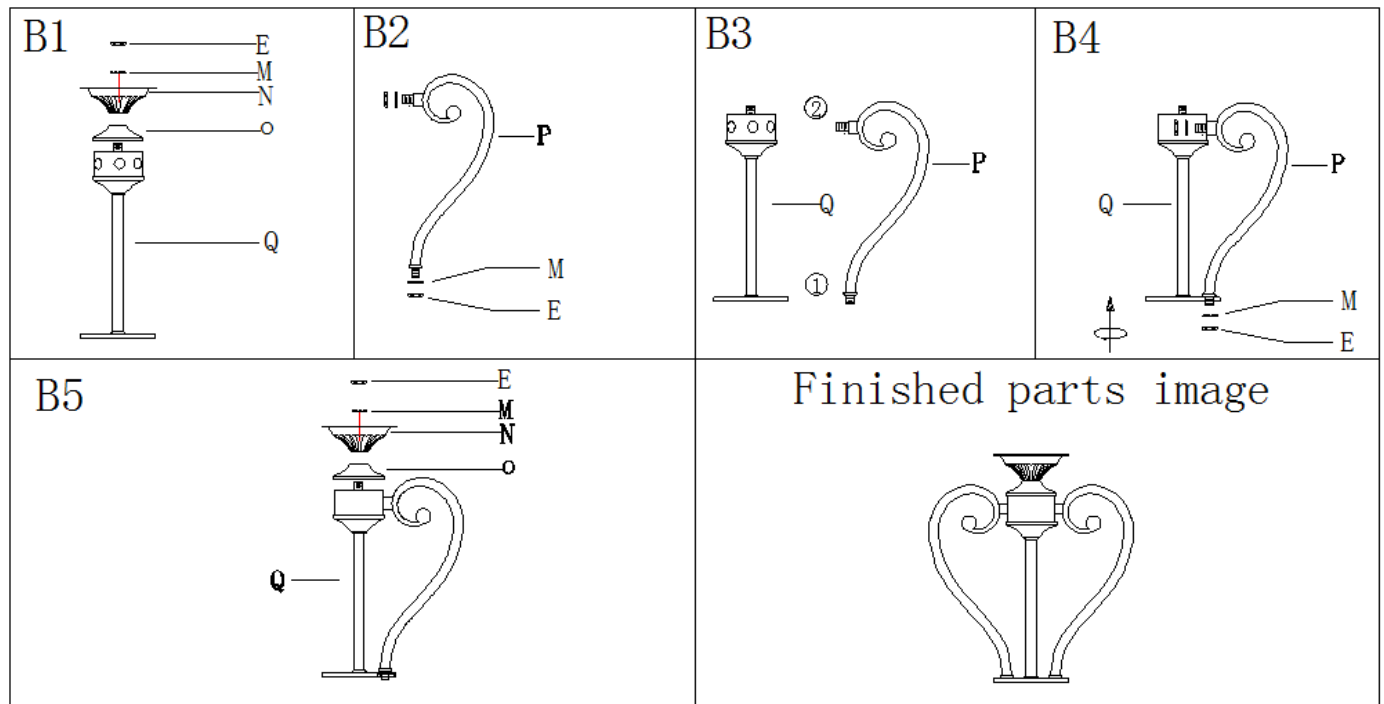

Sept B1: Unscrew the hex nut (E) from upper fixture (Q) then remove washer (M), top trim (N), decorative cap (O) from upper fixture (Q)

Sept B2: Unscrew the hex nut (E) and remove washer (M) from small arm (P), this step need do the same with the another end of small arm (P)


Sept B3: Insert the threaded ends of small arm (P) to upper fixture (Q)

Sept B4: Slide washer (M) through nipple then tighten with hex nut (E)

Sept B5: Slide decorative cap (O), top trim (N), washer (M) through nipple then tighten with hex nut (E)

Repeat the above steps to finish the others arms assembly

## Make lower fixture assembly

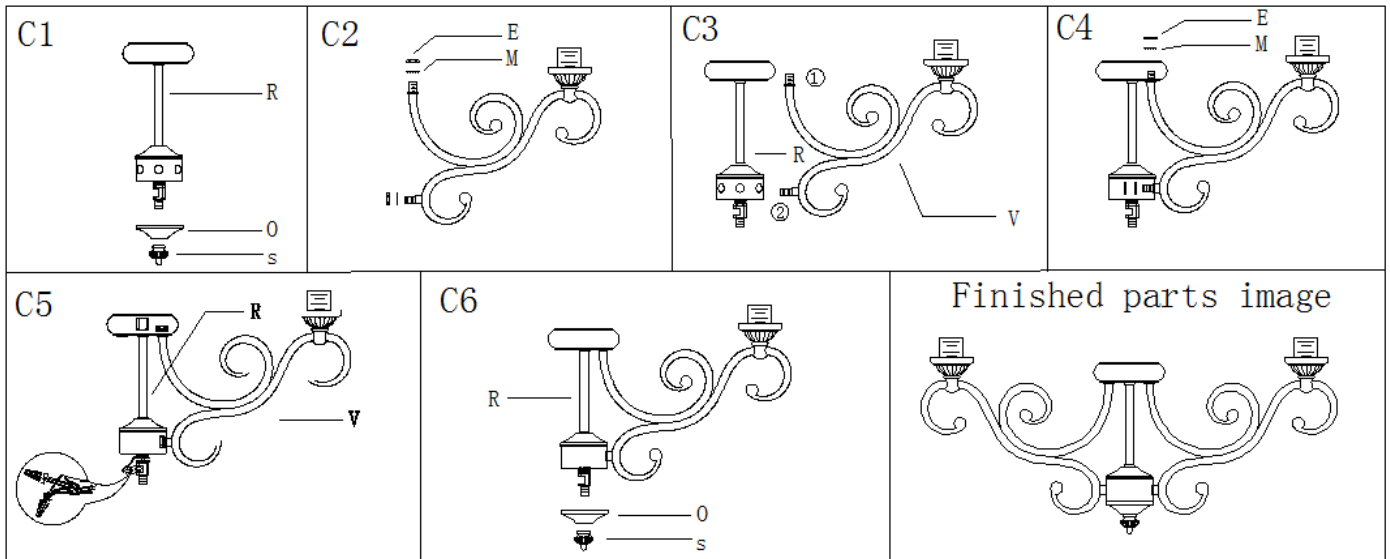

Sept C1: Unscrew the finial(S) from lower fixture(R) then remove decorative cap(O) from upper fixture(R)

Sept C2: Unscrew the hex nut (E) and remove washer(M) from big arm(V), this step need do the same with the another end of big arm(V)


Sept C3: Insert the threaded ends of big arm (V) to lower fixture(R)

Sept C4: Slide washer (M) through nipple then tighten with hex nut(E)

Repeat the above steps to finish the others arms assembly

Sept C5: Make wire connections inside wire house : insert the end of smooth and black wires into plastic wire connector until snug, then twist plastic wire connector(A) until wires are tightly joined together, wrap each connector with approved electrical tape. Do the same with ribbed and white wires


## Make the whole fixture assembly

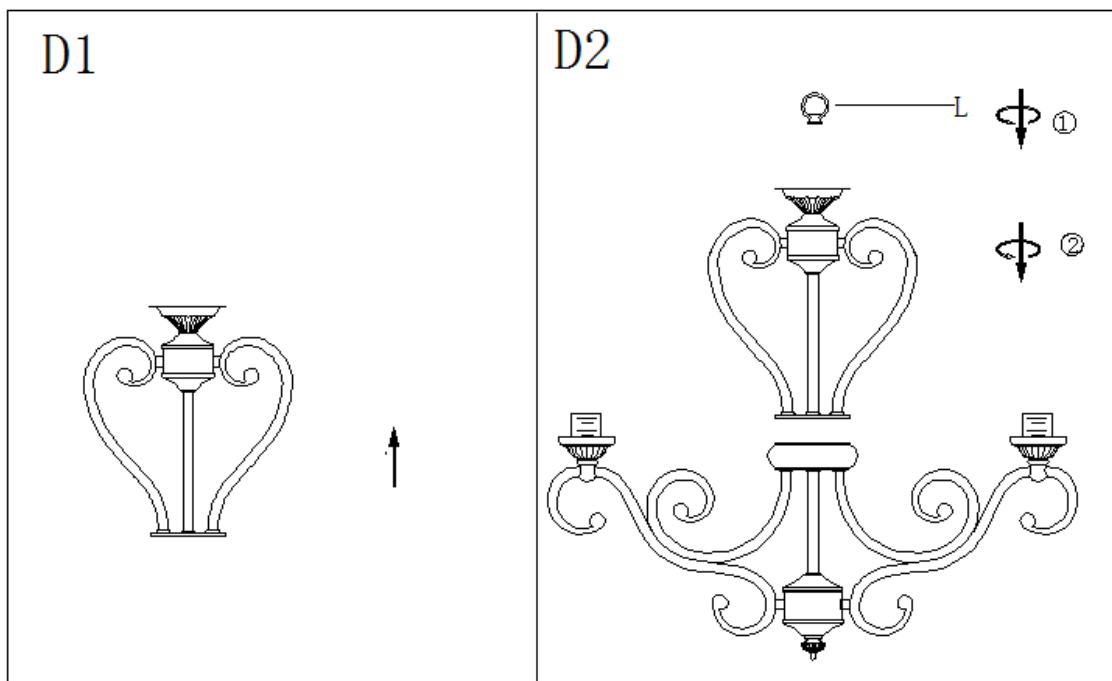

Step D1: carefully pass cord through upper fixture

Step D2: Thread the upper fixture onto the lower fixture until snug, then thread the loop(L) onto the nipple inside top trim.

### 3. Make pre-installation

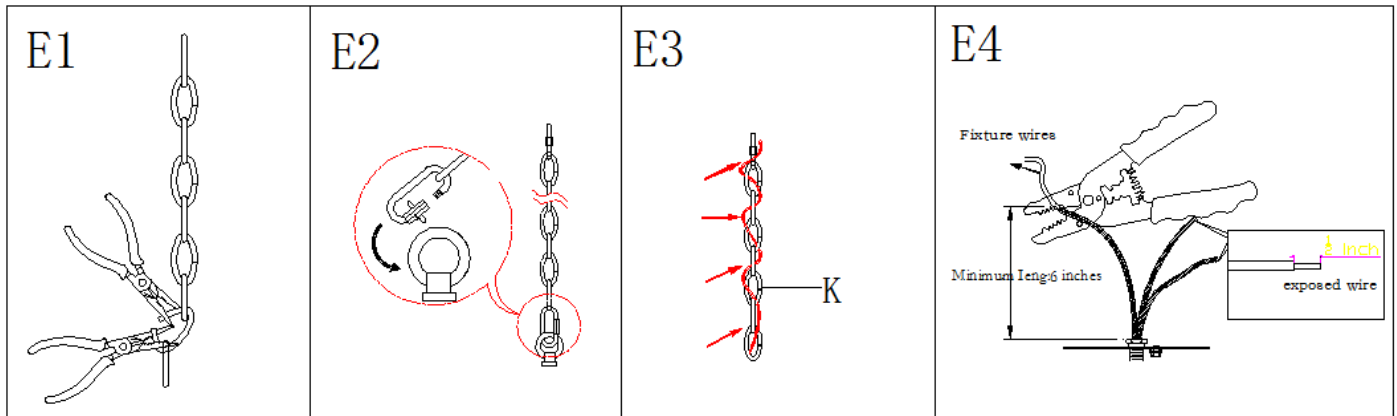

Step E1: By measuring, determine the correct length of wires needed. Use the wire pliers, cut and discard the remaining wires.


Step E2: Attach a quick link (J) to loop on the top trim and to connect the end of chain (K).

Step E3: Gently lace wires through short chain (K), top trim (M), long chain (K) to the top of another quick link (J)

Step E4: If needed, cut off the wires length of fixture. At this point, need take note of length should be available for the following mounting. The length from the top of nipple are at least 6"

### 4. Turn off power

### 5. Make installation

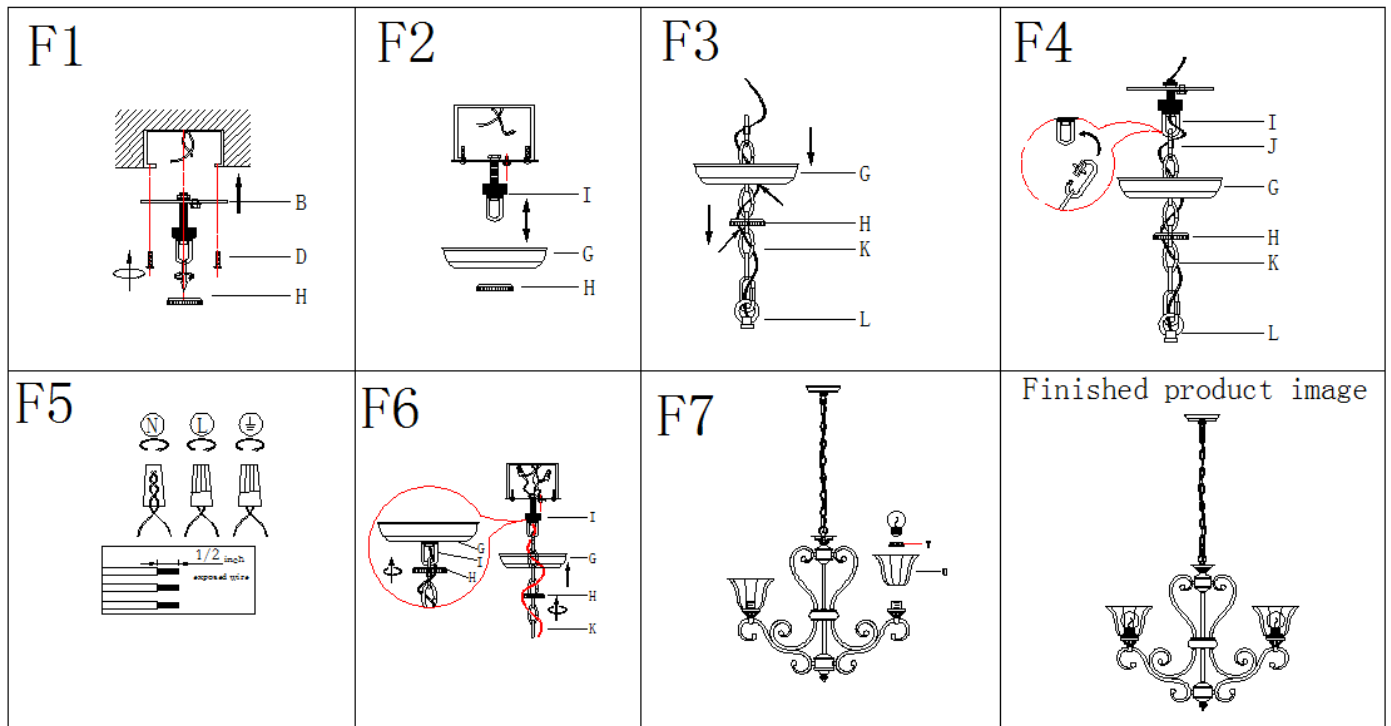

Step F1: Attach single bar (B) to outlet box with mounting screw (D). The side of single bar marked "GND" must face out

Step F2: Raise the canopy (G) through collar loop (I) and screw the collar loop (I) to a proper position by measuring .

Unscrew threaded ring (H) from collar loop (I) and remove the canopy (G).

Step F3: Slip threaded ring (H) over the chain (K) and wires, then do the same with the canopy (G)


Step F4: Open the quick link (J) then attach to the screw collar loop (I). Close the quick link (J).

Pass the wires through screw collar loop (I) to the top of nipple (F)

## Step F5: Make wire connections

Connect wires as below wires connecting shown. **TAKE NOTE OF YOUR COLOR OF FIXTURE ,NEVER CONNECT WIRES TO GROUND WIRES**


### Connect ground wire according to below chart

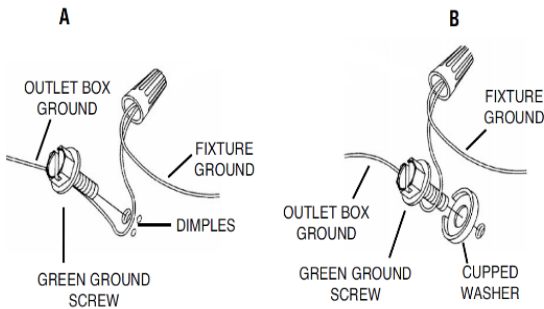

### Connect wires according to below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



Twist plastic wire connector(A) until wires are tightly joined together,wrap each connector with approved electrical tape and carefully stuff all wires into the outlet box

Step D6:Raise canopy(G) to ceiling and secure canopy(G) in place by tightening threaded ring (H)onto collar loop(I)

Step D7:Remove socket ring from socket,then position glass on lamp,and secure with the socket ring.

Install bulb (Not included. Please do not exceed the maximum capacity recommended on the socket.)

**6. Check everything installed properly, then you could turn on the light.**