

INSTALLATION GUIDE

WARNINGS AND CAUTIONS

Released Date:2026-02

READ AND SAVE THESE INSTRUCTIONS

Please read and understand this entire manual before attempting to assemble, install or operate the product.

WARNING

- **RISK OF ELECTRIC SHOCK** - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.

- **RISK OF FIRE** - Use bulbs specified by the markings and/or labels on the fixture.

- **RISK OF PERSONAL INJURY** - DO NOT bend the blades when installing the fan, or cleaning the fan.

Do not insert foreign objects in between rotating fan blades.

- **RISK OF FIRE, ELECTRIC SHOCK, OR PERSONAL INJURY** - mount to outlet box marked and use mounting screws provided with the outlet box.

- All set screws must be checked, and re-tightened where necessary, before installation.

- After making the wire connections, the wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box and the ungrounded conductor on the other side of the outlet box.


CAUTION

- For your safety, read instructions completely before beginning installation.

- If in doubt about electrical installation, consult a licensed electrician.

- Disconnect fixture from the power source before replacing bulbs or cleaning. Make sure the bulbs are given sufficient time to cool be before removing.


TOOLS REQUIRED

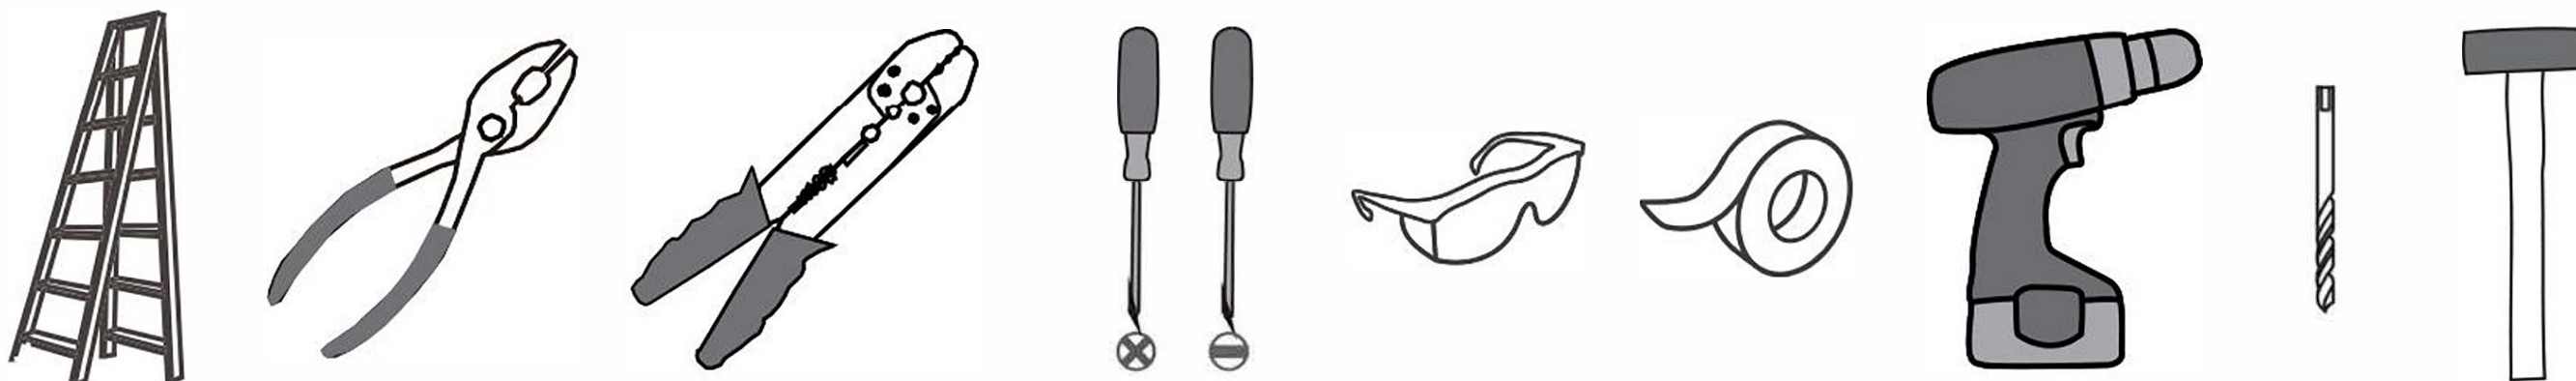


CARE AND MAINTENANCE

- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.


PACKAGE CONTENTS

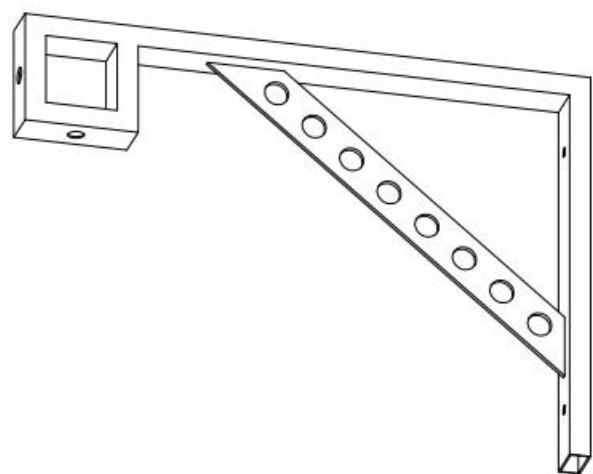


A Triangular Bracket
x 1

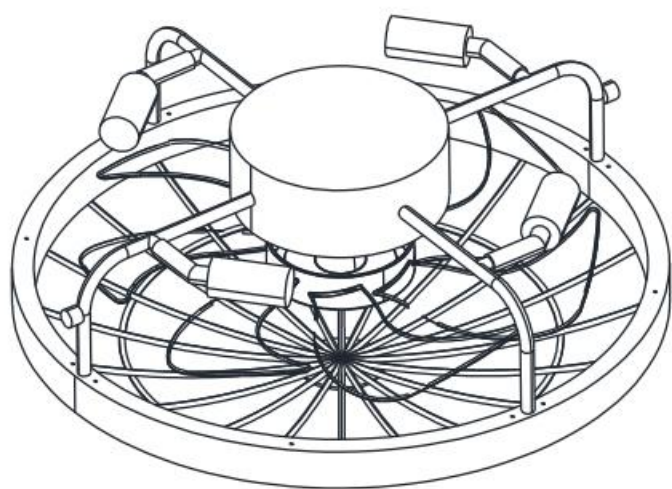

B Fixture Body
x 1

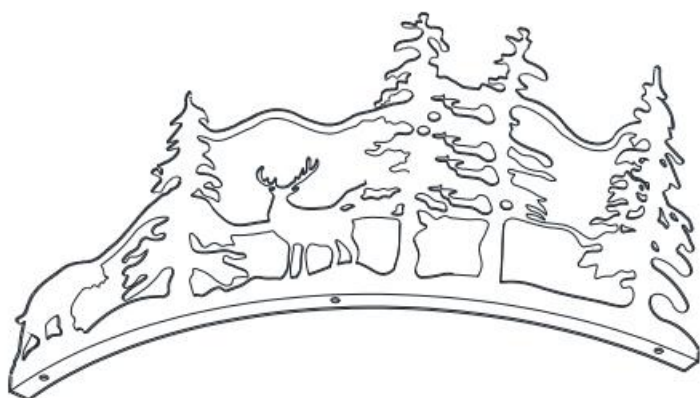

C Forest Deer Lace Iron
x 4

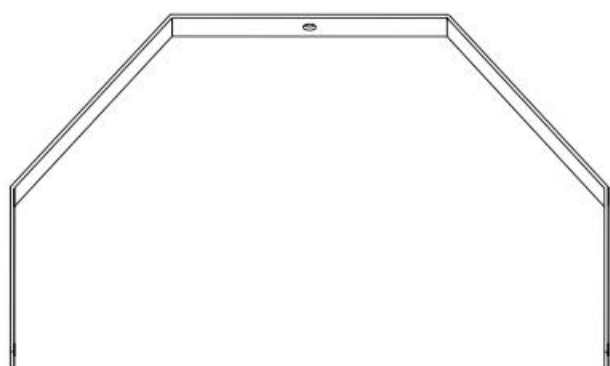


D Arc-shaped Hanger
x 1


PACKAGE CONTENTS (PARTS BAG 1)



NOTE: Hardware not shown to actual size.



AA Wing Nut with Threaded Stud
x 2



HH Cotter Pin
x 1



BB Spacer Sleeve
x 1



II Anchor Bolt
x 2




CC Hex Bolt
x 1



JJ Remote Bracket Anchor
x 2




DD Hex Nut
x 1




KK Remote Bracket Screw
x 2



EE Wood Screw
x 2




LL Remote Bracket
x 1



FF Flat Washer(large)
x 1



MM Remote
x 1




GG Flat Washer(small)
x 2




NN Glove
x 1

INSTALLATION

1 Remove the 12 screws from the fixture body

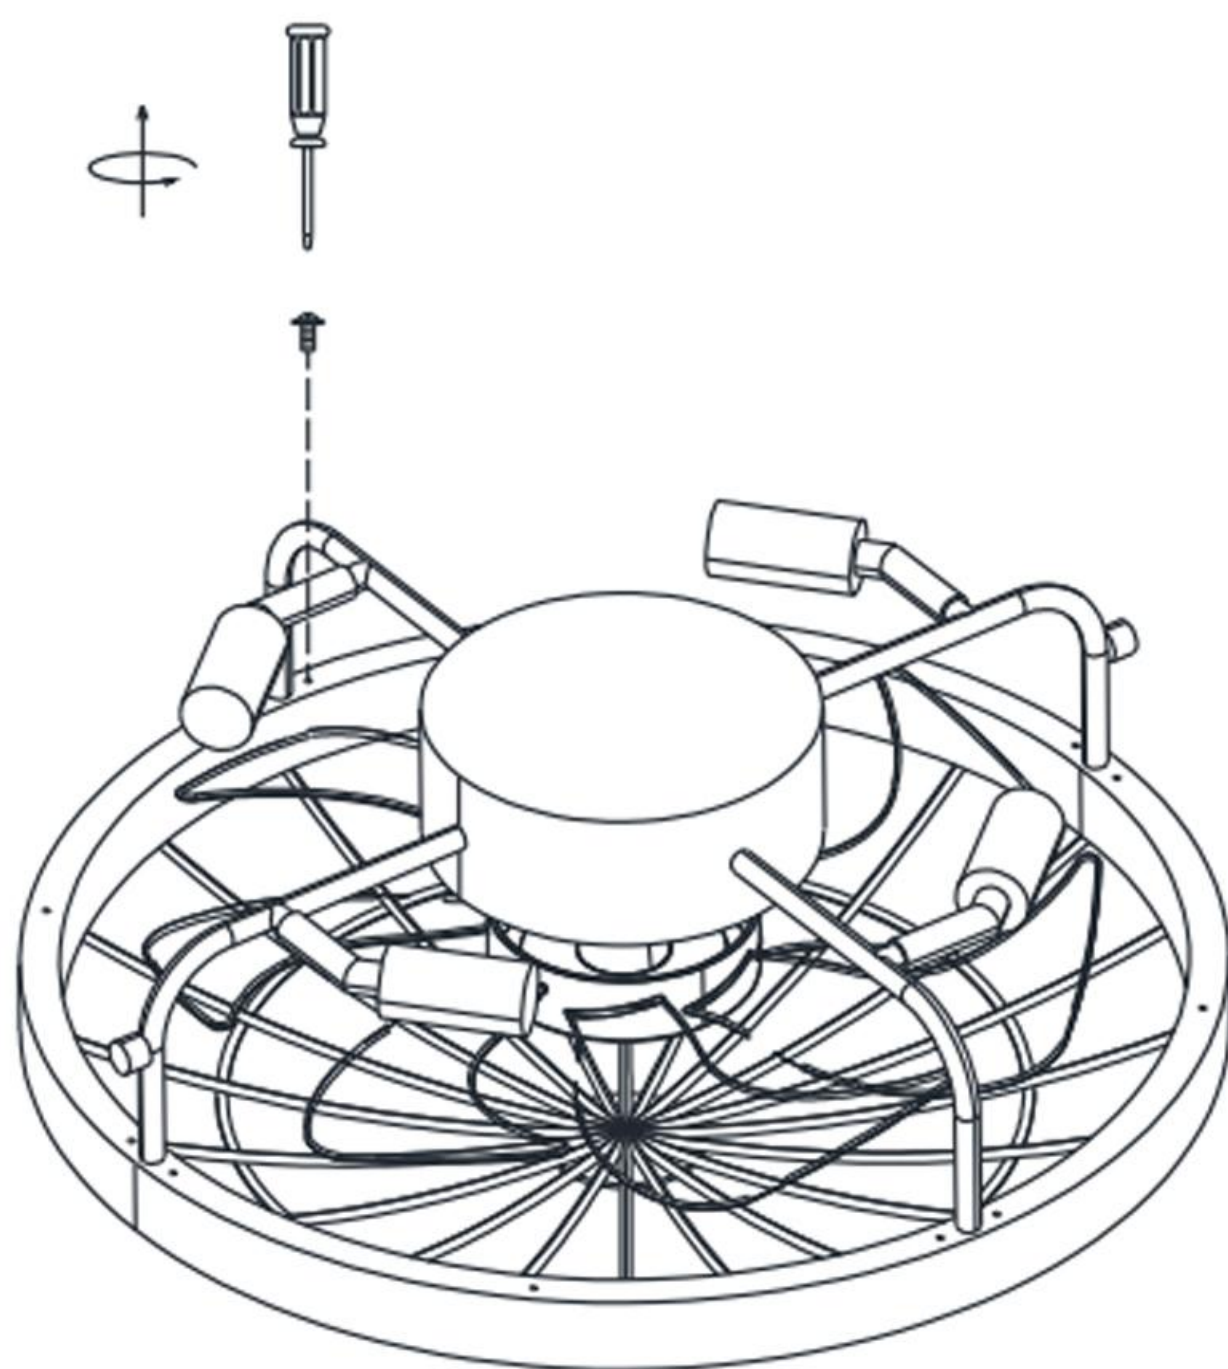


2 Install the Forest Deer Lace Iron onto the fixture body, and secure it by tightening the screws in the order of fixture body → Forest Deer Lace Iron → fan bottom

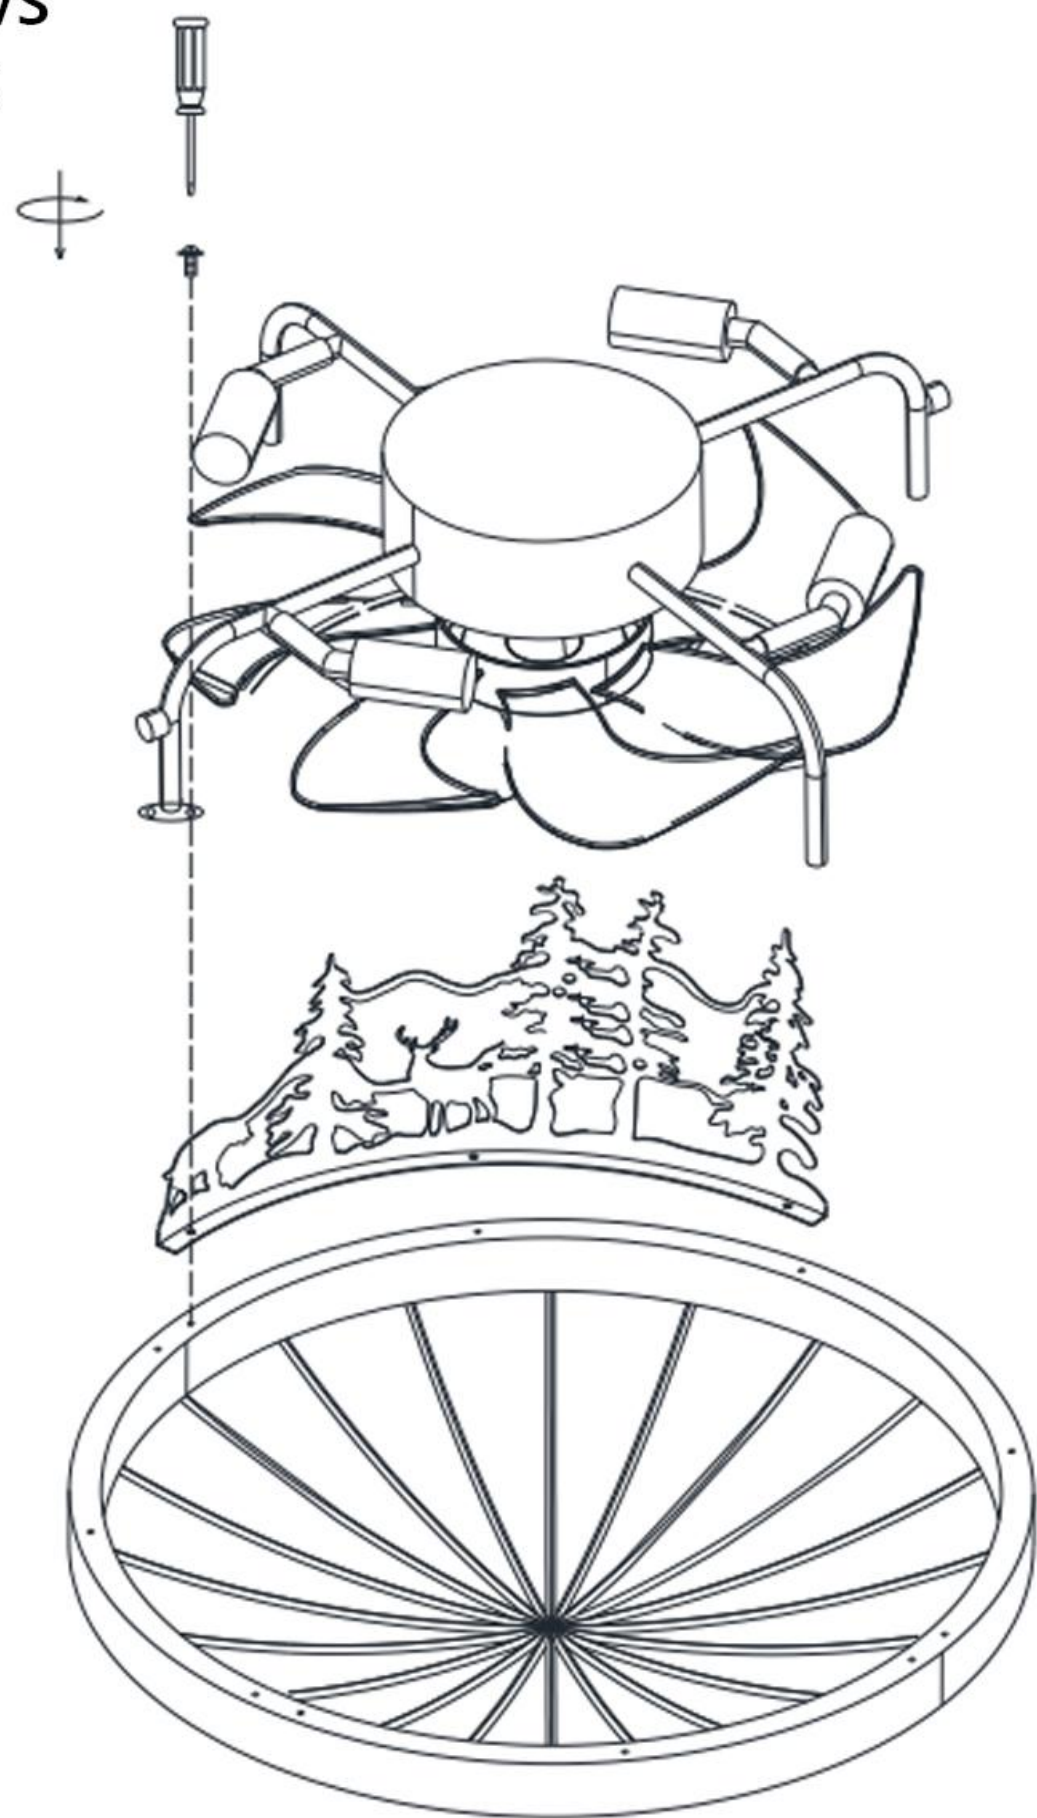


INSTALLATION

3 Install Arc-shaped Hanger

Align the holes on the fixture body with the holes on the Arc-shaped Hanger, and secure them using the Wing Nut with Threaded Stud(AA)

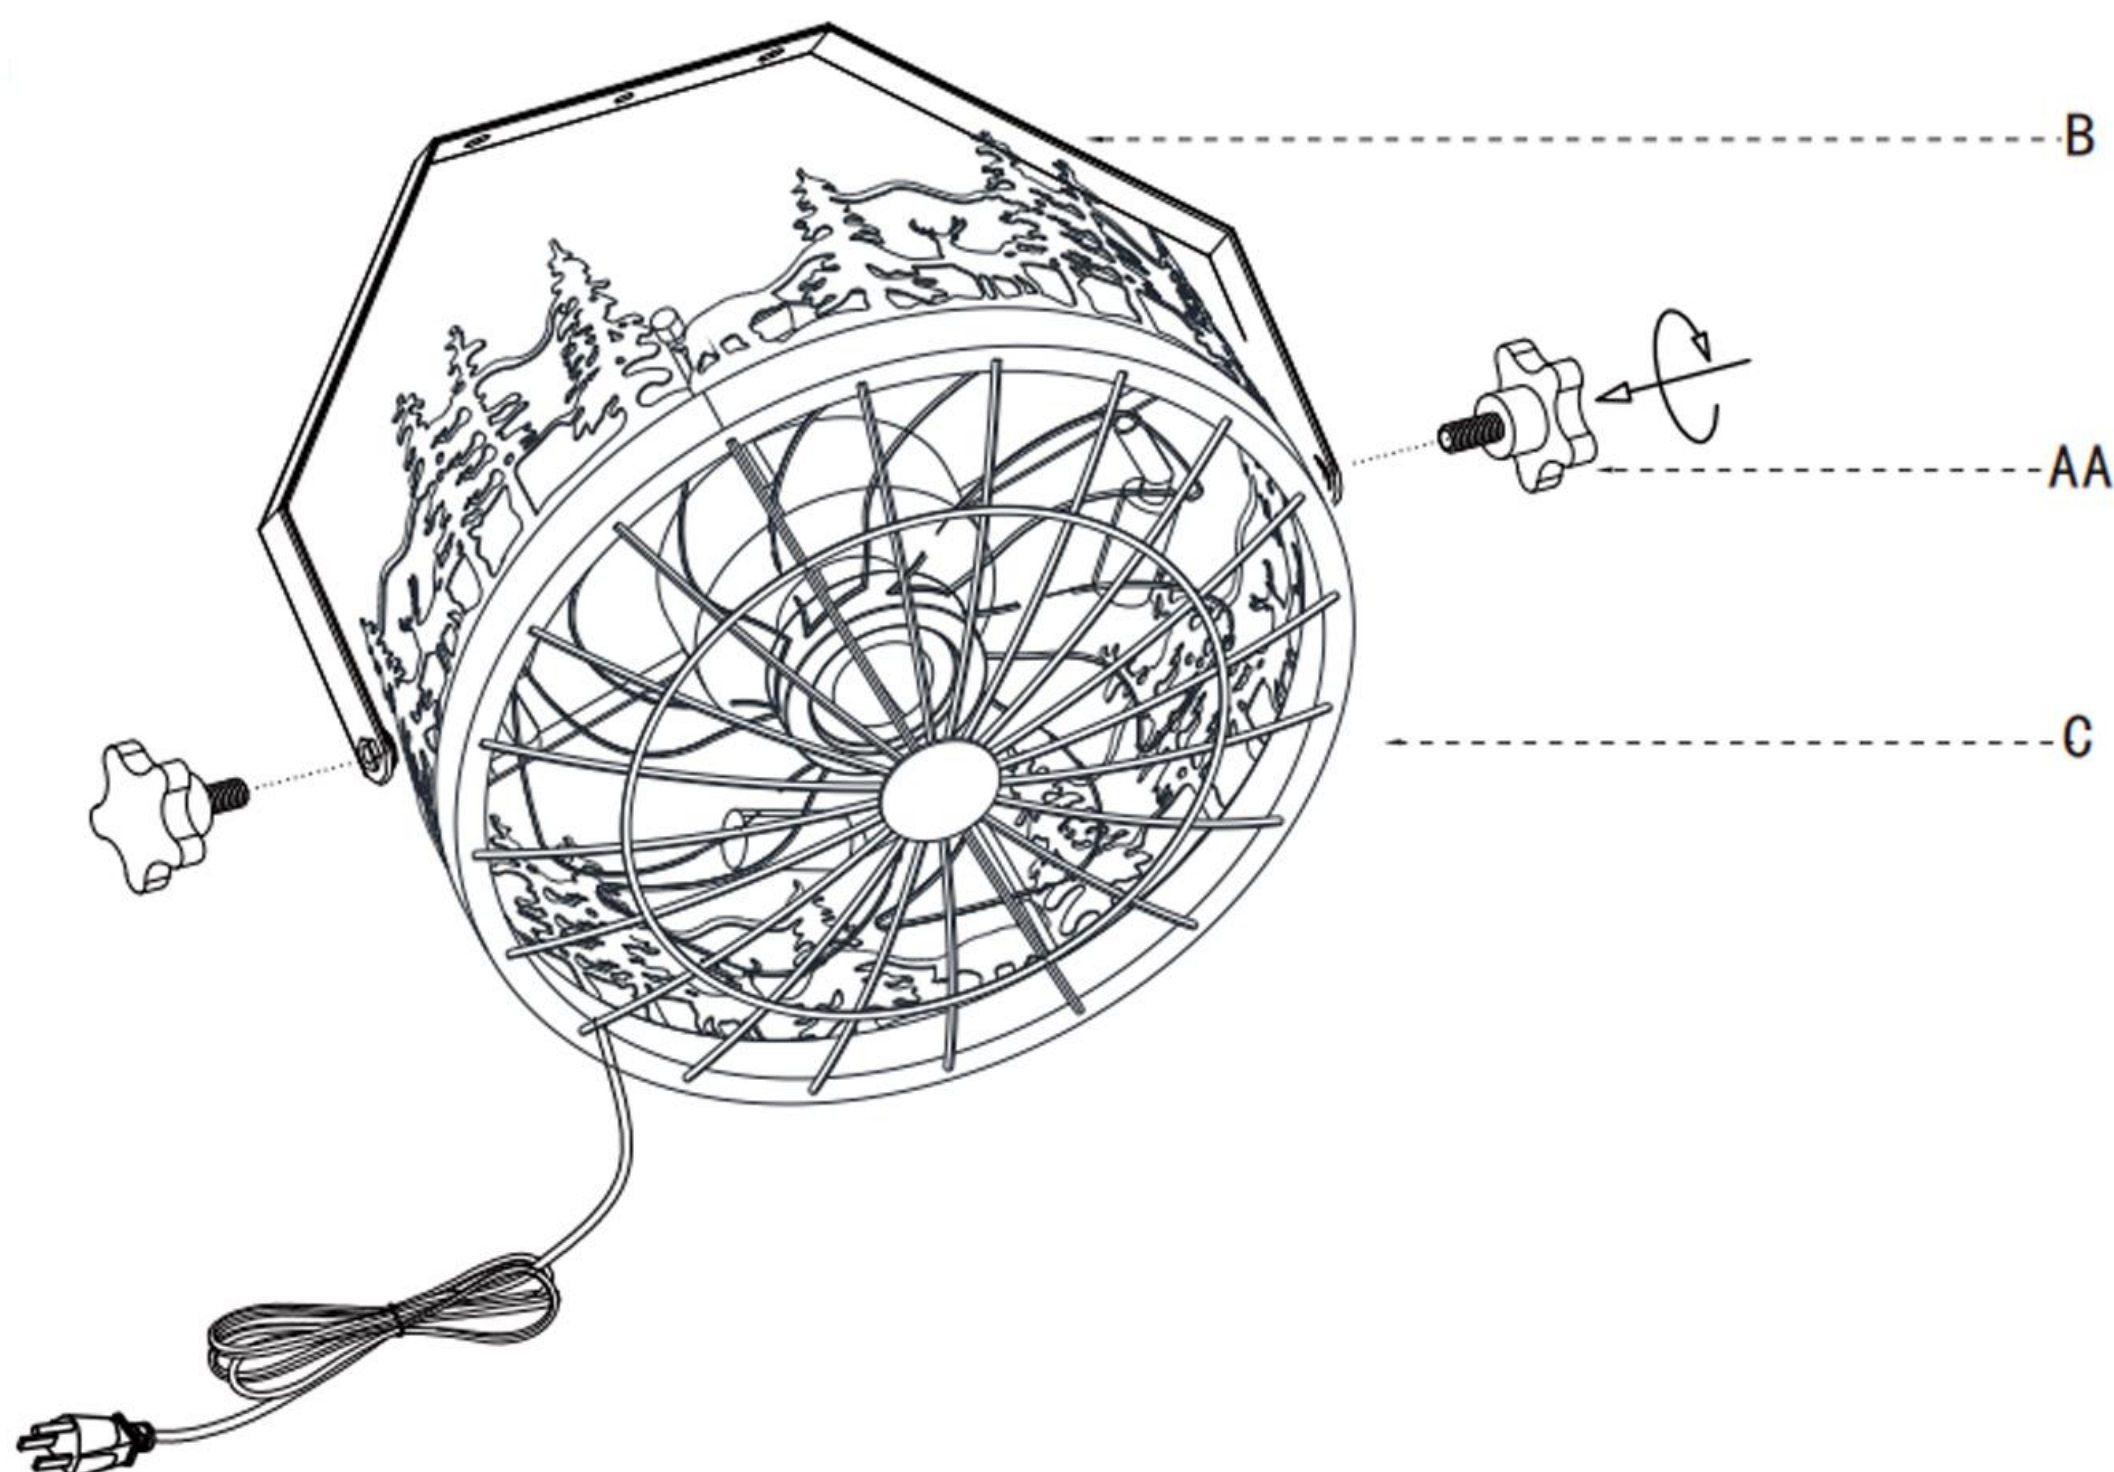

4 Install the triangular bracket (for wooden wall installation)


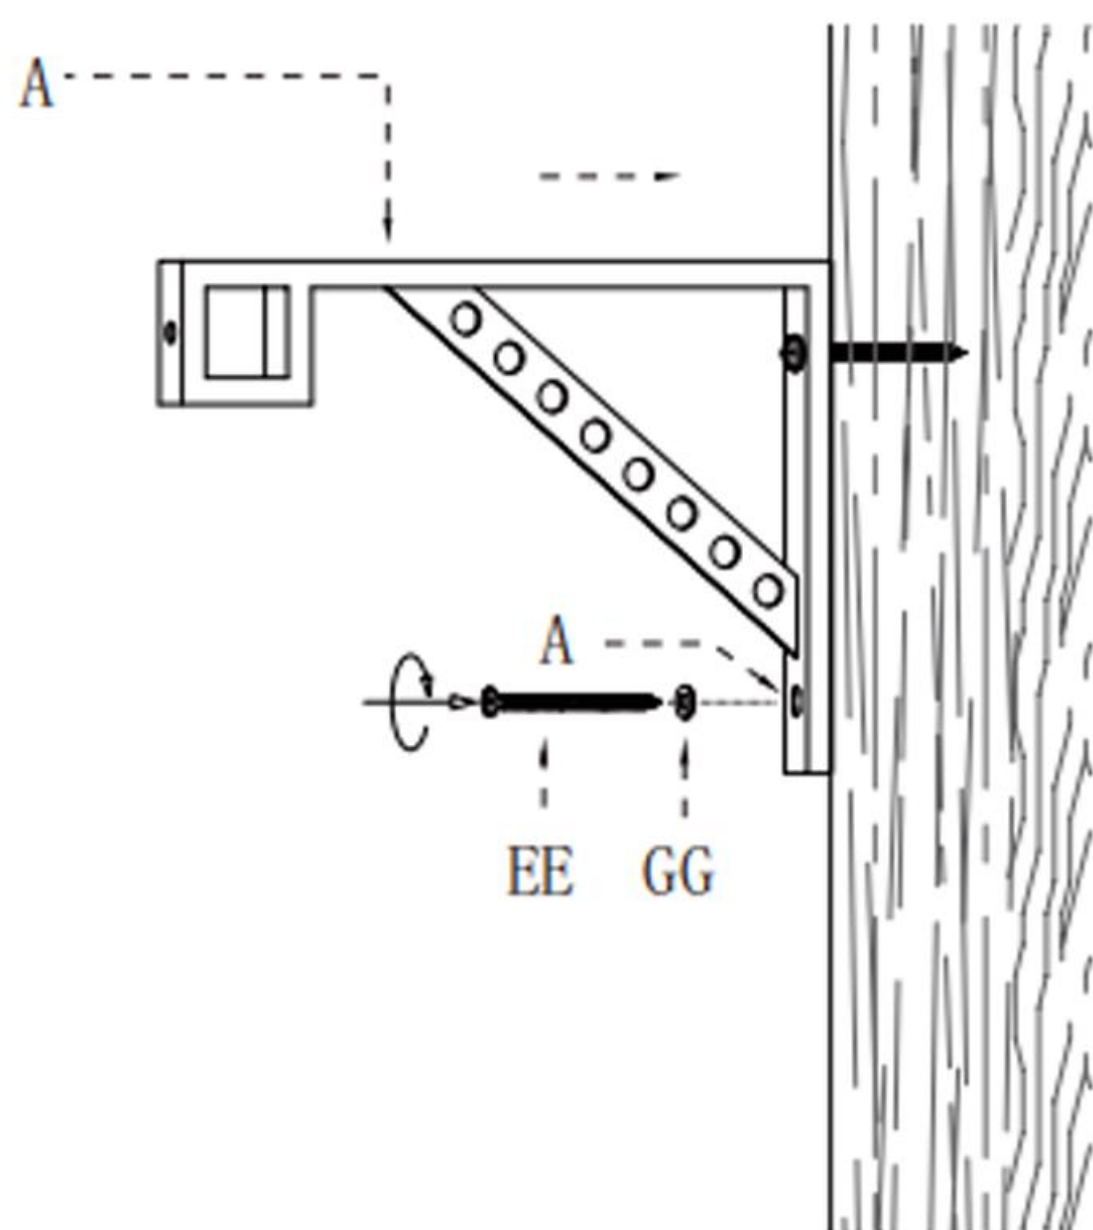


Step 1. Position the triangular bracket against the wooden wall.


Step 2. Insert the wood screw (EE) through the small flat washer (GG) and tighten it to secure the triangular bracket.

INSTALLATION


5 Install the triangular bracket (for non-wooden wall installation)

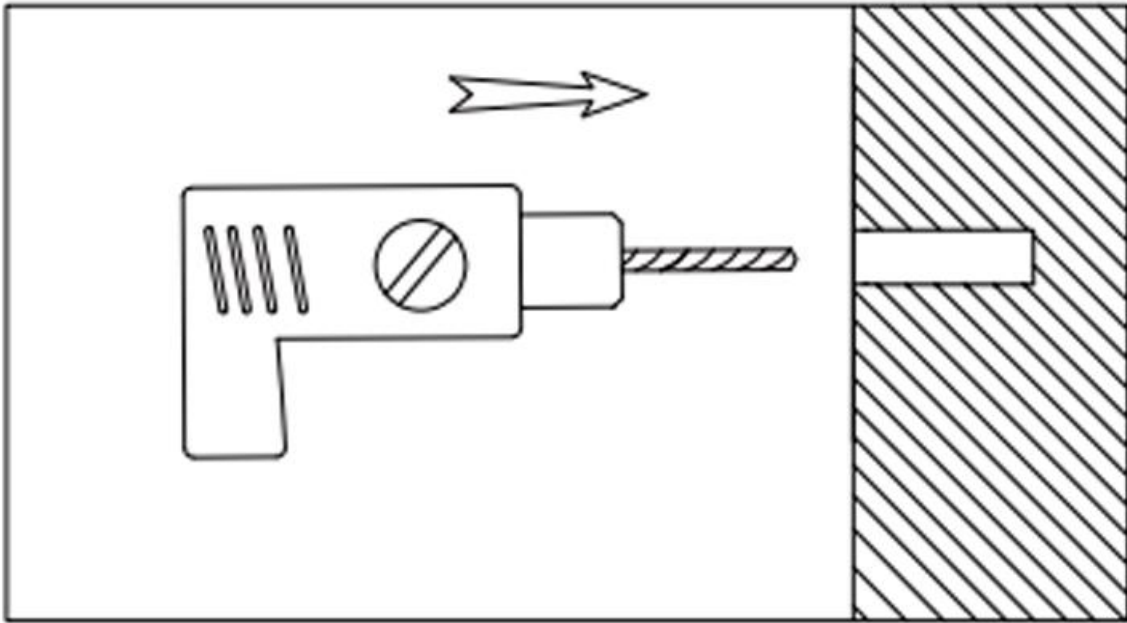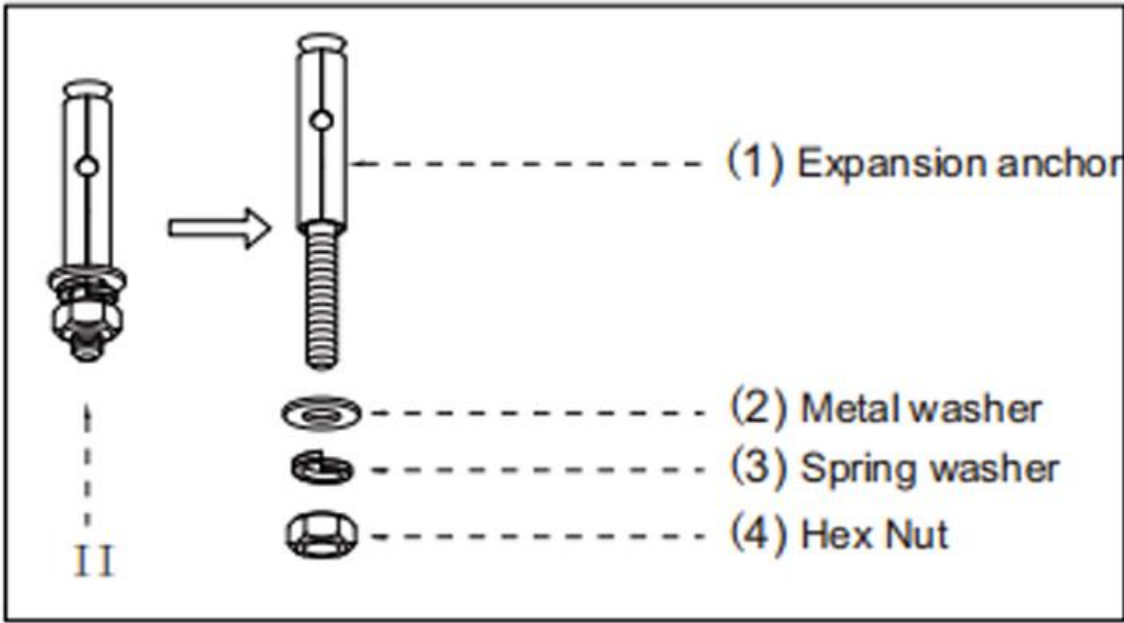


Step 1. First fix the bracket position, then drill the holes.

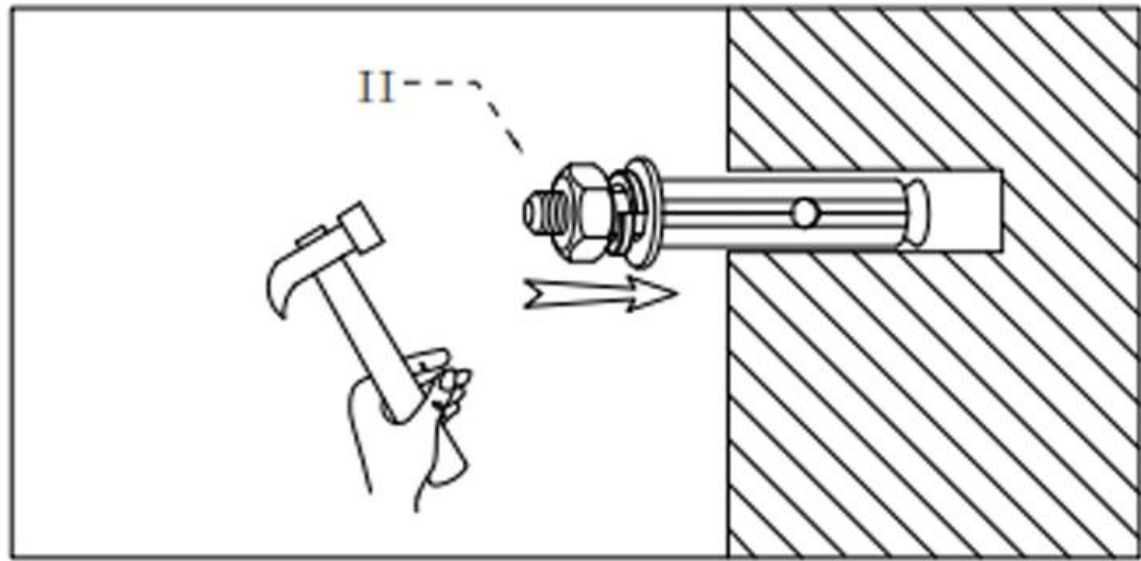


Step 2. Insert expansion anchor (1) into the hole. Note: Do not remove hex nut (4), spring washer (3), and metal washer (2).

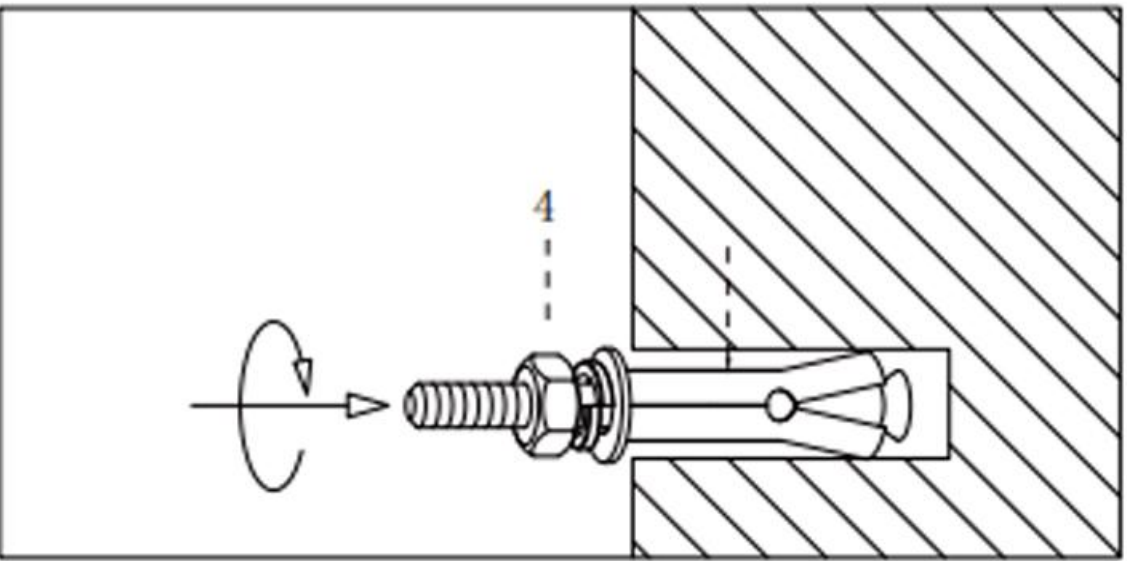

Step 3. Tighten hex nut (4) until expansion anchor (1) feels secure and no longer loose.

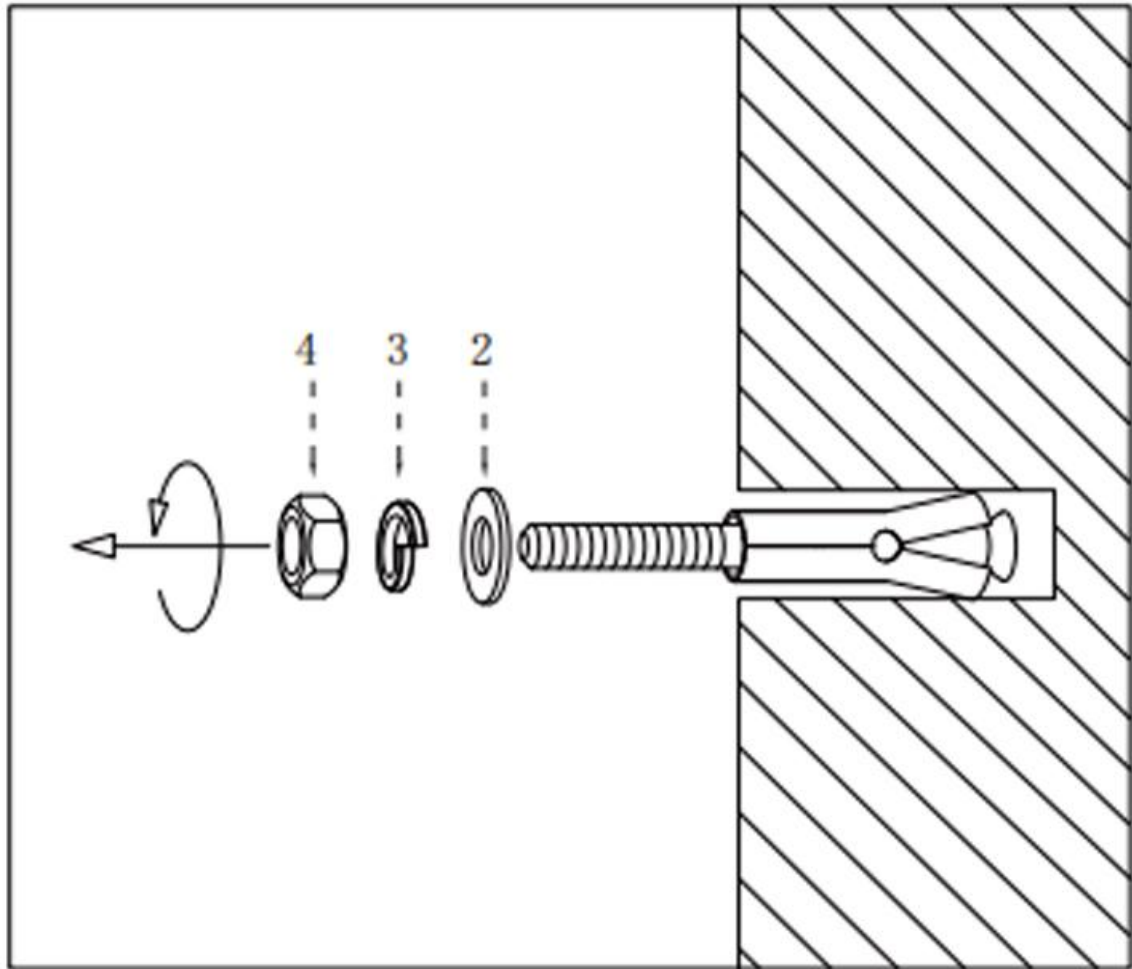


Step 4. Remove hex nut (4), spring washer (3), metal washer (2) for use in the next step.

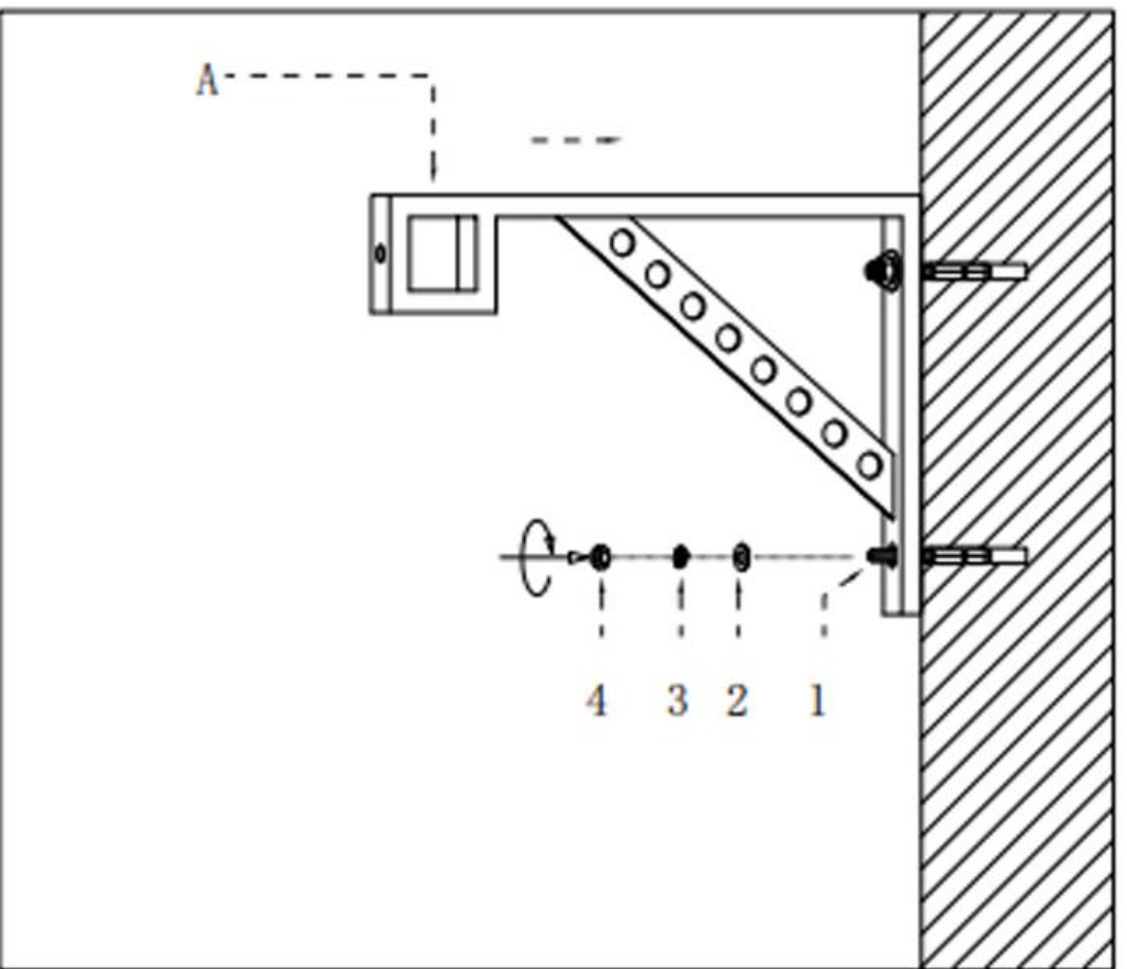

Step 5. At last insert the hole on triangular bracket (A) into expansion anchor (1); Successively fit in metal washer (2), spring washer (3), and tighten with hex nut (4).


INSTALLATION

6 Attach the fixture body to the triangular bracket

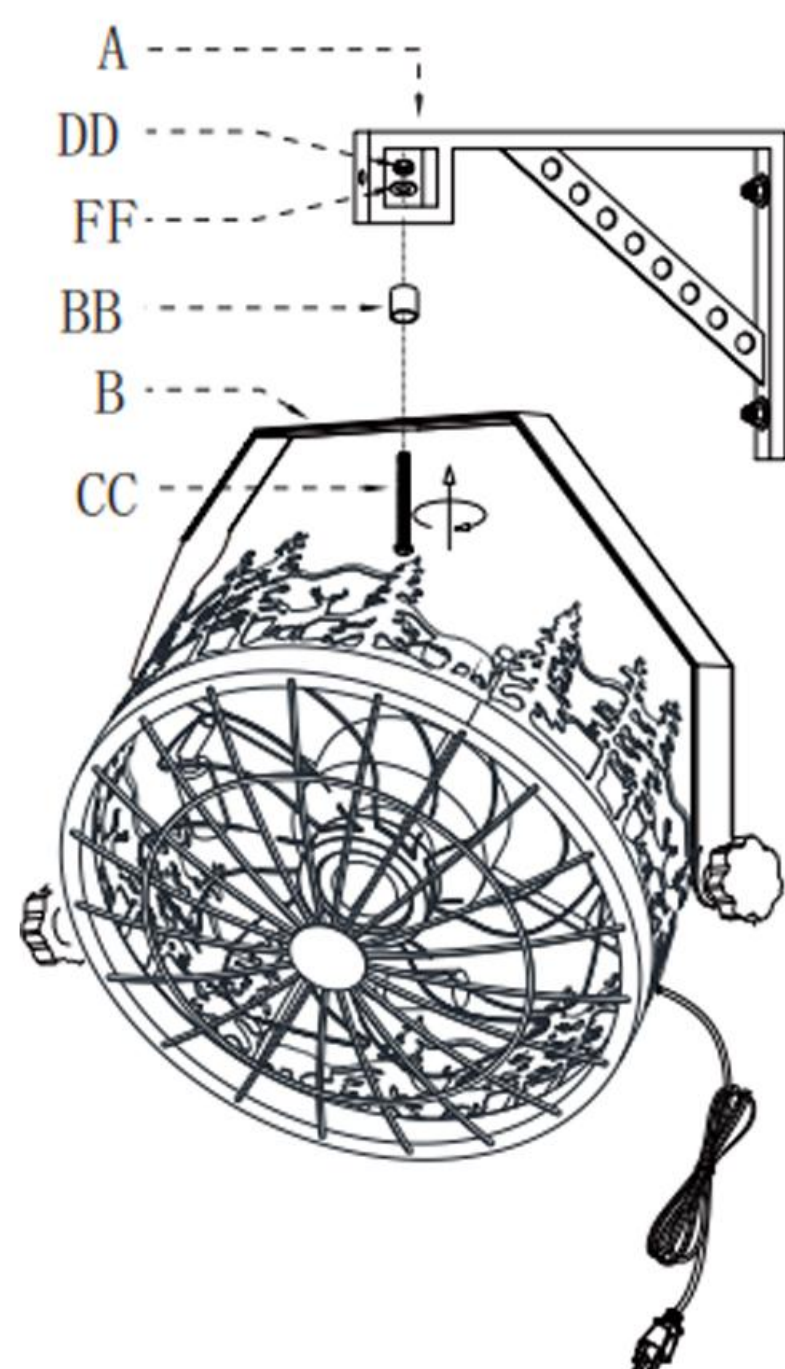

Secure the hex bolt (CC) through the arc-shaped hanger, Spacer Sleeve (BB), and triangular bracket, then fasten with the small flat washer (FF) and hex nut (DD)


7 Secure the fixture body

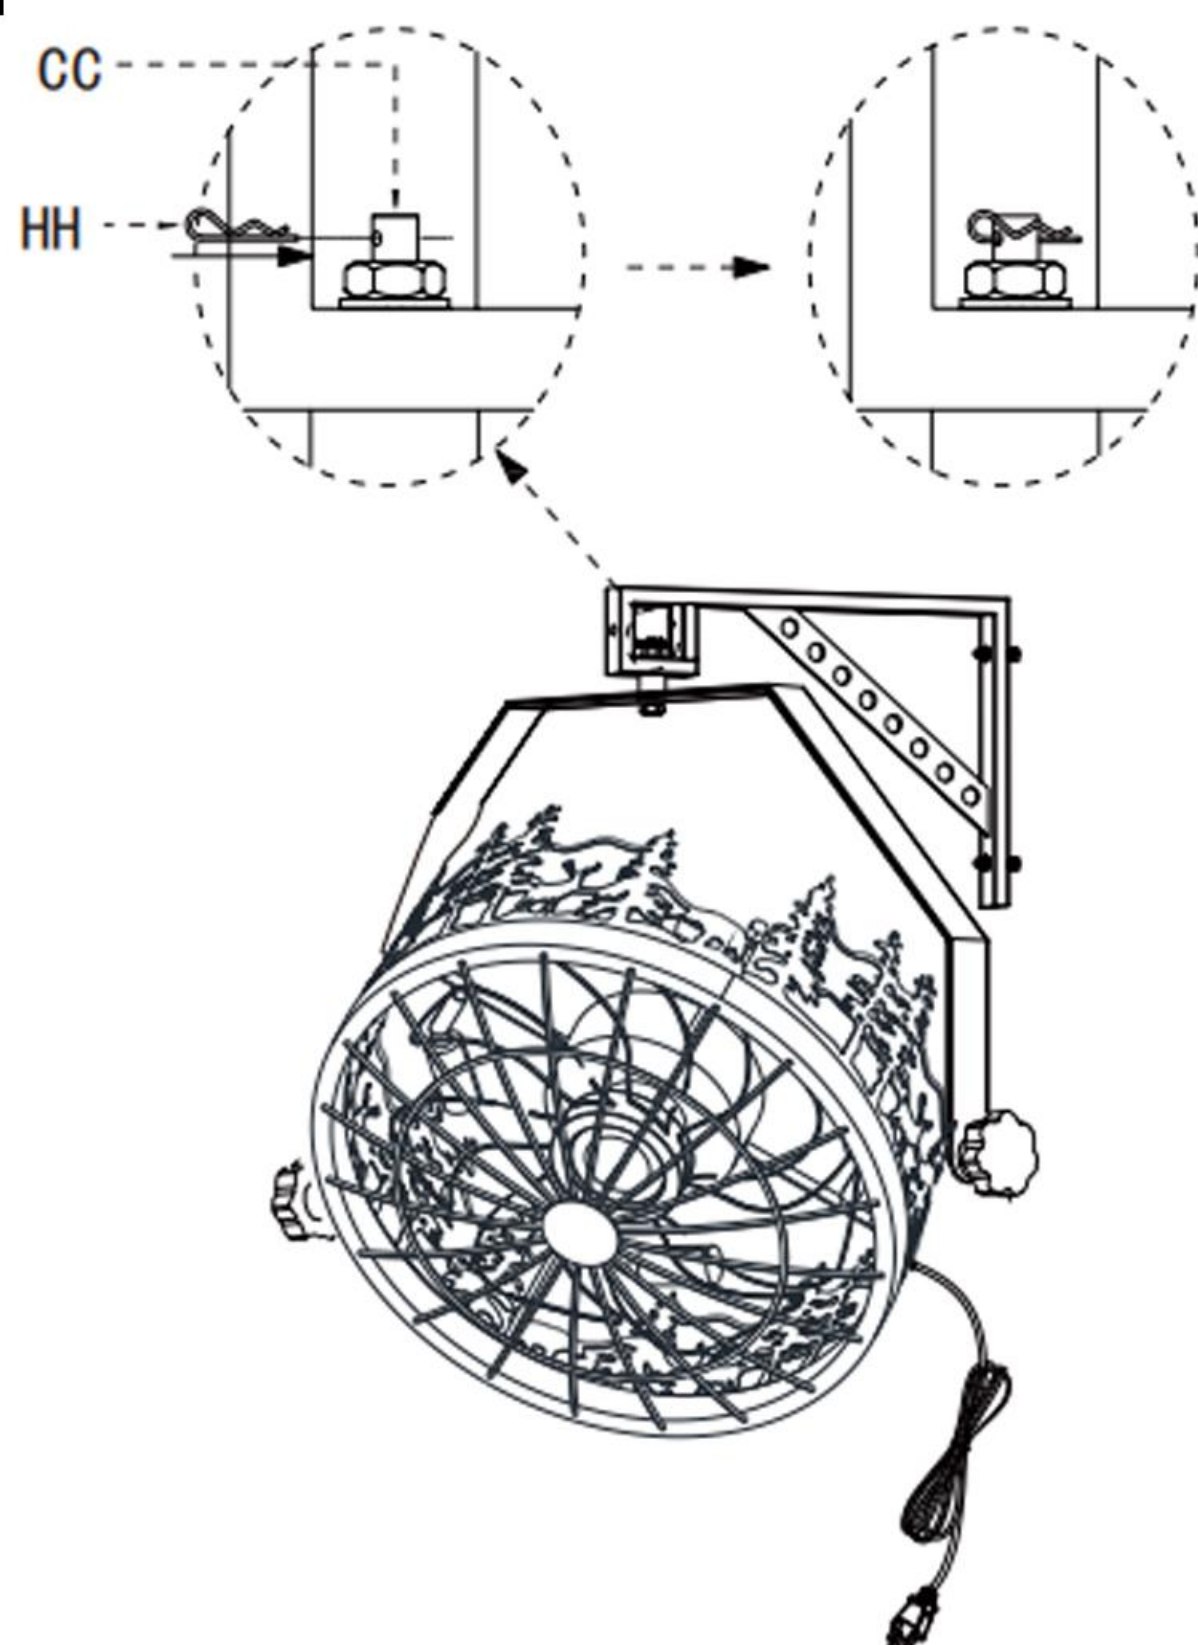

Insert the Cotter Pin (HH) into the hole of the hex bolt (CC)

INSTALLATION


8 Adjusting the Wind Direction Angle

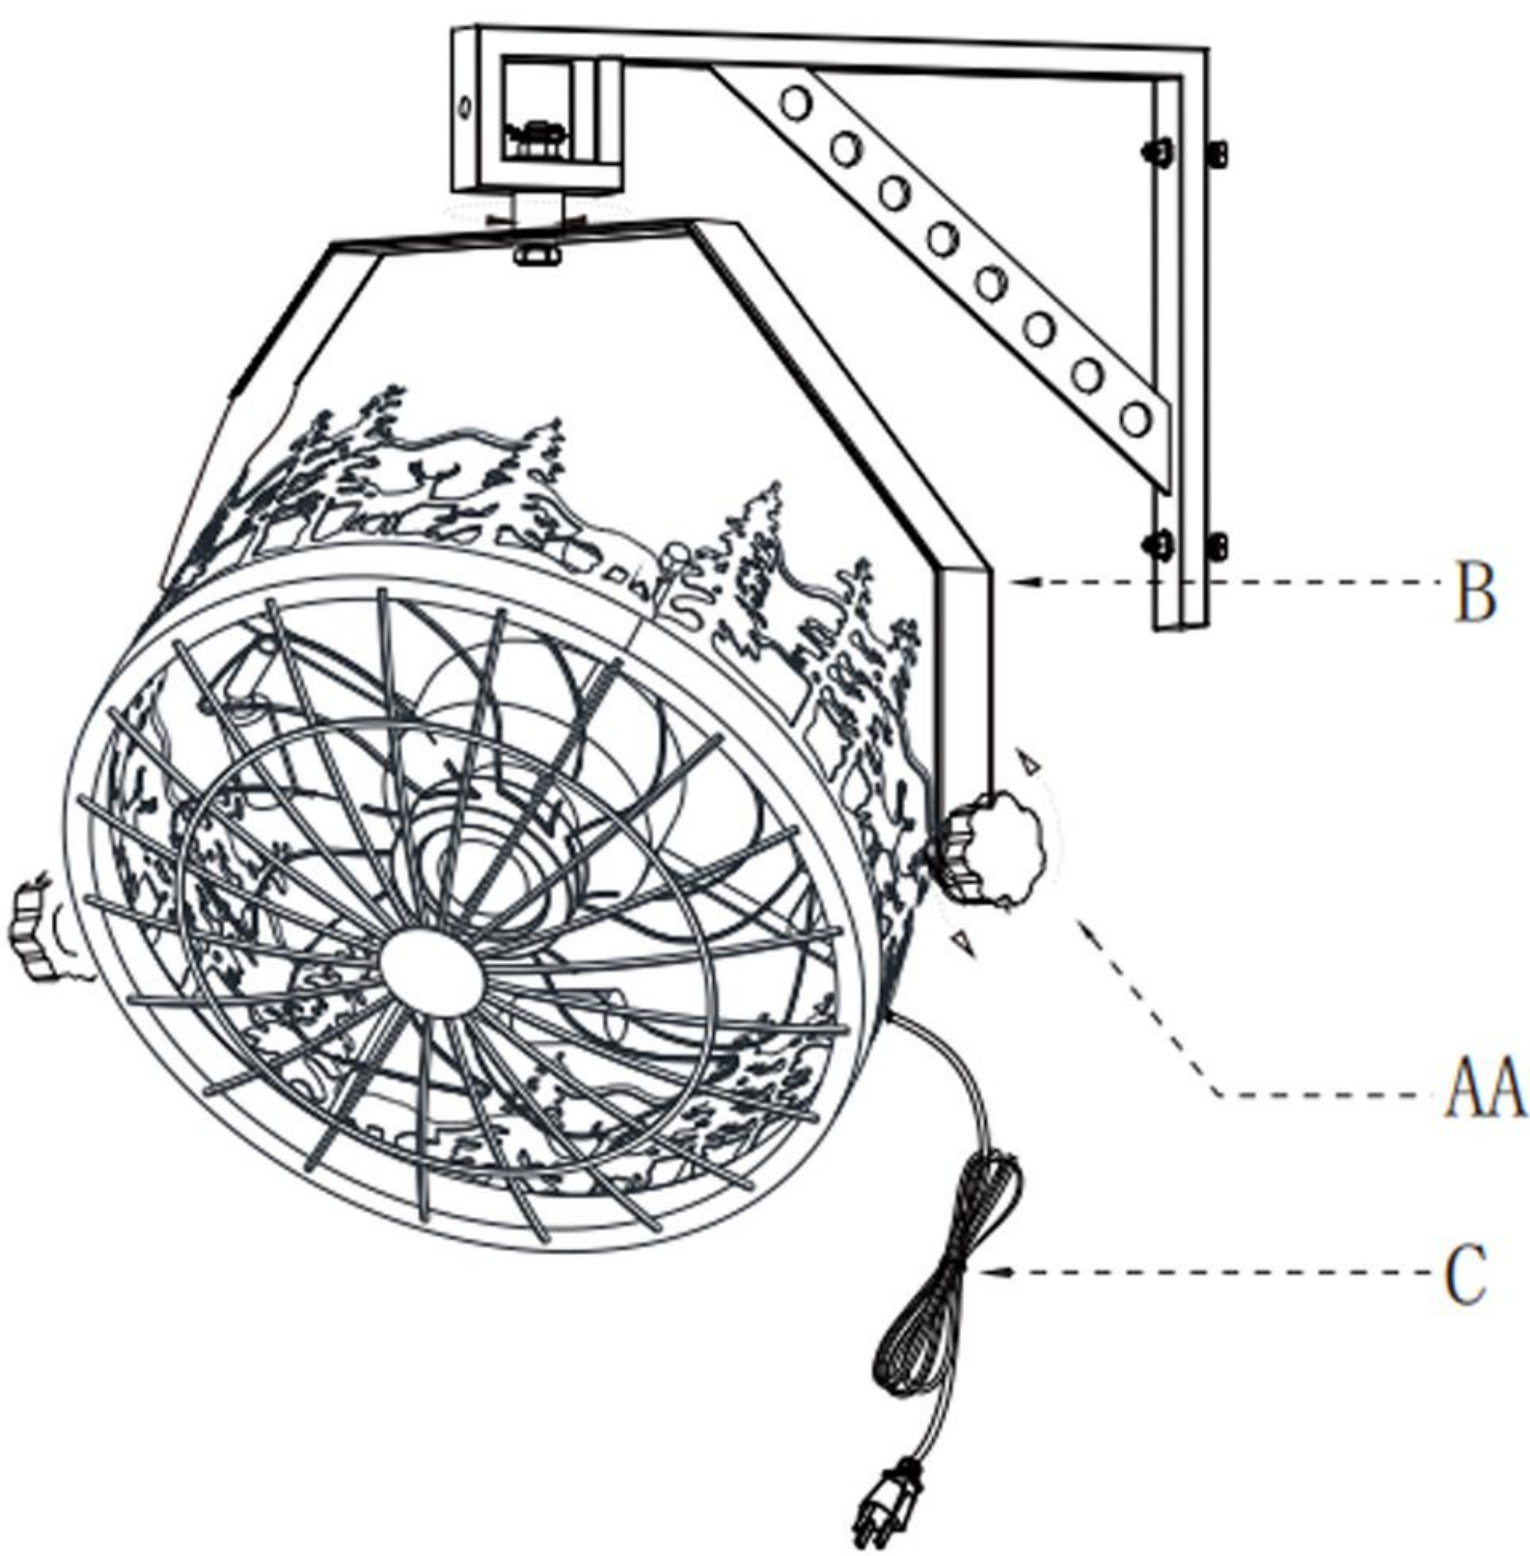


1. Loosen the Wing Nut with Threaded Stud (AA) to adjust the fixture body up and down, align it to the desired angle, and then tighten the Wing Nut with Threaded Stud (AA)

2. Adjust to the desired position by moving the arc-shaped hanger (B) left or right


9 Install the bulbs and operate the fixture (bulbs not included)

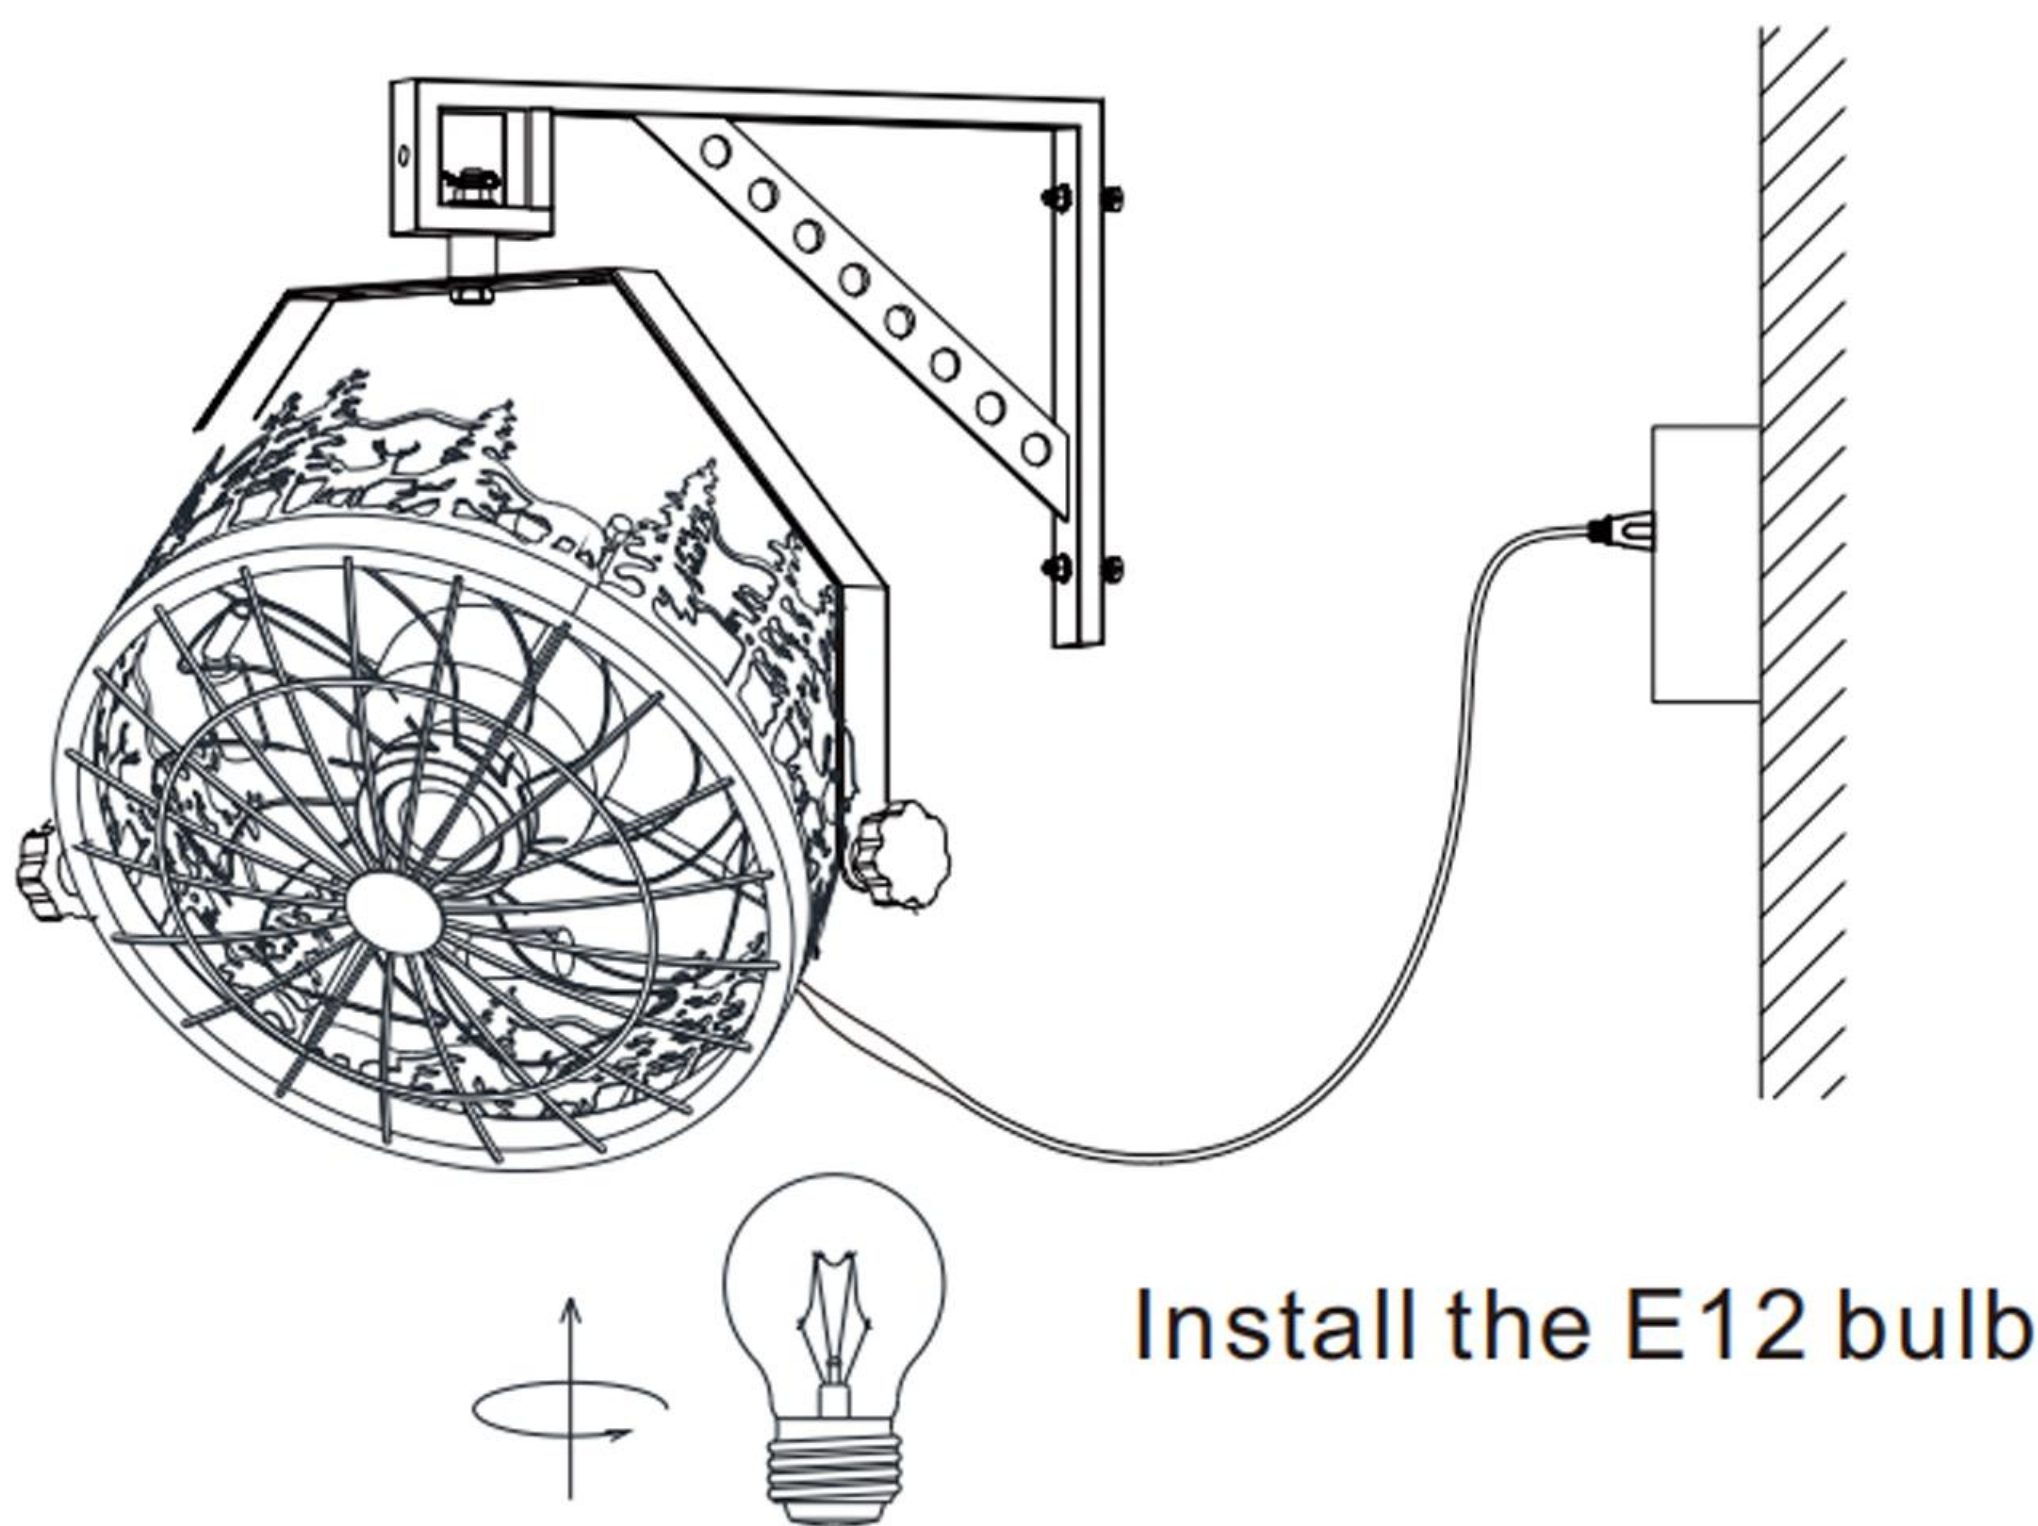



10 Adjustable from Multiple Angles

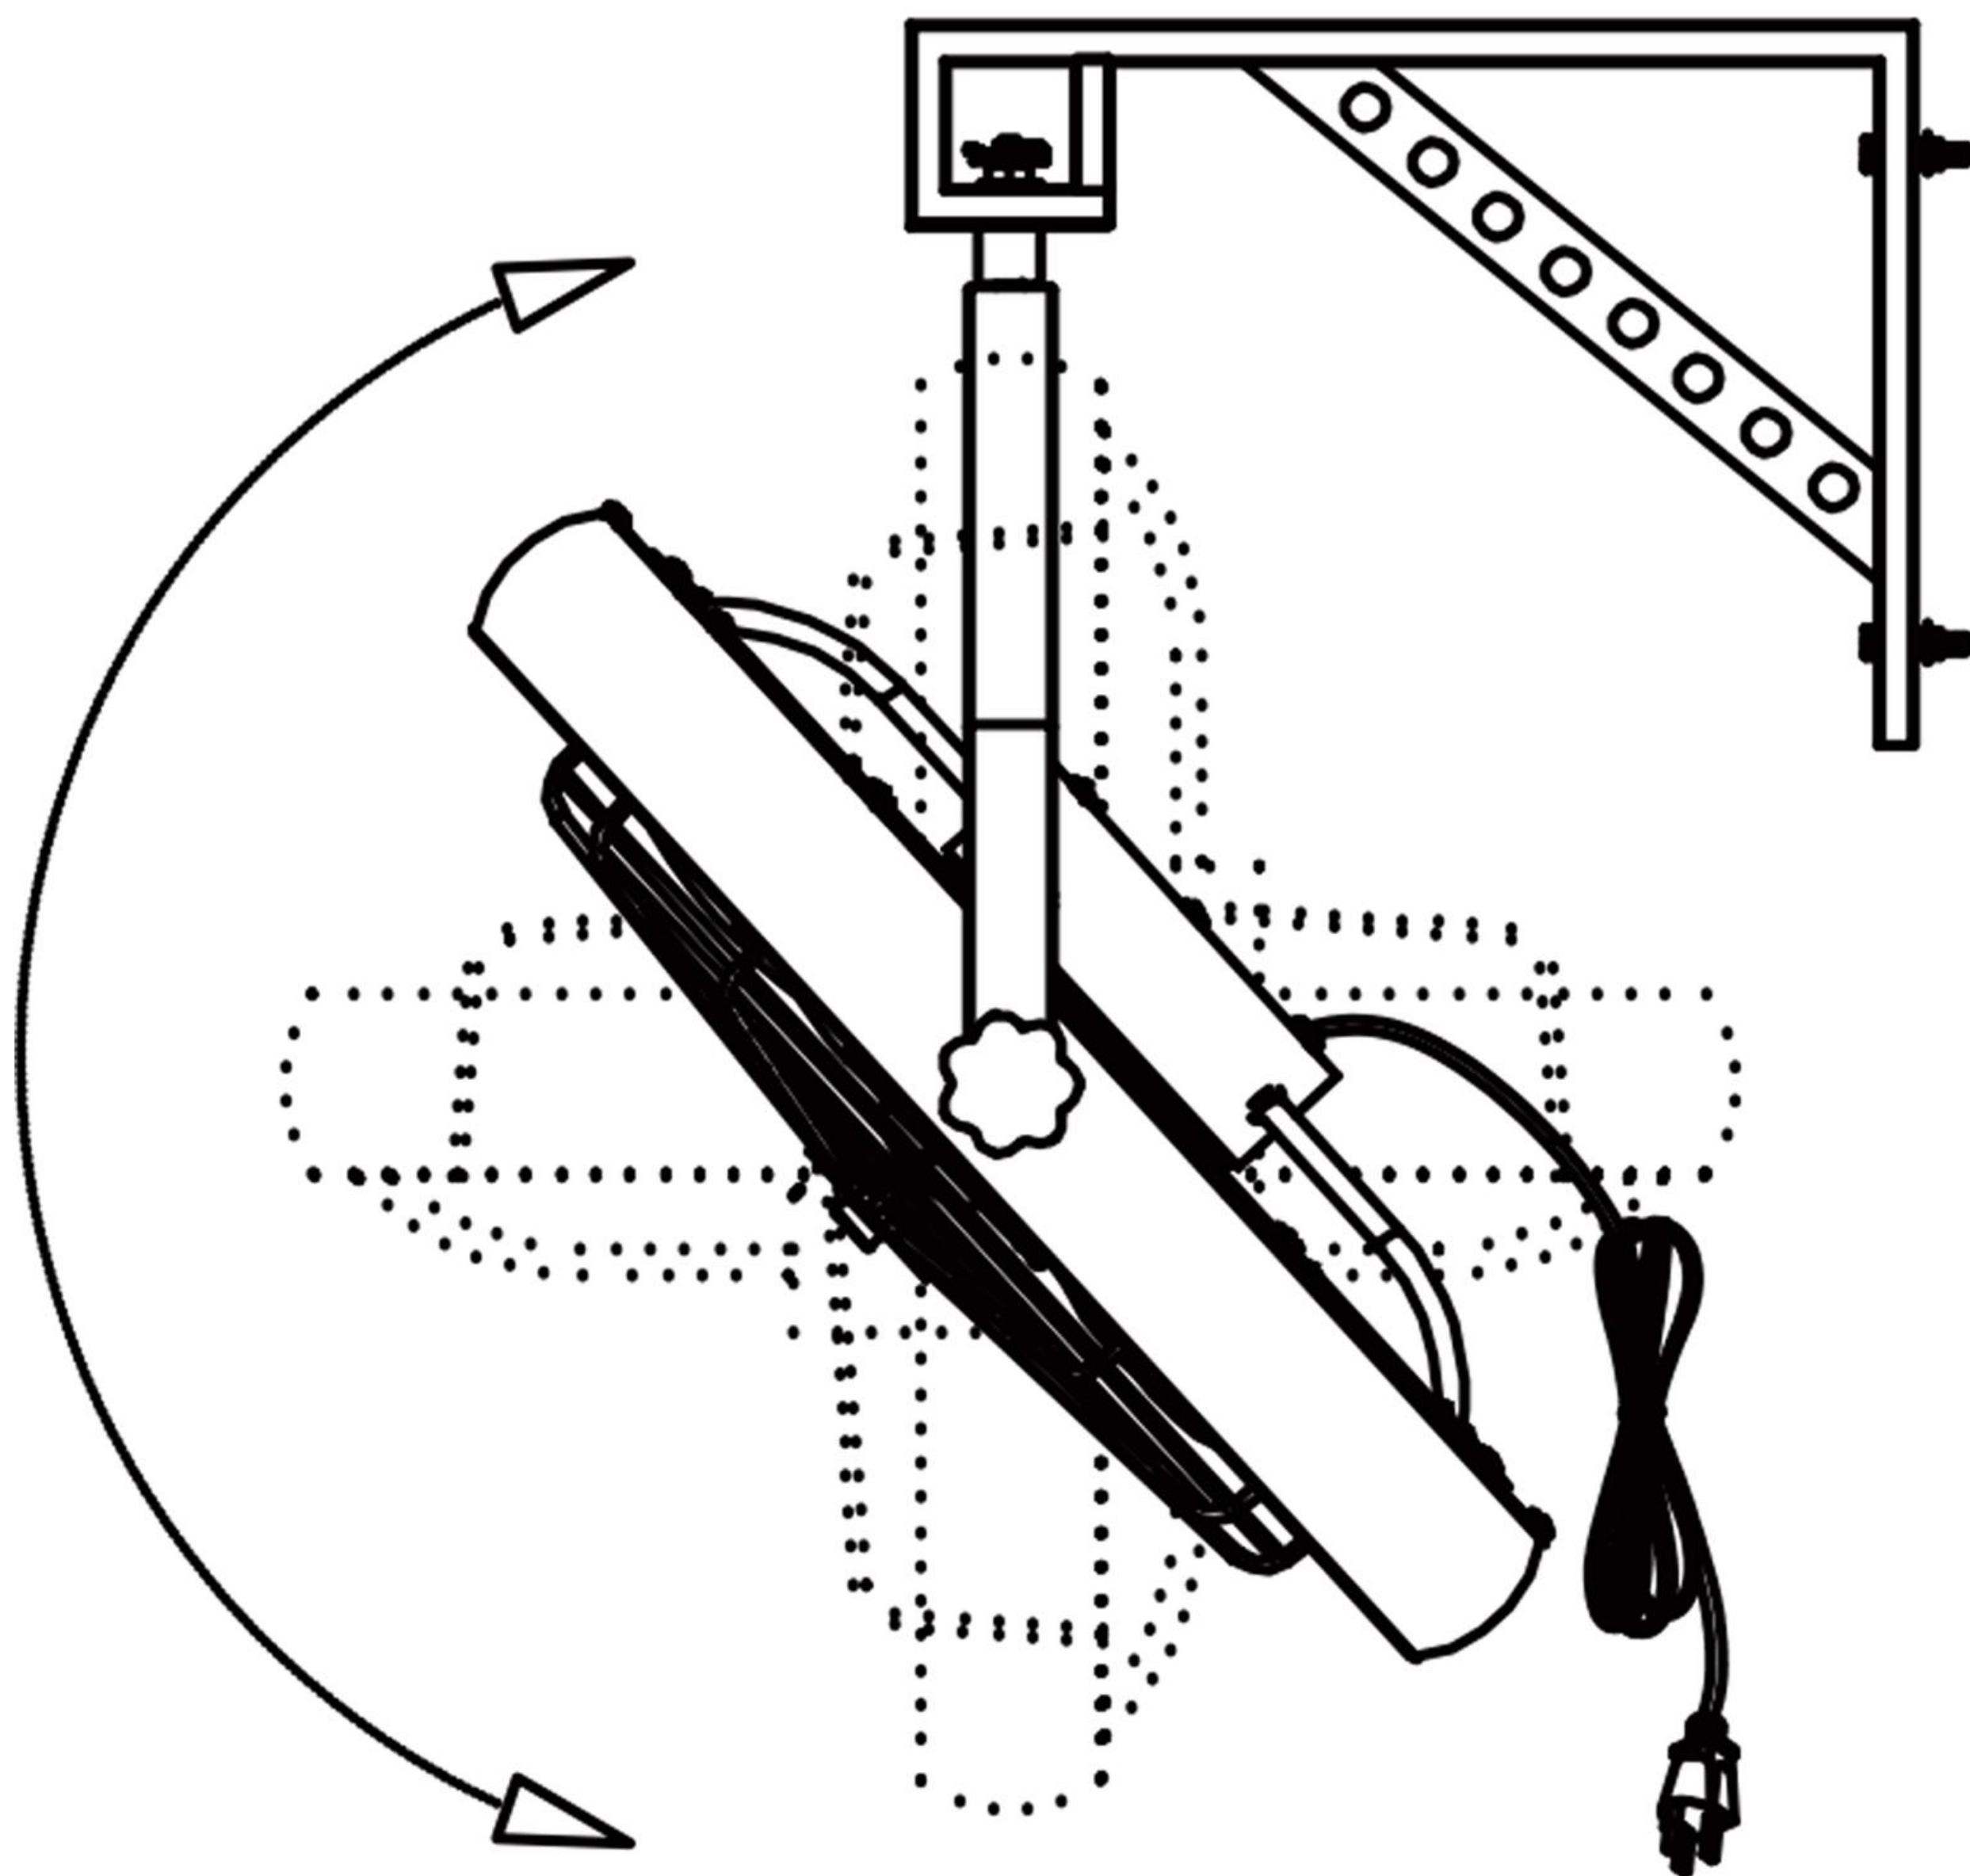



11 Can be wall-mounted or ceiling-mounted

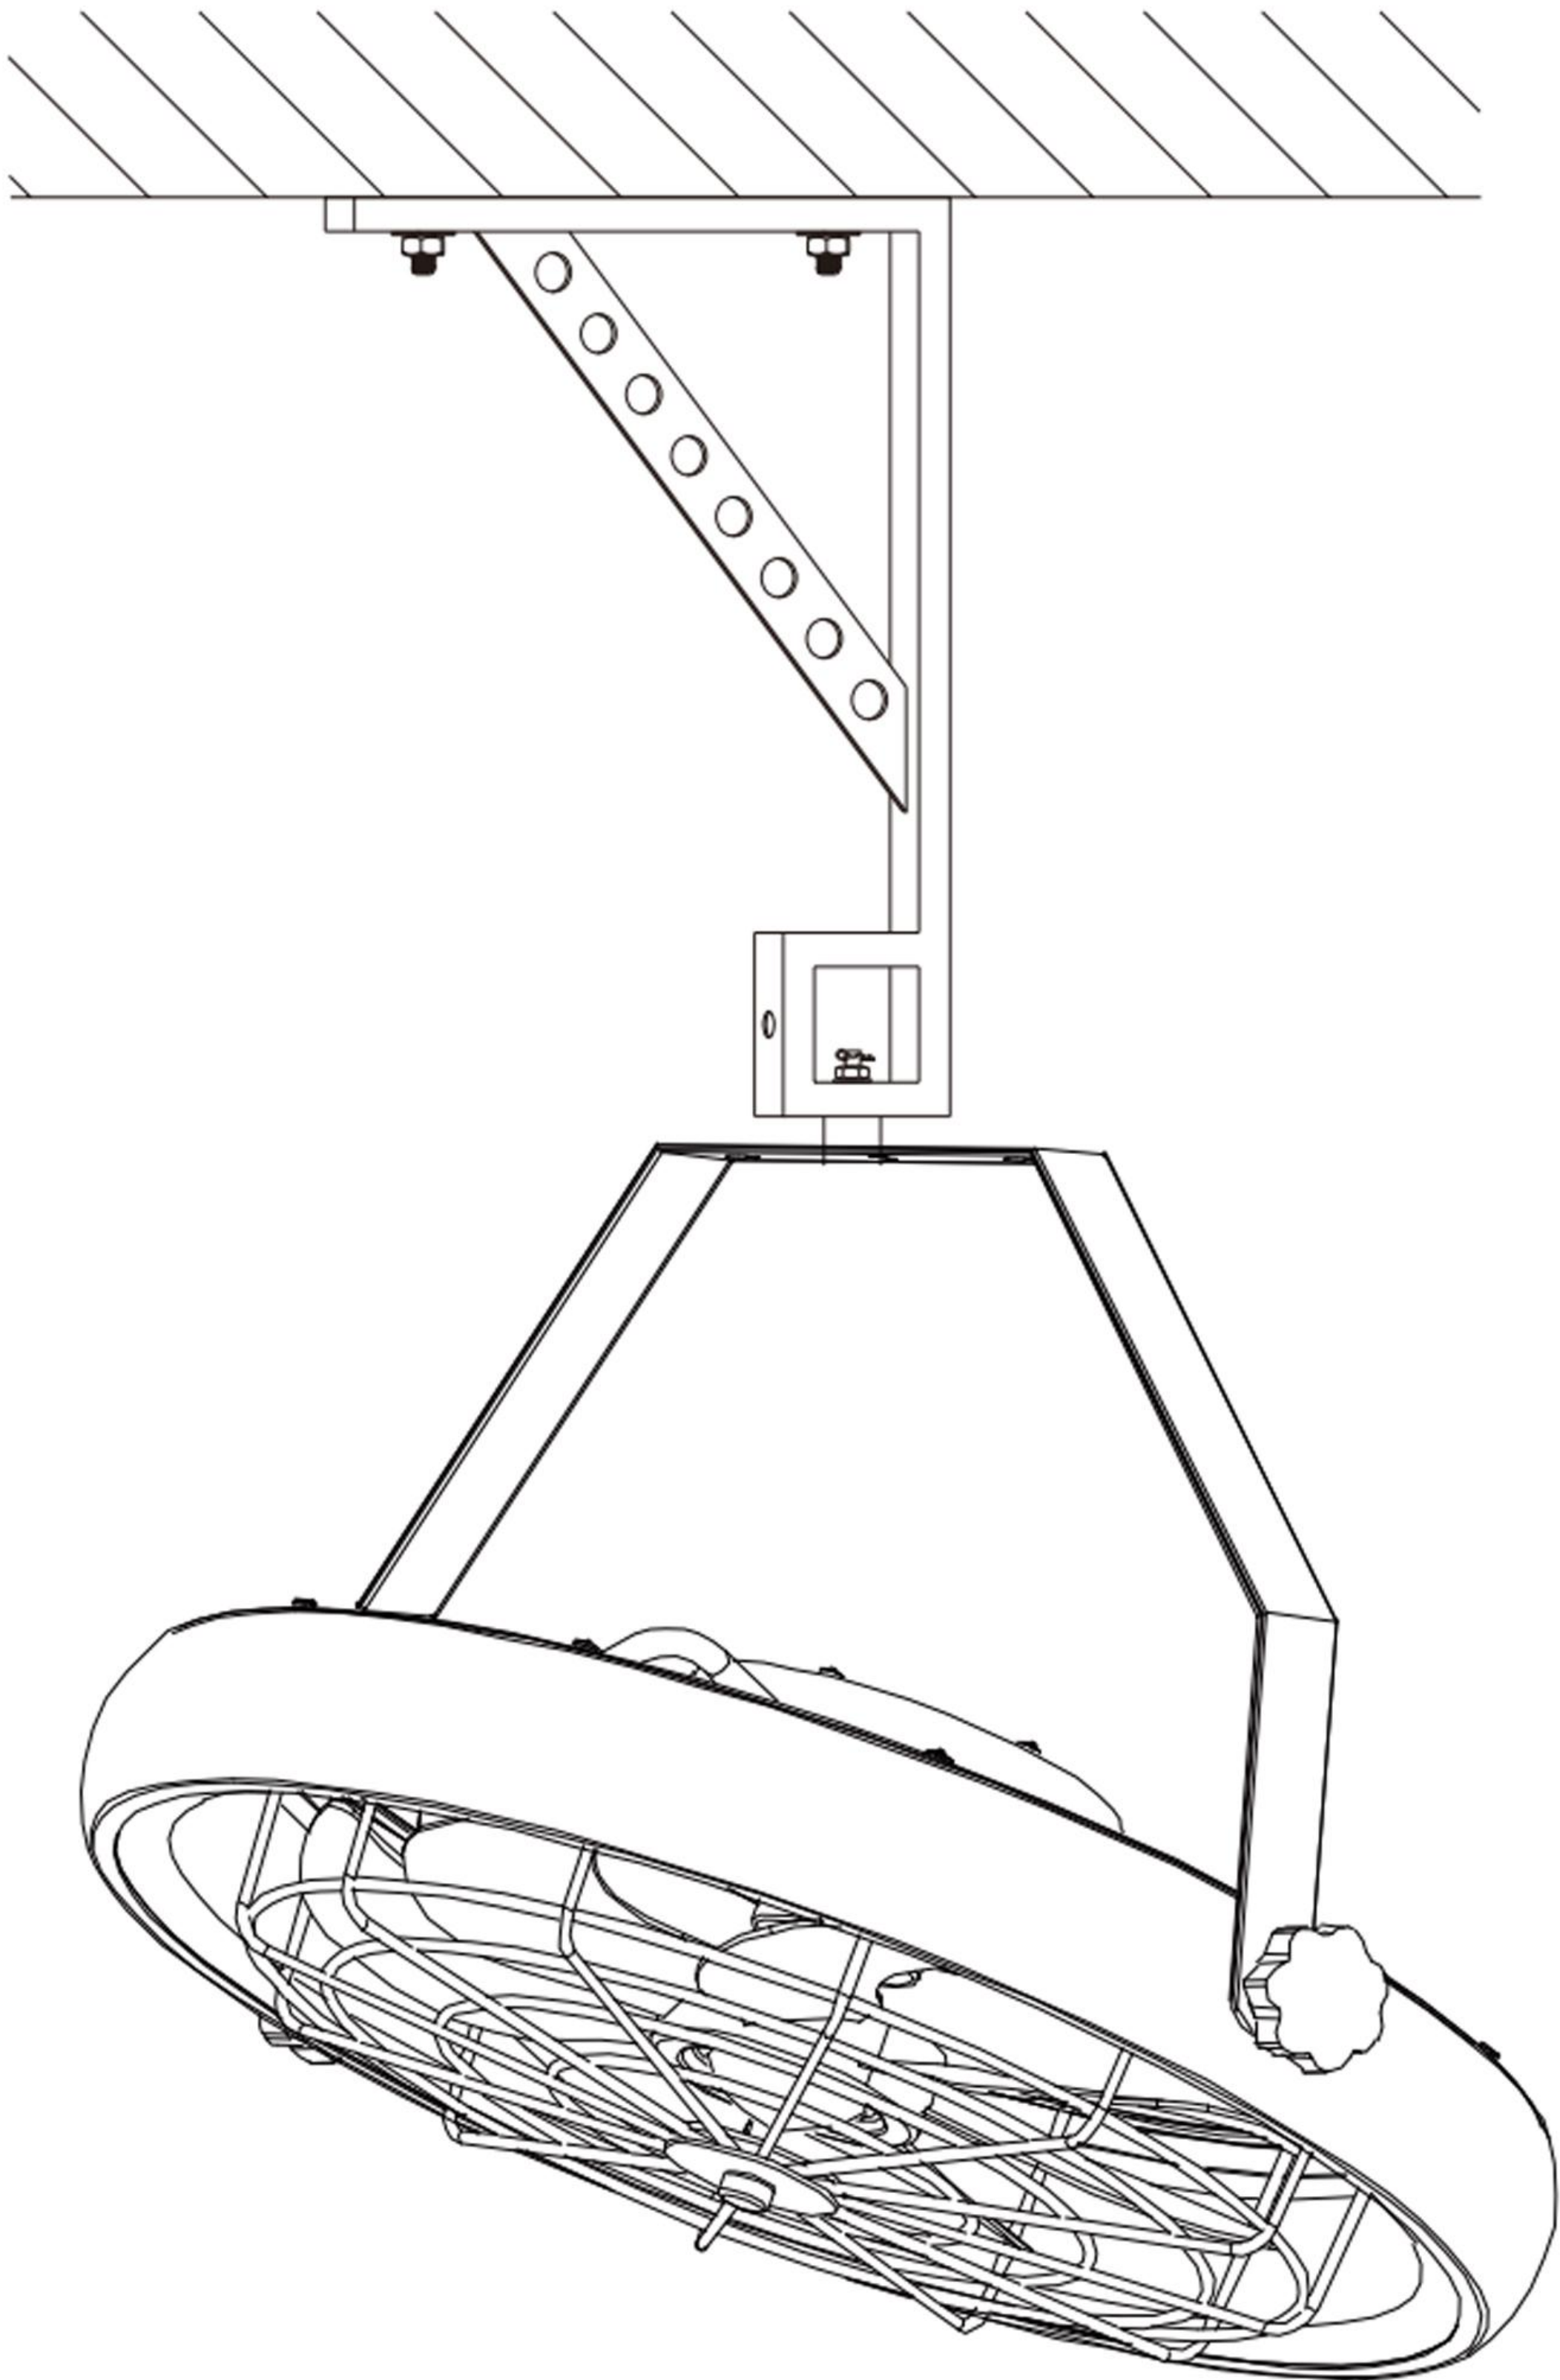

12 Install Wall Bracket

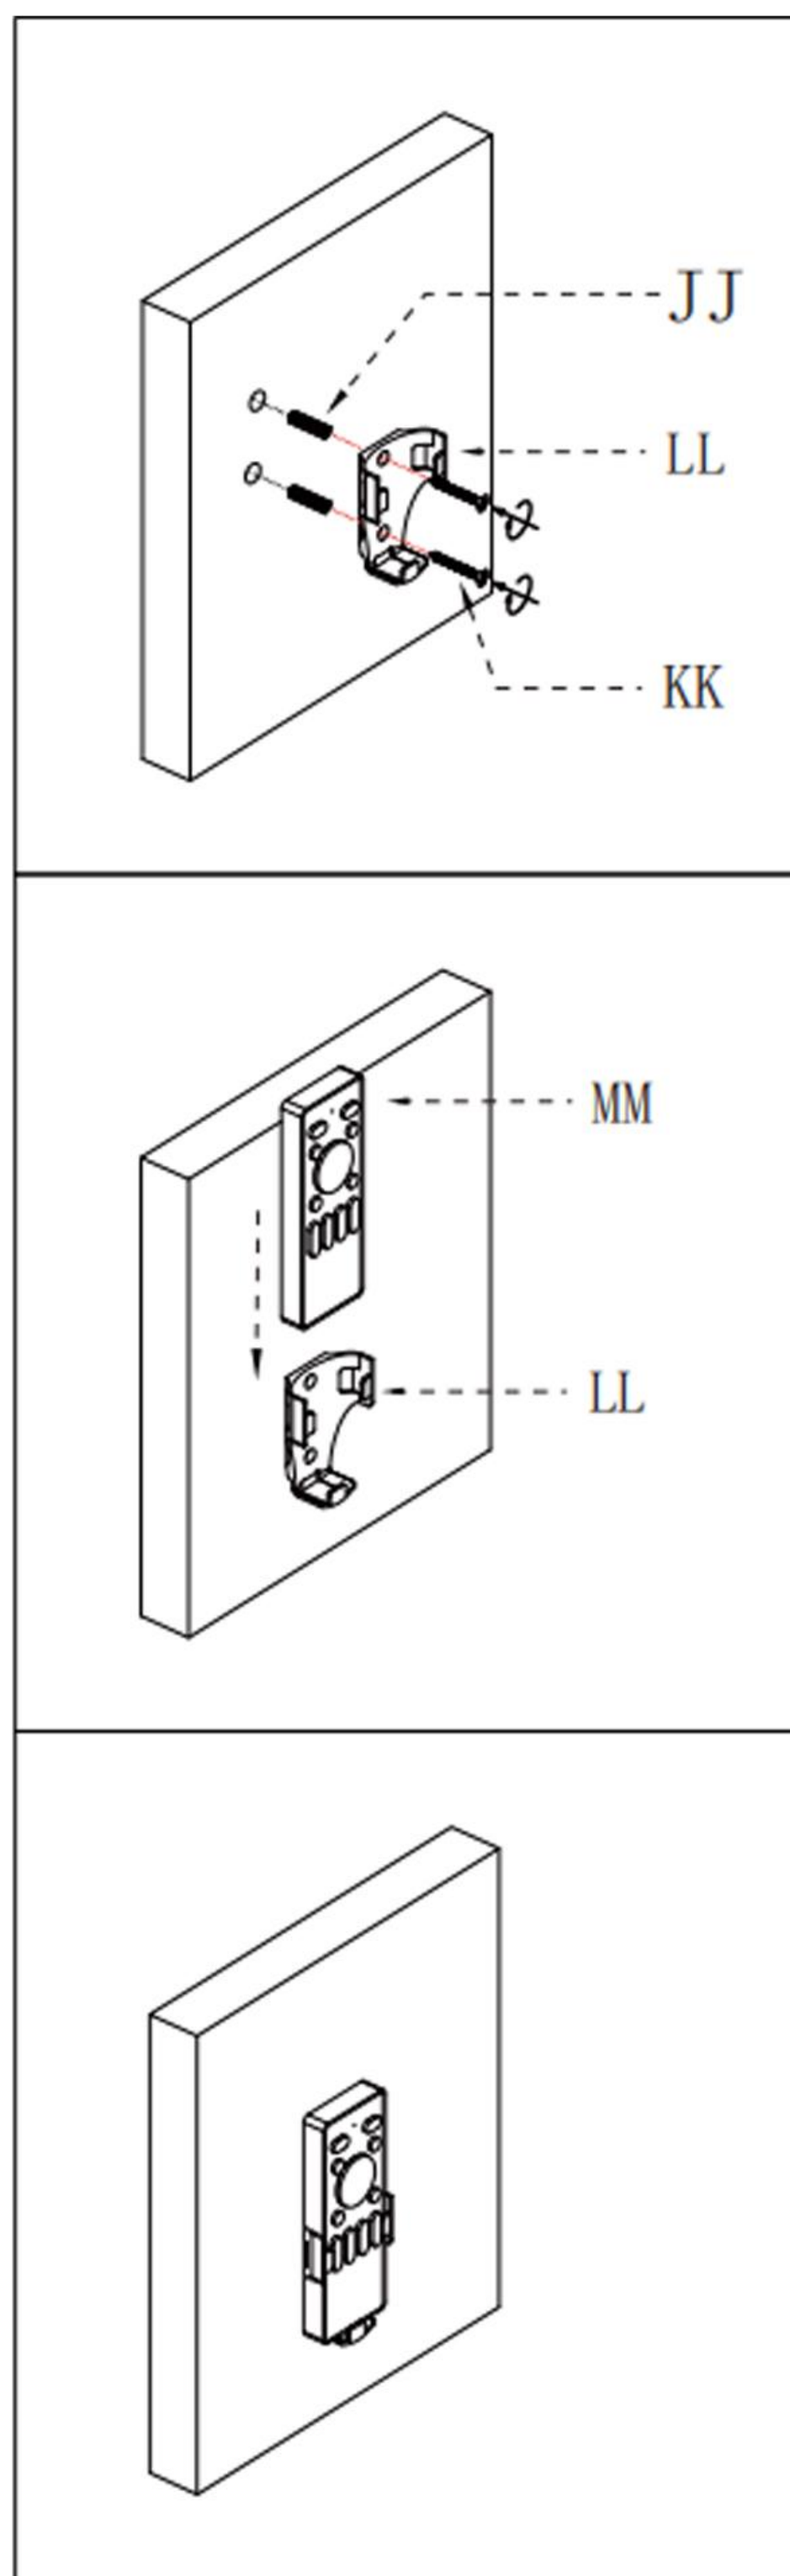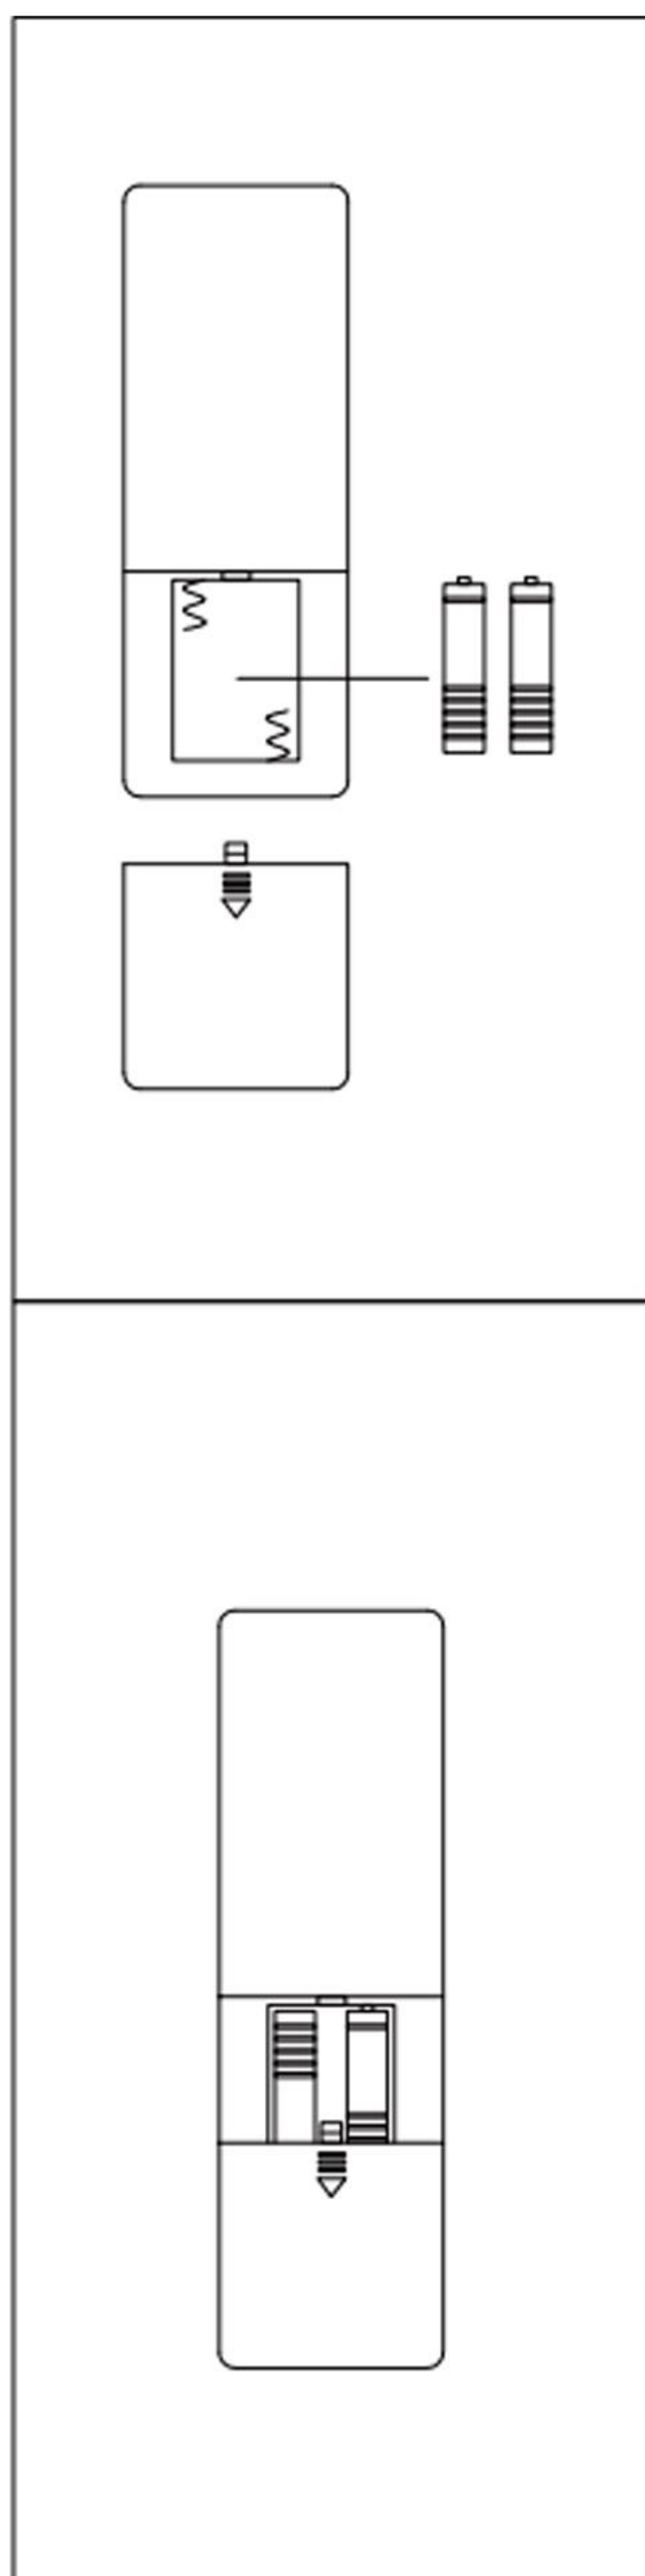

13 Remote Control Instruction

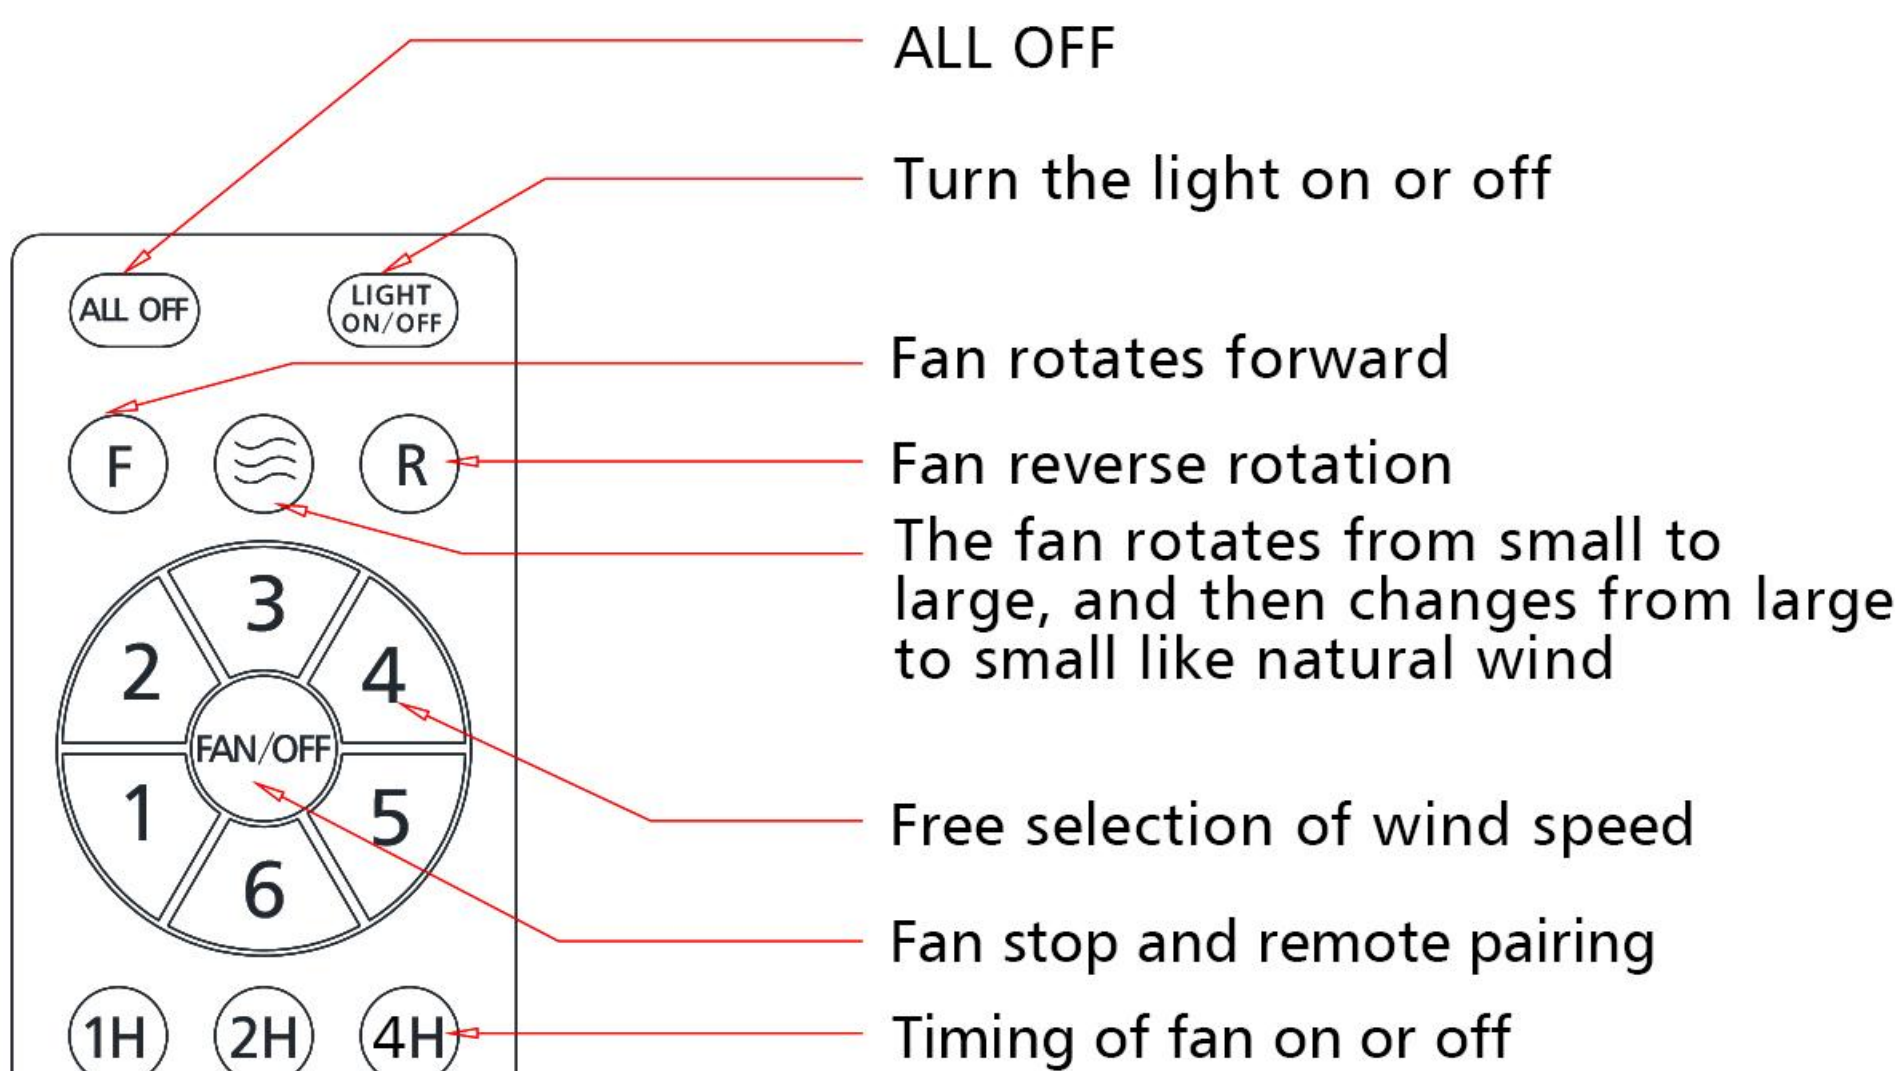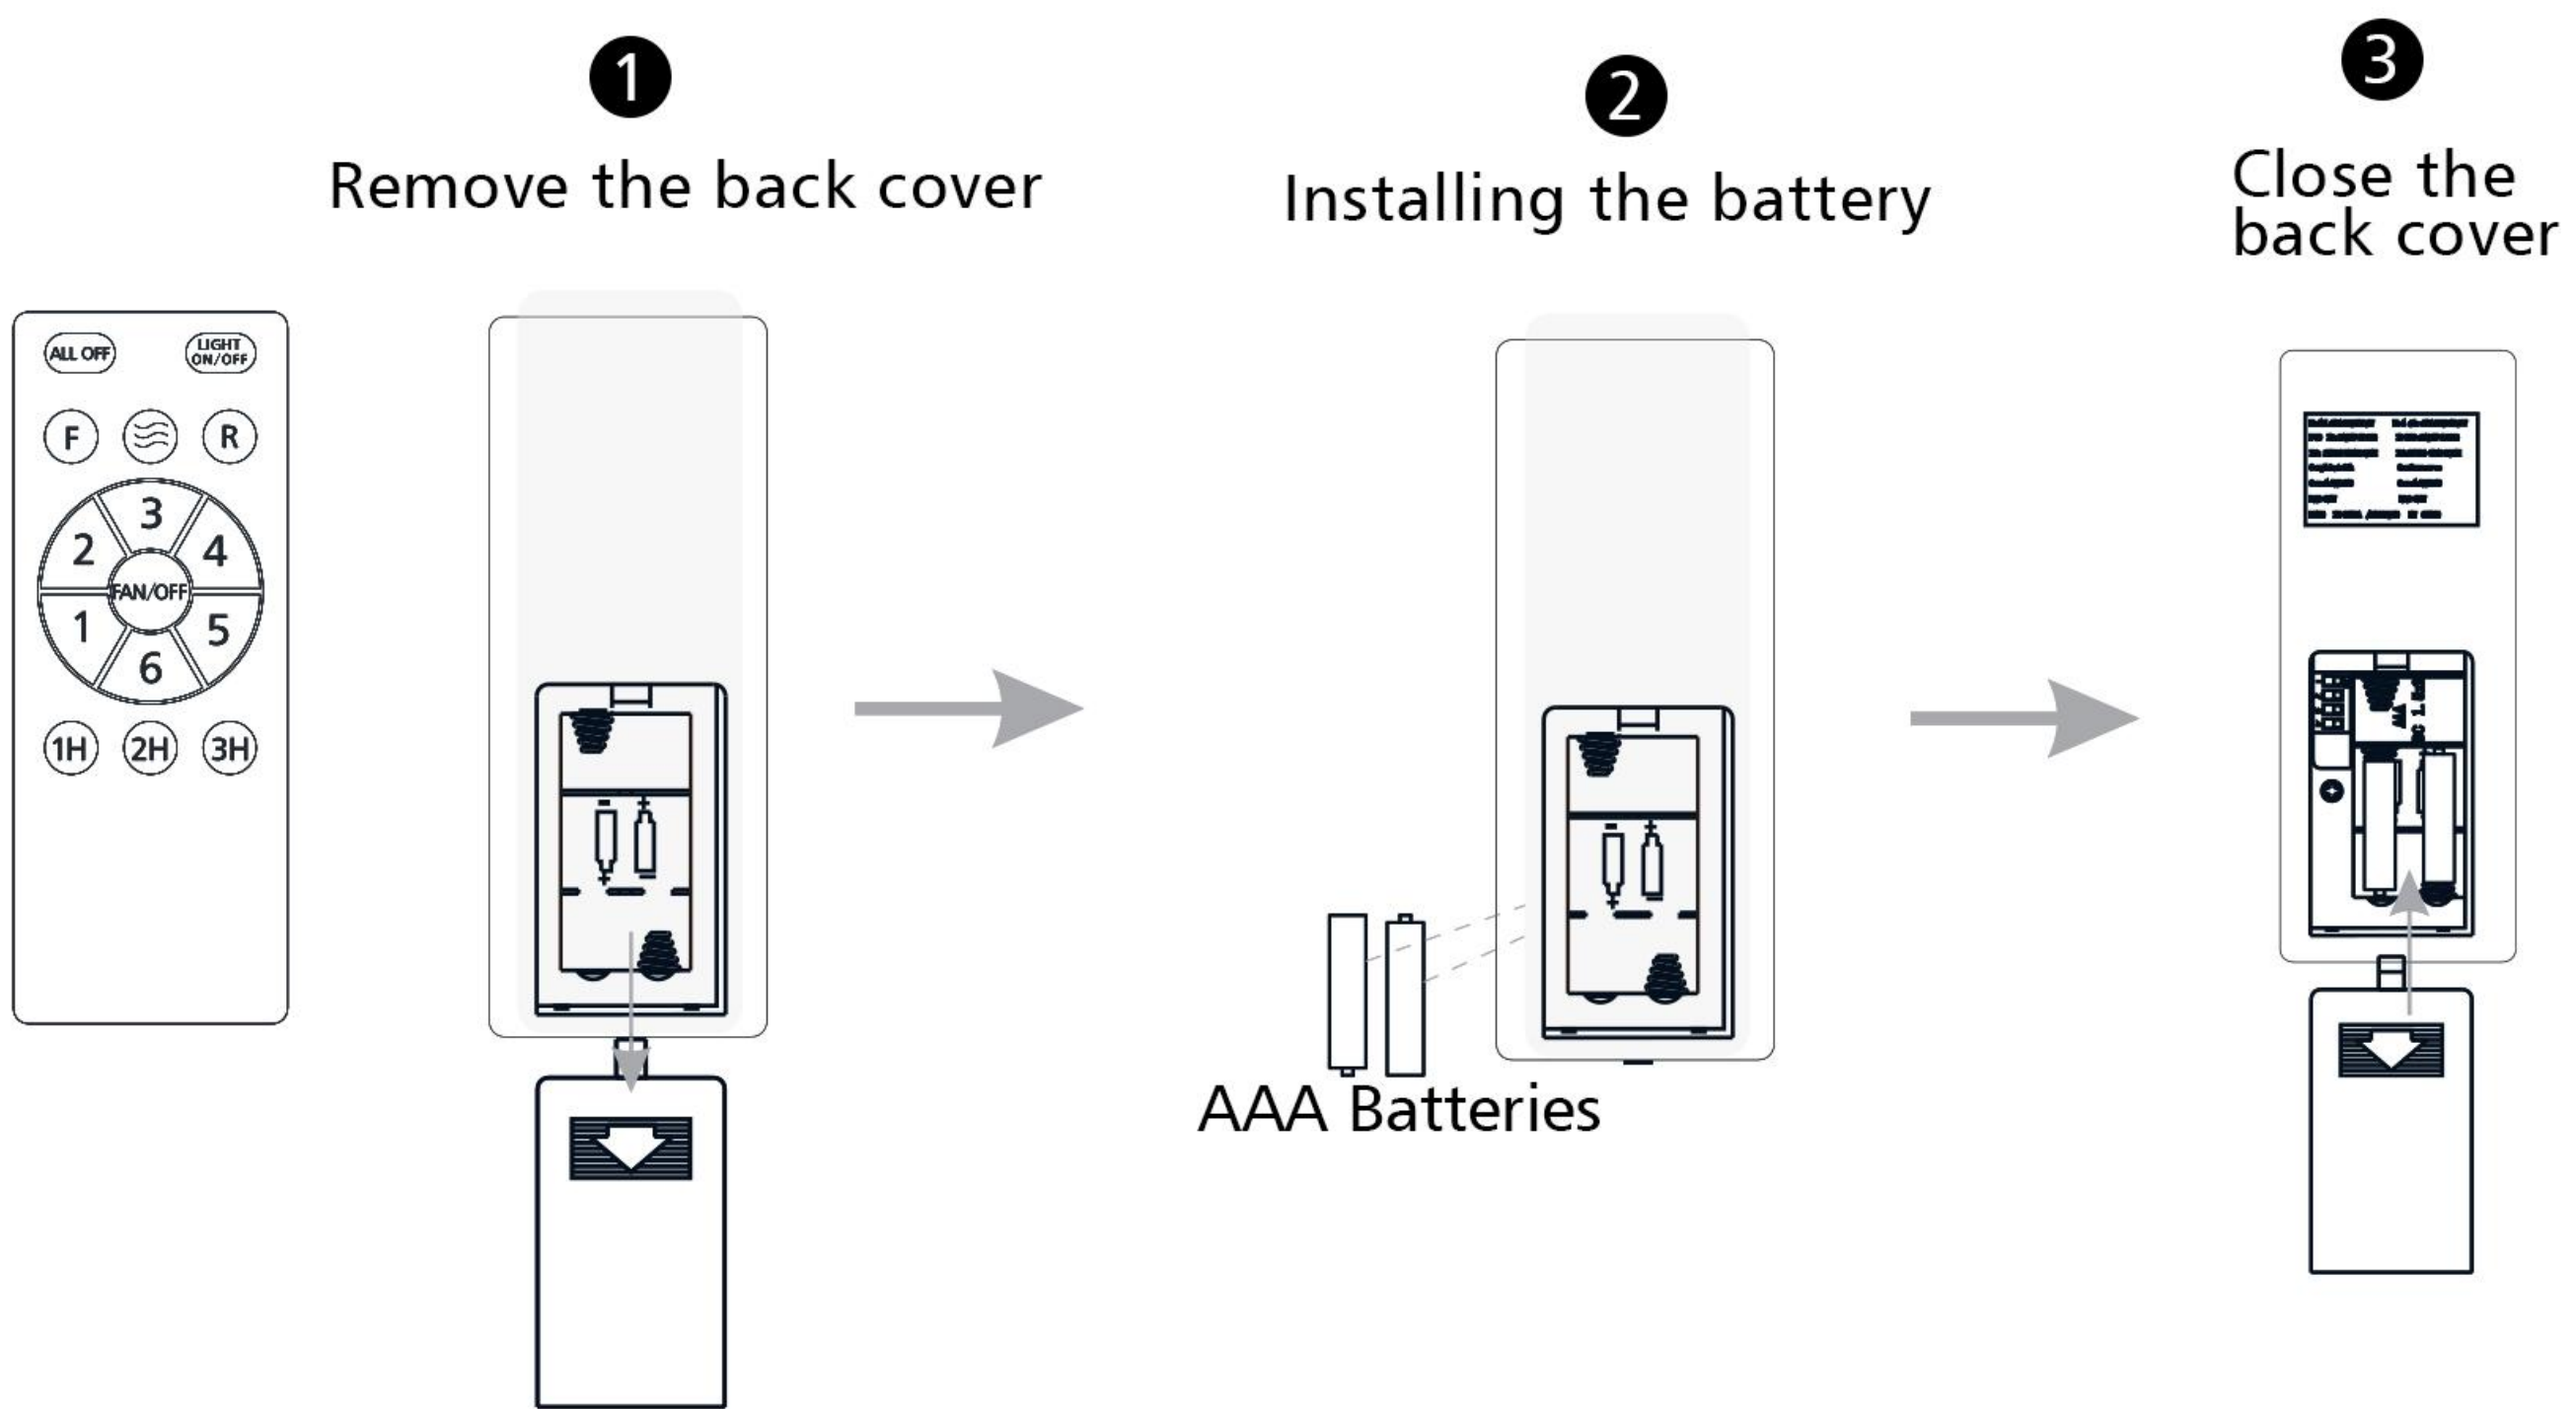

Remote Control Pairing Instructions:
(If the remote is not working, please refer to this method)

1. Plug in the power supply and turn on the light (if it's already plug in, please unplug, then back on).
2. Press and hold the FAN OFF button for 5 seconds to pair the fan light with the remote control.
3. After pairing, press several random buttons on the remote to test whether the fan light responds correctly.

Your installation is now complete. Save this sheet for future