

Image Coming Soon

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Pirouette

WS-94518

PRODUCT DESCRIPTION


Turning Pointe. Evoking the elegance of a ballerina in mid-pirouette, the Pirouette wall sconce features beautifully textured metal that gracefully wraps to minimize front illumination. Diagonally cut vertical ends add a dynamic touch, directing color temperature adjustable LED light into a warm wall wash above and below.

FEATURES

- Ambient illumination and backlit
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	2700K,3000K,3500K,4000K
CRI	90
Construction	Steel frame with glass diffuser

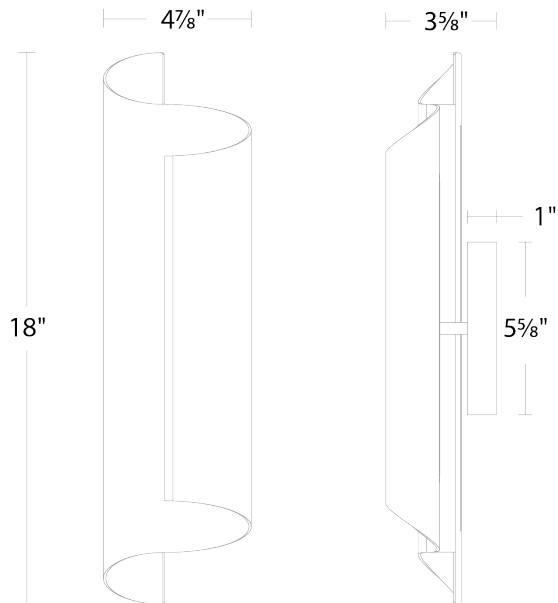


WS-94518

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-94518 18"	2700K	AB Aged Brass	29.2W	588	435
	2700K	BK Black	29.2W	588	435
	2700K	BN Brushed Nickel	29.2W	588	435
	3000K	AB Aged Brass	29.2W	641	487
	3000K	BK Black	29.2W	641	487
	3000K	BN Brushed Nickel	29.2W	641	487
	3500K	AB Aged Brass	29.2W	651	486
	3500K	BK Black	29.2W	651	486
	3500K	BN Brushed Nickel	29.2W	651	486
	4000K	AB Aged Brass	29.2W	623	467
	4000K	BK Black	29.2W	623	467
	4000K	BN Brushed Nickel	29.2W	623	467

Example: **WS-94518-40-BN**

For custom requests please contact customs@modernforms.com

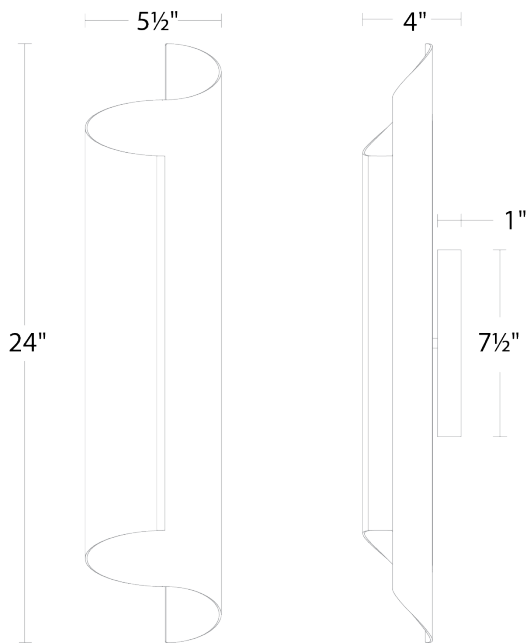

WS-94524

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Pirouette

WS-94524

PRODUCT DESCRIPTION

Turning Pointe. Evoking the elegance of a ballerina in mid-pirouette, the Pirouette wall sconce features beautifully textured metal that gracefully wraps to minimize front illumination. Diagonally cut vertical ends add a dynamic touch, directing color temperature adjustable LED light into a warm wall wash above and below.

FEATURES

- Ambient illumination and backlit
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	2700K,3000K,3500K,4000K
CRI	90
Construction	Steel frame with glass diffuser

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-94524 24"	2700K	AB Aged Brass	35.6W	3200	623
	2700K	BK Black	35.6W	3200	623
	2700K	BN Brushed Nickel	35.6W	3200	623
	3000K	AB Aged Brass	35.6W	3200	680
	3000K	BK Black	35.6W	3200	680
	3000K	BN Brushed Nickel	35.6W	3200	680
	3500K	AB Aged Brass	35.6W	3200	693
	3500K	BK Black	35.6W	3200	693
	3500K	BN Brushed Nickel	35.6W	3200	693
	4000K	AB Aged Brass	35.6W	3200	677
	4000K	BK Black	35.6W	3200	677
	4000K	BN Brushed Nickel	35.6W	3200	677

Example: **WS-94524-40-BN**

For custom requests please contact customs@modernforms.com