



D25

Assembly Instruction

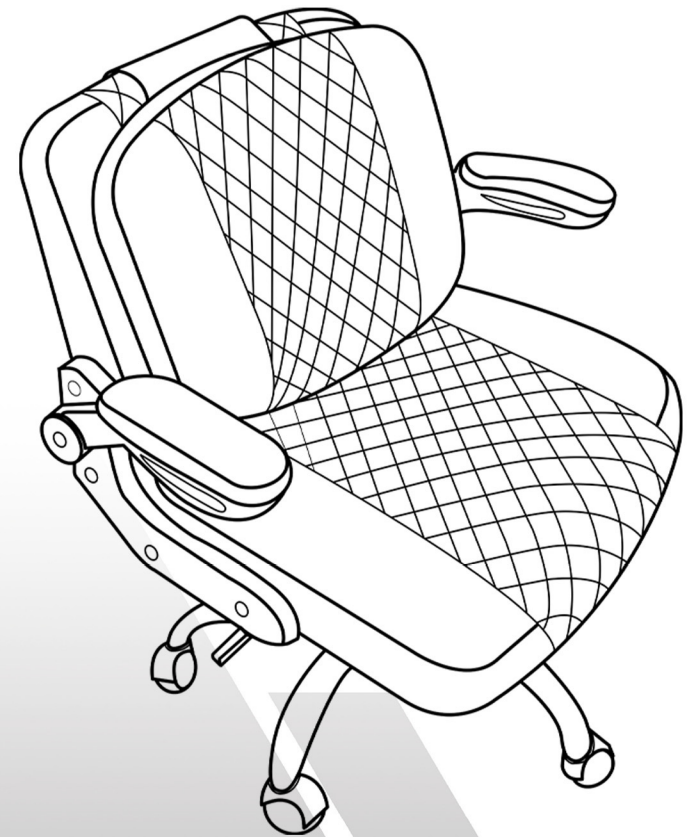

Instructions for Use

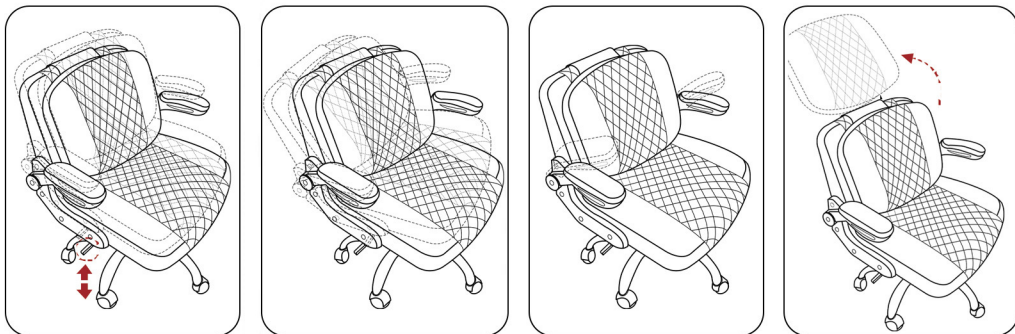

Up and Down Adjustment














Rocking Function

Flip-Up Armrests

Flexible Back Cushion

Thanks for purchasing our products. Please read this manual before assembly. And please assemble in order, After the assembly, keep the instruction properly. Make sure all the parts are included (13 kinds in total)

Accessories List

(1) Backrest 	(2) Seat Cushion 	(3) Split Base Tube 	(4) Central Base Tube 	(5) 5 Castors 
(6) Air Rod 	(7) 2 Armrests 	(8) Base Plate 	(9) 10 Screws (M6X12mm) 	(10) 8 Screws (M6X30mm) 
(11) 4 Screws (M6X20mm) 	(12) 8 Decoration Caps 	(13) Hexagon Wrench 		

Notice


- This is a chair designed for only one person. Do not seat two or more persons on this chair.
- Do not stand on the chair.
- Do not sit in a reverse position or on the outer edge of the seat cushion.
- Check the screws every 6 months to ensure they are tight. Do not use the chair if the screws are loose.
- Please assemble the chair according to the provided instructions.

Assembly instruction

Please assemble in a wide and flat place.

Step 1


Take out Split Base Tube (3) and Central Base Tube (4). Insert Split Base Tube (3) into Central Base Tube (4) as shown. Align with the holes on both sides, tighten 10 M6X12mm Screws (9) with Hexagon Wrench (13).

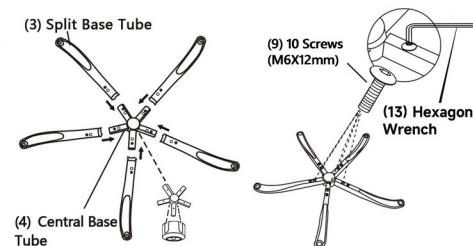

Step 2

Take out 5 Castors (5) and Air Rod (6). Insert 5 Castors (5) into part of Step 1 and press them in firmly. Put Air Rod (6) into the hole of the Central Base Tube (4) as shown.


* Caution: Confirm Castors (5) must be inserted deeply. Otherwise the castors could easily fall out and the chair could fall down.

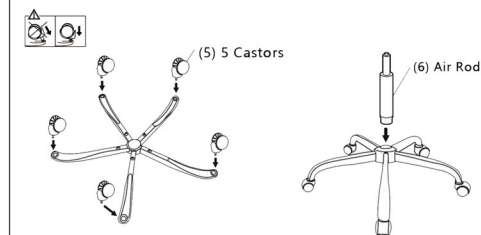

Step 3


Tighten the 4 Screws M6X30mm (10) with Hexagon Wrench (13) to fix 2 Armrests (7) to the two sides of the Seat Cushion (2).

* Caution: Tighten 4 screws to 50% to secure the armrest and seat cushion, then after the backrest has been inserted between two armrests, align and fasten all screws, then tighten them to 100%.

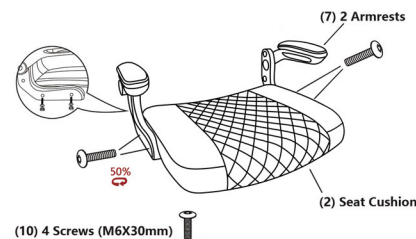

Step 4


Insert the Backrest (1) between the 2 Armrests (7), align the holes then press the armrests in and fasten them, then tighten with 4 M6X30mm Screws (10). Cover the screw holes on both sides of 2 Armrests (7) with 8 Decorative Caps (12).

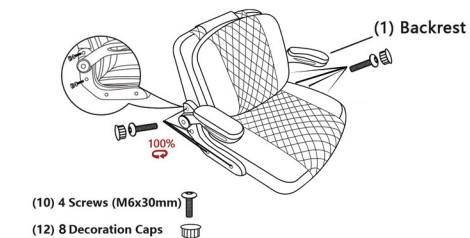

Step 5

Fix Base Plate (8) to the bottom of Seat Cushion (2). Tighten the 4 M6X20mm Screws(11) with Hexagon Wrench (13) firmly.

* Caution: There is a FRONT print on the front of the Base Plate (8). Tighten the screws to 50% first and then tighten them when all the screws are in place.

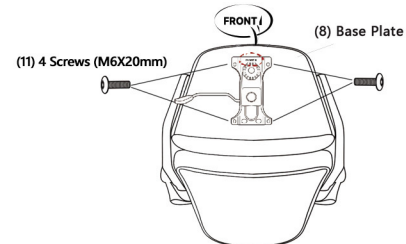

Step 6

Pick up the Step 2's Air Rod (6) and Central Base Tube (4). Insert the Air Rod (6) into Step 5's Base Plate (8). There's a hole in the middle of Base Plate (8). Press the Seat Cushion (2) from top to bottom, use your whole body's strength to insert it firmly, the assembly is complete now.

* Caution: If the Air Rod (6) doesn't insert to Base Plate (8) firmly, it's likely to fall off when the chair rises up.

