
APPROX WEIGHT: 788.74 lbs.

3D VIEW FOR REFERENCE

EFFICIENCY MASTER TILT TABLE - EM1-500-4250-6

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

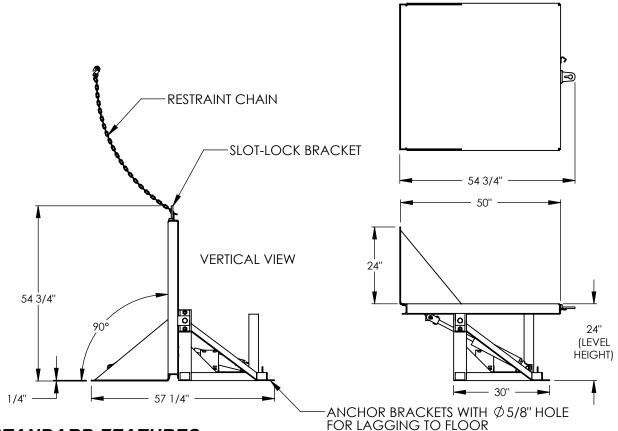

NONE

DIMENSION TOLERANCE ± 1/4" I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn [] As marked

11/17/2015

W.O.#

SCALE: 1:30 FILE NAME:

SALES: X

03-007-076

STANDARD FEATURES

MODEL NUMBER IS EM1-500-4250-6 MAX CAPACITY IS 6,000 LBS (EVENLY DISTRIBUTED LOAD) OVERALL WIDTH IS 46" **DECK LENGTH IS 50" OVERALL LENGTH IS 57 1/4"** DECK LEVEL HEIGHT IS 24" **OVERALL HEIGHT IS 54 3/4"** MAX TILT ANGLE IS 90° SAFETY SLOT-LOCK RESTRAINT CHAIN BRACKET ALL STEEL CONSTRUCTION DURABLE LIQUID PAINT BLUE FINISH WARNING: CHECK STATE AND LOCAL CODES

DI EASE CIDCI E SDECIEICATIONS

PLEASE CIRCLE SPECIFICATIONS:									
	POWER	AC	;	*DC			≯IR/	OIL	
	MOTOR V	OATIC	E F	15 2	08	2	30 4	60	
	DEDICATED CIRCUIT REQUIRED								
	MOTOR PI	OR PHASE		SINGLE			THREE		
	CONTROL		HAND			# FOOT			
	~ ALL BATTERY CHARGERS ARE 115V AC ~								
*	BATTERY CHE	RG.	RE/	MOTE	=	ΟN	I-BO	ARD	
*	CHRG. INDIC	ATOR	,	YES			NO		
* AVAILABLE AT ADDITIONAL COST									

SALES SPECIAL FEATURES

FOR INTERNAL USE ONLY PROJECT SIGN OFF ENG. reference: X FAB. QUOTED LEAD TIME: X POWER

Ρ

Ρ

R

0

1	Ā	Signed:	Date:
	L	Printed Name:	
		LEAD TIME WILL START	UPON RECEIPT OF SIGNED APPROVAL DRAWII
	DICTI	DIDLITORIC NIANAE.	D O #

QUOTE #

Χ

VESTIL MANUFACTURING