



## Vista Pivot™ II

### Framed Pivot Shower Door

### 1506D-48

#### Features

- Framed, 1/8" (3 mm) thick tempered glass door and 3/16" (5 mm) thick tempered glass in-line panel.
- Pivot bushings provide smooth, silent operation.
- Full-length magnetic door latch provides secure door closure.
- Threshold conveniently directs water back into shower.
- Full-length handle for easy operation.

#### Material

- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

#### Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

#### Components

Additional included component/s: Hardware kit.



#### Codes/Standards

ANSI Z97.1 (Tempered Glass)  
CPSC 16CFR 1201


#### STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------


	S	Silver
--	---	--------

#### Available Glass Options

Code	Description
------	-------------

	Rain
--	------

**Vista Pivot™ II**  
Framed Pivot Shower Door  
**1506D-48**

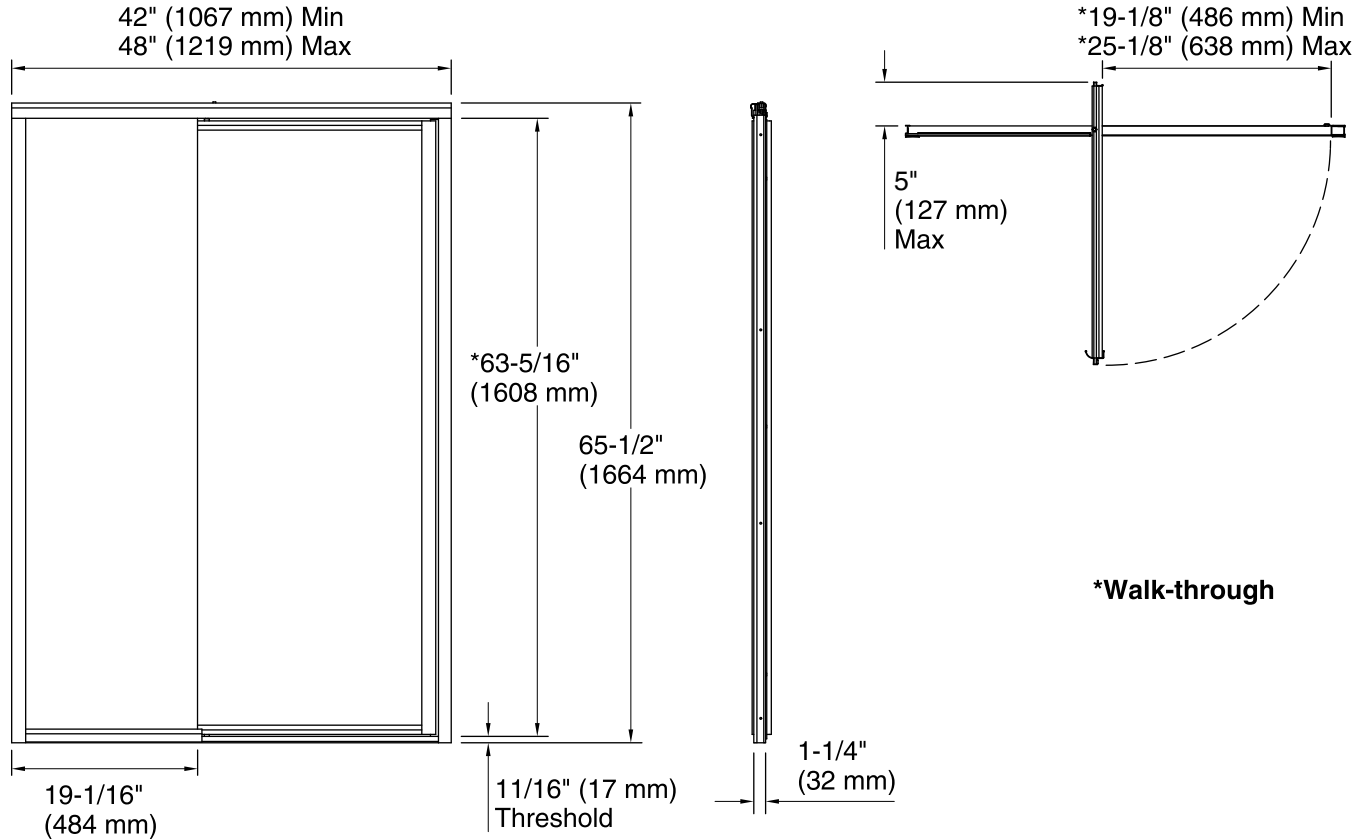

**Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 42" (1067 mm)

Opening Width - Max: 48" (1219 mm)

Walk-through - Min: 19-1/8" (486 mm)

Walk-through - Max: 25-1/8" (638 mm)

Glass thickness: 1/8" (3 mm)

**Notes**

Install this product according to the installation guide.

The vertical opening should be a minimum of 67" (1702 mm) to allow for installation clearance.