



flush mount

1

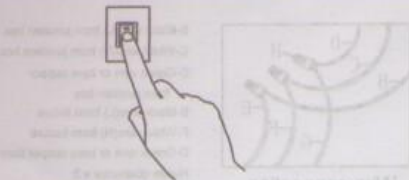

turn off the power.

5




Wire connection

B-Black wire(L) from junction box
C-White wire(N) from junction box
D-Green wire or bare copper from junction box
E-Black wire(L) from fixture
F-White wire(N) from fixture
G-Green wire or bare copper from fixture
H-wire connector x 3


Conect wires

2

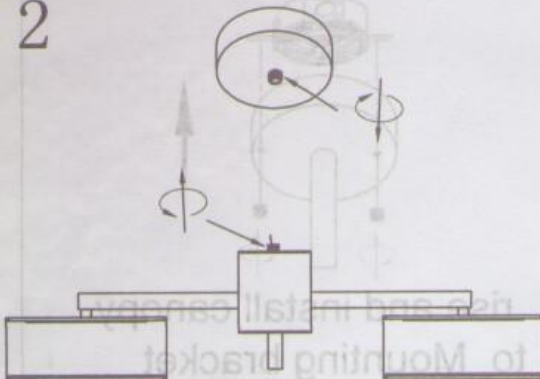


loosen and remove the nut outside the canopy and the nut at the top of fixture

6

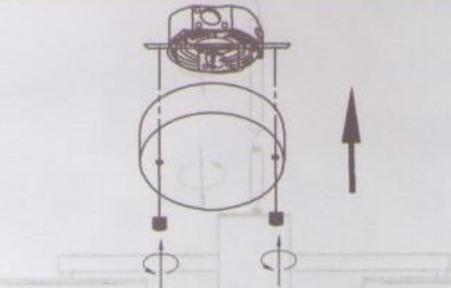


rise and install canopy to Mounting bracket

3

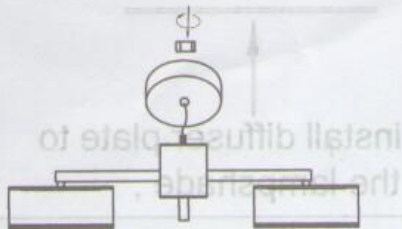


install the canopy to fixture

7

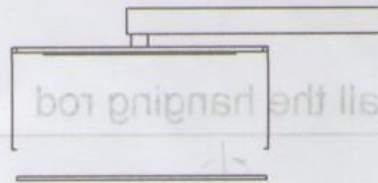


install diffuser plate to the lampshade ,

4

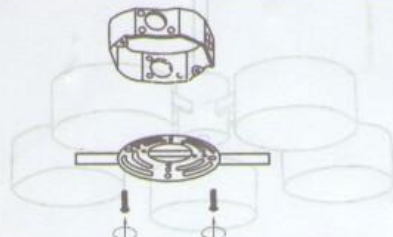


install mounting bracket

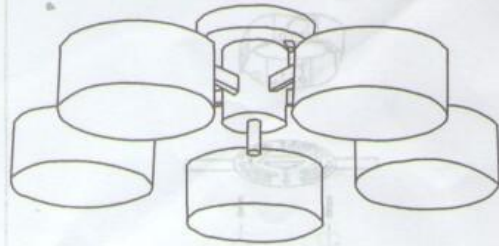

install mounting bracket


hanging lamp

1

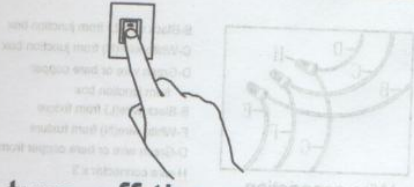

turn off the power.

5




Wire connection


- B-Black wire(L) from junction box
- C-White wire(N) from junction box
- D-Green wire or bare copper from junction box
- E-Black wire(L) from fixture
- F-White wire(N) from fixture
- G-Green wire or bare copper from fixture
- H-wire connector x 3

Connect wires

2

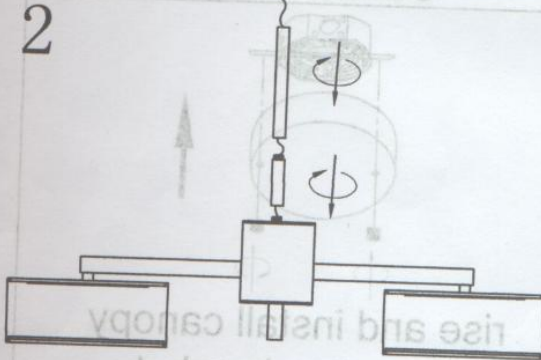


6



rise and install canopy to Mounting bracket


install the hanging rod

7

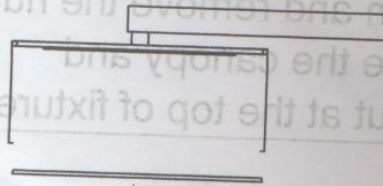


install diffuser plate to the lampshade ,

3




install the canopy to fixture

4

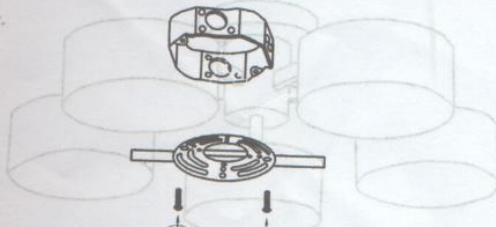

install mounting bracket

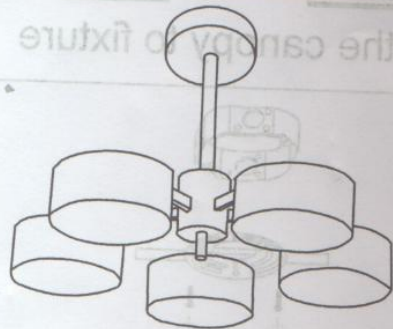

install mounting bracket