


8241PL-01GD-US / 8241PL-01WT-US

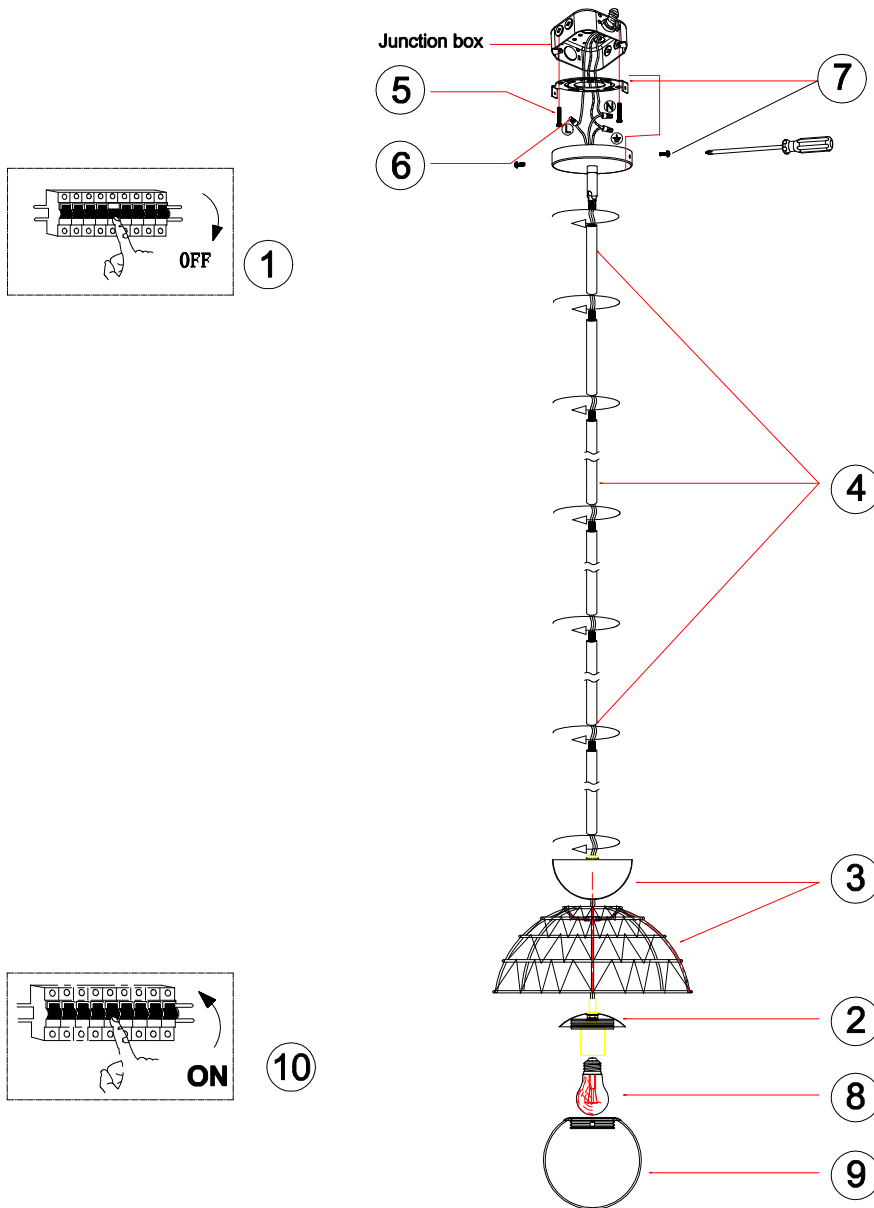

- 1: Turn off the main power supply.
- 2: Take the lamp cap out of the package, and the wires will fall naturally.
- 3: Pass the lamp cap through the lampshade, then through the semi-circular cover, and use the wrench to tighten the nut.
- 4: Pass the wires through the straight pipe, the ceiling plate, and then tighten (below the long pipe, above the short pipe).
- 5: Use the attached fixing screws to secure the installation bracket to the electrical junction box on the wall.
- 6: Tighten the wiring end cover in the correct manner
- 7: Tighten and fix the installation plate onto the junction box, and then secure the screws on both sides of the ceiling.
- 8: Turn the E26 bulb into the lamp socket.
- 9: Insert the glass cover into the lamp base.
- 10: Turn on the main power supply, and the lights will come on.